

NASA CR-167971

(NASA-CR-167971) HIGH STRAIN PROPERTIES OF  
ANGLE-PLY COMPOSITE LAMINATE, PART 3 Final  
Report, 11 Jul. 1977 - 11 Apr. 1981 (IIT  
Research Inst.) 383 p HC A17/MP A01

N83-13180

Unclass  
02106

CSSL 11D G3/24

## HIGH STRAIN RATE PROPERTIES OF ANGLE-PLY COMPOSITE LAMINATES

Final Report - Part III

19960318 010

I. M. Daniel

IIT Research Institute  
Chicago, IL 60618

"EXEMPTION STATEMENT A"

Approved for public release;  
Distribution Unlimited

IITRI Project No. M06028  
NASA Contract NAS3-21016  
November 1981

DEPARTMENT OF DEFENSE  
ASTROPHYSICS TECHNICAL EVALUATION CENTER  
WRIGHT-PATTERSON AIR FORCE BASE, OH 45433

**NASA**

National Aeronautics and Space Administration

Lewis Research Center  
Cleveland, OH 44135




DTIC QUALITY INSPECTED 1

PLASTIC

441389

# DISCLAIMER NOTICE

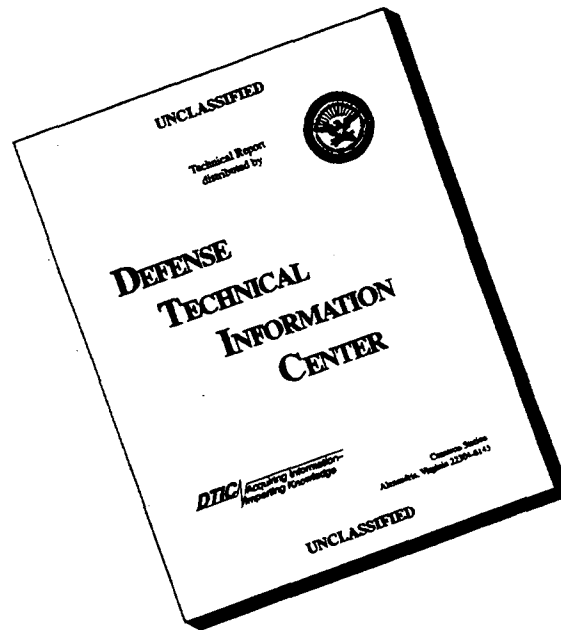

**THIS DOCUMENT IS BEST  
QUALITY AVAILABLE. THE  
COPY FURNISHED TO DTIC  
CONTAINED A SIGNIFICANT  
NUMBER OF PAGES WHICH DO  
NOT REPRODUCE LEGIBLY.**

1. Report No. NASA CR-167971		2. Government Accession No.		3. Recipient's Catalog No.	
4. Title and Subtitle HIGH STRAIN RATE PROPERTIES OF ANGLE-PLY COMPOSITE LAMINATES, PART III				5. Report Date November 1981	
				6. Performing Organization Code	
7. Author(s) I. M. Daniel				8. Performing Organization Report No. MO6026	
9. Performing Organization Name and Address IIT Research Institute 10 West 35 Street Chicago, IL 60616				10. Work Unit No.	
				11. Contract or Grant No. NAS 3-21016	
12. Sponsoring Agency Name and Address National Aeronautics & Space Administration Washington, DC 20546				13. Type of Report and Period Covered Final Report, PART III 7/11/77 - 4/11/81	
				14. Sponsoring Agency Code	
15. Supplementary Notes Project Manager: C. C. Chamis NASA Lewis Research Center 21000 Brookpark Road, M.S. 49-6 Cleveland, Ohio 44135					
16. Abstract  Angle-ply graphite/epoxy and graphite/S-glass/epoxy laminates were characterized in uniaxial tension at strain rates ranging from quasi-static to over $500s^{-1}$ . Laminate ring specimens of $[\pm 15]_{2s}$ , $[\pm 22.5]_{2s}$ , $[\pm 30]_{2s}$ , $[\pm 45]_{2s}$ , $[\pm 60]_{2s}$ , $[\pm 67.5]_{2s}$ , and $[\pm 75]_{2s}$ layups were loaded under internal pressure. Results were presented in the form of stress-strain curves to failure. Properties determined included moduli, Poisson's ratios, strength, and ultimate strain. In all seven laminates for the two materials tested the modulus and strength increase with strain rate. The effect of strain rate varies with layup, being lowest for the fiber dominated $[\pm 15]_{2s}$ laminates and highest for the matrix dominated $[\pm 75]_{2s}$ laminates. The highest increments over the static values are 10 percent to 25 percent for the $[\pm 15]_{2s}$ layup and 200 percent to 275 percent for the $[\pm 75]_{2s}$ layup. Ultimate strains do not show any significant trends with strain rate. In almost all cases the ultimate strain values are within $\pm 20$ percent of the mean value and in half of the cases the deviations from the mean are less than 10 percent.					
17. Key Words (Suggested by Author(s)) Fiber composites, graphite, S-glass, hybrid, experimental data, test methods, angle-ply properties, dynamic stress-strain curves				18. Distribution Statement  Unclassified, Unlimited	
19. Security Classif. (of this report) Unclassified		20. Security Classif. (of this page) Unclassified		21. No. of Pages 381	
22. Price*					

\* For sale by the National Technical Information Service, Springfield, Virginia 22161

## FOREWORD

This is the Final Report on IIT Research Institute Project No. K06013 (formerly M06026), "High Strain Rate Properties of Angle-Ply Composite Laminates," prepared by IITRI for NASA-Lewis Research Center, under Contract No. NAS3-21016. The work described in this report was conducted in the period July 11, 1977 to April 11, 1981. Dr. C. C. Chamis was the NASA-Lewis Project Manager. Dr. I. M. Daniel formerly of IITRI was the Principal Investigator. Additional contributions to the work reported herein were made by Messrs. W. G. Hamilton, G. M. Koller, T. Niro, and S. W. Schramm of IITRI, Dr. T. Liber of Travenol Laboratories, and Mr. R. H. LaBedz of Broutman and Associates.


Respectfully submitted,

IIT RESEARCH INSTITUTE



I. M. Daniel  
Professor and Director  
Experimental Stress  
Analysis Laboratory  
Illinois Institute of Technology

APPROVED:



John A. Granath, Director  
Engineering Division



## HIGH STRAIN RATE PROPERTIES OF ANGLE-PLY COMPOSITE LAMINATES

### ABSTRACT

Angle-ply graphite/epoxy and graphite/S-glass/epoxy laminates were characterized in uniaxial tension at strain rates ranging from quasi-static to over  $500\text{s}^{-1}$ . Laminate ring specimens of  $[\pm 15]_{2s}$ ,  $[\pm 22.5]_{2s}$ ,  $[\pm 30]_{2s}$ ,  $[\pm 45]_{2s}$ ,  $[\pm 60]_{2s}$ ,  $[\pm 67.5]_{2s}$  and  $[\pm 75]_{2s}$  layups were loaded under internal pressure. Results were presented in the form of stress-strain curves to failure. Properties determined included moduli, Poisson's ratios, strength, and ultimate strain. In all seven laminates for the two materials tested the modulus and strength increase with strain rate. The effect of strain rate varies with layup, being lowest for the fiber dominated  $[\pm 15]_{2s}$  laminates and highest for the matrix dominated  $[\pm 75]_{2s}$  laminates. The highest increments over the static values are 10% to 25% for the  $[\pm 15]_{2s}$  layup and 200% to 275% for the  $[\pm 75]_{2s}$  layup. Ultimate strains do not show any significant trends with strain rate. In almost all cases the ultimate strain values are within  $\pm 20\%$  of the mean value and in half of the cases the deviations from the mean are less than 10%.

## TABLE OF CONTENTS

	<u>Page</u>
1. INTRODUCTION	1-1
2. QUASI-STATIC TENSILE PROPERTIES OF ANGLE-PLY LAMINATES	2-1
3. INTERMEDIATE STRAIN RATE TENSILE PROPERTIES OF ANGLE-PLY LAMINATES	3-1
3.1 $[\pm 15]_{2s}$ LAMINATES	3-1
3.2 $[\pm 22.5]_{2s}$ LAMINATES	3-4
3.3 $[\pm 30]_{2s}$ LAMINATES	3-7
3.4 $[\pm 45]_{2s}$ LAMINATES	3-10
3.5 $[\pm 60]_{2s}$ LAMINATES	3-13
3.6 $[\pm 67.5]_{2s}$ LAMINATES	3-16
3.7 $[\pm 75]_{2s}$ LAMINATES	3-19
4. HIGH STRAIN RATE TENSILE PROPERTIES OF ANGLE-PLY LAMINATES	4-1
4.1 $[\pm 15]_{2s}$ LAMINATES	4-1
4.2 $[\pm 22.5]_{2s}$ LAMINATES	4-3
4.3 $[\pm 30]_{2s}$ LAMINATES	4-6
4.4 $[\pm 45]_{2s}$ LAMINATES	4-11
4.5 $[\pm 60]_{2s}$ LAMINATES	4-13
4.6 $[\pm 67.5]_{2s}$ LAMINATES	4-17
4.7 $[\pm 75]_{2s}$ LAMINATES	4-20
5. SUMMARY AND CONCLUSIONS	5-1

# LIST OF TABLES

<u>Table No.</u>		<u>Page</u>
2-1	Static Tensile Properties of $[\pm 6]_{2s}$ Angle-Ply SP288/AS Graphite/Epoxy Laminates	2-3
2-2	Static Tensile Properties of $[\pm 0]_{2s}$ Angle-Ply 80AS/20S/PR288 Graphite/S-Glass/Epoxy Laminates	2-4
3-1	Intermediate Strain Rate Tensile Properties of $[\pm 15]_{2s}$ SP288/AS Graphite/Epoxy	3-2
3-2	Intermediate Strain Rate Tensile Properties of $[\pm 15]_{2s}$ 80AS/20S/PR288 Graphite/S-Glass/Epoxy	3-3
3-3	Intermediate Strain Rate Tensile Properties of $[\pm 22.5]_{2s}$ SP288/AS Graphite/Epoxy	3-5
3-4	Intermediate Strain Rate Tensile Properties of $[\pm 22.5]_{2s}$ 80AS/20S/PR288 Graphite/S-Glass/Epoxy	3-6
3-5	Intermediate Strain Rate Tensile Properties of $[\pm 30]_{2s}$ SP288/AS Graphite/Epoxy	3-8
3-6	Intermediate Strain Rate Tensile Properties of $[\pm 30]_{2s}$ 80AS/20S/PR288 Graphite/S-Glass/Epoxy	3-9
3-7	Intermediate Strain Rate Tensile Properties of $[\pm 45]_{2s}$ SP288/AS Graphite/Epoxy	3-11
3-8	Intermediate Strain Rate Tensile Properties of $[\pm 45]_{2s}$ 80AS/20S/PR288 Graphite/S-Glass/Epoxy	3-12
3-9	Intermediate Strain Rate Tensile Properties of $[\pm 60]_{2s}$ SP288/AS Graphite/Epoxy	3-14
3-10	Intermediate Strain Rate Tensile Properties of $[\pm 60]_{2s}$ 80AS/20S/PR288 Graphite/S-Glass/Epoxy	3-15
3-11	Intermediate Strain Rate Tensile Properties of $[\pm 67.5]_{2s}$ SP288/AS Graphite/Epoxy	3-17
3-12	Intermediate Strain Rate Tensile Properties of $[\pm 67.5]_{2s}$ 80AS/20S/PR288 Graphite/S-Glass/Epoxy	3-18
3-13	Intermediate Strain Rate Tensile Properties of $[\pm 75]_{2s}$ SP288/AS Graphite/Epoxy	3-20
3-14	Intermediate Strain Rate Tensile Properties of $[\pm 75]_{2s}$ 80AS/20S/PR288 Graphite/S-Glass/Epoxy	3-21

# LIST OF TABLES (Cont.)

<u>Table No.</u>		<u>Page</u>
4-1	High Strain Rate Tensile Properties of $[\pm 15]_{2s}$ SP288/AS Graphite/Epoxy	4-2
4-2	High Strain Rate Tensile Properties of $[\pm 15]_{2s}$ 80AS/20S/PR288 Graphite/S-Glass/Epoxy	4-4
4-3	High Strain Rate Tensile Properties of $[\pm 22.5]_{2s}$ SP288/AS Graphite/Epoxy	4-5
4-4	High Strain Rate Tensile Properties of $[\pm 22.5]_{2s}$ 80AS/20S/PR288 Graphite/S-Glass/Epoxy	4-7
4-5	High Strain Rate Tensile Properties of $[\pm 30]_{2s}$ SP288/AS Graphite/Epoxy	4-9
4-6	High Strain Rate Tensile Properties of $[\pm 30]_{2s}$ 80AS/20S/PR288 Graphite/S-Glass/Epoxy	4-10
4-7	High Strain Rate Tensile Properties of $[\pm 45]_{2s}$ SP288/AS Graphite/Epoxy	4-12
4-8	High Strain Rate Tensile Properties of $[\pm 45]_{2s}$ 80AS/20S/PR288 Graphite/S-Glass/Epoxy	4-14
4-9	High Strain Rate Tensile Properties of $[\pm 60]_{2s}$ SP288/AS Graphite/Epoxy	4-15
4-10	High Strain Rate Tensile Properties of $[\pm 60]_{2s}$ 80AS/20S/PR288 Graphite/S-Glass/Epoxy	4-16
4-11	High Strain Rate Tensile Properties of $[\pm 67.5]_{2s}$ SP288/AS Graphite/Epoxy	4-18
4-12	High Strain Rate Tensile Properties of $[\pm 67.5]_{2s}$ 80AS/20S/PR288 Graphite/S-Glass/Epoxy	4-19
4-13	High Strain Rate Tensile Properties of $[\pm 75]_{2s}$ SP288/AS Graphite/Epoxy	4-21
4-14	High Strain Rate Tensile Properties of $[\pm 75]_{2s}$ 80AS/20S/PR288 Graphite/S-Glass/Epoxy	4-23
5-1	High Strain Rate Tensile Properties of $[\pm 15]_{2s}$ SP288/AS Graphite/Epoxy	5-2
5-2	High Strain Rate Tensile Properties of $[\pm 15]_{2s}$ 80AS/20S/PR288 Graphite/S-Glass/Epoxy	5-3

# LIST OF TABLES (Concluded)

<u>Table No.</u>		<u>Page</u>
5-3	High Strain Rate Tensile Properties of $[\pm 22.5]_{2s}$ SP288/AS Graphite/Epoxy	5-4
5-4	High Strain Rate Tensile Properties of $[\pm 22.5]_{2s}$ 80AS/20S/PR288 Graphite/S-Glass/Epoxy	5-5
5-5	High Strain Rate Tensile Properties of $[\pm 30]_{2s}$ SP288/AS Graphite/Epoxy	5-6
5-6	High Strain Rate Tensile Properties of $[\pm 30]_{2s}$ 80AS/20S/PR288 Graphite/S-Glass/Epoxy	5-7
5-7	High Strain Rate Tensile Properties of $[\pm 45]_{2s}$ SP288/AS Graphite/Epoxy	5-8
5-8	High Strain Rate Tensile Properties of $[\pm 45]_{2s}$ 80AS/20S/PR288 Graphite/S-Glass Epoxy	5-9
5-9	High Strain Rate Tensile Properties of $[\pm 60]_{2s}$ SP288/AS Graphite/Epoxy	5-10
5-10	High Strain Rate Tensile Properties of $[\pm 60]_{2s}$ 80AS/20S/PR288 Graphite/S-Glass/Epoxy	5-11
5-11	High Strain Rate Tensile Properties of $[\pm 67.5]_{2s}$ SP288/AS Graphite/Epoxy	5-12
5-12	High Strain Rate Tensile Properties of $[\pm 67.5]_{2s}$ 80AS/20S/PR288 Graphite/S-Glass Epoxy	5-13
5-13	High Strain Rate Tensile Properties of $[\pm 75]_{2s}$ SP288/AS Graphite/Epoxy	5-14
5-14	High Strain Rate Tensile Properties of $[\pm 75]_{2s}$ 80AS/20S/PR288 Graphite/S-Glass/Epoxy	5-15

# LIST OF FIGURES

<u>Figure No.</u>		<u>Page</u>
2-1	Strains in $[\pm 15]_{2s}$ SP288/AS ring specimen under static tensile loading (Specimen No. 35-1).	2-5
2-2	Strains in $[\pm 15]_{2s}$ SP288/AS ring specimen under static tensile loading (Specimen No. 35-3).	2-6
2-3	Strains in $[\pm 15]_{2s}$ SP288/AS ring specimen under static tensile loading (Specimen No. 35-5).	2-7
2-4	Strains in $[\pm 15]_{2s}$ 80AS/20S/PR288 ring specimen under static tensile loading (Specimen No. 36-1).	2-8
2-5	Strains in $[\pm 15]_{2s}$ 80AS/20S/PR288 ring specimen under static tensile loading (Specimen No. 36-3).	2-9
2-6	Strains in $[\pm 15]_{2s}$ 80AS/20S/PR288 ring specimen under static tensile loading (Specimen No. 36-5).	2-10
2-7	Strains in $[\pm 22.5]_{2s}$ SP288/AS ring specimen under static tensile loading (Specimen No. 33-1).	2-11
2-8	Strains in $[\pm 22.5]_{2s}$ SP288/AS ring specimen under static tensile loading (Specimen No. 33-3).	2-12
2-9	Strains in $[\pm 22.5]_{2s}$ SP288/AS ring specimen under static tensile loading (Specimen No. 33-5).	2-13
2-10	Strains in $[\pm 22.5]_{2s}$ 80AS/20S/PR288 ring specimen under static tensile loading (Specimen No. 34-1).	2-14
2-11	Strains in $[\pm 22.5]_{2s}$ 80AS/20S/PR288 ring specimen under static tensile loading (Specimen No. 34-3).	2-15
2-12	Strains in $[\pm 22.5]_{2s}$ 80AS/20S/PR288 ring specimen under static tensile loading (Specimen No. 34-5).	2-16
2-13	Strains in $[\pm 30]_{2s}$ SP288/AS ring specimen under static tensile loading (Specimen No. 28-1).	2-17
2-14	Strains in $[\pm 30]_{2s}$ SP288/AS ring specimen under static tensile loading (Specimen No. 28-3).	2-18
2-15	Strains in $[\pm 30]_{2s}$ SP288/AS specimen under static tensile loading (Specimen No. 28-5).	2-19
2-16	Strains in $[\pm 30]_{2s}$ 80AS/20S/PR288 ring specimen under static tensile loading (Specimen No. 29-1).	2-20

## LIST OF FIGURES (Cont.)

<u>Figure No.</u>		<u>Page</u>
2-17	Strains in $[\pm 30]_{2s}$ 80AS/20S/PR288 ring specimen under static tensile loading (Specimen No. 29-3).	2-21
2-18	Strains in $[\pm 30]_{2s}$ 80AS/20S/PR288 ring specimen under static tensile loading (Specimen No. 29-5).	2-22
2-19	Strains in $[\pm 45]_{2s}$ SP288/AS ring specimen under static tensile loading (Specimen No. 24-1).	2-23
2-20	Strains in $[\pm 45]_{2s}$ SP288/AS ring specimen under static tensile loading (Specimen No. 24-3).	2-24
2-21	Strains in $[\pm 45]_{2s}$ SP288/AS ring specimen under static tensile loading (Specimen No. 24-5).	2-25
2-22	Strains in $[\pm 45]_{2s}$ 80AS/20S/PR288 ring specimen under static tensile loading (Specimen No. 25-1).	2-26
2-23	Strains in $[\pm 45]_{2s}$ 80AS/20S/PR288 ring specimen under static tensile loading (Specimen No. 25-3).	2-27
2-24	Strains in $[\pm 45]_{2s}$ 80AS/20S/PR288 ring specimen under static tensile loading (Specimen No. 25-5).	2-28
2-25	Strains in $[\pm 60]_{2s}$ SP288/AS ring specimen under static tensile loading (Specimen No. 22-1).	2-29
2-26	Strains in $[\pm 60]_{2s}$ SP288/AS ring specimen under static tensile loading (Specimen No. 22-3).	2-30
2-27	Strains in $[\pm 60]_{2s}$ SP288/AS ring specimen under static tensile loading (Specimen No. 22-5).	2-31
2-28	Strains in $[\pm 60]_{2s}$ 80AS/20S/PR288 ring specimen under static tensile loading (Specimen No. 23-1).	2-32
2-29	Strains in $[\pm 60]_{2s}$ 80AS/20S/PR288 ring specimen under static tensile loading (Specimen No. 23-3).	2-33
2-30	Strains in $[\pm 60]_{2s}$ 80AS/20S/PR288 ring specimen under static tensile loading (Specimen No. 23-5).	2-34
2-31	Strains in $[\pm 67.5]_{2s}$ SP288/AS ring specimen under static tensile loading (Specimen No. 26-1).	2-35
2-32	Strains in $[\pm 67.5]_{2s}$ SP288/AS ring specimen under static tensile loading (Specimen No. 26-3).	2-36

# LIST OF FIGURES (Cont.)

<u>Figure No.</u>		<u>Page</u>
2-33	Strains in $[\pm 67.5]_{2s}$ SP288/AS ring specimen under static tensile loading (Specimen No. 26-5).	2-37
2-34	Strains in $[\pm 67.5]_{2s}$ 80AS/20S/PR288 ring specimen under static tensile loading (Specimen No. 27-1).	2-38
2-35	Strains in $[\pm 67.5]_{2s}$ 80AS/20S/PR288 ring specimen under static tensile loading (Specimen No. 27-3).	2-39
2-36	Strains in $[\pm 67.5]_{2s}$ 80AS/20S/PR288 ring specimen under static tensile loading (Specimen No. 27-5).	2-40
2-37	Strains in $[\pm 75]_{2s}$ SP288/AS ring specimen under static tensile loading (Specimen No. 20-1).	2-41
2-38	Strains in $[\pm 75]_{2s}$ SP288/AS ring specimen under static tensile loading (Specimen No. 20-3).	2-42
2-39	Strains in $[\pm 75]_{2s}$ SP288/AS ring specimen under static tensile loading (Specimen No. 20-5).	2-43
2-40	Strains in $[\pm 75]_{2s}$ 80AS/20S/PR288 ring specimen under static tensile loading (Specimen No. 21-1).	2-44
2-41	Strains in $[\pm 75]_{2s}$ 80AS/20S/PR288 ring specimen under static tensile loading (Specimen No. 21-5).	2-45
3-1	Strain records in steel ring and $[\pm 15]_{2s}$ SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 35-7 (0.65 g shotgun powder).	3-22
3-2	Strain records in steel ring and $[\pm 15]_{2s}$ SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 35-10 (0.65 g shotgun powder).	3-23
3-3	Strain records in steel ring and $[\pm 15]_{2s}$ SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 35-11 (0.65 g shotgun powder).	3-24
3-4	Stress-strain curves for dynamically loaded $[\pm 15]_{2s}$ SP288/AS graphite/epoxy ring, Specimen No. 35-7.	3-25
3-5	Stress-strain curves for dynamically loaded $[\pm 15]_{2s}$ SP288/AS graphite/epoxy ring, Specimen No. 35-10.	3-26
3-6	Stress-strain curves for dynamically loaded $[\pm 15]_{2s}$ SP288/AS graphite epoxy ring, Specimen No. 35-11.	3-27



# LIST OF FIGURES (Cont.)

<u>Figure No.</u>		<u>Page</u>
3-7	Strain records in steel ring and 80AS/20S/PR288 [ $\pm 15$ ] <sub>2s</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 36-6 (0.65 g shotgun powder).	3-28
3-8	Strain records in steel ring and 80AS/20S/PR288 [ $\pm 15$ ] <sub>2s</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 36-10 (0.65 g shotgun powder).	3-29
3-9	Strain records in steel ring and 80AS/20S/PR288 [ $\pm 15$ ] <sub>2s</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 36-11 (0.65 g shotgun powder).	3-30
3-10	Stress-strain curves for dynamically loaded [ $\pm 15$ ] <sub>2s</sub> 80AS/20S/PR288 graphite/S-glass/epoxy ring, Specimen No. 36-6.	3-31
3-11	Stress-strain curves for dynamically loaded [ $\pm 15$ ] <sub>2s</sub> 80AS/20S/PR288 graphite/S-glass/epoxy ring, Specimen No. 36-10.	3-32
3-12	Stress-strain curves for dynamically loaded [ $\pm 15$ ] <sub>2s</sub> 80AS/20S/PR288 graphite/S-glass/epoxy ring, Specimen No. 36-11.	3-33
3-13	Strain records in steel ring and [ $\pm 22.5$ ] <sub>2s</sub> SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 33-10 (0.65 g shotgun powder).	3-34
3-14	Strain records in steel ring and [ $\pm 22.5$ ] <sub>2s</sub> SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 33-11 (0.65 g shotgun powder).	3-35
3-15	Strain records in steel ring and [ $\pm 22.5$ ] <sub>2s</sub> SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 33-13 (0.65 g shotgun powder).	3-36
3-16	Stress-strain curves for dynamically loaded [ $\pm 22.5$ ] <sub>2s</sub> SP288/AS graphite/epoxy ring, Specimen No. 33-10.	3-37
3-17	Stress-strain curves for dynamically loaded [ $\pm 22.5$ ] <sub>2s</sub> SP288/AS graphite/epoxy ring, Specimen No. 33-11.	3-38
3-18	Stress-strain curves for dynamically loaded [ $\pm 22.5$ ] <sub>2s</sub> SP288/AS graphite/epoxy ring, Specimen No. 33-13.	3-39
3-19	Strain records in steel ring and 80AS/20S/PR288 [ $\pm 22.5$ ] <sub>2s</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 34-2 (0.65 g shotgun powder).	3-40

# LIST OF FIGURES (Cont.)

Figure No.		Page
3-20	Strain records in steel ring and 80AS/20S/PR288 [ $\pm 22.5$ ] <sub>2s</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 34-10 (0.65 g shotgun powder).	3-41
3-21	Strain records in steel ring and 80AS/20S/PR288 [ $\pm 22.5$ ] <sub>2s</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 34-11 (0.65 g shotgun powder).	3-42
3-22	Stress-strain curves for dynamically loaded [ $\pm 22.5$ ] <sub>2s</sub> 80AS/20S/PR288 graphite/S-glass/epoxy ring, Specimen No. 34-2.	3-43
3-23	Stress-strain curves for dynamically loaded [ $\pm 22.5$ ] <sub>2s</sub> 80AS/20S/PR288 graphite/S-glass/epoxy ring, Specimen No. 34-10.	3-44
3-24	Stress-strain curves for dynamically loaded [ $\pm 22.5$ ] <sub>2s</sub> 80AS/20S/PR288 graphite/S-glass/epoxy ring, Specimen No. 34-11.	3-45
3-25	Strain records in steel ring and [ $\pm 30$ ] <sub>2s</sub> SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 28-2 (0.65 g shotgun powder).	3-46
3-26	Strain records in steel ring and [ $\pm 30$ ] <sub>2s</sub> SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 28-12 (0.65 g shotgun powder).	3-47
3-27	Strain records in steel ring and [ $\pm 30$ ] <sub>2s</sub> SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 28-13 (0.65 g shotgun powder).	3-48
3-28	Stress-strain curves for dynamically loaded [ $\pm 30$ ] <sub>2s</sub> SP288/AS graphite/epoxy ring, Specimen No. 28-2.	3-49
3-29	Stress-strain curves for dynamically loaded [ $\pm 30$ ] <sub>2s</sub> SP288/AS graphite/epoxy ring, Specimen No. 28-12.	3-50
3-30	Stress-strain curves for dynamically loaded [ $\pm 30$ ] <sub>2s</sub> SP288/AS graphite/epoxy ring, Specimen No. 28-13.	3-51
3-31	Strain records in steel ring and 80AS/20S/PR288 [ $\pm 30$ ] <sub>2s</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 54-2 (0.65 g shotgun powder).	3-52
3-32	Strain records in steel ring and 80AS/20S/PR288 [ $\pm 30$ ] <sub>2s</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 54-3 (0.65 g shotgun powder).	3-53

# LIST OF FIGURES (Cont.)

<u>Figure No.</u>		<u>Page</u>
3-33	Strain records in steel ring and 80AS/20S/PR288 [ $\pm 30$ ] <sub>2s</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 54-5 (0.65 g shotgun powder).	3-54
3-34	Stress-strain curves for dynamically loaded [ $\pm 30$ ] <sub>2s</sub> 80AS/20S/PR288 graphite/S-glass/epoxy ring, Specimen No. 54-2.	3-55
3-35	Stress-strain curves for dynamically loaded [ $\pm 30$ ] <sub>2s</sub> 80AS/20S/PR288 graphite/S-glass/epoxy ring, Specimen No. 54-3.	3-56
3-36	Stress-strain curves for dynamically loaded [ $\pm 30$ ] <sub>2s</sub> 80AS/20S/PR288 graphite/S-glass/epoxy ring, Specimen No. 54-5.	3-57
3-37	Strain records in steel ring and [ $\pm 45$ ] <sub>2s</sub> SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 24-11 (0.65 g shotgun powder).	3-58
3-38	Strain records in steel ring and [ $\pm 45$ ] <sub>2s</sub> SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 52-2 (0.65 g shotgun powder).	3-59
3-39	Strain records in steel ring and [ $\pm 45$ ] <sub>2s</sub> SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 52-3 (0.65 g shotgun powder).	3-60
3-40	Strain records in steel ring and [ $\pm 45$ ] <sub>2s</sub> SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 52-4 (0.65 g shotgun powder).	3-61
3-41	Stress-strain curves for dynamically loaded [ $\pm 45$ ] <sub>2s</sub> SP288/AS graphite/epoxy ring, Specimen No. 24-11.	3-62
3-42	Stress-strain curves for dynamically loaded [ $\pm 45$ ] <sub>2s</sub> SP288/AS graphite/epoxy ring, Specimen No. 52-2.	3-63
3-43	Stress-strain curves for dynamically loaded [ $\pm 45$ ] <sub>2s</sub> SP288/AS graphite/epoxy ring, Specimen No. 52-3.	3-64
3-44	Stress-strain curves for dynamically loaded [ $\pm 45$ ] <sub>2s</sub> SP288/AS graphite/epoxy ring, Specimen No. 52-4.	3-65
3-45	Strain records in steel ring and 80AS/20S/PR288 [ $\pm 45$ ] <sub>2s</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 25-9 (0.65 g shotgun powder).	3-66

# LIST OF FIGURES (Cont.)

<u>Figure No.</u>		<u>Page</u>
3-46	Strain records in steel ring and 80AS/20S/PR288 [ $\pm 45$ ] <sub>2s</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 53-1 (0.65 g shotgun powder).	3-67
3-47	Strain records in steel ring and 80AS/20S/PR288 [ $\pm 45$ ] <sub>2s</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 53-4 (0.65 g shotgun powder).	3-68
3-48	Strain records in steel ring and 80AS/20S/PR288 [ $\pm 45$ ] <sub>2s</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 53-5 (0.65 g shotgun powder).	3-69
3-49	Stress-strain curves for dynamically loaded [ $\pm 45$ ] <sub>2s</sub> 80AS/20S/PR288 graphite/S-glass/epoxy ring, Specimen No. 25-9.	3-70
3-50	Stress-strain curves for dynamically loaded [ $\pm 45$ ] <sub>2s</sub> 80AS/20S/PR288 graphite/S-glass/epoxy ring, Specimen No. 53-1.	3-71
3-51	Stress-strain curves for dynamically loaded [ $\pm 45$ ] <sub>2s</sub> 80AS/20S/PR288 graphite/S-glass/epoxy ring, Specimen No. 53-4.	3-72
3-52	Stress-strain curves for dynamically loaded [ $\pm 45$ ] <sub>2s</sub> 80AS/20S/PR288 graphite/S-glass/epoxy ring, Specimen No. 53-5.	3-73
3-53	Strain records in steel ring and [ $\pm 60$ ] <sub>2s</sub> SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 22-9 (0.65 g shotgun powder).	3-74
3-54	Strain records in steel ring and [ $\pm 60$ ] <sub>2s</sub> SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 22-10 (0.65 g shotgun powder).	3-75
3-55	Strain records in steel ring and [ $\pm 60$ ] <sub>2s</sub> SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 22-11 (0.65 g shotgun powder).	3-76
3-56	Stress-strain curve for dynamically loaded [ $\pm 60$ ] <sub>2s</sub> SP288/AS graphite/epoxy ring, Specimen No. 22-9.	3-77
3-57	Stress-strain curve for dynamically loaded [ $\pm 60$ ] <sub>2s</sub> SP288/AS graphite/epoxy ring, Specimen No. 22-10.	3-78
3-58	Stress-strain curve for dynamically loaded [ $\pm 60$ ] <sub>2s</sub> SP288/AS graphite/epoxy ring, Specimen No. 22-11.	3-79

# LIST OF FIGURES (Cont.)

<u>Figure No.</u>		<u>Page</u>
3-59	Strain records in steel ring and 80AS/20S/PR288 [ $\pm 60$ ] <sub>2s</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 23-7 (0.65 g shotgun powder).	3-80
3-60	Strain records in steel ring and 80AS/20S/PR288 [ $\pm 60$ ] <sub>2s</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 23-10 (0.65 g shotgun powder).	3-81
3-61	Strain records in steel ring and 80AS/20S/PR288 [ $\pm 60$ ] <sub>2s</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 23-11 (0.65 g shotgun powder).	3-82
3-62	Stress-strain curve for dynamically loaded [ $\pm 60$ ] <sub>2s</sub> 80AS/20S/PR288 graphite/S-glass/epoxy ring, Specimen No. 23-7.	3-83
3-63	Stress-strain curve for dynamically loaded [ $\pm 60$ ] <sub>2s</sub> 80AS/20S/PR288 graphite/S-glass/epoxy ring, Specimen No. 23-10.	3-84
3-64	Stress-strain curve for dynamically loaded [ $\pm 60$ ] <sub>2s</sub> 80AS/20S/PR288 graphite/S-glass/epoxy ring, Specimen No. 23-11.	3-85
3-65	Strain records in steel ring and [ $\pm 67.5$ ] <sub>2s</sub> SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 26-10 (0.65 g shotgun powder).	3-86
3-66	Strain records in steel ring and [ $\pm 67.5$ ] <sub>2s</sub> SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 26-11 (0.65 g shotgun powder).	3-87
3-67	Strain records in steel ring and [ $\pm 67.5$ ] <sub>2s</sub> SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 26-13 (0.65 g shotgun powder).	3-88
3-68	Stress-strain curve for dynamically loaded [ $\pm 67.5$ ] <sub>2s</sub> SP288/AS graphite/epoxy ring, Specimen No. 26-10.	3-89
3-69	Stress-strain curve for dynamically loaded [ $\pm 67.5$ ] <sub>2s</sub> SP288/AS graphite/epoxy ring, Specimen No. 26-11.	3-90
3-70	Stress-strain curve for dynamically loaded [ $\pm 67.5$ ] <sub>2s</sub> SP288/AS graphite/epoxy ring, Specimen No. 26-13.	3-91
3-71	Strain records in steel ring and 80AS/20S/PR288 [ $\pm 67.5$ ] <sub>2s</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 27-10 (0.65 g shotgun powder).	3-92

# LIST OF FIGURES (Cont.)

Figure No.		Page
3-72	Strain records in steel ring and 80AS/20S/PR288 [ $\pm 67.5$ ] <sub>2s</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 27-11 (0.65 g shotgun powder).	3-93
3-73	Strain records in steel ring and 80AS/20S/PR288 [ $\pm 67.5$ ] <sub>2s</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 27-13 (0.65 g shotgun powder).	3-94
3-74	Stress-strain curve for dynamically loaded [ $\pm 67.5$ ] <sub>2s</sub> 80AS/20S/PR288 graphite/S-glass/epoxy ring, Specimen No. 27-10.	3-95
3-75	Stress-strain curve for dynamically loaded [ $\pm 67.5$ ] <sub>2s</sub> 80AS/20S/PR288 graphite/S-glass/epoxy ring, Specimen No. 27-11.	3-96
3-76	Stress-strain curve for dynamically loaded [ $\pm 67.5$ ] <sub>2s</sub> 80AS/20S/PR288 graphite/S-glass/epoxy ring, Specimen No. 27-13.	3-97
3-77	Strain records in steel ring and [ $\pm 75$ ] <sub>2s</sub> SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 20-12 (0.65 g shotgun powder).	3-98
3-78	Stress-strain curve for dynamically loaded [ $\pm 75$ ] <sub>2s</sub> graphite/epoxy ring, Specimen No. 20-12.	3-99
3-79	Strain records in steel ring and 80AS/20S/PR288 [ $\pm 75$ ] <sub>2s</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 21-10 (0.65 g shotgun powder).	3-100
3-80	Strain records in steel ring and 80AS/20S/PR288 [ $\pm 75$ ] <sub>2s</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 21-11 (0.65 g shotgun powder).	3-101
3-81	Strain records in steel ring and 80AS/20S/PR288 [ $\pm 75$ ] <sub>2s</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 21-12 (0.65 g shotgun powder).	3-102
3-82	Stress-strain curve for dynamically loaded [ $\pm 75$ ] <sub>2s</sub> 80AS/20S/PR288 graphite/S-glass/epoxy ring Specimen No. 21-10.	3-103
3-83	Stress-strain curve for dynamically loaded [ $\pm 75$ ] <sub>2s</sub> 80AS/20S/PR288 graphite/S-glass/epoxy ring, Specimen No. 21-11.	3-104
3-84	Stress-strain curve for dynamically loaded [ $\pm 75$ ] <sub>2s</sub> 80AS/20S/PR288 graphite/S-glass/epoxy ring, Specimen No. 21-12.	3-105

# LIST OF FIGURES (Cont.)

<u>Figure No.</u>		<u>Page</u>
4-1	Strain records in steel ring and $[\pm 15]_{2s}$ SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 35-2 (100 mg PETN detonator).	4-24
4-2	Strain and its derivatives in steel ring for Specimen No. 35-2.	4-25
4-3	Circumferential strain and its derivatives in $[\pm 15]_{2s}$ SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 35-2.	4-26
4-4	Strain records in steel ring and $[\pm 15]_{2s}$ SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 35-4 (100 mg PETN detonator).	4-27
4-5	Strain and its derivatives in steel ring for Specimen No. 35-4.	4-28
4-6	Circumferential strain and its derivatives in $[\pm 15]_{2s}$ SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 35-4.	4-29
4-7	Strain records in steel ring and $[\pm 15]_{2s}$ SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 35-6 (100 mg PETN detonator).	4-30
4-8	Strain and its derivatives in steel ring in Specimen No. 35-6.	4-31
4-9	Circumferential strain and its derivatives in $[\pm 15]_{2s}$ SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 35-6.	4-32
4-10	Stress-strain curve for dynamically loaded $[\pm 15]_{2s}$ SP288/AS graphite/epoxy ring, Specimen No. 35-2.	4-33
4-11	Stress-strain curve for dynamically loaded $[\pm 15]_{2s}$ SP288/AS graphite/epoxy ring, Specimen No. 35-4.	4-34
4-12	Stress-strain curve for dynamically loaded $[\pm 15]_{2s}$ SP288/AS graphite/epoxy ring, Specimen No. 35-6.	4-35
4-13	Strain records in steel ring and 80AS/20S/PR288 $[\pm 15]_{2s}$ graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 36-2 (100 mg PETN detonator).	4-36
4-14	Strain and its derivatives in steel ring for Specimen No. 36-2.	4-37

# LIST OF FIGURES (Cont.)

<u>Figure No.</u>		<u>Page</u>
4-15	Circumferential strain and its derivatives in 80AS/20S/PR288 [ $\pm 15$ ] <sub>2s</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 36-2.	4-38
4-16	Strain records in steel ring and 80AS/20S/PR288 [ $\pm 15$ ] <sub>2s</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 36-4 (100 mg PETN detonator).	4-39
4-17	Strain and its derivatives in steel ring for Specimen No. 36-4.	4-40
4-18	Circumferential strain and its derivatives in 80AS/20S/PR288 [ $\pm 15$ ] <sub>2s</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 36-4.	4-41
4-19	Strain records in steel ring and 80AS/20S/PR288 [ $\pm 15$ ] <sub>2s</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 36-7 (100 mg PETN detonator).	4-42
4-20	Strain and its derivatives in steel ring for Specimen No. 36-7.	4-43
4-21	Circumferential strain and its derivatives in 80AS/20S/PR288 [ $\pm 15$ ] <sub>2s</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 36-7.	4-44
4-22	Stress-strain curve for dynamically loaded 80AS/20S/PR288 [ $\pm 15$ ] <sub>2s</sub> graphite/S-glass/epoxy ring, Specimen No. 36-2.	4-45
4-23	Stress-strain curve for dynamically loaded 80AS/20S/PR288 [ $\pm 15$ ] <sub>2s</sub> graphite/S-glass/epoxy ring, Specimen No. 36-4.	4-46
4-24	Stress-strain curve for dynamically loaded 80AS/20S/PR288 [ $\pm 15$ ] <sub>2s</sub> graphite/S-glass/epoxy ring, Specimen No. 36-7.	4-47
4-25	Strain records in steel ring and SP288/AS [ $\pm 22.5$ ] <sub>2s</sub> graphite/epoxy ring under dynamic loading for Specimen No. 33-4 (100 mg PETN detonator).	4-48
4-26	Strain in steel ring and its derivatives for Specimen No. 33-4.	4-49
4-27	Circumferential strain and its derivatives in SP288/AS [ $\pm 22.5$ ] <sub>2s</sub> graphite/epoxy ring under dynamic loading, Specimen No. 33-4.	4-50
4-28	Strain records in steel ring and SP288/AS [ $\pm 22.5$ ] <sub>2s</sub> graphite/epoxy ring under dynamic loading for Specimen No. 33-6 (100 mg PETN detonator).	4-51



# LIST OF FIGURES (Cont.)

<u>Figure No.</u>		<u>Page</u>
4-29	Strain in steel ring and its derivatives for Specimen No. 33-6.	4-52
4-30	Circumferential strain and its derivatives in SP288/AS $[\pm 22.5]_{2s}$ graphite/epoxy ring under dynamic loading, Specimen No. 33-6.	4-53
4-31	Strain records in steel ring and SP288/AS $[\pm 22.5]_{2s}$ graphite/epoxy ring under dynamic loading for Specimen No. 33-7 (100 mg PETN detonator).	4-54
4-32	Strain in steel ring and its derivatives for Specimen No. 33-7.	4-55
4-33	Circumferential strain and its derivatives in SP288/AS $[\pm 22.5]_{2s}$ graphite/epoxy ring under dynamic loading, Specimen No. 33-7.	4-56
4-34	Stress-strain curve for dynamically loaded SP288/AS $[\pm 22.5]_{2s}$ graphite/epoxy ring, Specimen No. 33-4 (100 mg PETN detonator).	4-57
4-35	Stress-strain curve for dynamically loaded SP288/AS $[\pm 22.5]_{2s}$ graphite/epoxy ring, Specimen No. 33-6 (100 mg PETN detonator).	4-58
4-36	Stress-strain curve for dynamically loaded SP288/AS $[\pm 22.5]_{2s}$ graphite/epoxy ring, Specimen No. 33-7 (100 mg PETN detonator).	4-59
4-37	Strain records in steel ring and in 80AS/20S/PR288 $[\pm 22.5]_{2s}$ graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 34-4 (100 mg PETN detonator).	4-60
4-38	Strain and its derivatives in steel ring for Specimen No. 34-4.	4-61
4-39	Circumferential strain and its derivatives in 80AS/20S/PR288 $[\pm 22.5]_{2s}$ graphite/S-glass/epoxy ring under dynamic loading, Specimen No. 34-4.	4-62
4-40	Strain records in steel ring and in 80AS/20S/PR288 $[\pm 22.5]_{2s}$ graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 34-6 (100 mg PETN detonator).	4-63
4-41	Strain and its derivatives in steel ring for Specimen No. 34-6.	4-64

# LIST OF FIGURES (Cont.)

<u>Figure No.</u>		<u>Page</u>
4-42	Circumferential strain and its derivatives in 80AS/20S/PR288 $[\pm 22.5]_{2s}$ graphite/S-glass/epoxy ring under dynamic loading, Specimen No. 34-6.	4-65
4-43	Strain records in steel ring and in 80AS/20S/PR288 $[\pm 22.5]_{2s}$ graphite/S-glass/epoxy ring under dynamic loading, Specimen No. 34-7 (100 mg PETN detonator).	4-66
4-44	Strain and its derivatives in steel ring for Specimen No. 34-7.	4-67
4-45	Circumferential strain and its derivatives in 80AS/20S/PR288 $[\pm 22.5]_{2s}$ graphite/S-glass/epoxy ring under dynamic loading, Specimen No. 34-7.	4-68
4-46	Stress-strain curve for dynamically loaded 80AS/20S/PR288 $[\pm 22.5]_{2s}$ graphite/S-glass/epoxy ring, Specimen No. 34-4 (100 mg PETN detonator).	4-69
4-47	Stress-strain curve for dynamically loaded 80AS/20S/PR288 $[\pm 22.5]_{2s}$ graphite/S-glass/epoxy ring, Specimen No. 34-6 (100 mg PETN detonator).	4-70
4-48	Stress-strain curve for dynamically loaded 80AS/20S/PR288 $[\pm 22.5]_{2s}$ graphite/S-glass/epoxy ring, Specimen No. 34-7 (100 mg PETN detonator).	4-71
4-49	Strain records in steel ring and SP288/AS $[\pm 30]_{2s}$ graphite/epoxy ring under dynamic loading, Specimen No. 28-9 (1.56 g bullseye powder, $KClO_4$ , and aluminum dust).	4-72
4-50	Strain and its derivatives in steel ring for Specimen No. 28-9.	4-73
4-51	Circumferential strain and its derivatives in SP288/AS $[\pm 30]_{2s}$ graphite/epoxy ring under dynamic loading, Specimen No. 28-9.	4-74
4-52	Strain records in steel ring and SP288/AS $[\pm 30]_{2s}$ graphite/epoxy ring under dynamic loading, Specimen No. 28-10 (1.56 g bullseye powder, $KClO_4$ , and aluminum dust).	4-75
4-53	Circumferential strain and its derivatives in SP288/AS $[\pm 30]_{2s}$ graphite/epoxy ring under dynamic loading, Specimen No. 28-10.	4-76
4-54	Strain records in steel ring and SP288/AS $[\pm 30]_{2s}$ graphite/epoxy ring under dynamic loading, Specimen No. 28-11 (1.56 g bullseye powder, $KClO_4$ , and aluminum dust).	4-77

# LIST OF FIGURES (Cont.)

<u>Figure No.</u>		<u>Page</u>
4-55	Circumferential strain and its derivatives in SP288/AS [±30] <sub>2S</sub> graphite/epoxy ring under dynamic loading, Specimen No. 28-11.	4-78
4-56	Stress-strain curve for dynamically loaded SP288/AS [±30] <sub>2S</sub> graphite/epoxy ring, Specimen No. 28-9 (1.56 g bullseye powder, KClO <sub>4</sub> , and aluminum dust).	4-79
4-57	Stress-strain curve for dynamically loaded SP288/AS [±30] <sub>2S</sub> graphite/epoxy ring, Specimen No. 28-10 (1.56 g bullseye powder, KClO <sub>4</sub> , and aluminum dust).	4-80
4-58	Stress-strain curve for dynamically loaded SP288/AS [±30] <sub>2S</sub> graphite/epoxy ring, Specimen No. 28-11 (1.56 g bullseye powder, KClO <sub>4</sub> , and aluminum dust).	4-81
4-59	Strain records in steel ring and in 80AS/20S/PR288 [±30] <sub>2S</sub> graphite/S-glass/epoxy ring under dynamic loading, Specimen No. 29-10 (1.56 g bullseye powder, KClO <sub>4</sub> , and aluminum dust).	4-82
4-60	Circumferential strain and its derivatives in 80AS/20S/ PR288 [±30] <sub>2S</sub> graphite/S-glass/epoxy ring under dynamic loading, Specimen No. 29-10.	4-83
4-61	Strain records in steel ring and in 80AS/20S/PR288 [±30] <sub>2S</sub> graphite/S-glass/epoxy ring under dynamic loading, Specimen No. 29-11 (1.56 g bullseye powder, KClO <sub>4</sub> , and aluminum dust).	4-84
4-62	Circumferential strain and its derivatives in 80AS/20S/ PR288 [±30] <sub>2S</sub> graphite/S-glass/epoxy ring under dynamic loading, Specimen No. 29-11.	4-85
4-63	Strain records in steel ring and in 80AS/20S/PR288 [±30] <sub>2S</sub> graphite/S-glass/epoxy ring under dynamic loading, Specimen No. 29-12 (1.56 g. bullseye powder, KClO <sub>4</sub> , and aluminum dust).	4-86
4-64	Circumferential strain and its derivatives in 80AS/20S/ PR288 [±30] <sub>2S</sub> graphite/S-glass/epoxy ring under dynamic loading, Specimen No. 29-12	4-87
4-65	Stress-strain curve for dynamically loaded 80AS/20S/ PR288 [±30] <sub>2S</sub> graphite/S-glass/epoxy ring, Specimen No. 29-10 (1.56 g bullseye powder, KClO <sub>4</sub> , and aluminum dust).	4-88

# LIST OF FIGURES (Cont.)

Figure No.		Page
4-66	Stress-strain curve for dynamically loaded 80AS/20S/PR288 [ $\pm 30$ ] <sub>2s</sub> graphite/S-glass/epoxy ring, Specimen No. 29-11 (1.56 g bullseye powder, $KClO_4$ , aluminum dust).	4-89
4-67	Stress-strain curve for dynamically loaded 80AS/20S/PR288 [ $\pm 30$ ] <sub>2s</sub> graphite/S-glass/epoxy ring, Specimen No. 29-12 (1.56 g bullseye powder, $KClO_4$ , aluminum dust).	4-90
4-68	Strain records in steel ring and SP288/AS [ $\pm 45$ ] <sub>2s</sub> graphite/epoxy ring under dynamic loading for Specimen No. 24-11 (1.56 g pistol powder $KClO_4$ , and aluminum dust).	4-91
4-69	Strain and its derivatives in steel ring for Specimen No. 24-11.	4-92
4-70	Circumferential strain and its derivatives in SP288/AS [ $\pm 45$ ] <sub>2s</sub> graphite/epoxy ring under dynamic loading for Specimen No. 24-11 (1.56 g pistol powder, $KClO_4$ , and aluminum dust).	4-93
4-71	Strain records in steel ring and SP288/AS [ $\pm 45$ ] <sub>2s</sub> graphite/epoxy ring under dynamic loading for Specimen No. 24-12 (1.56 g pistol powder, $KClO_4$ , and aluminum dust).	4-94
4-72	Strain and its derivatives in steel ring for Specimen No. 24-12.	4-95
4-73	Circumferential strain and its derivatives in SP288/AS [ $\pm 45$ ] <sub>2s</sub> graphite/epoxy ring under dynamic loading for Specimen No. 24-12.	4-96
4-74	Strain records in steel ring and SP288/AS [ $\pm 45$ ] <sub>2s</sub> graphite/epoxy ring under dynamic loading for Specimen No. 24-13 (1.56 g pistol powder, $KClO_4$ , and aluminum dust).	4-97
4-75	Circumferential strain and its derivatives in steel ring for Specimen No. 24-13.	4-98
4-76	Circumferential strain and its derivatives in SP288/AS [ $\pm 45$ ] <sub>2s</sub> graphite/epoxy ring under dynamic loading for Specimen No. 24-13 (1.56 g pistol powder, $KClO_4$ , and aluminum dust).	4-99
4-77	Stress-strain curve for dynamically loaded SP288/AS [ $\pm 45$ ] <sub>2s</sub> graphite/epoxy ring, Specimen No. 24-11 (1.56 g pistol powder, $KClO_4$ , and aluminum dust).	4-100
4-78	Stress-strain curve for dynamically loaded SP288/AS [ $\pm 45$ ] <sub>2s</sub> graphite/epoxy ring, Specimen No. 24-12 (1.56 g pistol powder, $KClO_4$ , and aluminum dust).	4-101

# LIST OF FIGURES (Cont.)

<u>Figure No.</u>		<u>Page</u>
4-79	Stress-strain curve for dynamically loaded SP288/AS [ $\pm 45$ ] <sub>2S</sub> graphite/epoxy ring, Specimen No. 24-13 (1.56 g pistol powder, KClO <sub>4</sub> , and aluminum dust).	4-102
4-80	Strain records in steel ring and 80AS/20S/PR288 [ $\pm 45$ ] <sub>2S</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 25-11 (1.56 g pistol powder, KClO <sub>4</sub> , and aluminum dust).	4-103
4-81	Strain and its derivatives in steel ring for Specimen No. 25-11.	4-104
4-82	Circumferential strain and its derivatives in 80AS/20S/PR288 [ $\pm 45$ ] <sub>2S</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 25-11 (1.56 g pistol powder, KClO <sub>4</sub> , and aluminum dust).	4-105
4-83	Strain records in steel ring and 80AS/20S/PR288 [ $\pm 45$ ] <sub>2S</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 25-12 (1.56 g pistol powder, KClO <sub>4</sub> , and aluminum dust).	4-106
4-84	Strain and its derivatives in steel ring for Specimen No. 25-12.	4-107
4-85	Circumferential strain and its derivatives in 80AS/20S/PR288 [ $\pm 45$ ] <sub>2S</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 25-12 (1.56 g pistol powder, KClO <sub>4</sub> , and aluminum dust).	4-108
4-86	Strain records in steel ring and 80AS/20S/PR288 [ $\pm 45$ ] <sub>2S</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 25-13 (1.56 g pistol powder, KClO <sub>4</sub> , and aluminum dust).	4-109
4-87	Strain and its derivatives in steel ring for Specimen No. 25-13.	4-110
4-88	Circumferential strain and its derivatives in 80AS/20S/PR288 [ $\pm 45$ ] <sub>2S</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 25-13 (1.56 g pistol powder, KClO <sub>4</sub> , and aluminum dust).	4-111
4-89	Stress-strain curve for dynamically loaded 80AS/20S/PR288 [ $\pm 45$ ] <sub>2S</sub> graphite/S-glass/epoxy ring, Specimen No. 25-11 (1.56 g pistol powder, KClO <sub>4</sub> , and aluminum dust).	4-112
4-90	Stress-strain curve for dynamically loaded 80AS/20S/PR288 [ $\pm 45$ ] <sub>2S</sub> graphite/S-glass/epoxy ring, Specimen No. 25-12 (1.56 g pistol powder, KClO <sub>4</sub> , and aluminum dust).	4-113

# LIST OF FIGURES (Cont.)

<u>Figure No.</u>		<u>Page</u>
4-91	Stress-strain curve for dynamically loaded 80AS/20S PR288 [ $\pm 45$ ] <sub>2s</sub> graphite/S-glass/epoxy ring, Specimen No. 25-13 (1.56 g pistol powder, $KClO_4$ , and aluminum dust).	4-114
4-92	Strain records in steel ring and SP288/AS [ $\pm 60$ ] <sub>2s</sub> graphite/epoxy ring under dynamic loading for Specimen No. 22-6 (1.56 g pistol powder, $KClO_4$ , and aluminum dust).	4-115
4-93	Strain and its derivatives in steel ring for Specimen No. 22-6.	4-116
4-94	Circumferential strain and its derivatives in SP288/AS [ $\pm 60$ ] <sub>2s</sub> graphite/epoxy ring under dynamic loading for Specimen No. 22-6.	4-117
4-95	Strain records in steel ring and SP288/AS [ $\pm 60$ ] <sub>2s</sub> graphite/epoxy ring under dynamic loading for Specimen No. 22-7 (1.56 g pistol powder, $KClO_4$ , and aluminum dust).	4-118
4-96	Strain and its derivatives in steel ring for Specimen No. 22-7.	4-119
4-97	Circumferential strain and its derivatives in SP288/AS [ $\pm 60$ ] <sub>2s</sub> graphite/epoxy ring under dynamic loading for Specimen No. 22-7.	4-120
4-98	Strain records in steel ring and SP288/AS [ $\pm 60$ ] <sub>2s</sub> graphite/epoxy ring under dynamic loading for Specimen No. 22-8 (1.56 g pistol powder, $KClO_4$ , and aluminum dust).	4-121
4-99	Strain and its derivatives in steel ring for Specimen No. 22-8.	4-122
4-100	Circumferential strain and its derivatives in SP288/AS [ $\pm 60$ ] <sub>2s</sub> graphite/epoxy ring under dynamic loading for Specimen No. 22-8.	4-123
4-101	Stress-strain curve for dynamically loaded SP288/AS [ $\pm 60$ ] <sub>2s</sub> graphite/epoxy ring, Specimen No. 22-6 (1.56 g pistol powder $KClO_4$ , and aluminum dust).	4-124
4-102	Stress-strain curve for dynamically loaded SP288/AS [ $\pm 60$ ] <sub>2s</sub> graphite/epoxy ring, Specimen No. 22-7 (1.56 g pistol powder, $KClO_4$ , and aluminum dust).	4-125
4-103	Stress-strain curve for dynamically loaded SP288/AS [ $\pm 60$ ] <sub>2s</sub> graphite/epoxy ring, Specimen No. 22-8 (1.56 g pistol powder, $KClO_4$ , and aluminum dust).	4-126

# LIST OF FIGURES (Cont.)

<u>Figure No.</u>		<u>Page</u>
4-104	Strain records in steel ring and $[\pm 60]_{2s}$ 80AS/20S/PR288 graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 23-2 (1.56 g pistol powder, $KClO_4$ , and aluminum dust).	4-127
4-105	Strain and its derivatives in steel ring for Specimen No. 23-2.	4-128
4-106	Circumferential strain and its derivatives in $[\pm 60]_{2s}$ 80AS/20S/PR288 graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 23-2.	4-129
4-107	Strain records in steel ring and $[\pm 60]_{2s}$ 80AS/20S/PR288 graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 23-4 (1.56 g pistol powder, $KClO_4$ , and aluminum dust).	4-130
4-108	Strain and its derivatives in steel ring for Specimen No. 23-4.	4-131
4-109	Circumferential strain and its derivatives in $[\pm 60]_{2s}$ 80AS/20S/PR288 graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 23-4.	4-132
4-110	Strain records in steel ring and $[\pm 60]_{2s}$ 80AS/20S/PR288 graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 23-6 (1.56 g pistol powder, $KClO_4$ , and aluminum dust).	4-133
4-111	Strain and its derivatives in steel ring for Specimen No. 23-6.	4-134
4-112	Circumferential strain and its derivatives in $[\pm 60]_{2s}$ 80AS/20S/PR288 graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 23-6.	4-135
4-113	Stress-strain curve for dynamically loaded $[\pm 60]_{2s}$ 80AS/20S/PR288 graphite/S-glass/epoxy ring, Specimen No. 23-2 (1.56 g pistol powder, $KClO_4$ , and aluminum dust).	4-136
4-114	Stress-strain curve for dynamically loaded $[\pm 60]_{2s}$ 80AS/20S/PR288 graphite/S-glass/epoxy ring, Specimen No. 23-4 (1.56 g pistol powder, $KClO_4$ , and aluminum dust).	4-137
4-115	Stress-strain curve for dynamically loaded $[\pm 60]_{2s}$ 80AS/20S/PR288 graphite/S-glass/epoxy ring, Specimen No. 23-6 (1.56 g pistol powder, $KClO_4$ , and aluminum dust).	4-138

# LIST OF FIGURES (Cont.)

Figure No.		Page
4-116	Strain records in steel ring and $[\pm 67.5]_{2s}$ SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 26-2 (1.56 g pistol powder, $KClO_4$ , and aluminum dust).	4-139
4-117	Strain and its derivatives in steel ring for Specimen No. 26-2.	4-140
4-118	Circumferential strain and its derivatives in $[\pm 67.5]_{2s}$ SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 26-2.	4-141
4-119	Strain records in steel ring and $[\pm 67.5]_{2s}$ SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 26-4 (1.56 g pistol powder, $KClO_4$ , and aluminum dust).	4-142
4-120	Strain and its derivatives in steel ring for Specimen No. 26-4.	4-143
4-121	Circumferential strain and its derivatives in $[\pm 67.5]_{2s}$ SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 26-4.	4-144
4-122	Strain records in steel ring and $[\pm 67.5]_{2s}$ SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 26-6 (1.56 g pistol powder, $KClO_4$ , and aluminum dust).	4-145
4-123	Strain and its derivatives in steel ring for Specimen No. 26-6.	4-146
4-124	Circumferential strain and its derivatives in $[\pm 67.5]_{2s}$ SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 26-6.	4-147
4-125	Stress-strain curve for dynamically loaded $[\pm 67.5]_{2s}$ SP288/AS graphite/epoxy ring, Specimen No. 26-2 (1.56 g pistol powder, $KClO_4$ , and aluminum dust).	4-148
4-126	Stress-strain curve for dynamically loaded $[\pm 67.5]_{2s}$ SP288/AS graphite/epoxy ring, Specimen No. 26-4 (1.56 g pistol powder, $KClO_4$ , and aluminum dust).	4-149
4-127	Stress-strain curve for dynamically loaded $[\pm 67.5]_{2s}$ SP288/AS graphite/epoxy ring, Specimen No. 26-6 (1.56 g pistol powder, $KClO_4$ , and aluminum dust).	4-150
4-128	Strain records in steel ring and 80AS/20S/PR288 $[\pm 67.5]_{2s}$ graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 27-2 (1.56 g pistol powder, $KClO_4$ , and aluminum dust).	4-151



# LIST OF FIGURES (Cont.)

<u>Figure No.</u>		<u>Page</u>
4-129	Strain and its derivatives in steel ring for Specimen No. 27-2.	4-152
4-130	Circumferential strain and its derivatives in 80AS/20S/PR288 [ $\pm 67.5$ ] <sub>2s</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 27-2 (1.56 g pistol powder, $KClO_4$ , and aluminum dust).	4-153
4-131	Strain records in steel ring and 80AS/20S/PR288 [ $\pm 67.5$ ] <sub>2s</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 27-4 (1.56 g pistol powder, $KClO_4$ , and aluminum dust).	4-154
4-132	Strain and its derivatives in steel ring for Specimen No. 27-4.	4-155
4-133	Circumferential strain and its derivatives in 80AS/20S/PR288 [ $\pm 67.5$ ] <sub>2s</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 27-4 (1.56 g pistol powder, $KClO_4$ , and aluminum dust).	4-156
4-134	Strain records in steel ring and 80AS/20S/PR288 [ $\pm 67.5$ ] <sub>2s</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 27-6 (1.56 g pistol powder, $KClO_4$ , and aluminum dust).	4-157
4-135	Strain and its derivatives in steel ring for Specimen No. 27-6.	4-158
4-136	Circumferential strain and its derivatives in 80AS/20S/PR288 [ $\pm 67.5$ ] <sub>2s</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 27-6 (1.56 g pistol powder, $KClO_4$ , and aluminum dust).	4-159
4-137	Stress-strain curve for dynamically loaded 80AS/20S/PR288 [ $\pm 67.5$ ] <sub>2s</sub> graphite/S-glass/epoxy ring, Specimen No. 27-2 (1.56 g pistol powder, $KClO_4$ , and aluminum dust).	4-160
4-138	Stress-strain curve for dynamically loaded 80AS/20S/PR288 [ $\pm 67.5$ ] <sub>2s</sub> graphite/S-glass/epoxy ring, Specimen No. 27-4 (1.56 g pistol powder, $KClO_4$ , and aluminum dust).	4-161
4-139	Stress-strain curve for dynamically loaded 80AS/20S/PR288 [ $\pm 67.5$ ] <sub>2s</sub> graphite/S-glass/epoxy ring, Specimen No. 27-6 (1.56 g pistol powder, $KClO_4$ , and aluminum dust).	4-162
4-140	Strain records in steel ring and SP288/AS [ $\pm 75$ ] <sub>2s</sub> graphite/epoxy ring under dynamic loading for Specimen No. 20-2 (1.56 g pistol powder, $KClO_4$ , and aluminum dust).	4-163

# LIST OF FIGURES (Cont.)

<u>Figure No.</u>		<u>Page</u>
4-141	Strain and its derivatives in steel ring for Specimen No. 20-2.	4-164
4-142	Circumferential strain and its derivatives in SP288/AS $[\pm 75]_{2s}$ graphite/epoxy ring under dynamic loading for Specimen No. 20-2 (1.56 g pistol powder, $KClO_4$ , and aluminum dust).	4-165
4-143	Strain records in steel ring and SP288/AS $[\pm 75]_{2s}$ graphite/epoxy ring under dynamic loading for Specimen No. 20-4 (1.56 g pistol powder, $KClO_4$ , and aluminum dust).	4-166
4-144	Strain and its derivatives in steel ring for Specimen No. 20-4.	4-167
4-145	Circumferential strain and its derivatives in SP288/AS $[\pm 75]_{2s}$ graphite/epoxy ring under dynamic loading for Specimen No. 20-4 (1.56 g pistol powder, $KClO_4$ , and aluminum dust).	4-168
4-146	Strain records in steel ring and SP288/AS $[\pm 75]_{2s}$ graphite/epoxy ring under dynamic loading for Specimen No. 20-7 (1.56 g pistol powder, $KClO_4$ , and aluminum dust).	4-169
4-147	Strain and its derivatives in steel ring for Specimen No. 20-7.	4-170
4-148	Circumferential strain and its derivatives in SP288/AS $[\pm 75]_{2s}$ graphite/epoxy ring under dynamic loading for Specimen No. 20-7 (1.56 g pistol powder, $KClO_4$ , and aluminum dust).	4-171
4-149	Stress-strain curve for dynamically loaded SP288/AS $[\pm 75]_{2s}$ graphite/epoxy ring, Specimen No. 20-2 (1.56 g pistol powder, $KClO_4$ , and aluminum dust).	4-172
4-150	Stress-strain curve for dynamically loaded SP288/AS $[\pm 75]_{2s}$ graphite/epoxy ring, Specimen No. 20-4 (1.56 g pistol powder, $KClO_4$ , and aluminum dust).	4-173
4-151	Stress-strain curve for dynamically loaded SP288/AS $[\pm 75]_{2s}$ graphite/epoxy ring, Specimen No. 20-7 (1.56 g pistol powder, $KClO_4$ , and aluminum dust).	4-174
4-152	Strain records in steel ring and 80AS/20S/PR288 $[\pm 75]_{2s}$ graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 21-2 (1.56 g pistol powder, $KClO_4$ , and aluminum dust).	4-175

# LIST OF FIGURES (Concluded)

<u>Figure No.</u>		<u>Page</u>
4-153	Strain and its derivatives in steel ring for Specimen No. 21-2.	4-176
4-154	Circumferential strain and its derivatives in $[\pm 75]_{2s}$ 80AS/20S/PR288 graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 21-2.	4-177
4-155	Strain records in steel ring and 80AS/20S/PR288 $[\pm 75]_{2s}$ graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 21-4 (1.56 g pistol powder, $KClO_4$ , and aluminum dust).	4-178
4-156	Strain and its derivatives in steel ring for Specimen No. 21-4.	4-179
4-157	Circumferential strain and its derivatives in $[\pm 75]_{2s}$ 80AS/20S/PR288 graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 21-4.	4-180
4-158	Strain records in steel ring and 80AS/20S/PR288 $[\pm 75]_{2s}$ graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 21-6 (1.56 g pistol powder, $KClO_4$ , and aluminum dust).	4-181
4-159	Strain and its derivatives in steel ring for Specimen No. 21-6.	4-182
4-160	Circumferential strain and its derivatives in $[\pm 75]_{2s}$ 80AS/20S/PR288 graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 21-6.	4-183
4-161	Stress-strain curve for dynamically loaded 80AS/20S/PR288 $[\pm 75]_{2s}$ graphite/S-glass/epoxy ring, Specimen No. 21-2 (1.56 g pistol powder, $KClO_4$ , and aluminum dust).	4-184
4-162	Stress-strain curve for dynamically loaded 80AS/20S/PR288 $[\pm 75]_{2s}$ graphite/S-glass/epoxy ring, Specimen No. 21-4 (1.56 g pistol powder, $KClO_4$ , and aluminum dust).	4-185
4-163	Stress-strain curve for dynamically loaded 80AS/20S/PR288 $[\pm 75]_{2s}$ graphite/S-glass/epoxy ring, Specimen No. 21-6 (1.56 g pistol powder, $KClO_4$ , and aluminum dust).	4-186

## HIGH STRAIN RATE PROPERTIES OF ANGLE-PLY COMPOSITE LAMINATES

### 1. INTRODUCTION

In Part I of this report methods were described for testing and characterization of composite materials at strain rates ranging from quasi-static to over  $500\text{s}^{-1}$ . Three unidirectional materials were characterized: SP288/T300 graphite/epoxy, SP288/AS graphite/epoxy, and 80AS/20S/PR288 graphite/S-glass/epoxy.

It was found that the longitudinal modulus increases moderately with strain rate by up to 20%, but the longitudinal strength and ultimate strain did not vary much. Transverse modulus and strength increase sharply with strain rate, reaching values up to three times the static value. The in-plane shear modulus and shear strength increase noticeably with strain rate by up to approximately 65%. In all cases, it was found that ultimate strains did not vary with strain rate in any significant manner.

In Part II of this report the same experimental methods were used to characterize unidirectional off-axis laminates in the same range of strain rates. Rings of  $[22.5_g]$ ,  $[30_g]$ , and  $[45_g]$  layups were tested. Two materials were characterized: SP288/AS graphite/epoxy and 80AS/20S/PR288 graphite/S-glass/epoxy. It was found that in all three laminates of both materials the modulus and strength increase sharply with strain rate, reaching values roughly 100%, 150%, and 200% higher than corresponding static values for the  $[22.5_g]$ ,  $[30_g]$ , and  $[45_g]$  laminates, respectively. In the case of ultimate strain no definite trends were established, but the maximum deviation from the average was less than 18%.

The objective of the task described in this Part III of the report is to characterize angle-ply composite laminates in uniaxial tension at three strain rates. The same material systems were characterized as in the case of the off-axis laminates. The three strain rates selected are quasi-static, intermediate, and high rates ranging from  $10^{-4}\text{s}^{-1}$  to over  $500\text{s}^{-1}$ . All characterization tests were conducted by testing thin rings 10.16 cm (4 in.) in diameter, 2.54 cm (1 in.) wide, and 8-ply thick under internal pressure. Rings of

$[\pm 15]_{2s}$ ,  $[\pm 22.5]_{2s}$ ,  $[\pm 30]_{2s}$ ,  $[\pm 45]_{2s}$ ,  $[\pm 60]_{2s}$ ,  $[\pm 67.5]_{2s}$ , and  $[\pm 75]_{2s}$  layups were tested. Three replications per test were used. The data were analyzed according to procedures described in Part I of this report. Results were presented in the form of stress-strain curves to failure. Properties determined included initial, secant, and terminal strain rates; initial, secant, and terminal modulus and Poisson's ratio; and strength and ultimate strain. The effects of strain rate on the various properties are discussed below.

## 2. QUASI-STATIC TENSILE PROPERTIES OF ANGLE-PLY LAMINATES

Quasi-static tensile properties of  $[\pm\theta]_{2S}$  laminates were obtained by testing rings instrumented with strain gages under internal pressure. Three rings were tested for each of the two material systems, the SP288/AS graphite/epoxy and the 80AS/20S/PR288 graphite/S-glass/epoxy, and for each of the values of  $\theta = 15^\circ, 22.5^\circ, 30^\circ, 45^\circ, 60^\circ, 67.5^\circ, \text{ and } 75^\circ$ . Each ring was instrumented with a 2-gage rosette with elements in the axial and circumferential directions.

Stress-strain curves for all specimens tested are shown in Figures 2-1 through 2-41. Values for the modulus, Poisson's ratio, strength, and ultimate strain computed from these curves are shown in these figures and summarized in Tables 2-1 and 2-2. All but the  $[\pm 15]_{2S}$  specimens show nonlinear strain response to failure. Difficulties were encountered with the  $[\pm 45]_{2S}$  specimens due to excessive deformation of the rings. These specimens deformed into a conical shape and allowed the bladder to extrude through the opening between the sides of the ring specimen and the steel plates in contact with them. For these reasons only lower bounds are given in Tables 2-1 and 2-2 for the strength and ultimate strain values of these specimens.

Tables 2-1 and 2-2 include also results for the modulus and Poisson's ratio calculated using measured unidirectional properties. The agreement between experimental and predicted values is satisfactory. The calculated properties were obtained by using a computer program called SQ5. This program is a point stress analysis of a laminate under in-plane loads, moments, and temperature effects. The formulation uses the usual lamination theory whereby the laminate constitutive relations are derived from those of each ply of the laminate.

The modulus of the hybrid laminates is lower than that of the graphite/epoxy laminates for  $0^\circ \leq \theta < 45^\circ$ , but the relationship is reversed for  $45^\circ \leq \theta \leq 90^\circ$ . The strength of the hybrid laminates is consistently lower than that of the graphite/epoxy laminates for all layups. Poisson's ratios for the hybrid

laminates are lower than those for the graphite/epoxy for  $0^\circ \leq \theta \leq 22.5^\circ$ , but no significant differences exist for  $\theta \geq 30^\circ$ . The ultimate strain in the hybrid material is not significantly different from that of the graphite/epoxy for  $0^\circ \leq \theta \leq 30^\circ$ , but it becomes smaller than that of the graphite/epoxy material for  $\theta \geq 45^\circ$ .

TABLE 2-1. STATIC TENSILE PROPERTIES OF  $[\pm\theta]_{2s}$  ANGLE-PLY SP288/AS GRAPHITE/EPOXY LAMINATES

Laminate	Measured			Calculated		
	Modulus, $E_{\theta\theta}$ GPa ( $10^6$ psi)	Poisson's Ratio, $\nu_{\theta x}$	Strength, $S_{\theta\theta T}$ MPa (ksi)	Ultimate Strain, $\epsilon_{\theta\theta T}^u$	Modulus, $E_{\theta\theta}$ GPa ( $10^6$ psi)	Poisson's Ratio, $\nu_{\theta x}$
$[0_g]$	135 (19.5)	0.36	1458 (211)	0.0106	-	-
$[\pm 15]_{2s}$	104.5 (15.2)	0.86	823 (119.3)	0.0078	112.8 (16.3)	0.91
$[\pm 22.5]_{2s}$	81.4 (11.8)	1.18	773 (112.0)	0.0103	82.8 (12.0)	1.23
$[\pm 30]_{2s}$	58.6 (8.50)	1.25	566 (82.0)	0.0132	53.3 (7.72)	1.23
$[\pm 45]_{2s}$	20.4 (2.95)	0.69	>224 (32.5)	>0.0305	21.6 (3.13)	0.72
$[\pm 60]_{2s}$	14.0 (2.03)	0.32	105 (15.2)	0.0116	13.0 (1.88)	0.30
$[\pm 67.5]_{2s}$	12.0 (1.74)	0.17	85.1 (12.3)	0.0081	11.5 (1.67)	0.17
$[\pm 75]_{2s}$	12.1 (1.75)	0.09	74.8 (10.8)	0.0075	10.8 (1.57)	0.09
$[90_g]$	10.3 (1.49)	0.03	52 (7.6)	0.0052	-	-

Note: Fiber Volume Ratio:  $V_f = 0.57$ .



TABLE 2-2. STATIC TENSILE PROPERTIES OF  $[\pm\theta]_{2s}$  ANGLE-PLY  
80AS/20S/PR288 GRAPHITE/S-GLASS/EPOXY LAMINATES

Laminate	Measured			Calculated		
	Modulus, $E_{\theta\theta}$ GPa (10 <sup>6</sup> psi)	Poisson's Ratio, $\nu_{\theta\theta}$	Strength, $S_{\theta\theta T}$ MPa (ksi)	Ultimate Strain, $\epsilon_{\theta\theta T}$	Modulus, $E_{\theta\theta}$ GPa (10 <sup>6</sup> psi)	Poisson's Ratio, $\nu_{\theta\theta}$
$[0]_8$	107 (15.6)	0.18	1240 (180)	0.0114	-	-
$[\pm 15]_{2s}$	94.5 (13.7)	0.68	806 (116.8)	0.0084	89.7 (13.0)	0.71
$[\pm 22.5]_{2s}$	68.5 (9.93)	0.83	653 (94.6)	0.0104	68.7 (9.96)	0.98
$[\pm 30]_{2s}$	44.9 (6.51)	1.26	503 (73.0)	0.0139	46.8 (6.78)	1.04
$[\pm 45]_{2s}$	21.5 (3.12)	0.74	>191 (27.7)	>0.0265	20.8 (3.01)	0.67
$[\pm 60]_{2s}$	18.2 (2.64)	0.30	94.8 (13.7)	0.0085	13.4 (1.94)	0.30
$[\pm 67.5]_{2s}$	14.4 (2.08)	0.16	76.1 (11.0)	0.0062	12.3 (1.78)	0.17
$[\pm 75]_{2s}$	15.5 (2.25)	0.10	61.4 (8.9)	0.0047	11.8 (1.71)	0.09
$[90]_8$	11.8 (1.71)	0.02	49.0 (7.1)	0.0045	-	-

Note: Fiber Volume Ratios:  $V_f = 0.57$  for graphite/epoxy  
 $V_f = 0.56$  for S-glass/epoxy.

ORIGINAL PAGE IS  
OF POOR QUALITY

ORIGINAL PAGE IS  
OF POOR QUALITY

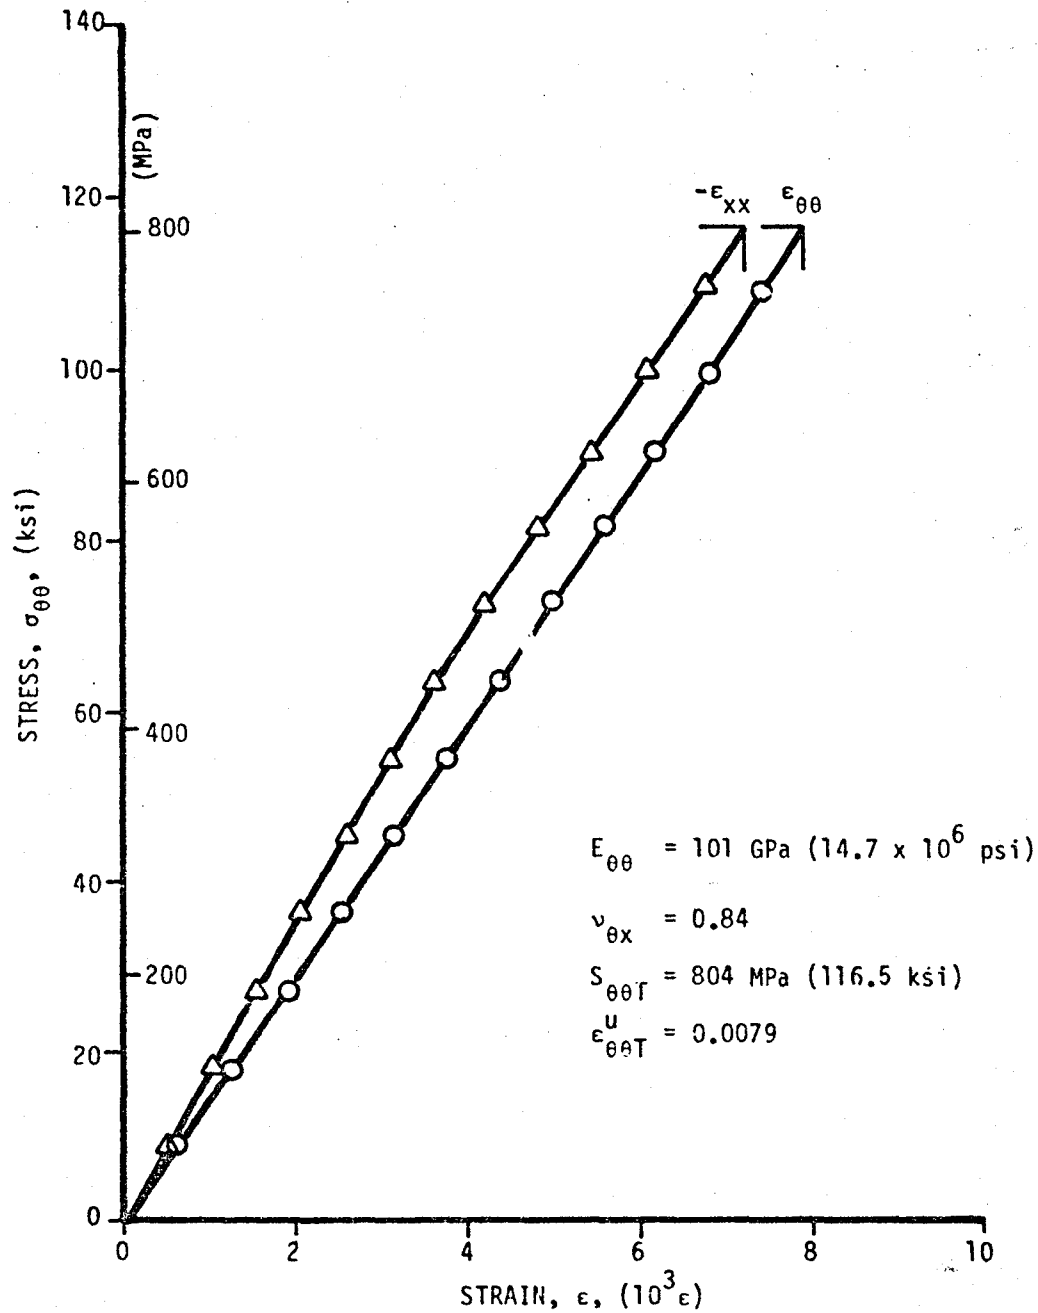


Figure 2-1. Strains in  $[\pm 15]_{2s}$  SP288/AS ring specimen under static tensile loading (Specimen No. 35-1).

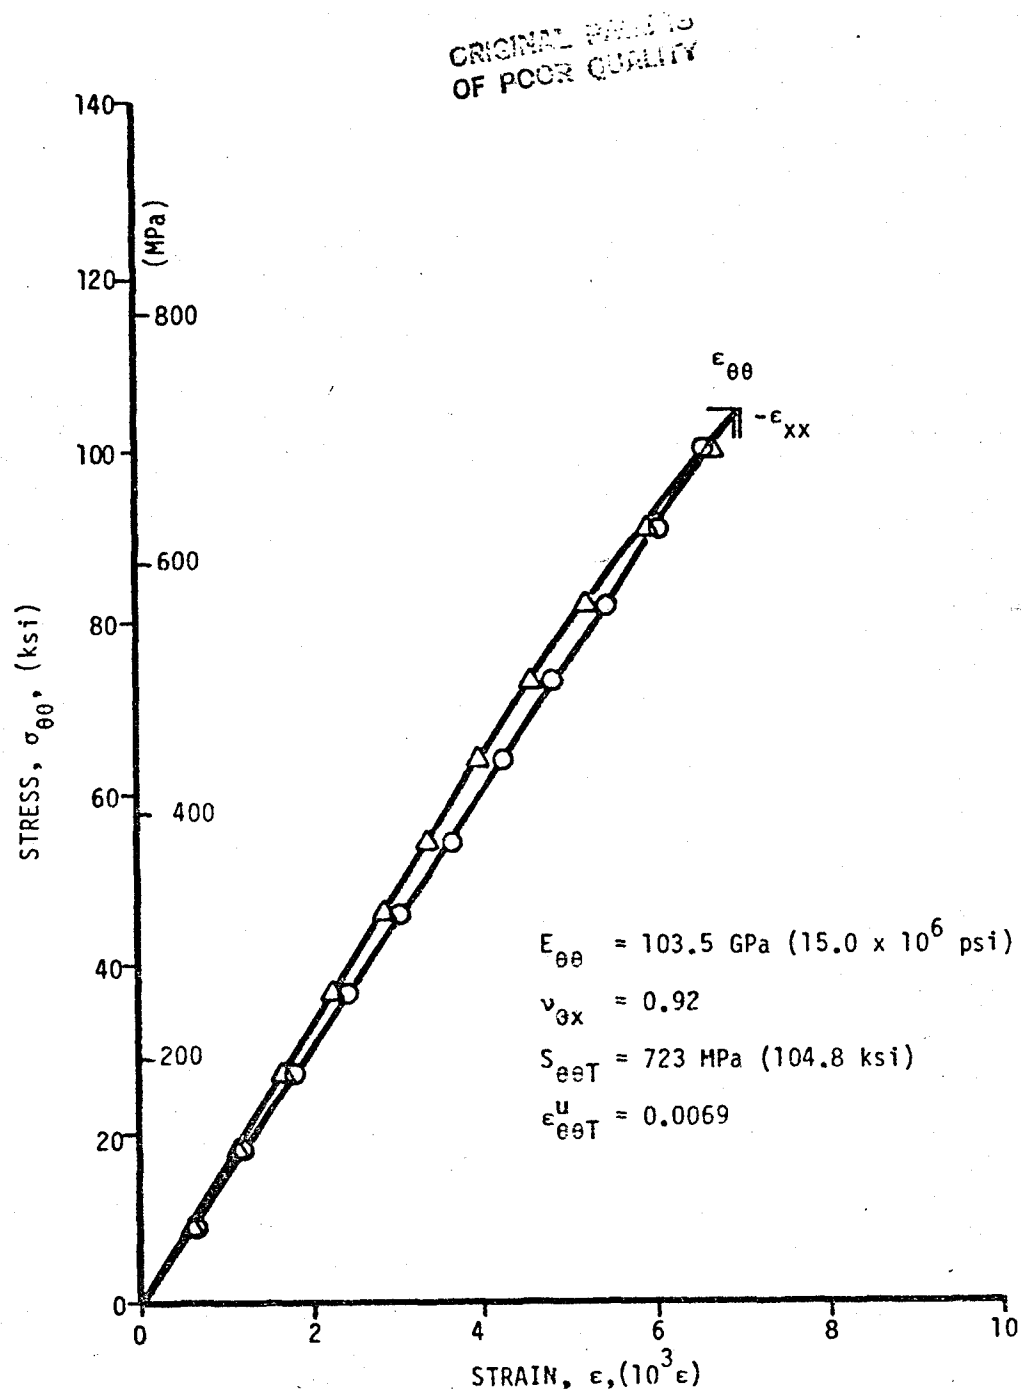


Figure 2-2. Strains in  $[\pm 15]_{2S}$  SP288/AS ring specimen under static tensile loading (Specimen No. 35-3).

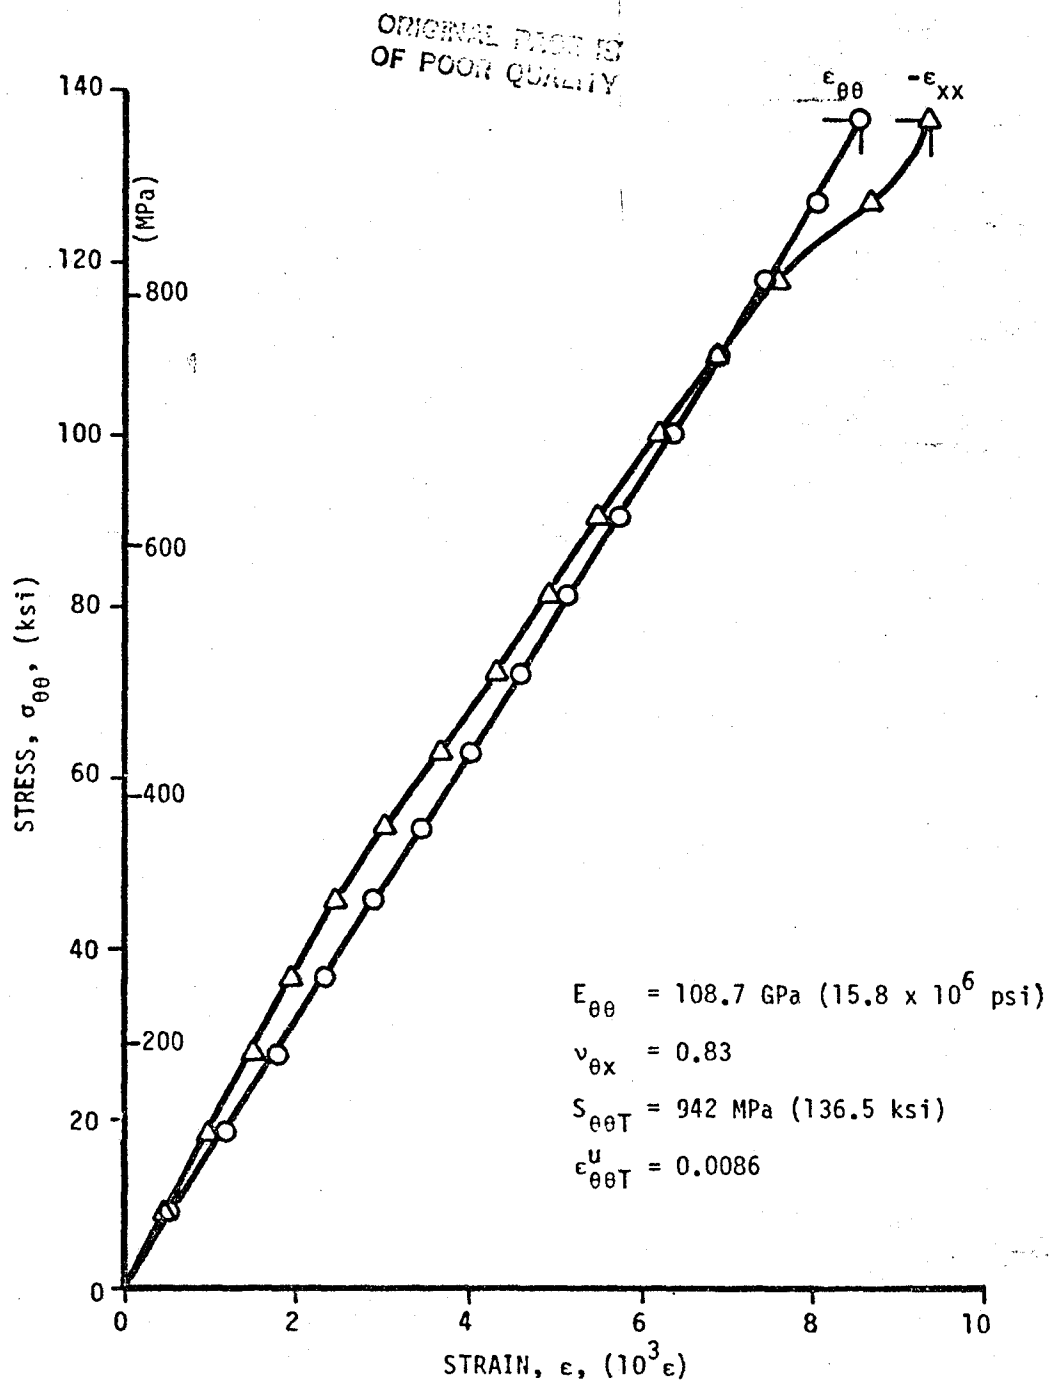


Figure 2-3. Strains in  $[\pm 15]_{2s}$  SP288/AS ring specimen under static tensile loading (Specimen No. 35-5).

ORIGINAL PAGE IS  
OF POOR QUALITY

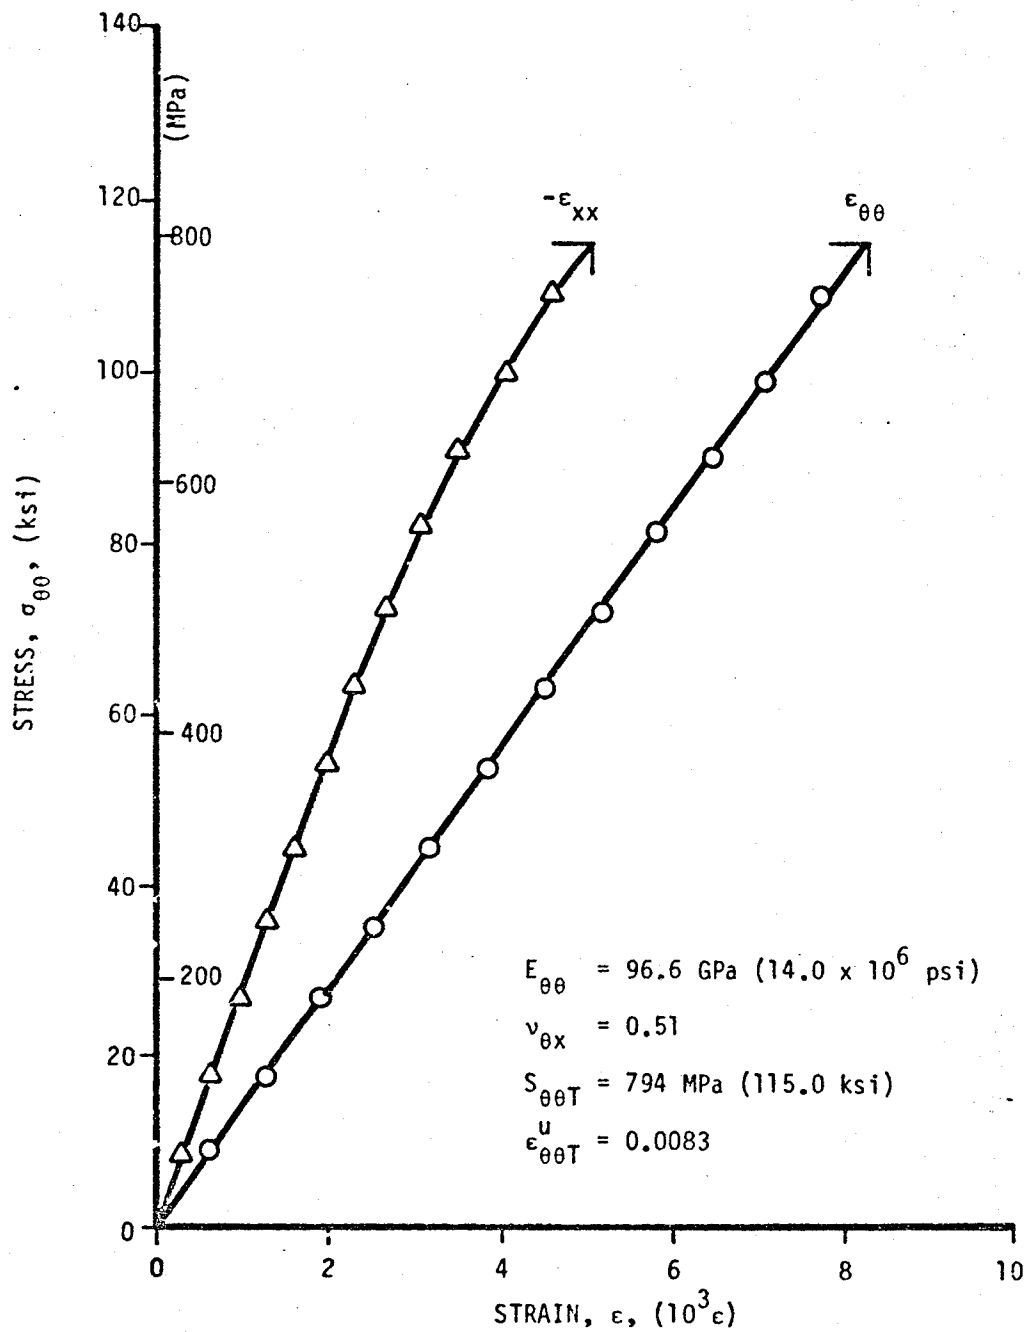


Figure 2-4. Strains in  $[\pm 15]_{2S}$  80AS/20S/PR288 ring specimen under static tensile loading (Specimen No. 36-1).

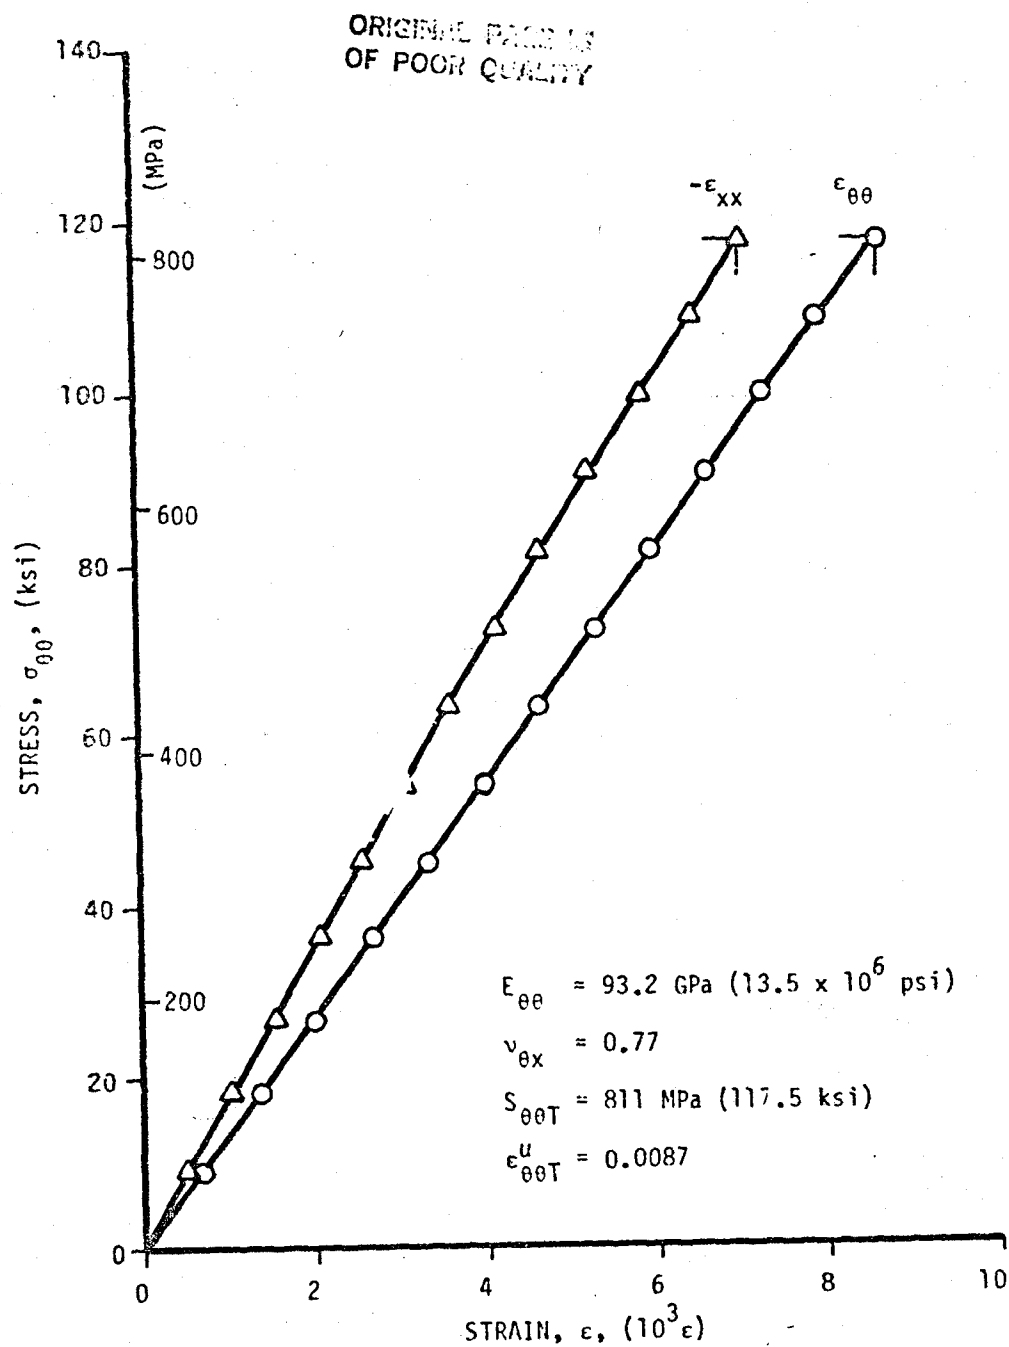


Figure 2-5. Strains in  $[\pm 15]_{2S}$  80AS/20S/PR288 ring specimen under static tensile loading (Specimen no. 36-3).

ORIGINAL PAGE IS  
OF POOR QUALITY

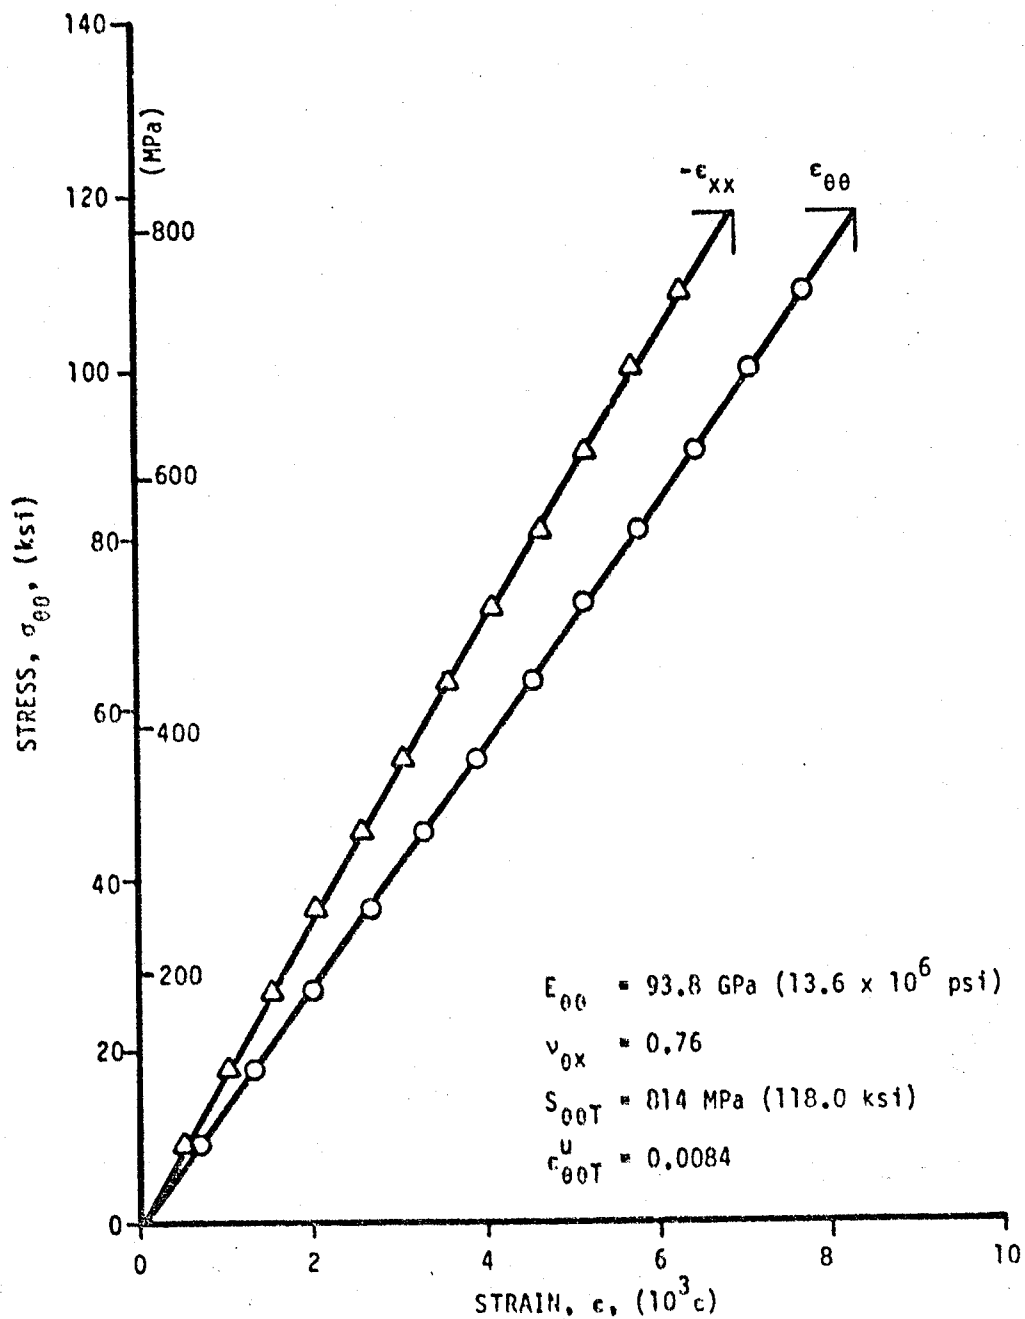


Figure 2-6. Strains in  $[\pm 15]_{2s}$  80AS/20S/PR288 ring specimen under static tensile loading (Specimen No. 36-5).

ORIGINAL PAGE IS  
OF POOR QUALITY

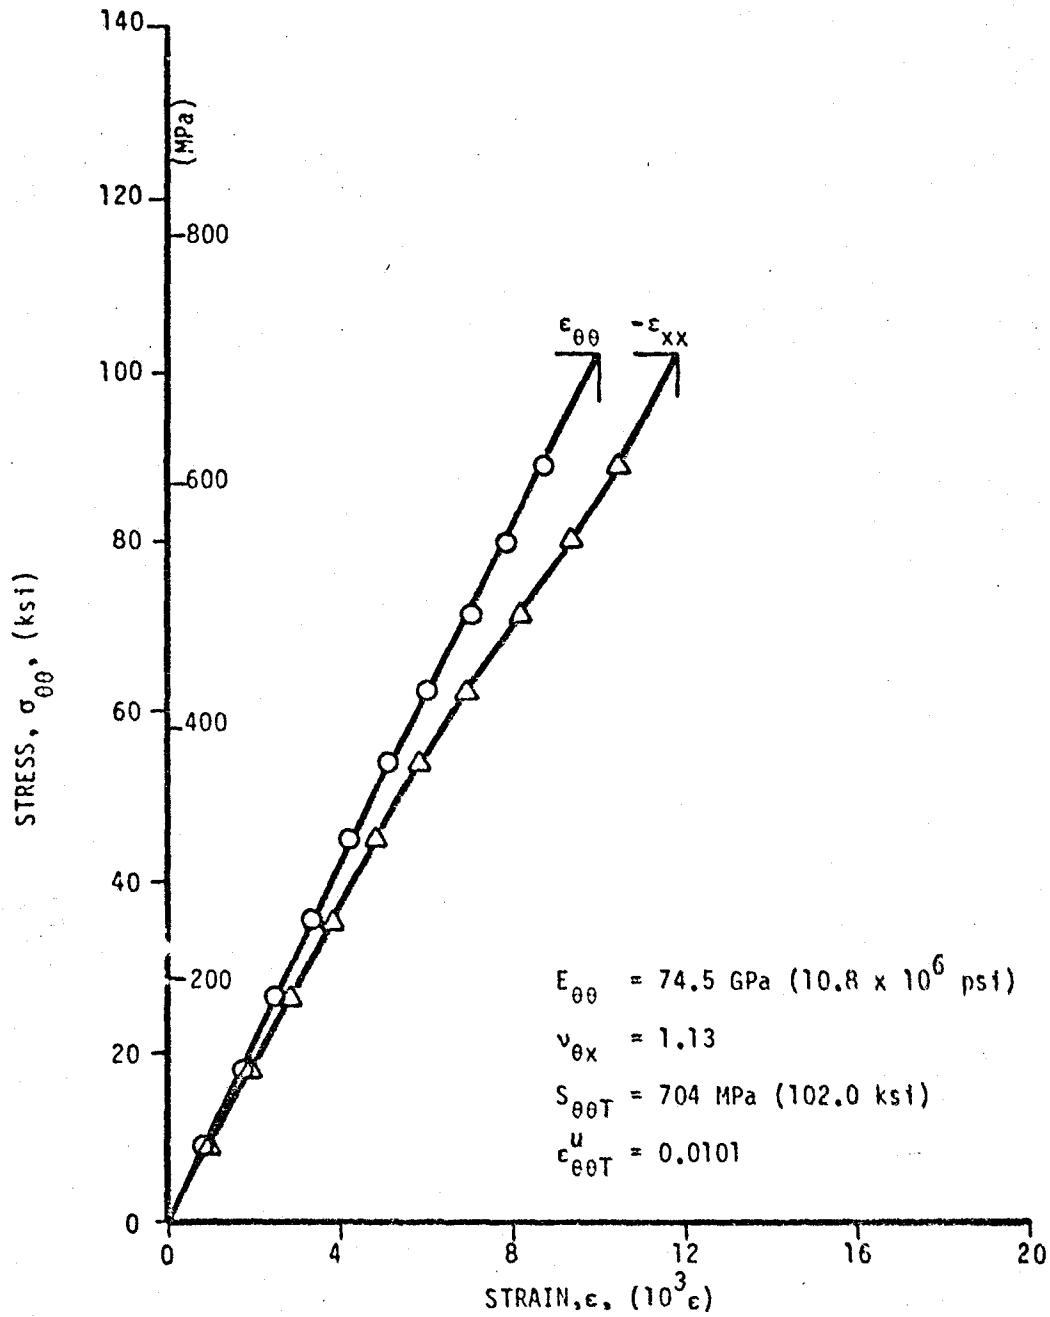


Figure 2-7. Strains in  $[\pm 22.5]_S$  SP288/AS ring specimen under static tensile loading (Specimen No. 33-1).



ORIGINAL PAGE IS  
OF POOR QUALITY

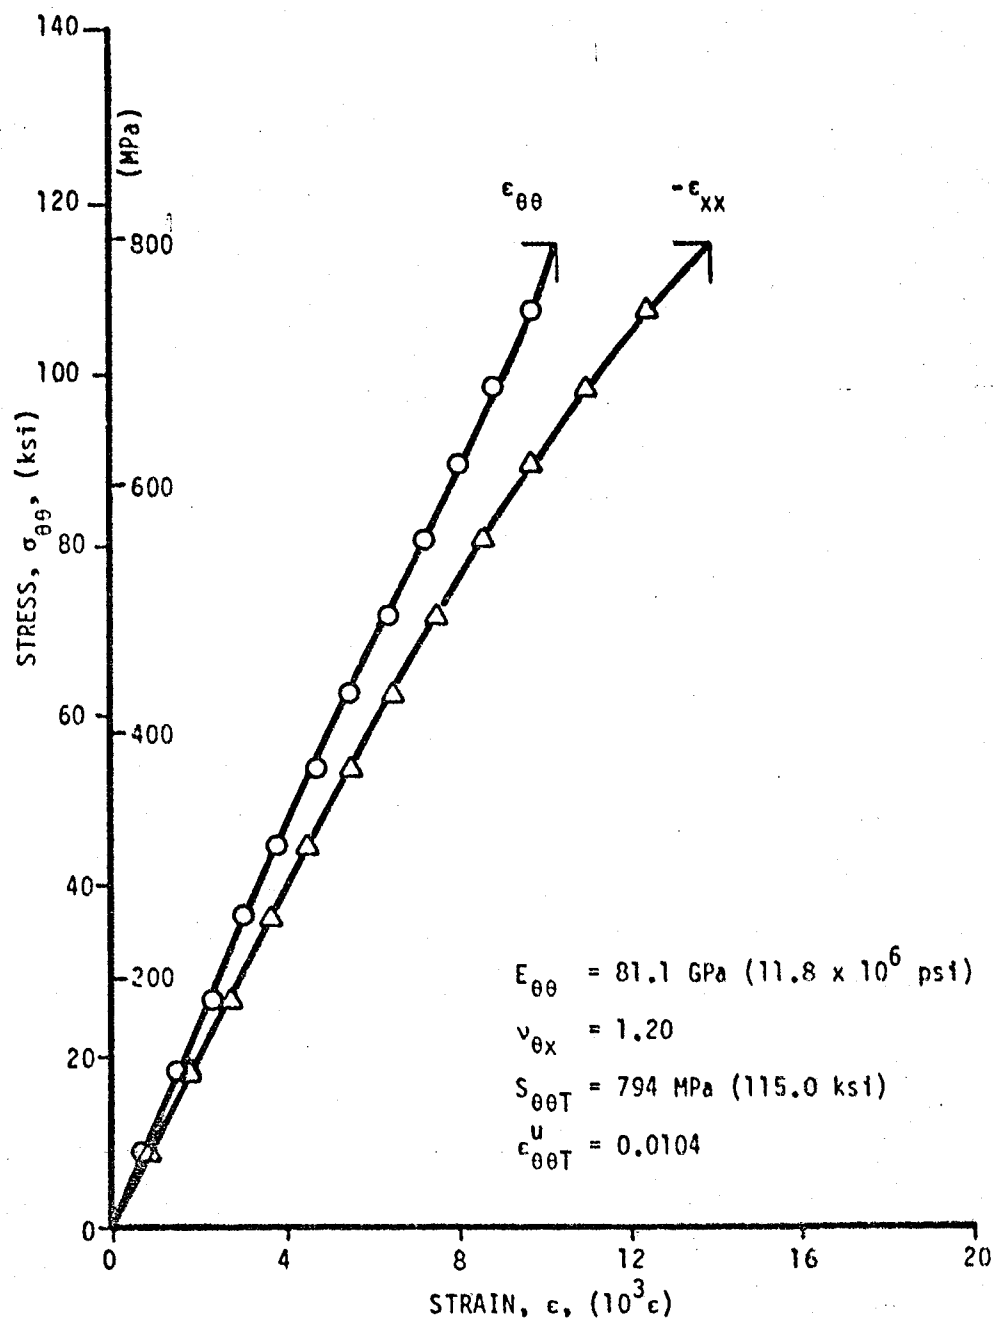


Figure 2-8. Strains in  $[\pm 22.5]_{2s}$  SP288/AS ring specimen under static tensile loading (Specimen No. 33-3).

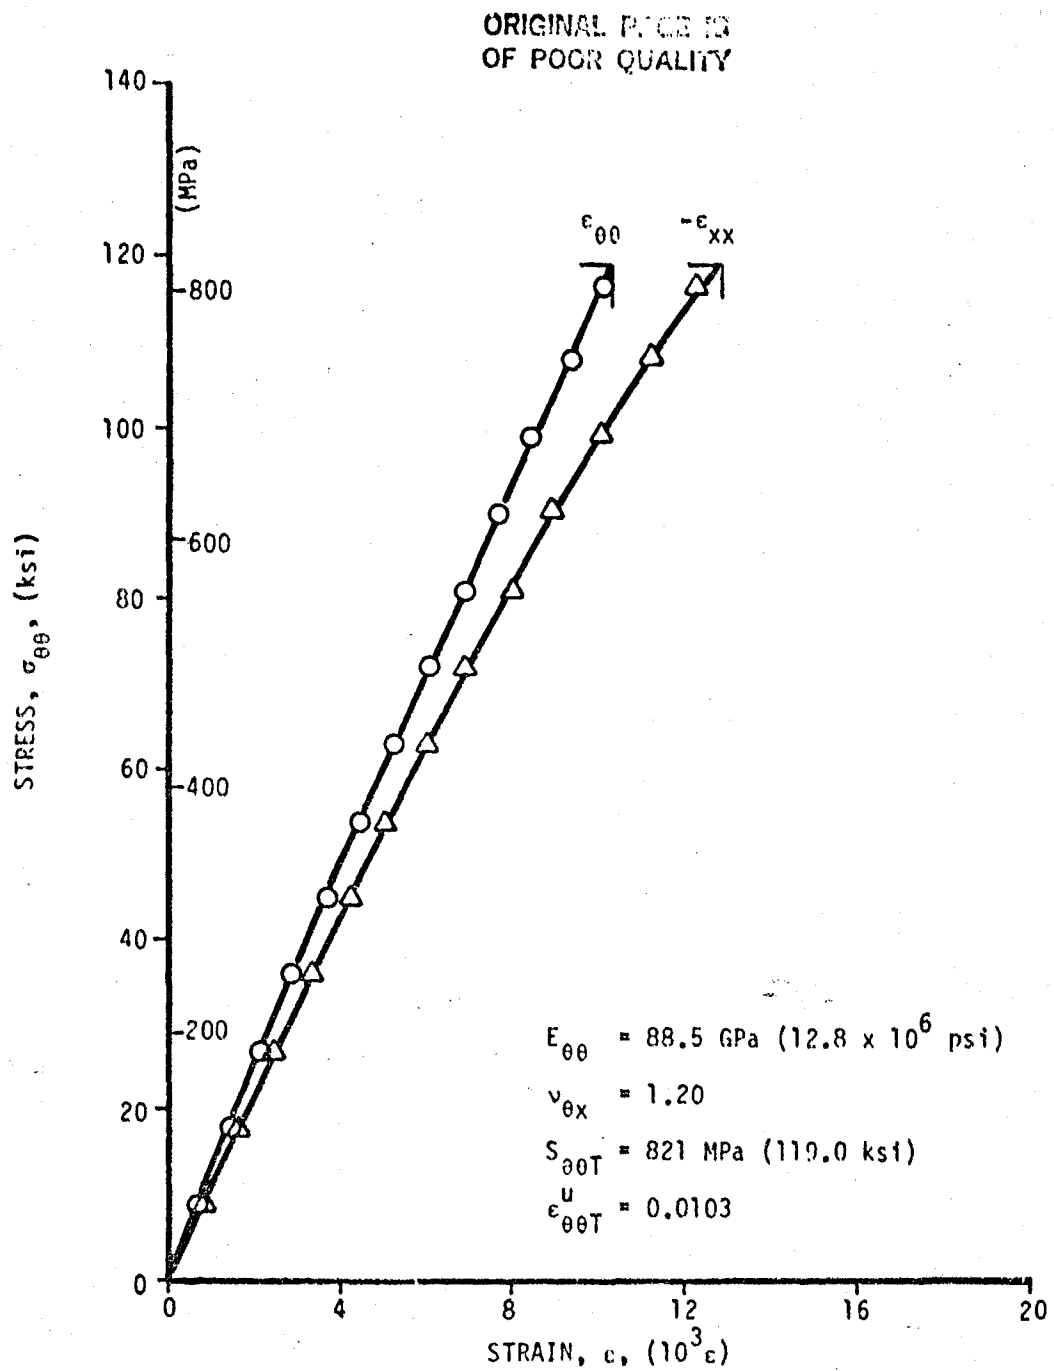


Figure 2-9. Strains in  $[\pm 22.5]_{2S}$  SP288/AS ring specimen under static tensile loading (Specimen No. 33-5).

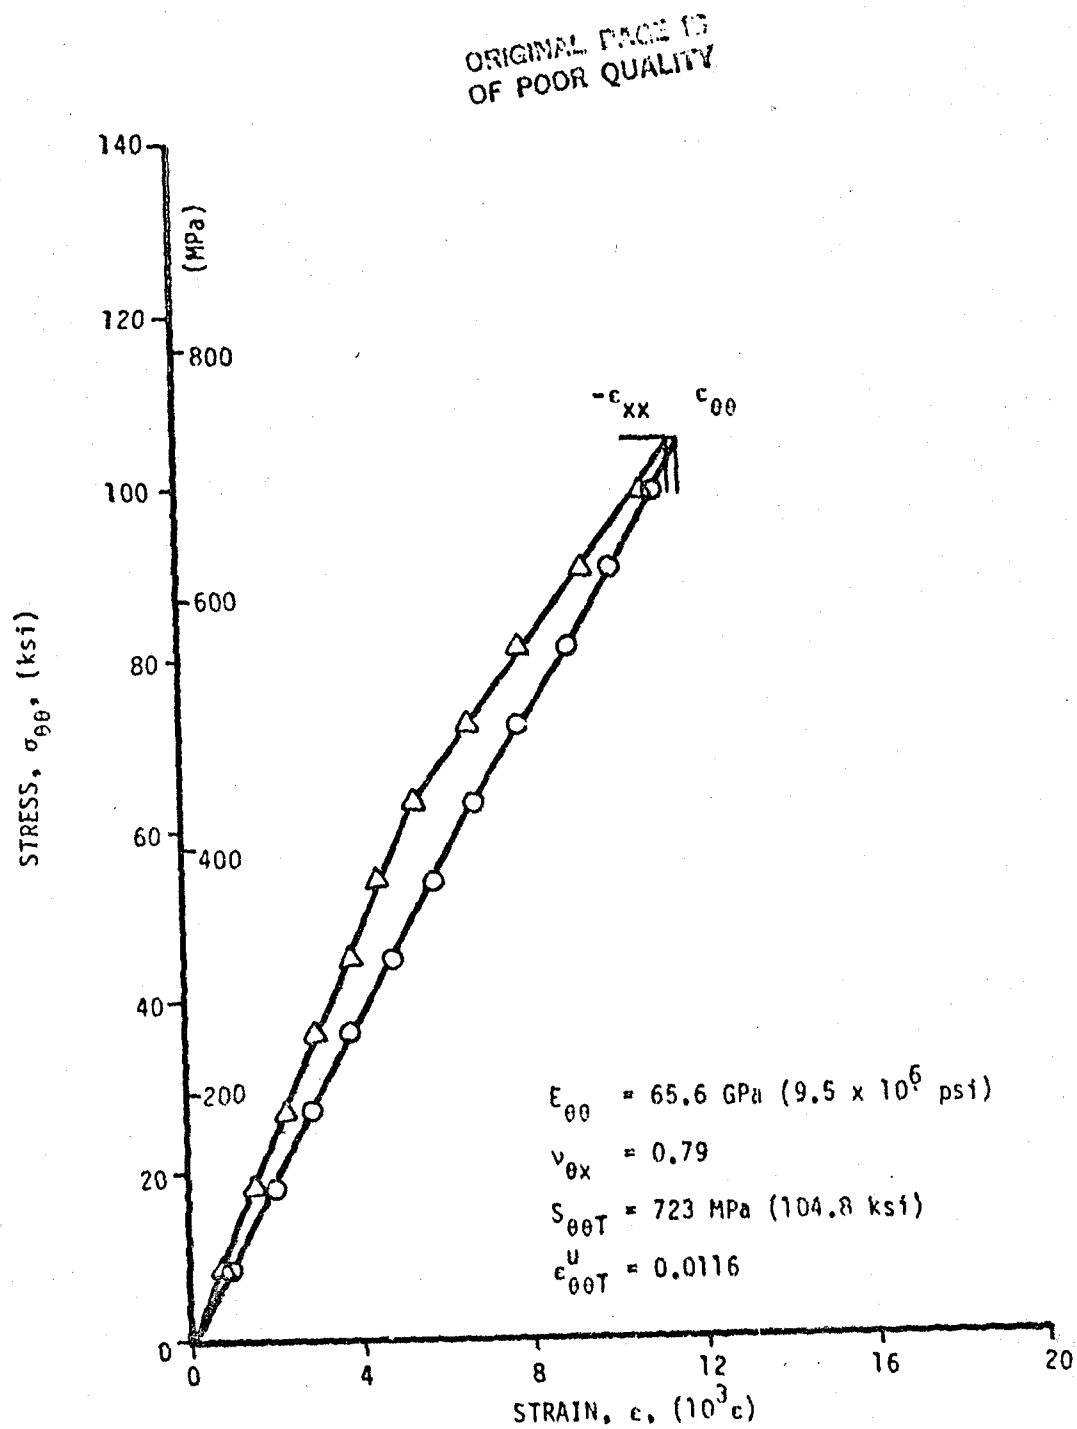


Figure 2-10. Strains in  $[\pm 22.5]_{2s}$  80AS/20S/PR288 ring specimen under static tensile loading (Specimen No. 34-1).

ORIGINAL PAGE IS  
OF POOR QUALITY

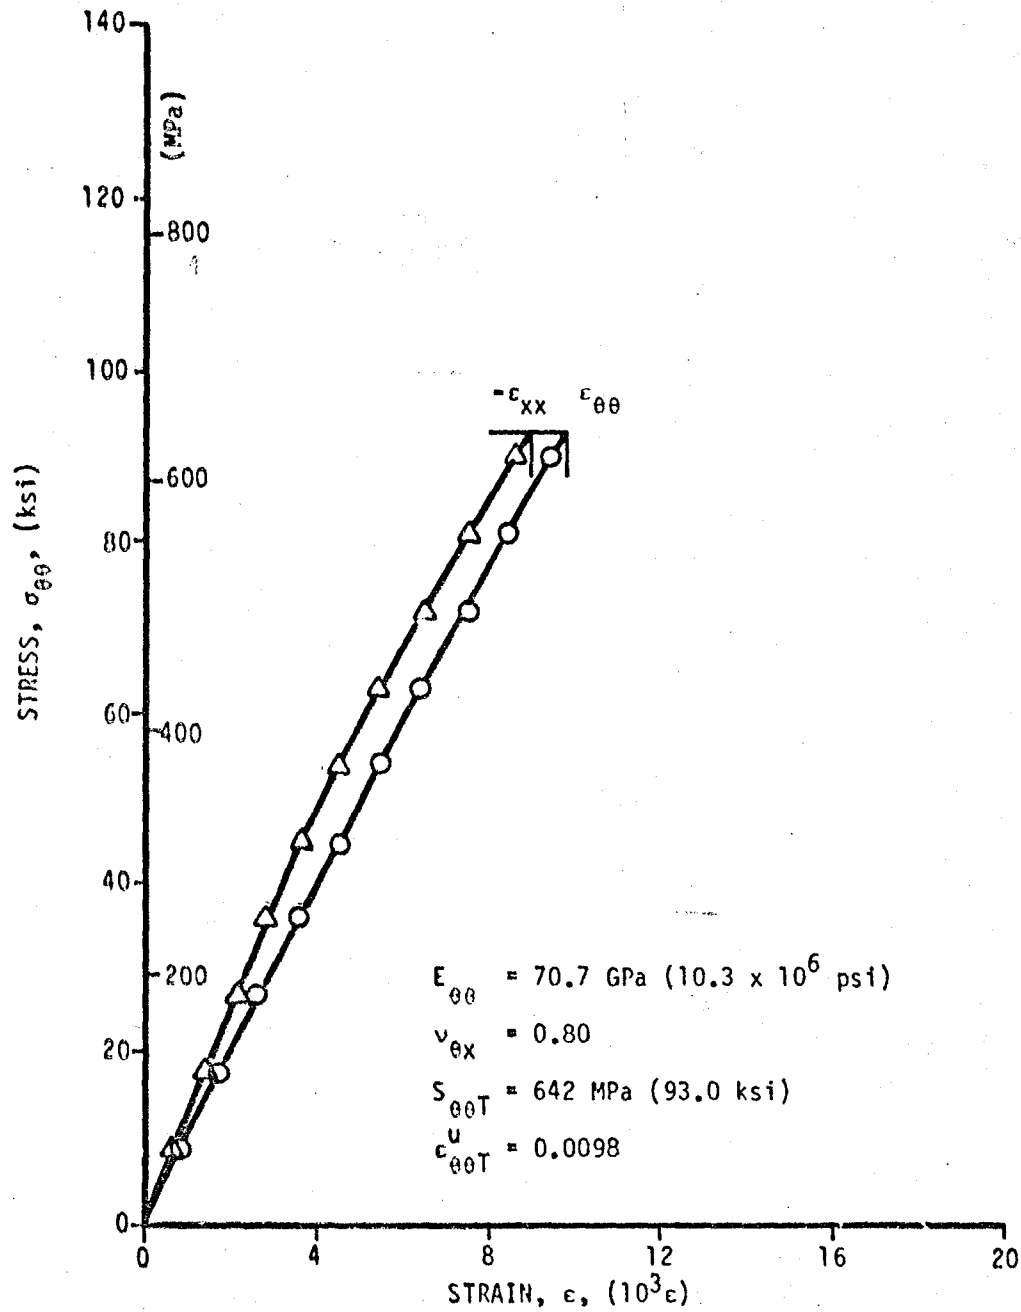


Figure 2-11. Strains in  $[\pm 22.5]_{2s}$  80AS/20S/PR288 ring specimen under static tensile loading (Specimen No. 34-3).

ORIGINAL PAGE IS  
OF POOR QUALITY

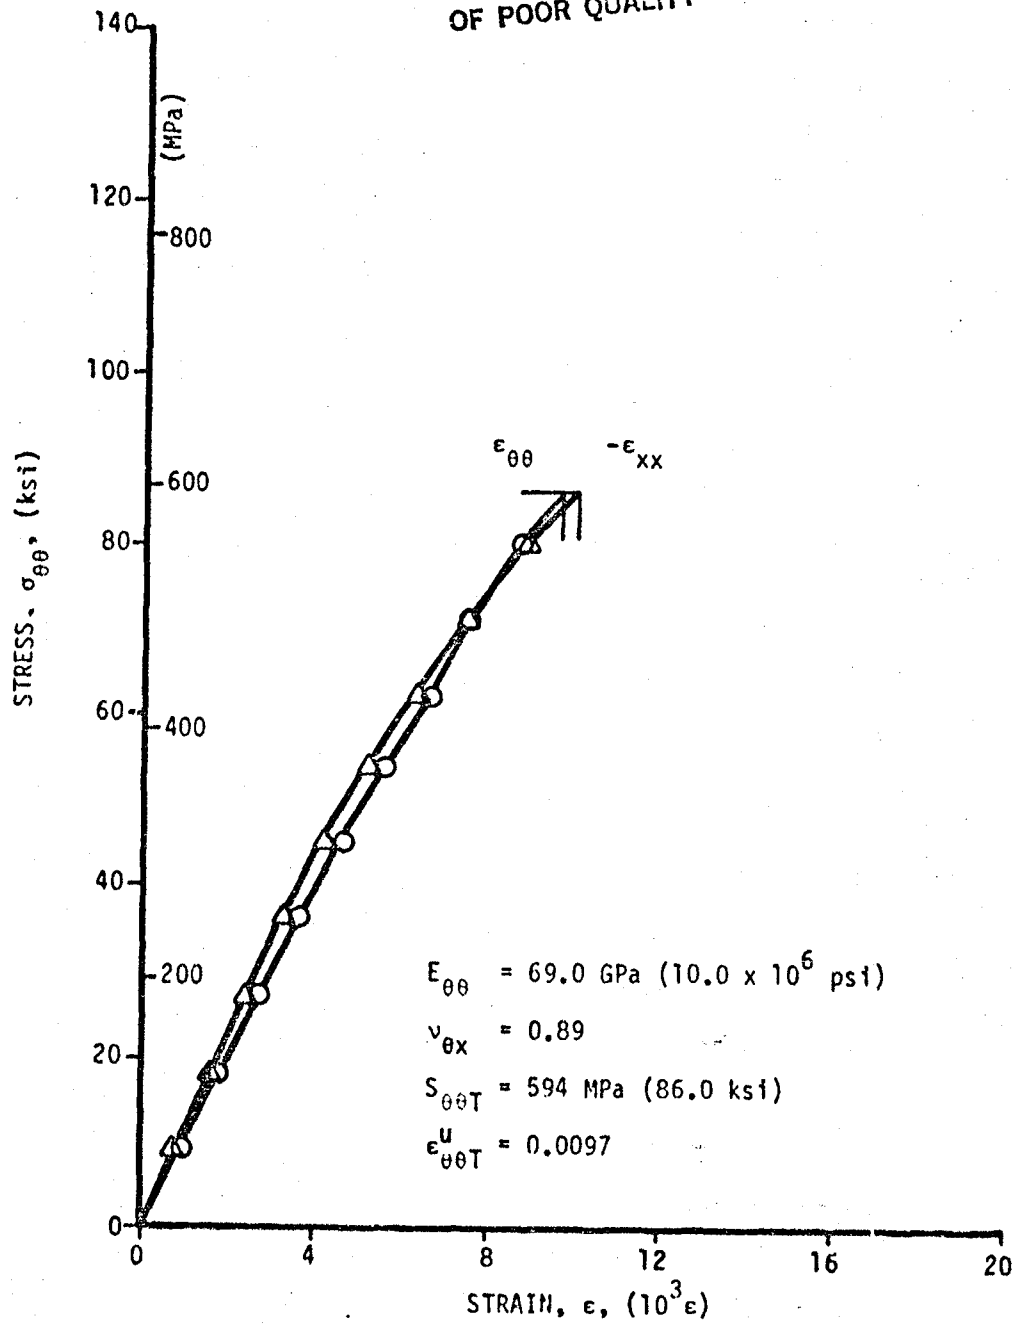


Figure 2-12. Strains in  $[\pm 22.5]_{2s}$  80AS/20S/PR200 ring specimen under static tensile loading (Specimen No. 34-5).

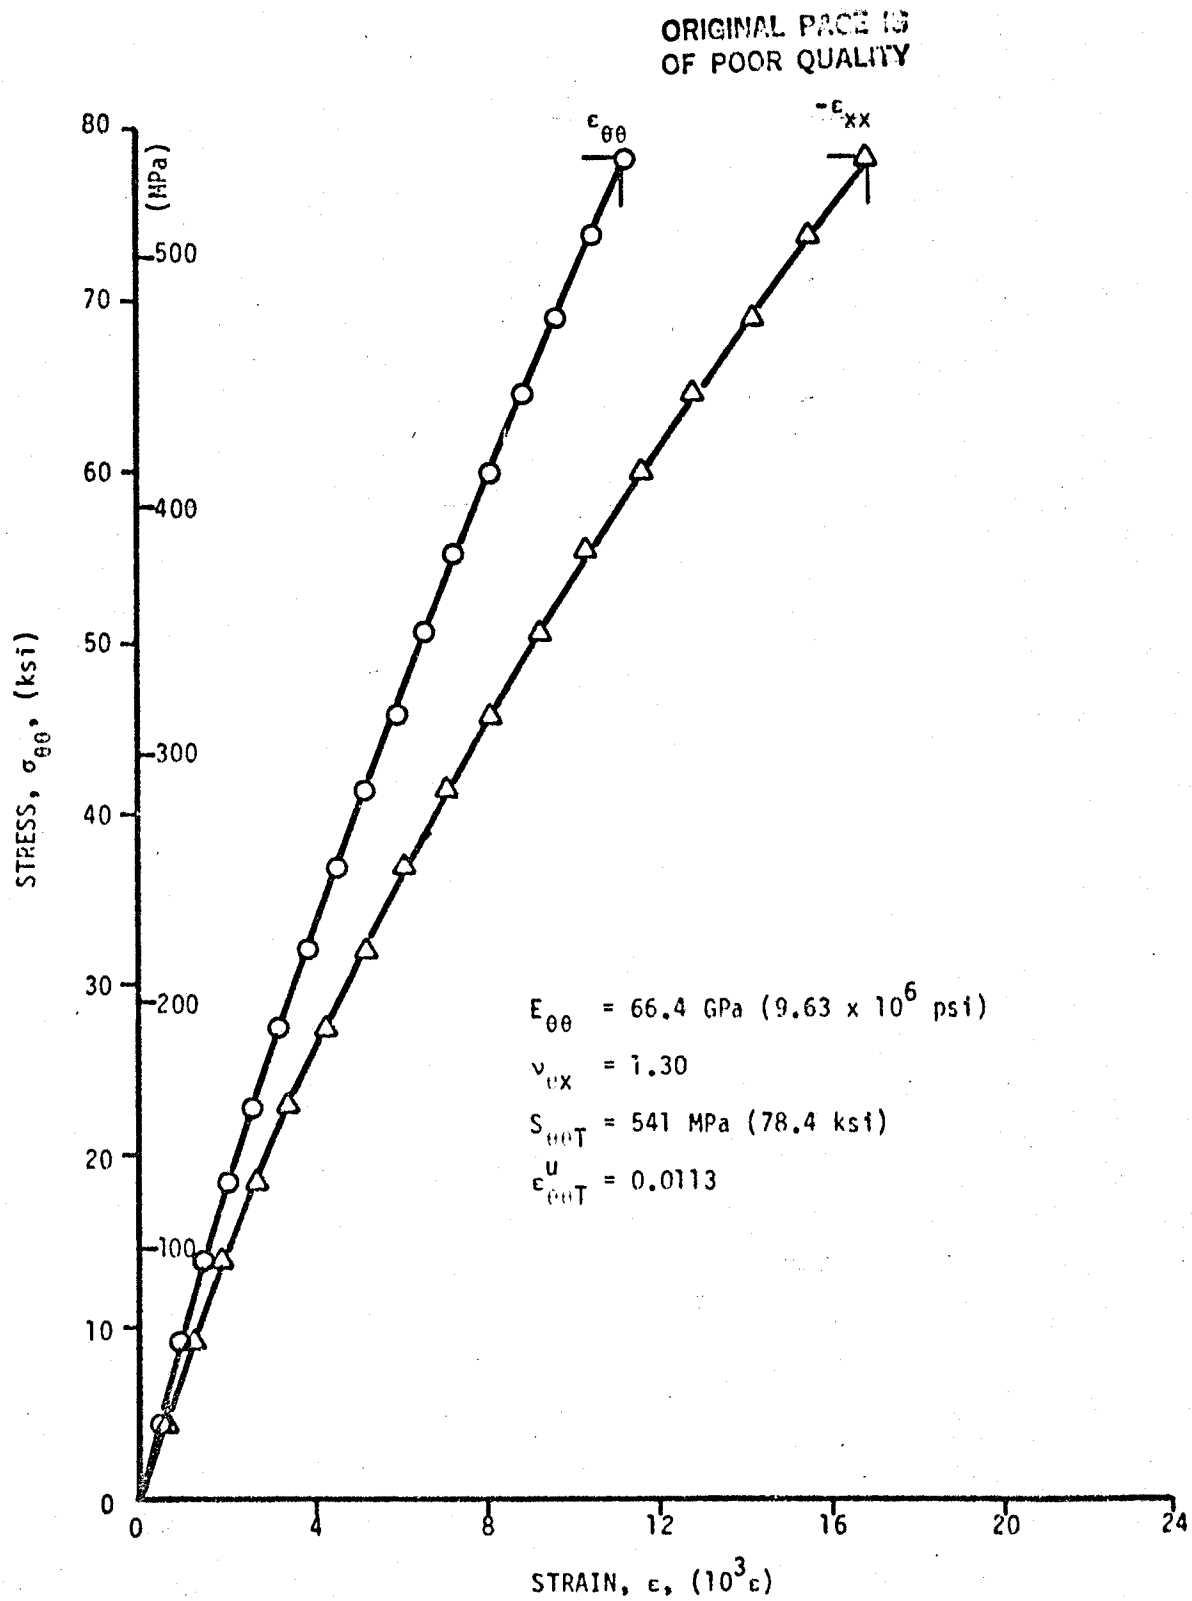


Figure 2-13. Strains in  $[\pm 30]_{2s}$  SP288/AS ring specimen under static tensile loading (Specimen No. 28-1).

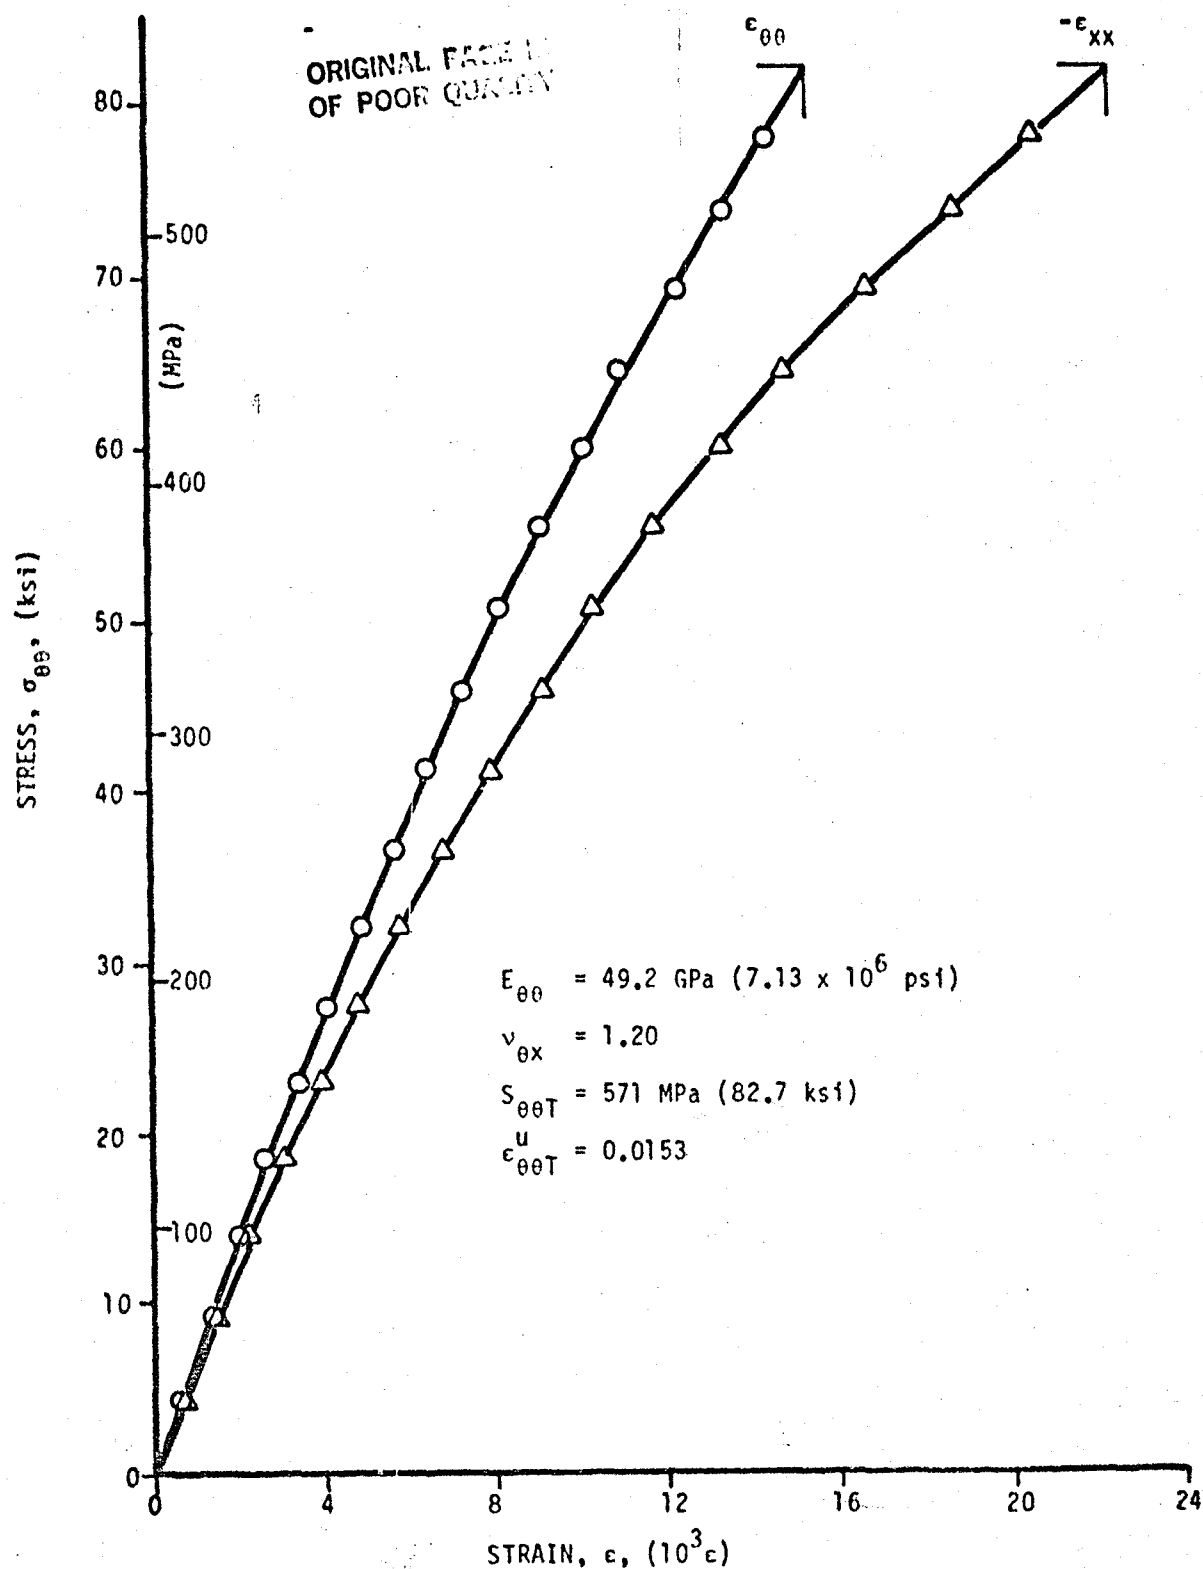


Figure 2-14. Strains in  $[\pm 30]_{2S}$  SP288/AS ring specimen under static tensile loading (Specimen No. 28-3).

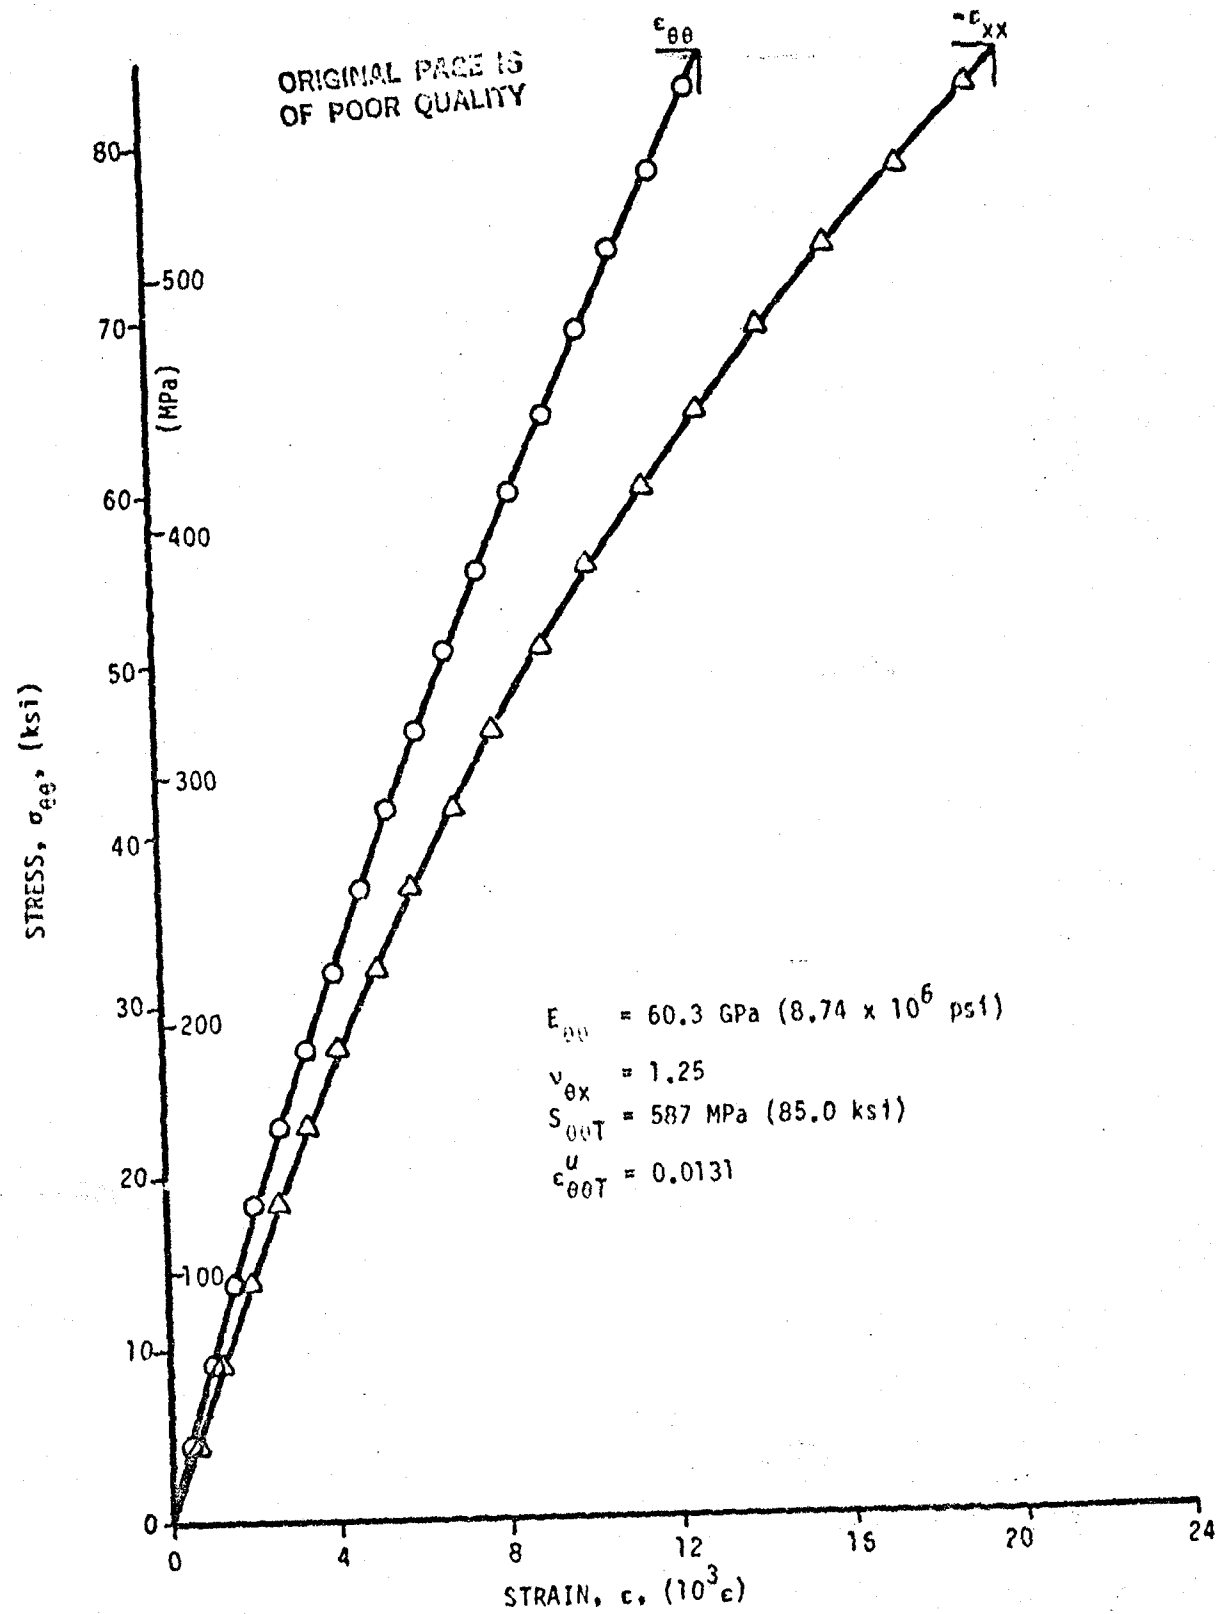


Figure 2-15. Strains in  $[\pm 30]_2$  SP288/AS specimen under static tensile loading (Specimen No. 28-5).



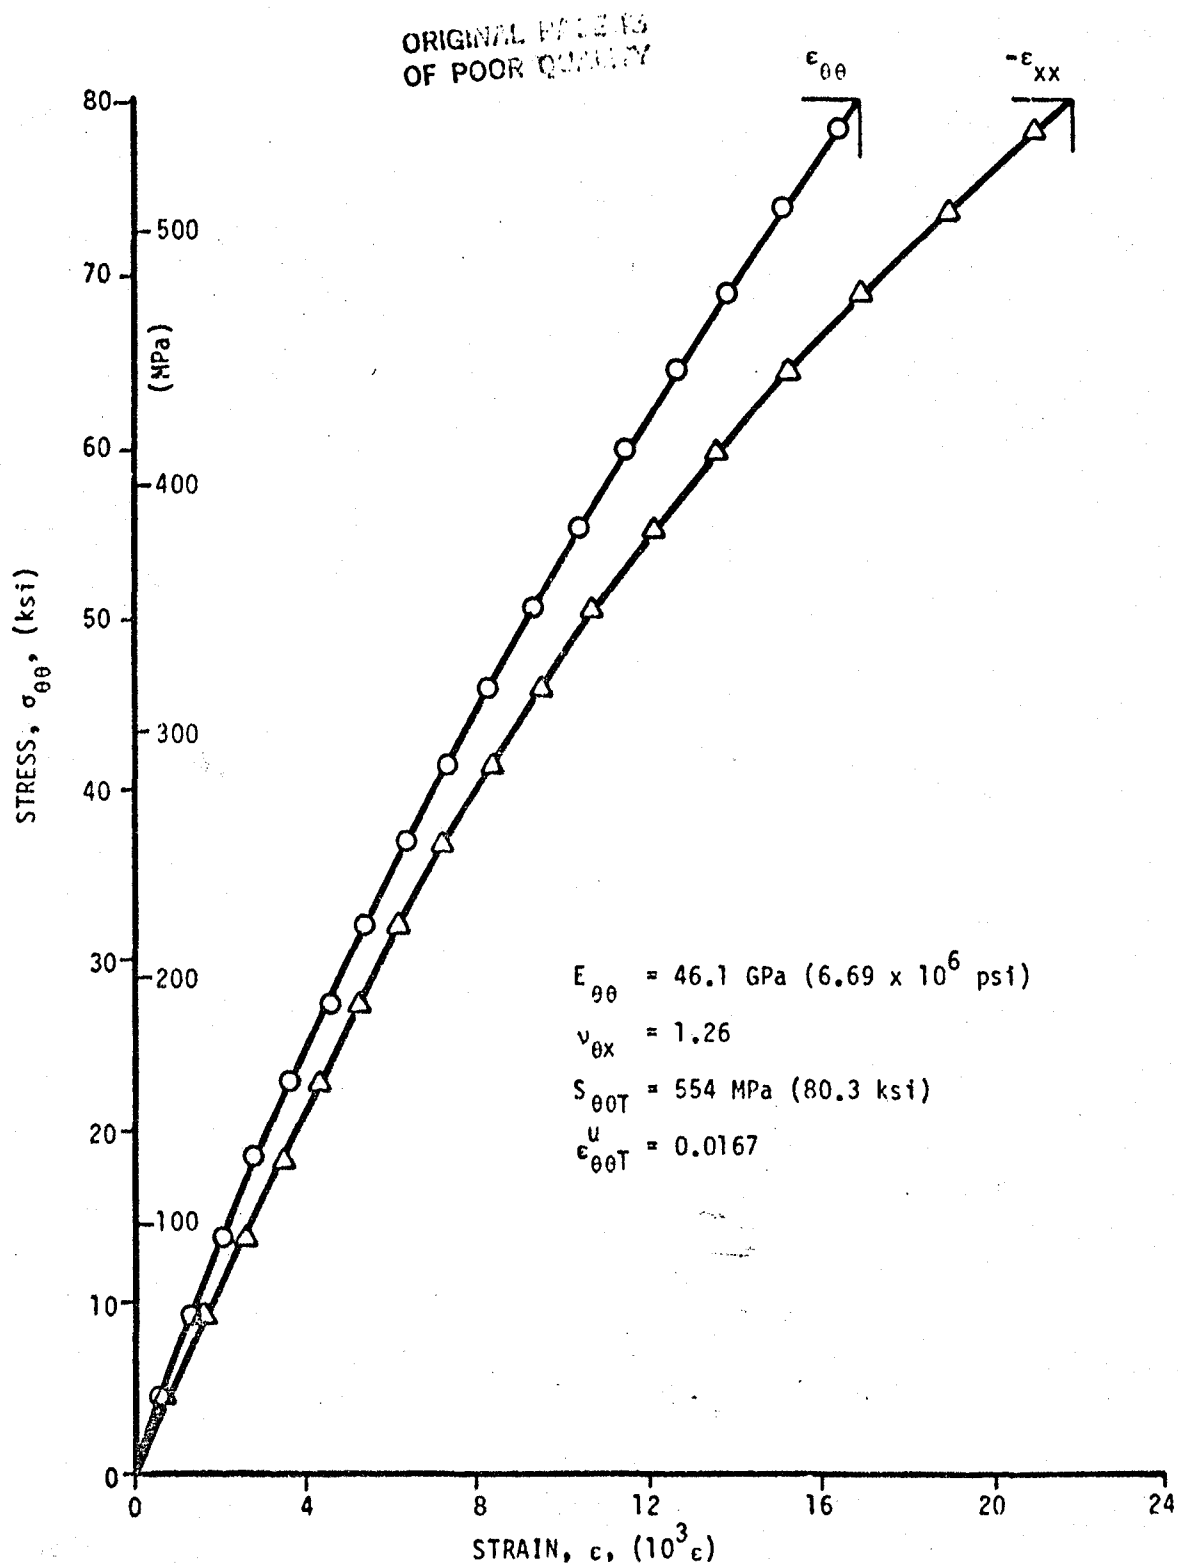


Figure 2-16. Strains in  $[\pm 30]_{2s}$  80AS/20S/PR288 ring specimen under static tensile loading (Specimen No. 29-1).

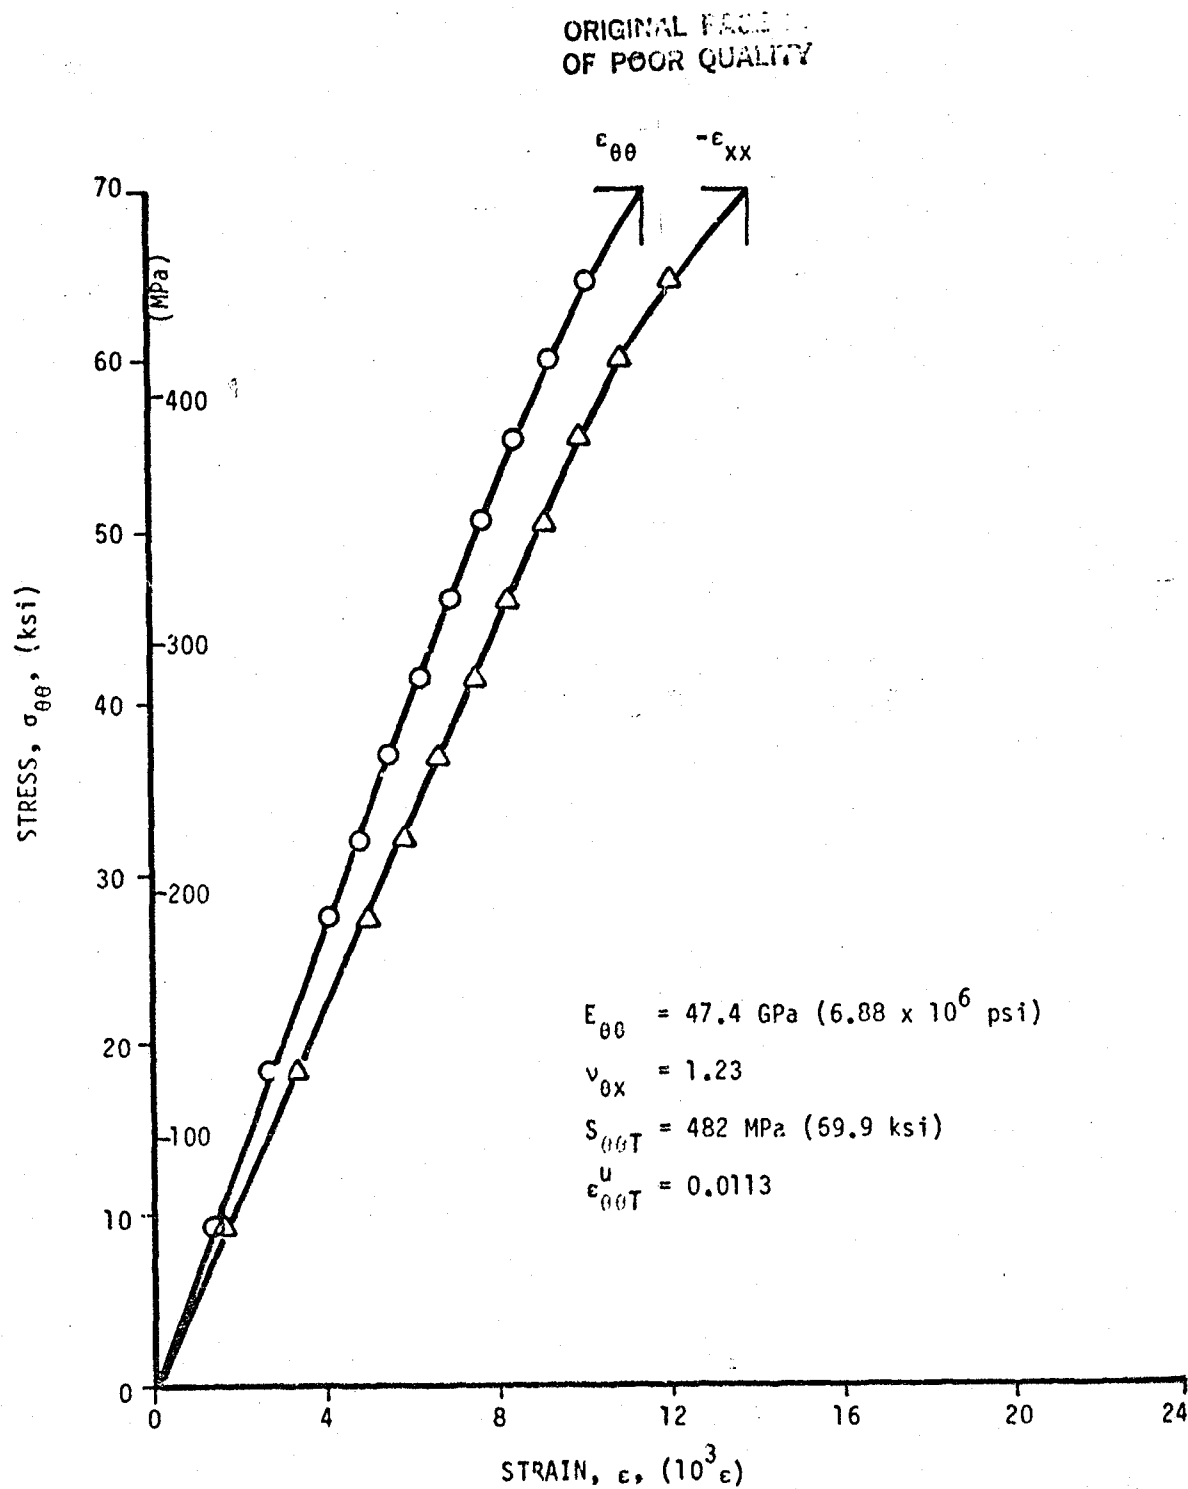


Figure 2-17. Strains in  $[\pm 30]_{2c}$  80AS/20S/PR288 ring specimen under static tensile loading (Specimen No. 29-3).

ORIGINAL PAGE IS  
OF POOR QUALITY

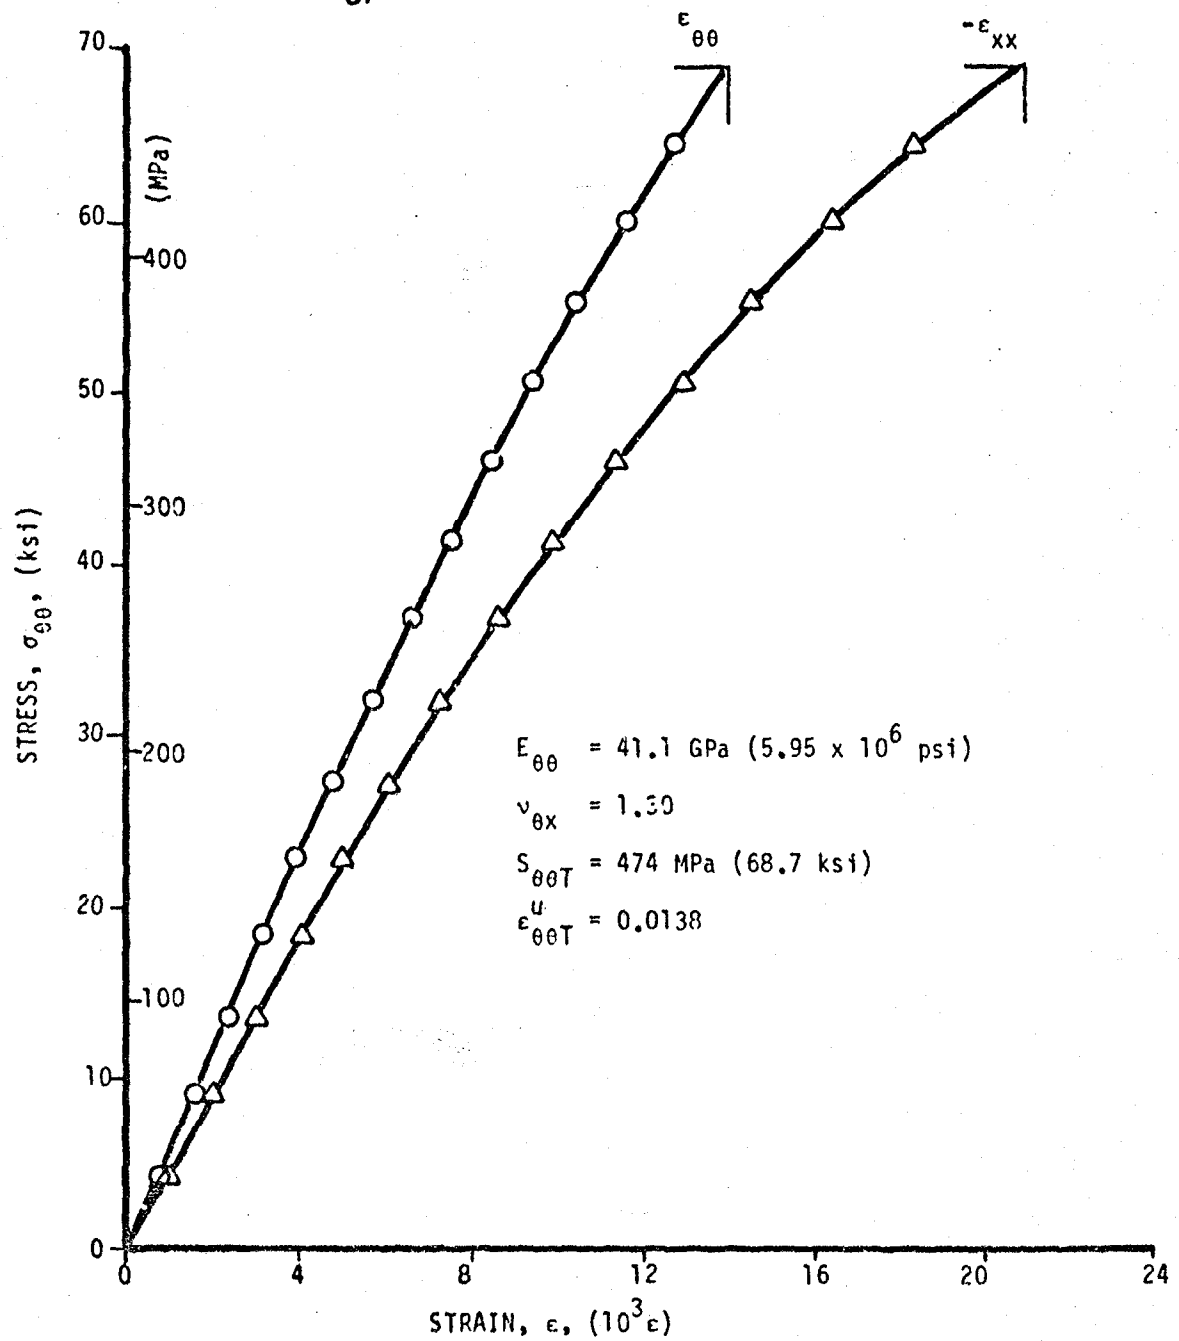


Figure 2-18. Strains in  $[\pm 30]_{2s}$  80AS/20S/PR288 ring specimen under static tensile loading (Specimen No. 29-5).

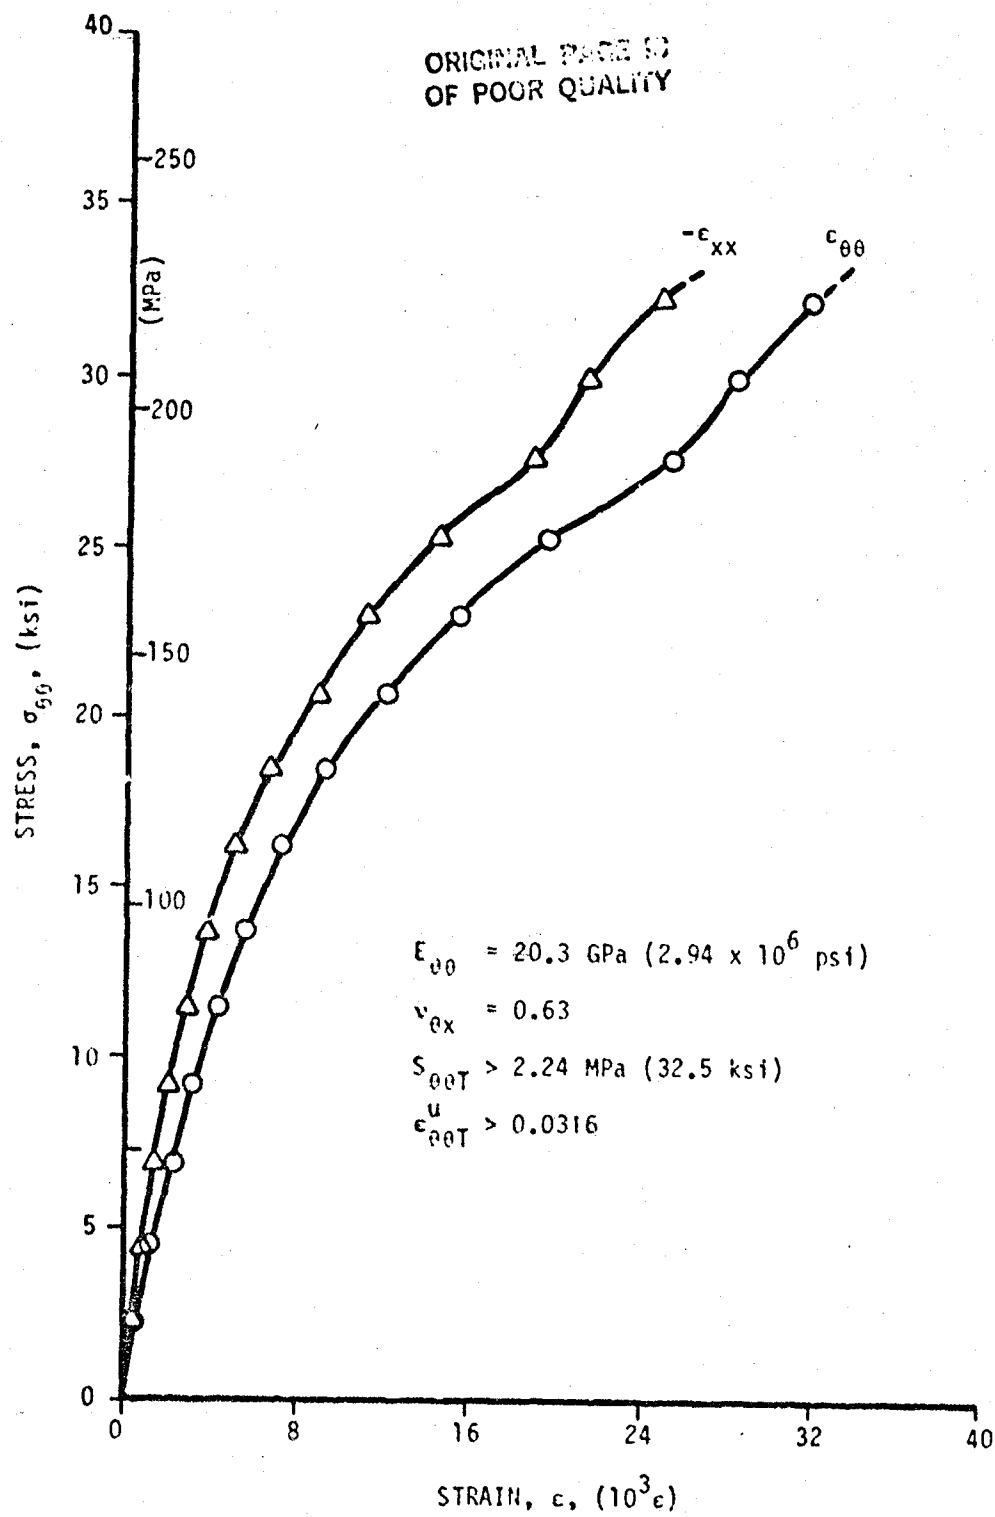


Figure 2-19. Strains in  $[\pm 45]_{2s}$  SP288/AS ring specimen under static tensile loading (Specimen No. 24-1).

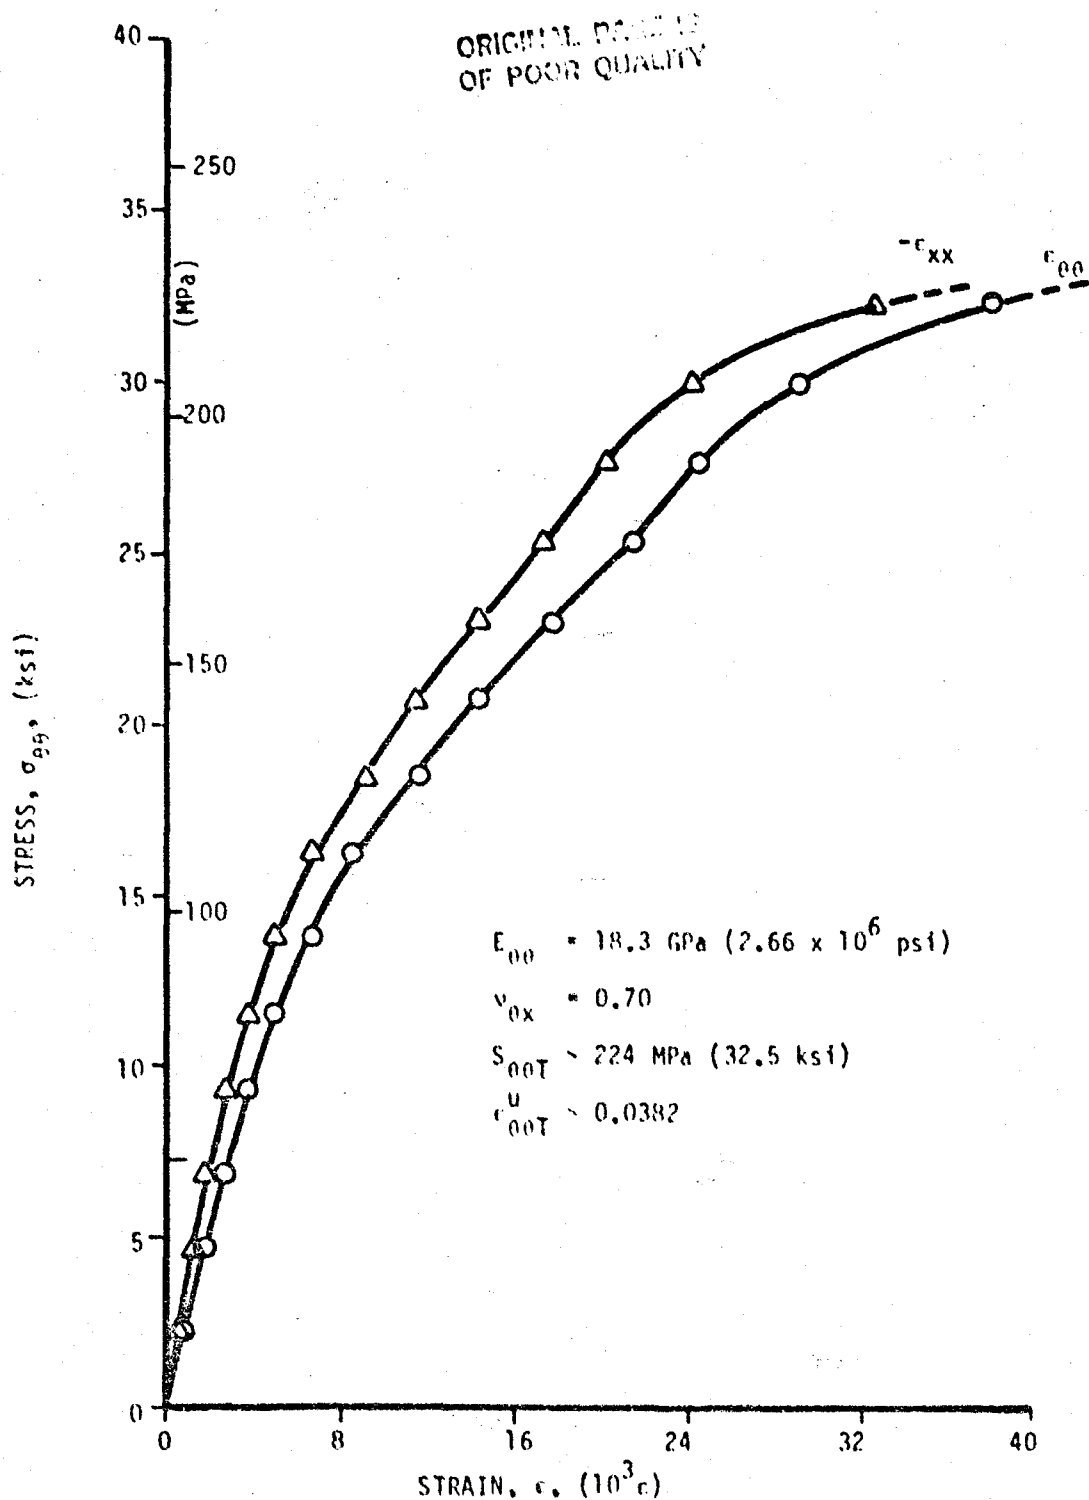


Figure 2-20. Strains in  $[+45]_{2S}$  SP288/AS ring specimen under static tensile loading (Specimen No. 24-3).

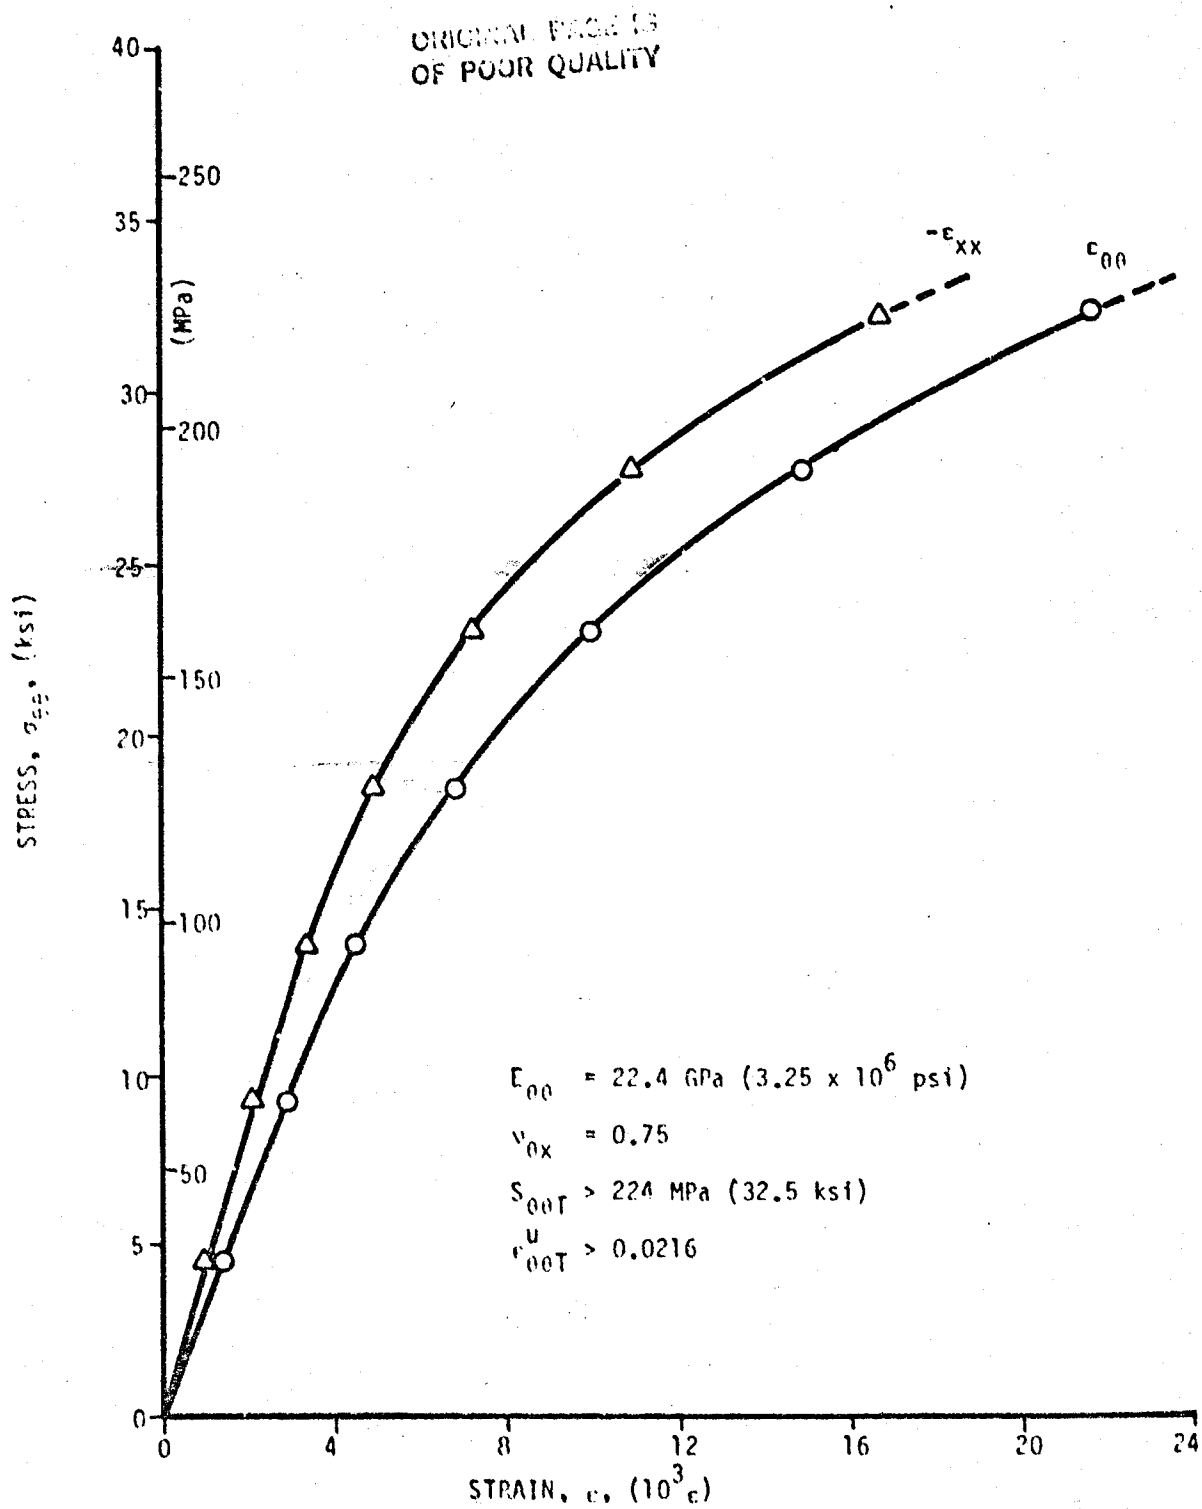


Figure 2-21. Strains in  $[+45]_{2s}$  SP288/AS ring specimen under static tensile loading (Specimen No. 24-5).

ORIGINAL PAGE IS  
OF POOR QUALITY

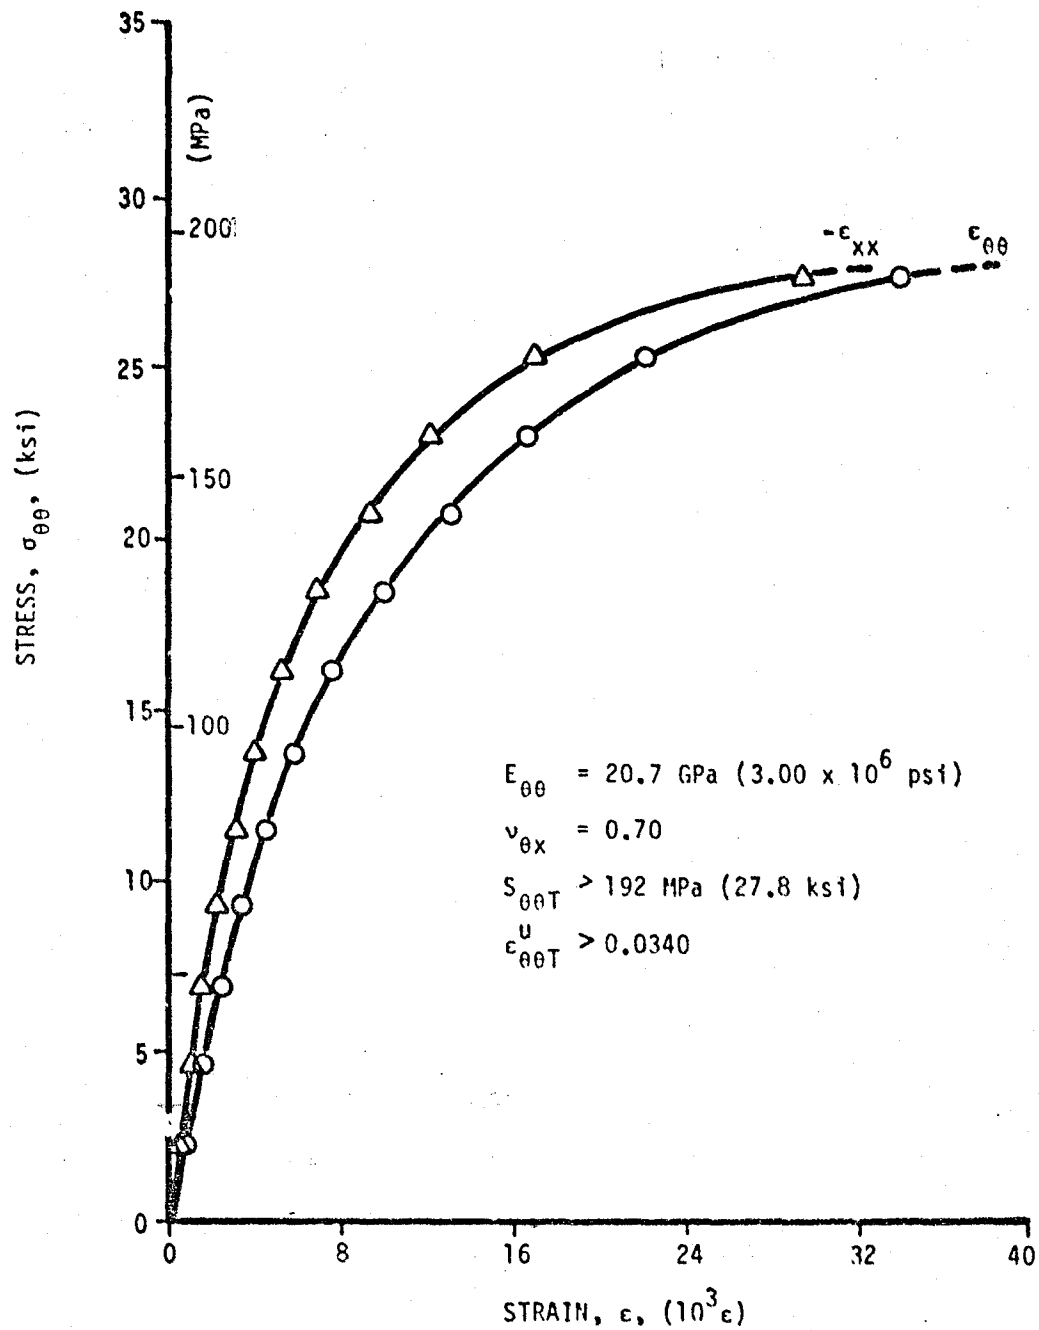


Figure 2-22. Strains in  $[\pm 45]_{2s}$  80AS/20S/PR288 ring specimen under static tensile loading (Specimen No. 25-1).

ORIGINAL PAGE IS  
OF POOR QUALITY

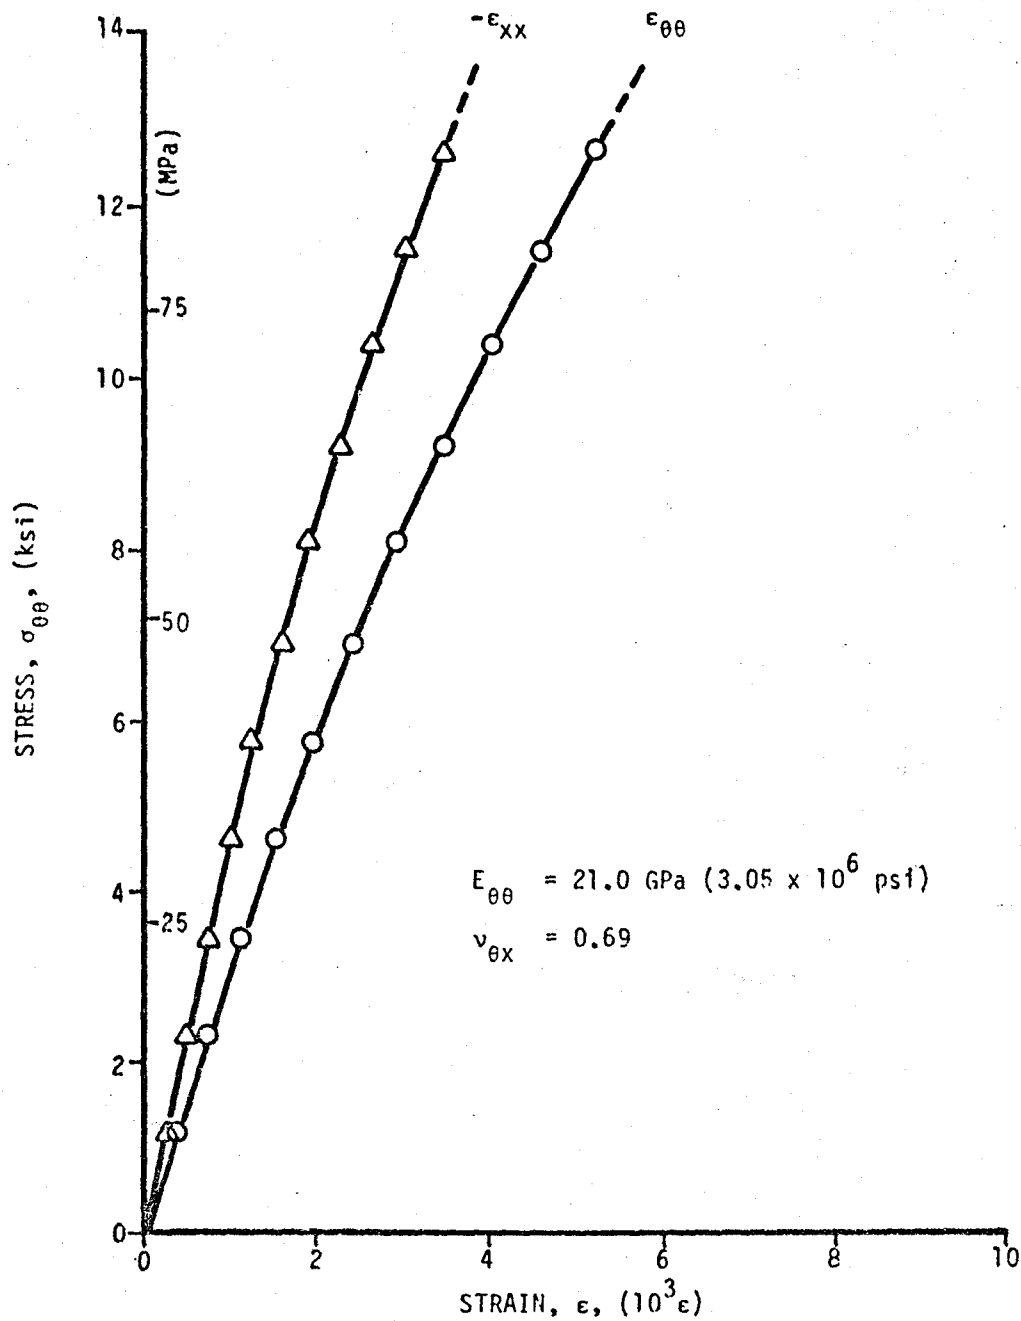


Figure 2-23. Strains in  $[\pm 45]_{2s}$  80AS/20S/PR288 ring specimen under static tensile loading (Specimen No. 25-3).



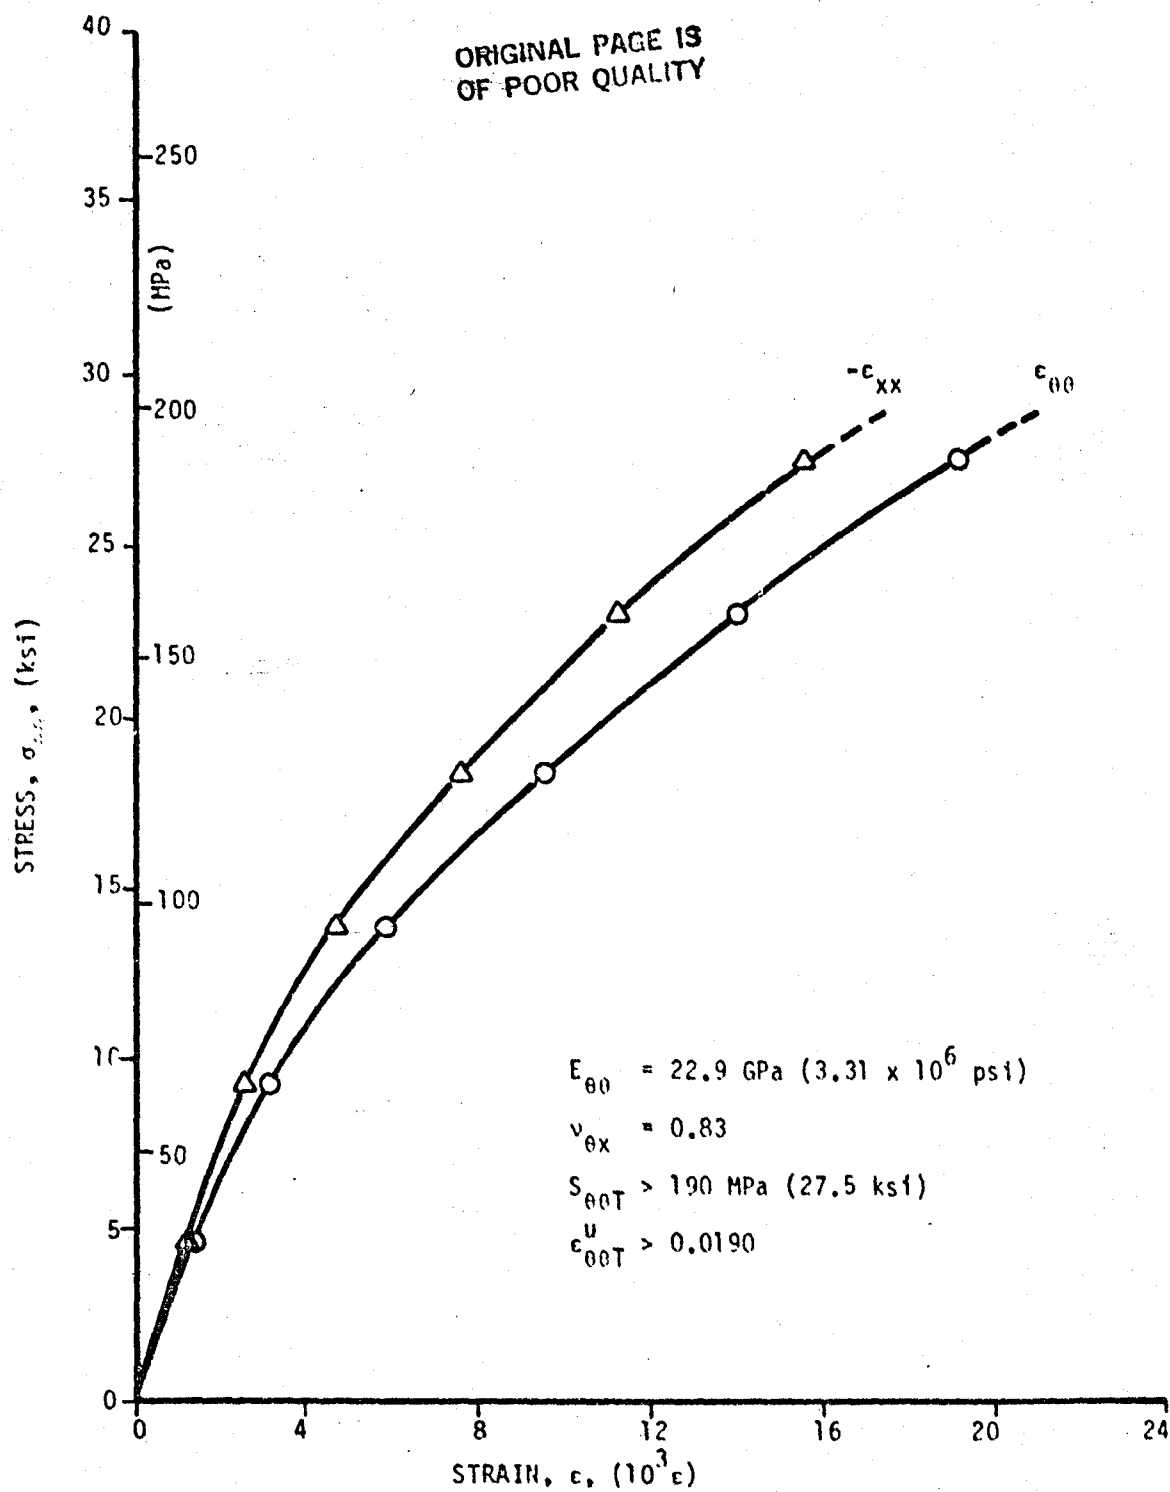


Figure 2-24. Strains in  $[\pm 45]_2$  80AS/20S/PR288 ring specimen under static tensile loading (Specimen No. 25-5).

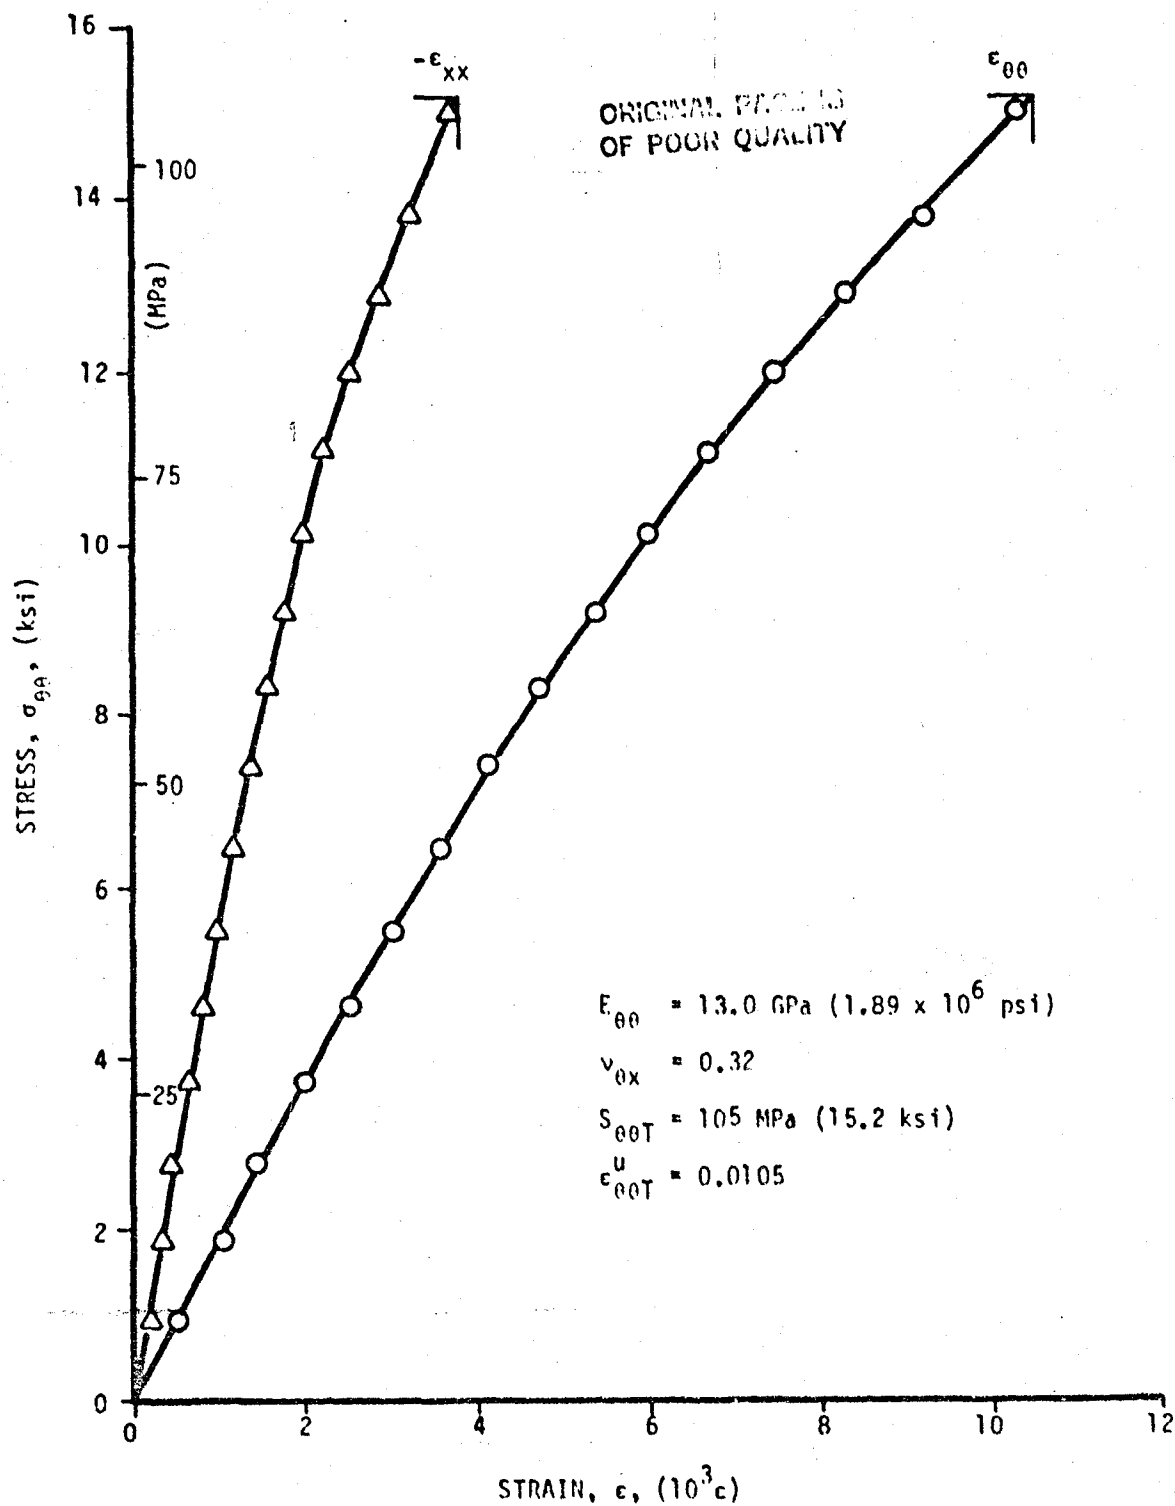


Figure 2-25. Strains in  $[\pm 60]_{2s}$  SP288/AS ring specimen under static tensile loading (Specimen No. 22-1).

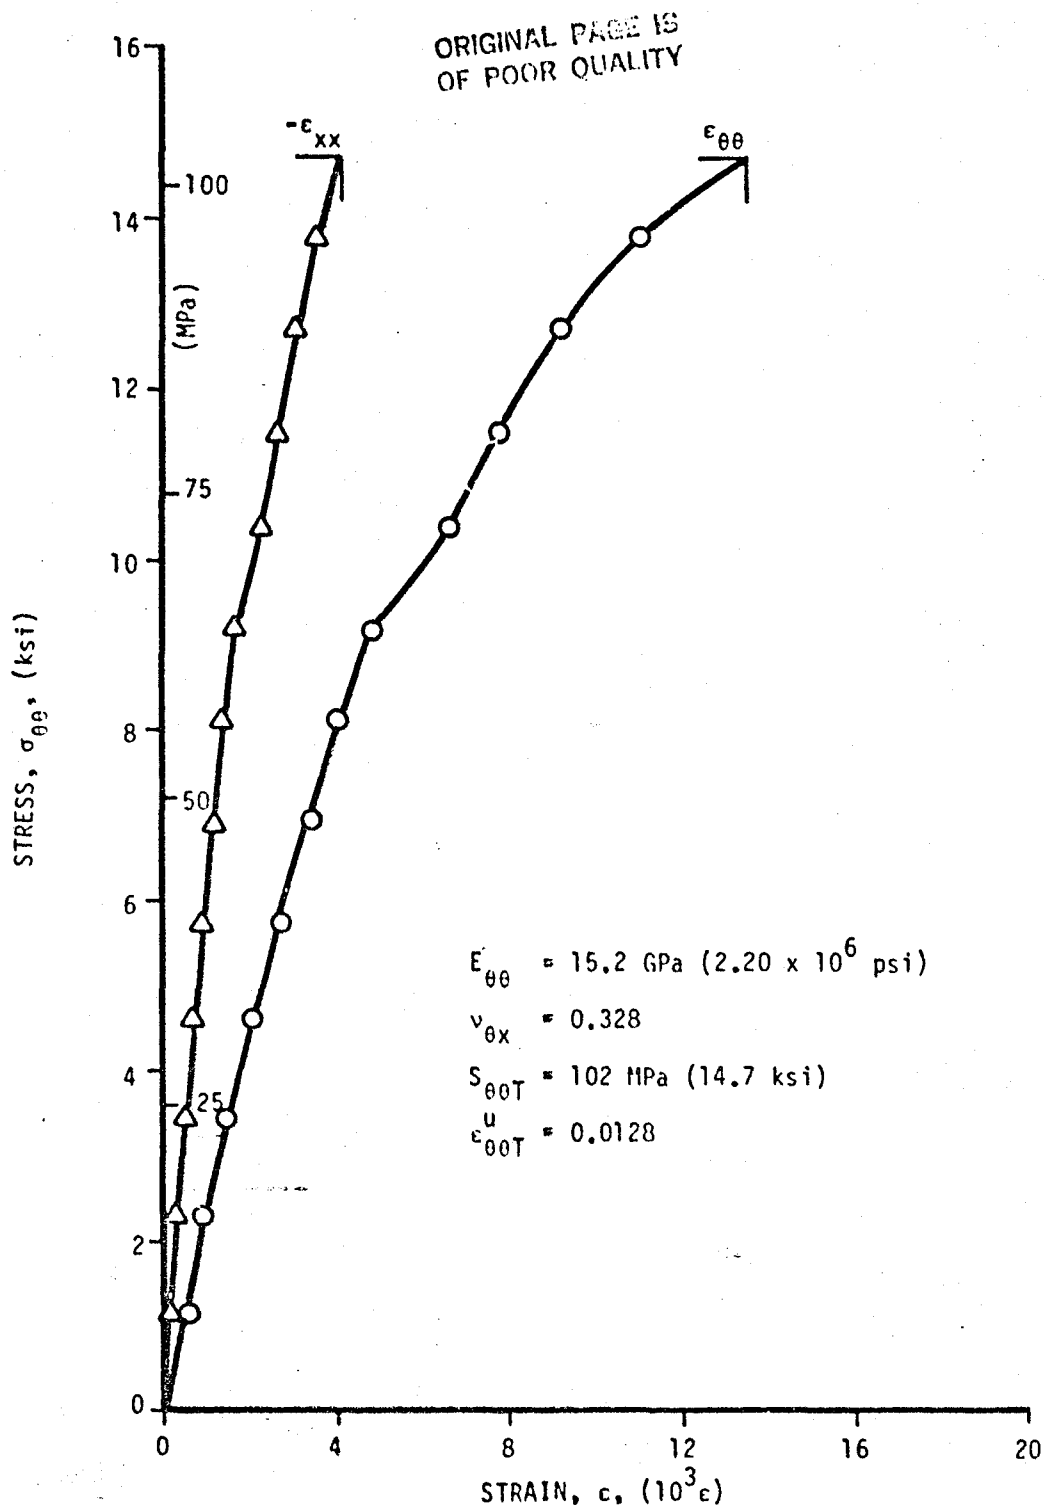


Figure 2-26. Strains in  $[\pm 60]_{2s}$  SP288/AS ring specimen under static tensile loading (Specimen No. 22-3).

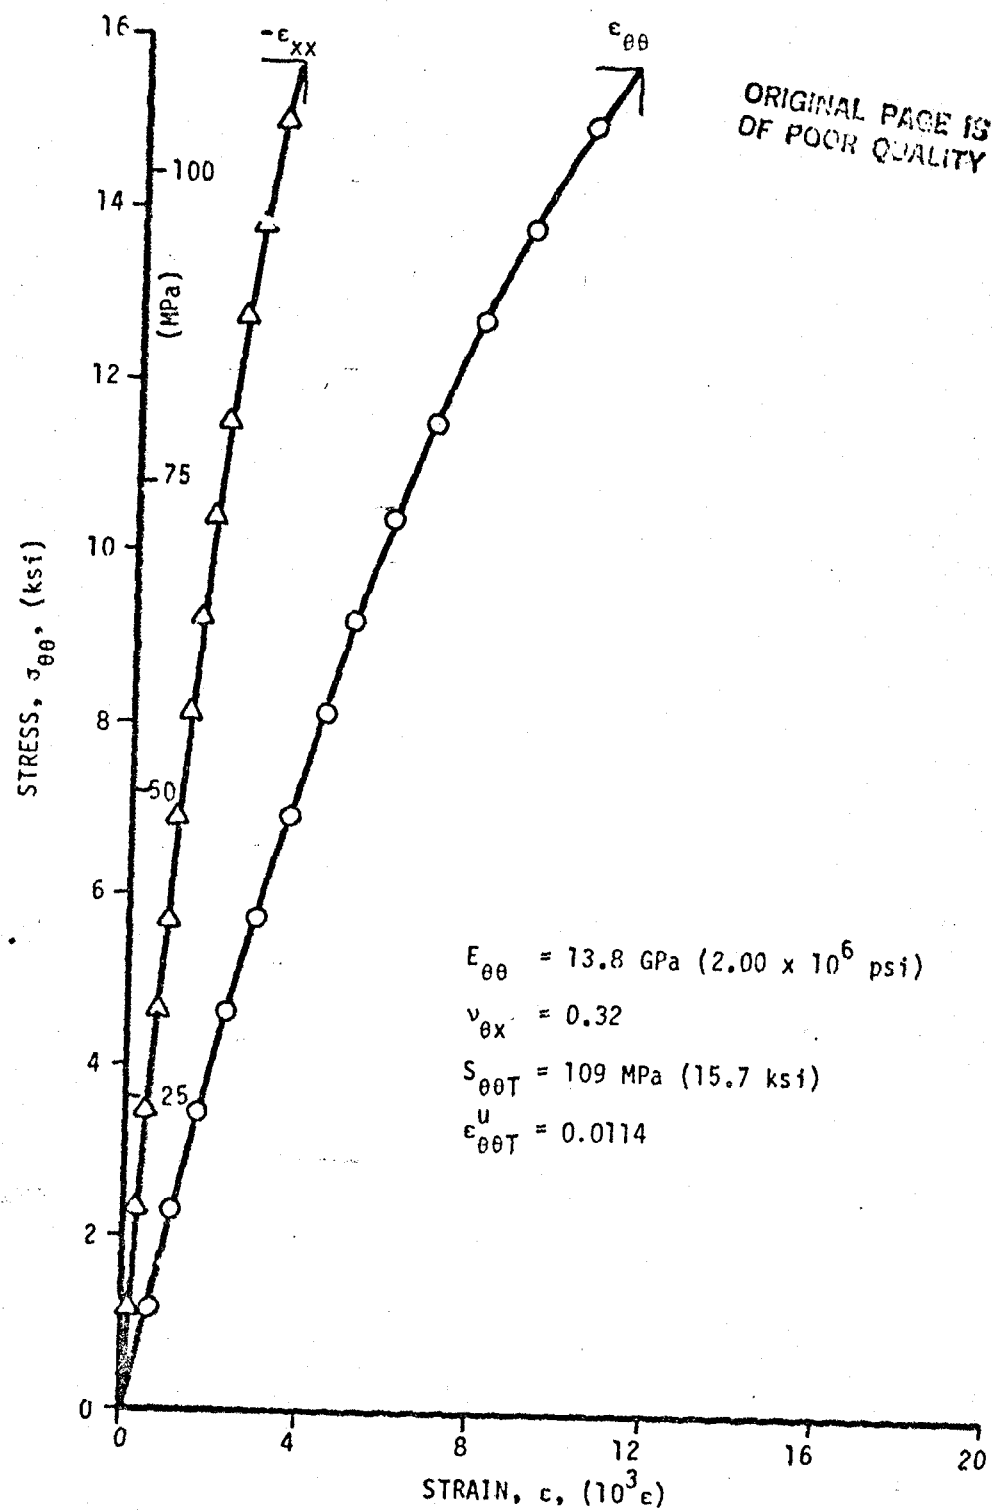


Figure 2-27. Strains in  $[\pm 60]_{2S}$  SP288/AS ring specimen under static tensile loading (Specimen No. 22-5).

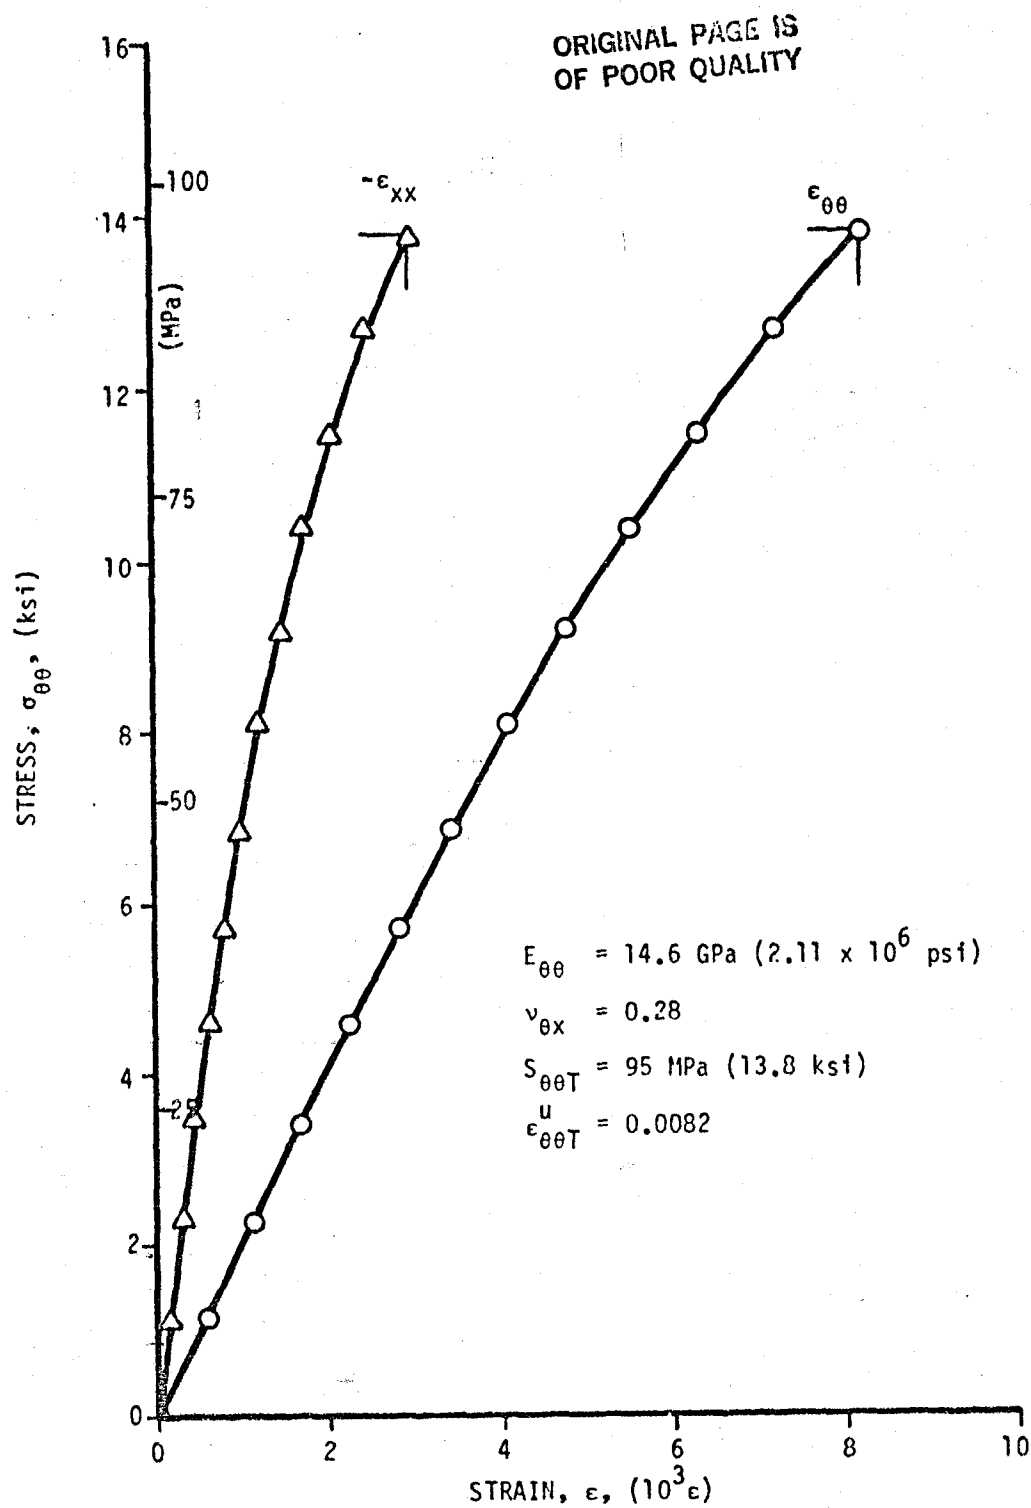


Figure 2-28. Strains in  $[\pm 60]_{2s}$  80AS/20S/PR288 ring specimen under static tensile loading (Specimen No. 23-1).

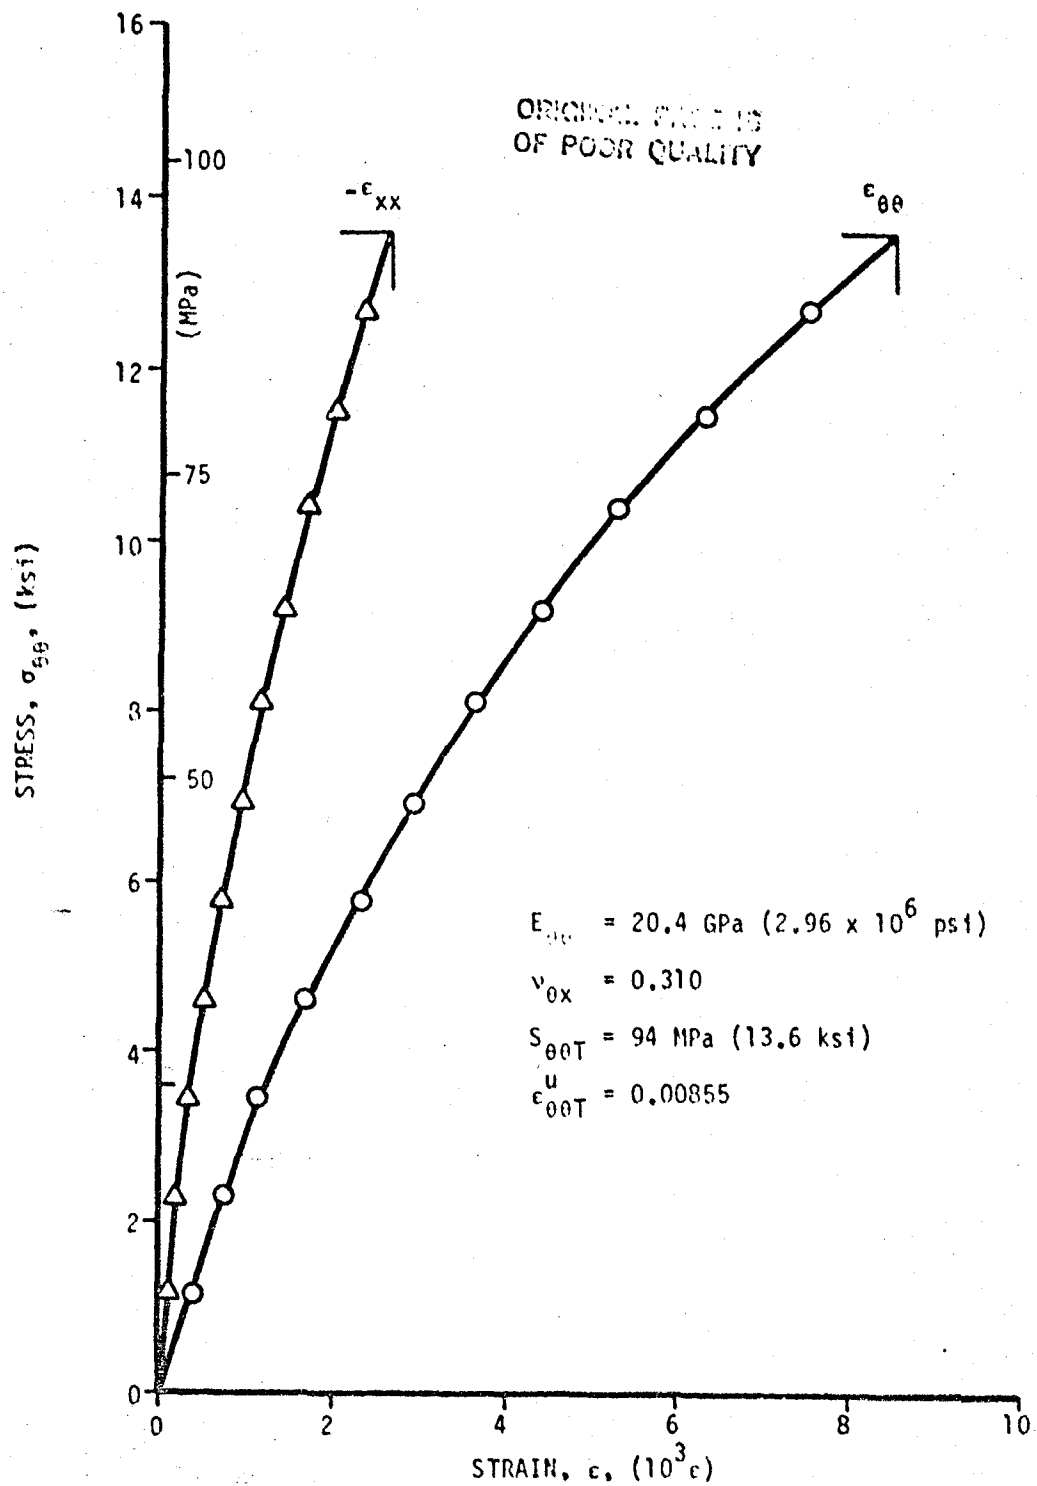


Figure 2-29. Strains in  $[\pm 60]_{2S}$  80AS/20S/PR288 ring specimen under static tensile loading (Specimen No. 23-3).

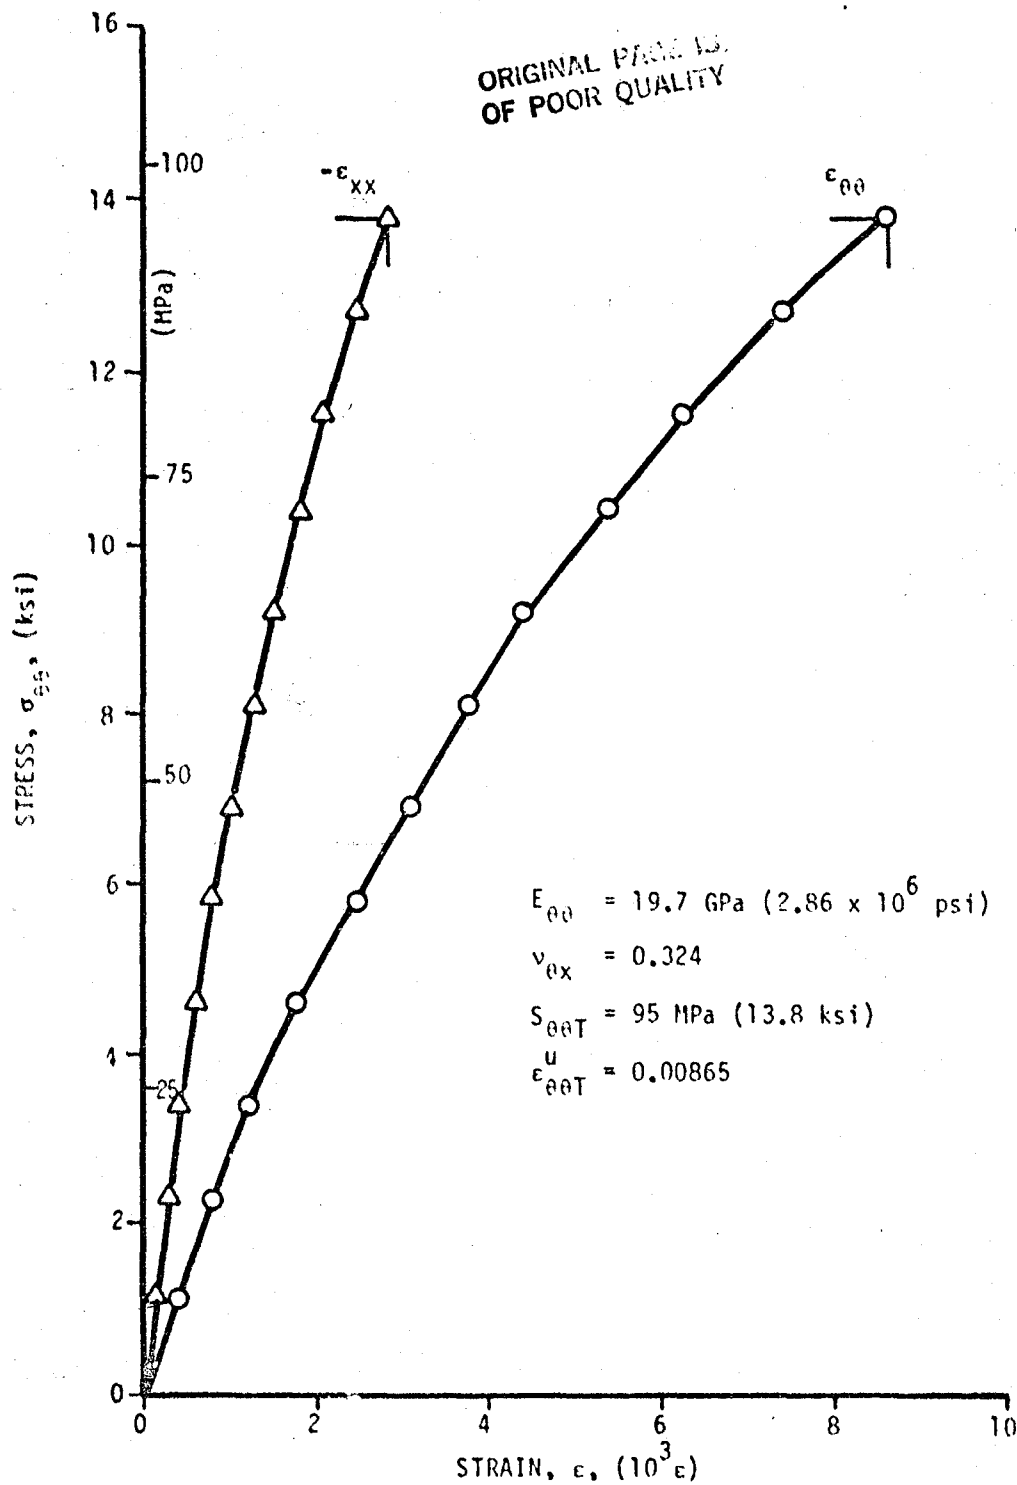


Figure 2-30. Strains in  $[+60]_{2S}$  80AS/20S/PR288 ring specimen under static tensile loading (Specimen No. 23-5).

ORIGINAL PAGE IS  
OF POOR QUALITY

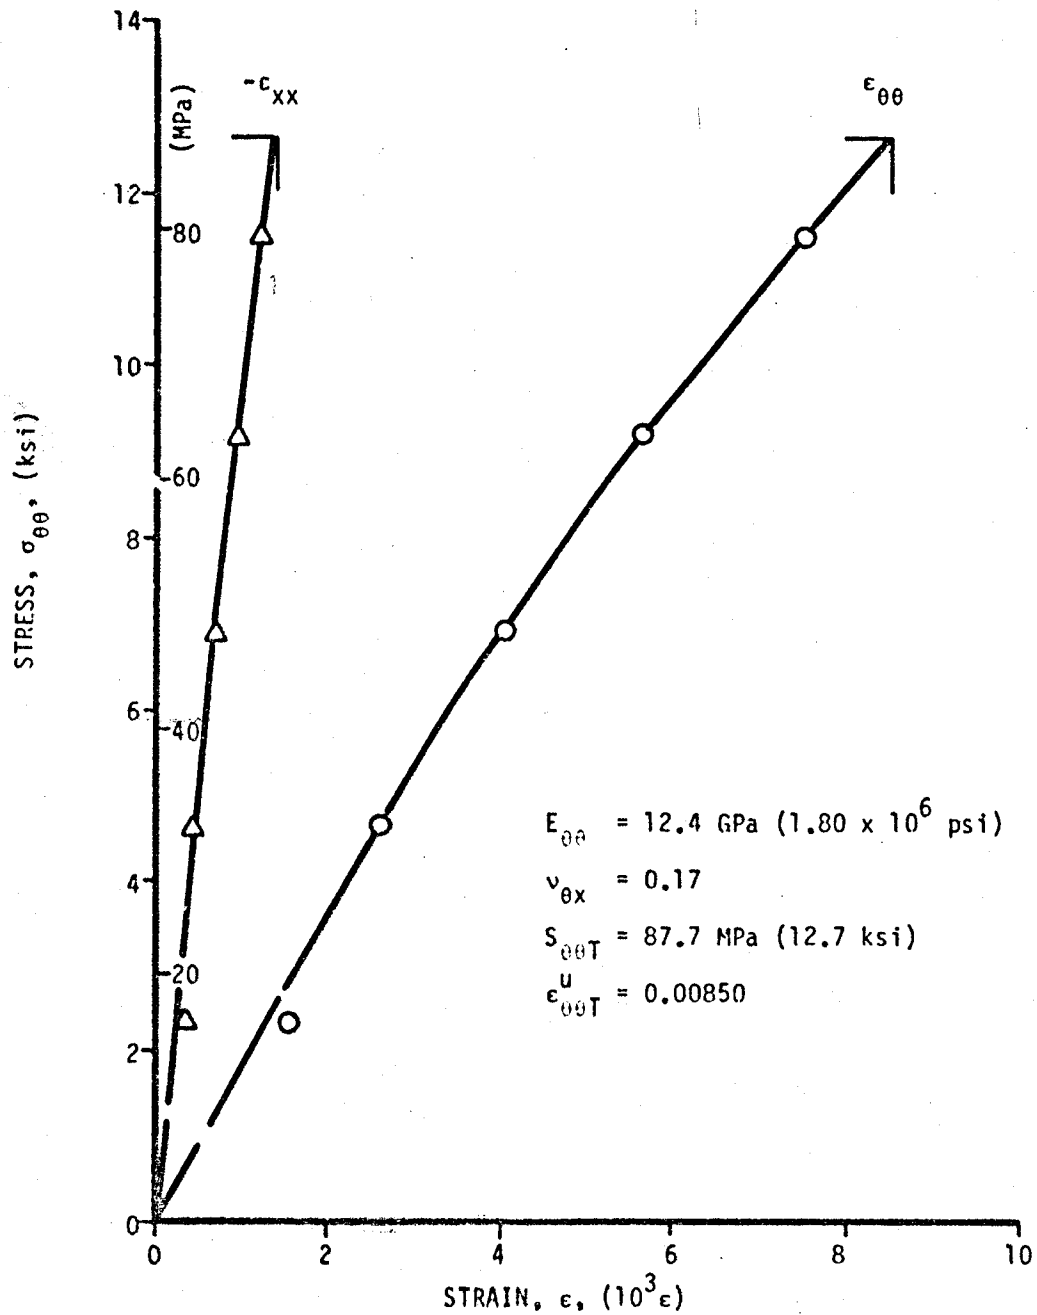


Figure 2-31. Strains in  $[\pm 67.5]_2$  SP288/AS ring specimen under static tensile loading (Specimen No. 26-1).



ORIGINAL PAGE IS  
OF POOR QUALITY

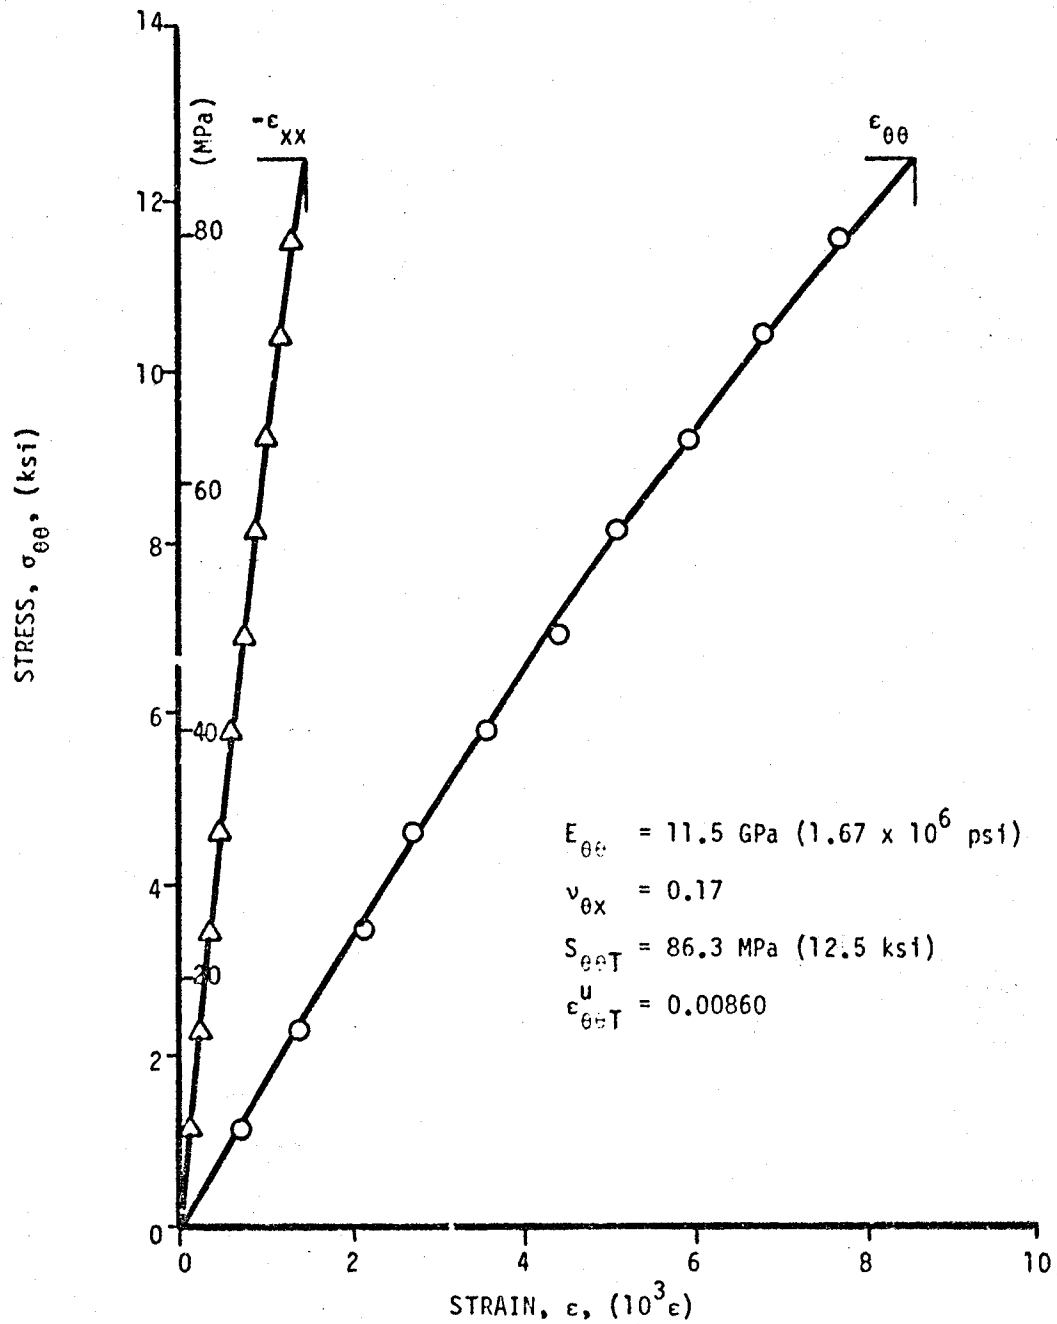


Figure 2-32. Strains in  $[\pm 67.5]_{2s}$  SP288/AS ring specimen under static tensile loading (Specimen No. 26-3).

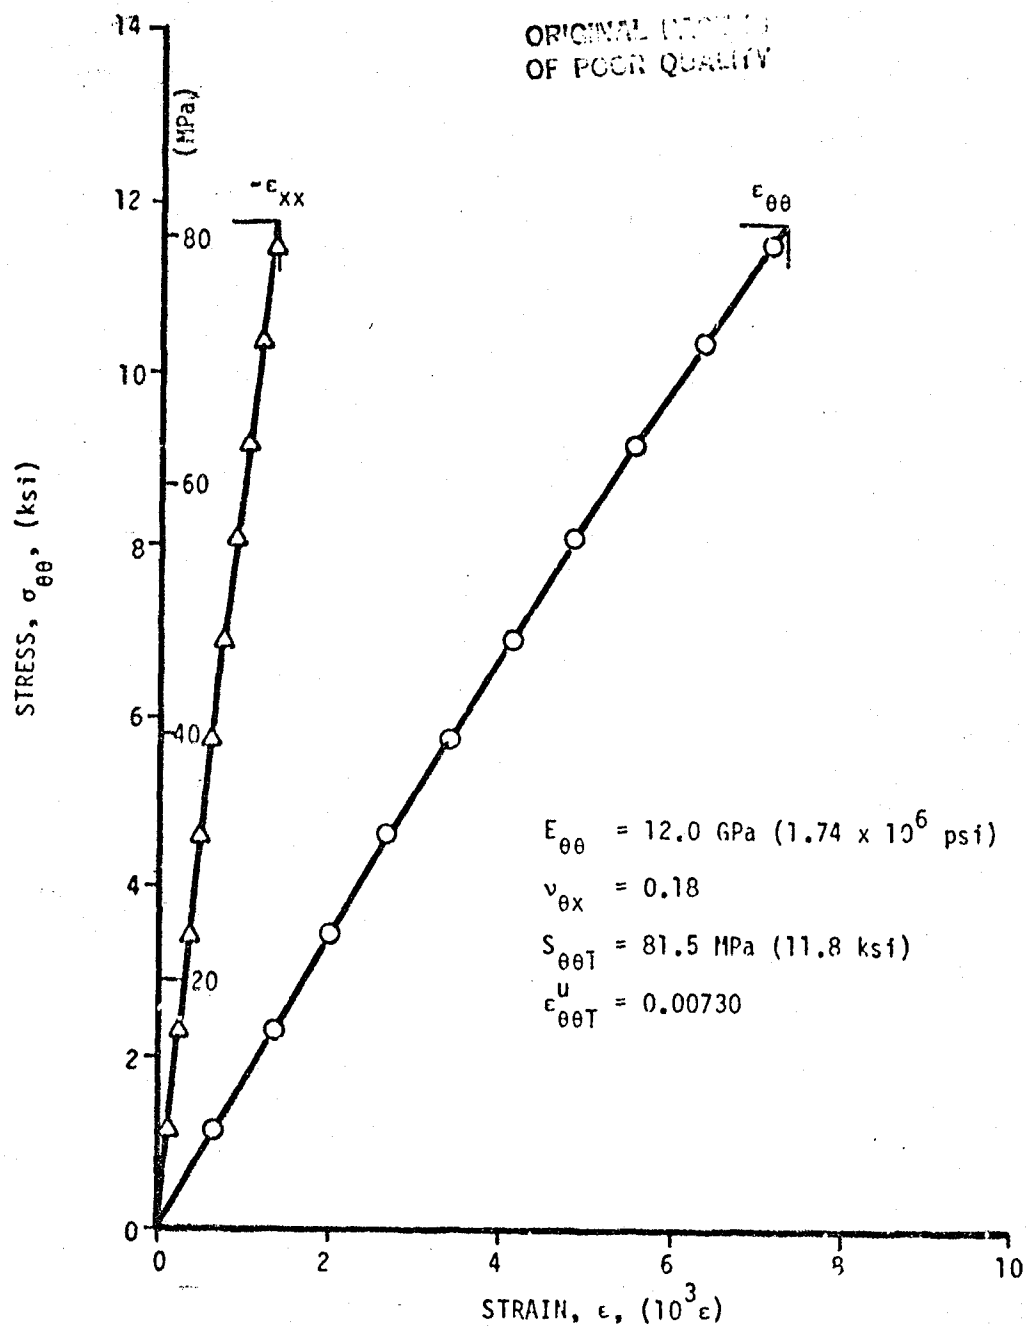


Figure 2-33. Strains in  $[\pm 67.5]_{2S}$  SP288/AS ring specimen under static tensile loading (Specimen No. 26-5).

ORIGINAL PAGE IS  
OF POOR QUALITY

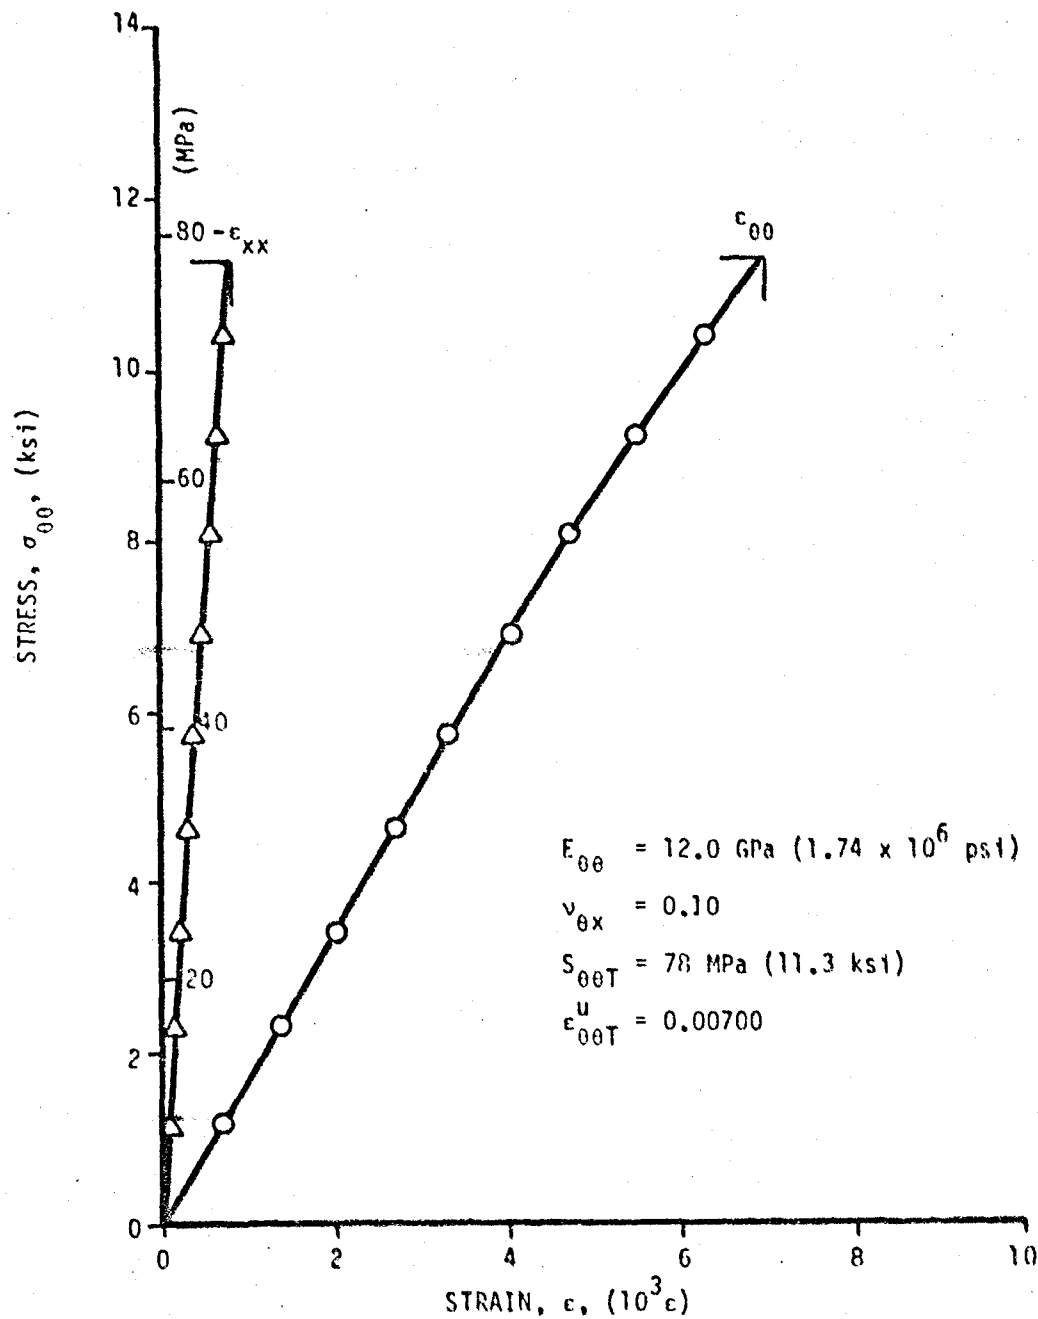


Figure 2-34. Strains in  $[\pm 67.5]_{2s}$  80AS/20S/PR288 ring specimen under static tensile loading (Specimen No. 27-1).

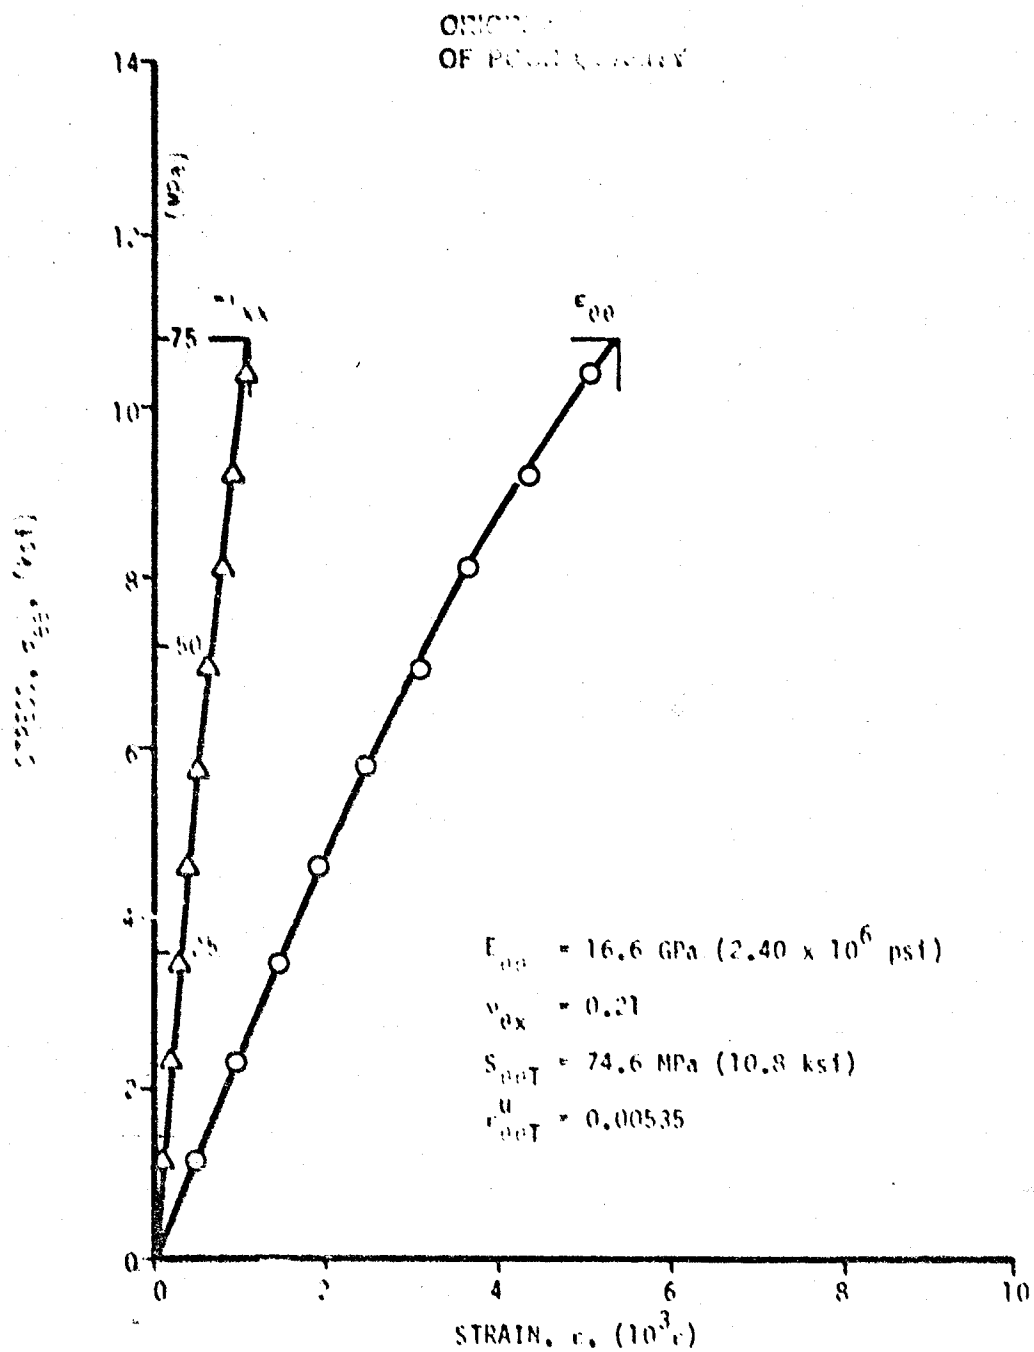


Figure 2-35. Strains in [+67.5]<sub>s</sub> 80AS/20S/PR288 ring specimen under static tensile loading (Specimen No. 27-3).

ORIGINAL PAGE IS  
OF POOR QUALITY

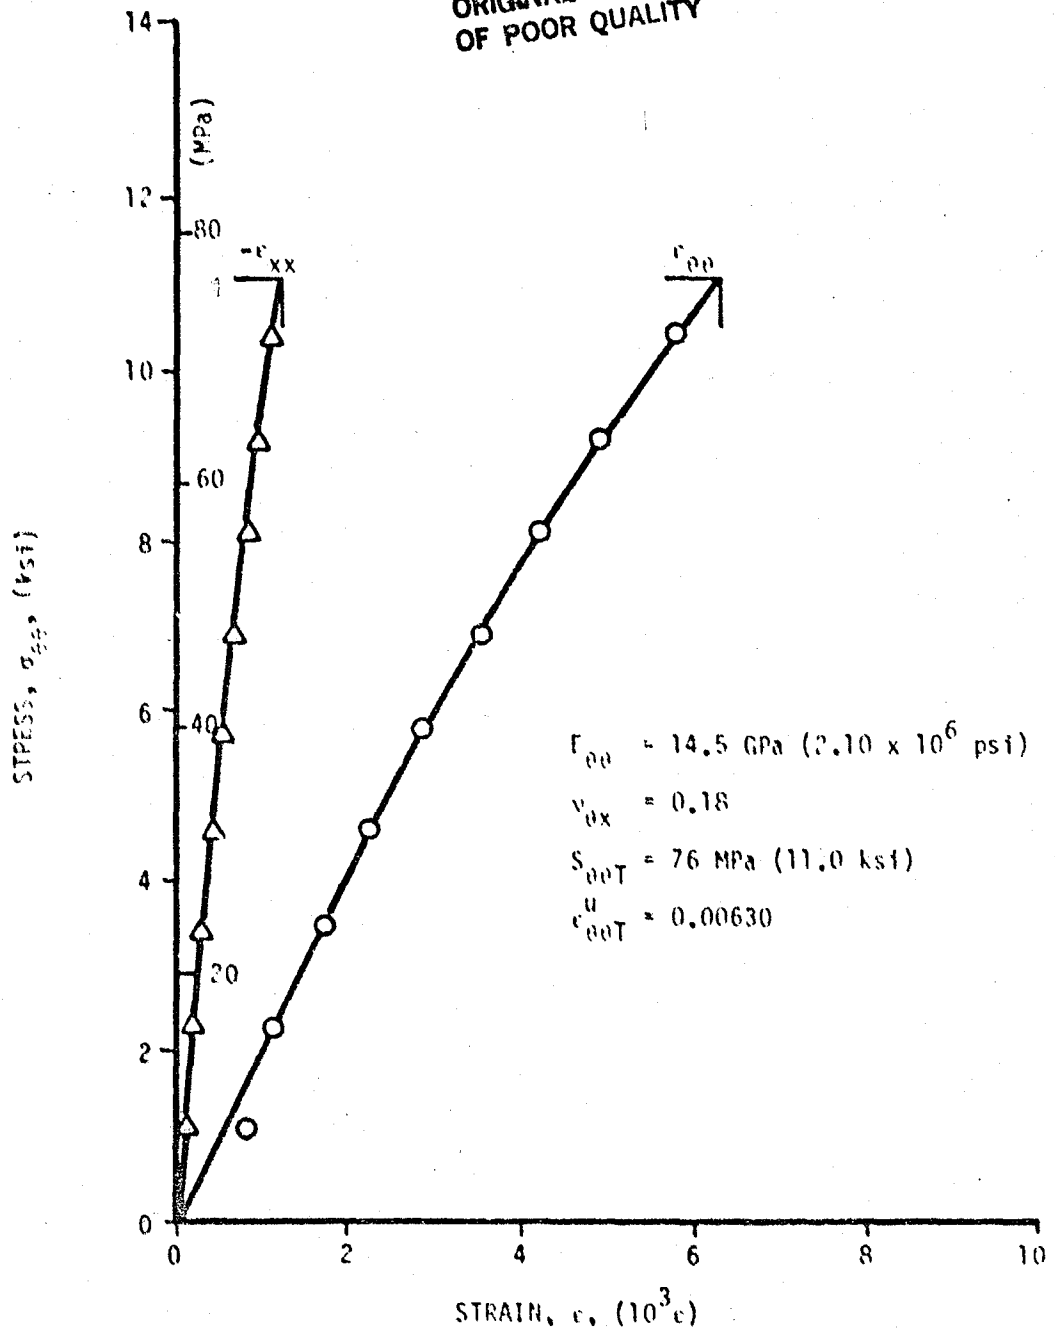


Figure 2-36. Strains in  $[+67.5]_{2S}$  80AS/20S/PR288 ring specimen under static tensile loading (Specimen No. 27-5).

ORIGINAL DESIGN  
OF FOUR QUARTERS

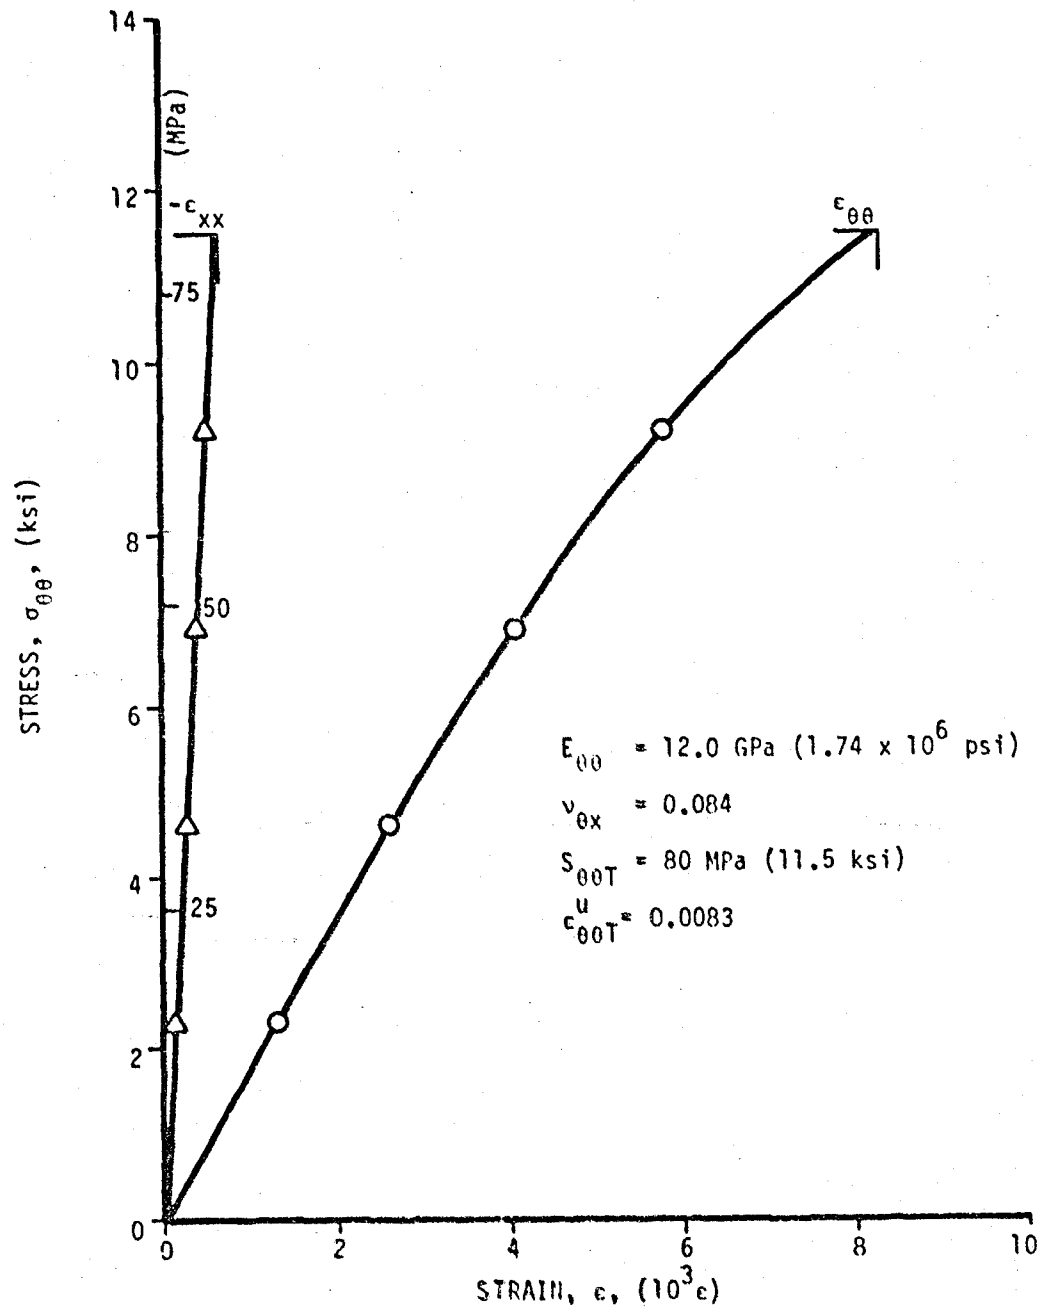


Figure 2-37. Strains in  $[\pm 75]_{2s}$  SP288/AS ring specimen under static tensile loading (Specimen No. 20-1).

ORIGINAL PAGE IS  
OF POOR QUALITY

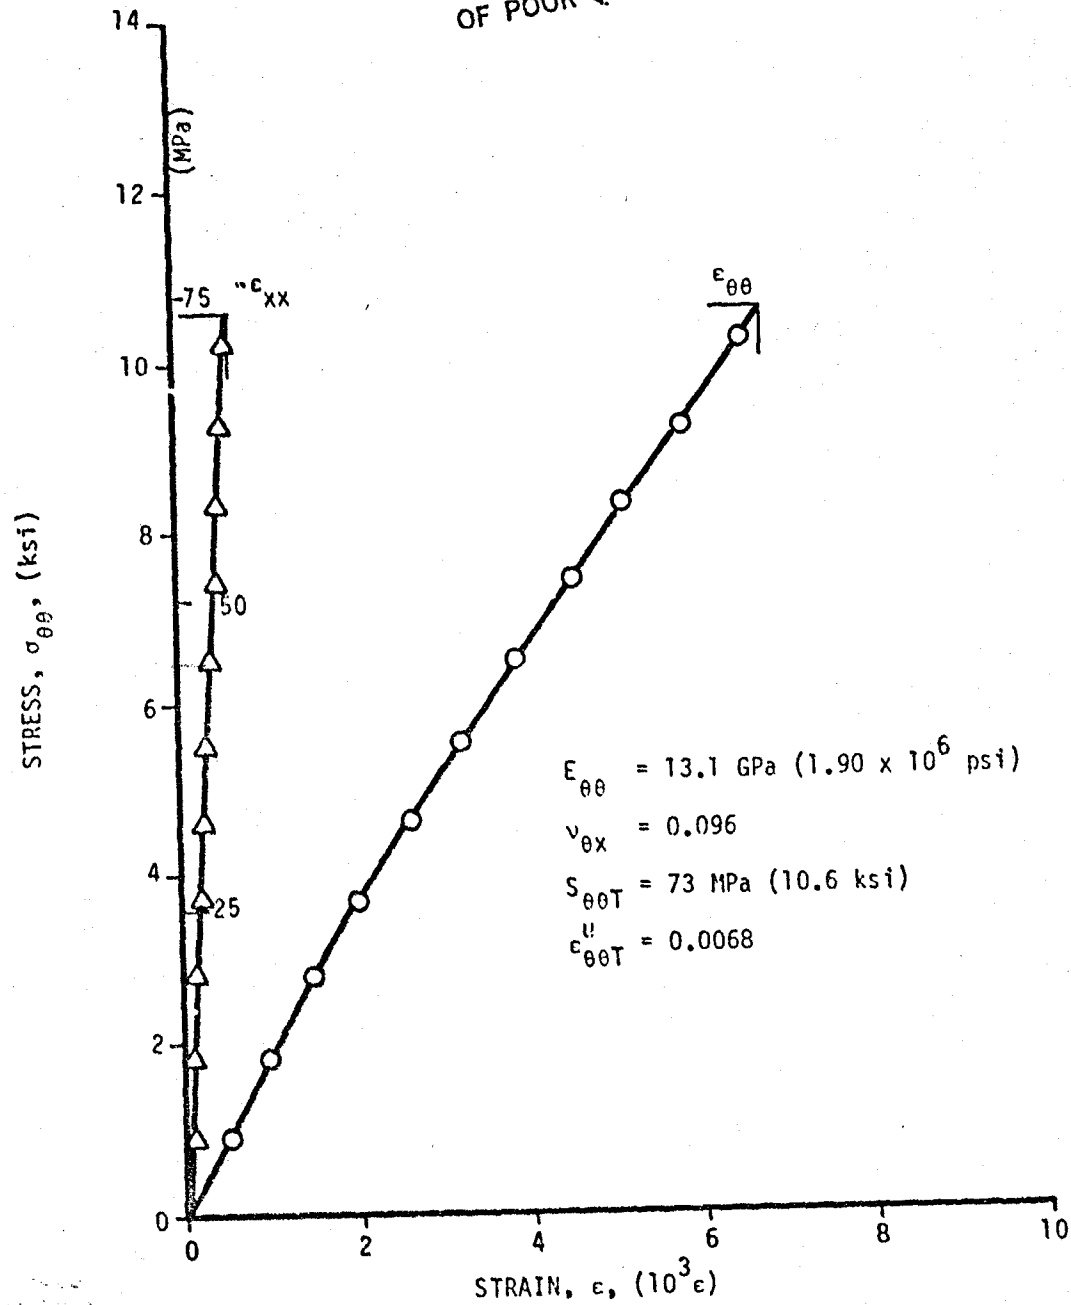


Figure 2-38. Strains in  $[\pm 75]_{2S}$  SP288/AS ring specimen under static tensile loading (Specimen No. 29-3).

ORIGINAL PAGE IS  
OF POOR QUALITY

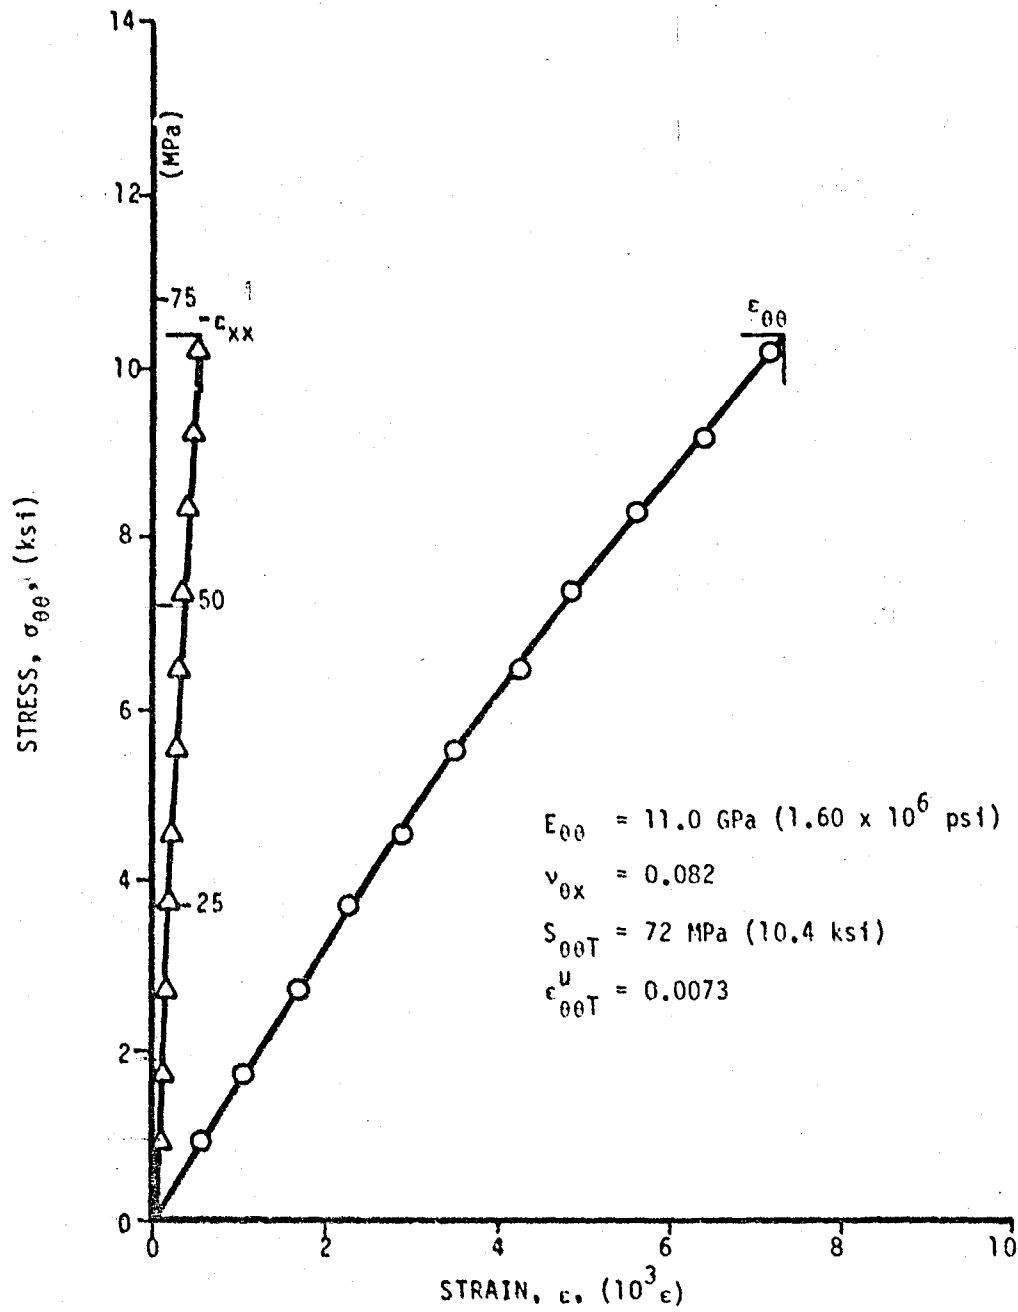


Figure 2-39. Strains in  $[\pm 75]_2$  SP288/AS ring specimen under static tensile loading (Specimen No. 20-5).



ORIGINAL PAGE IS  
OF POOR QUALITY

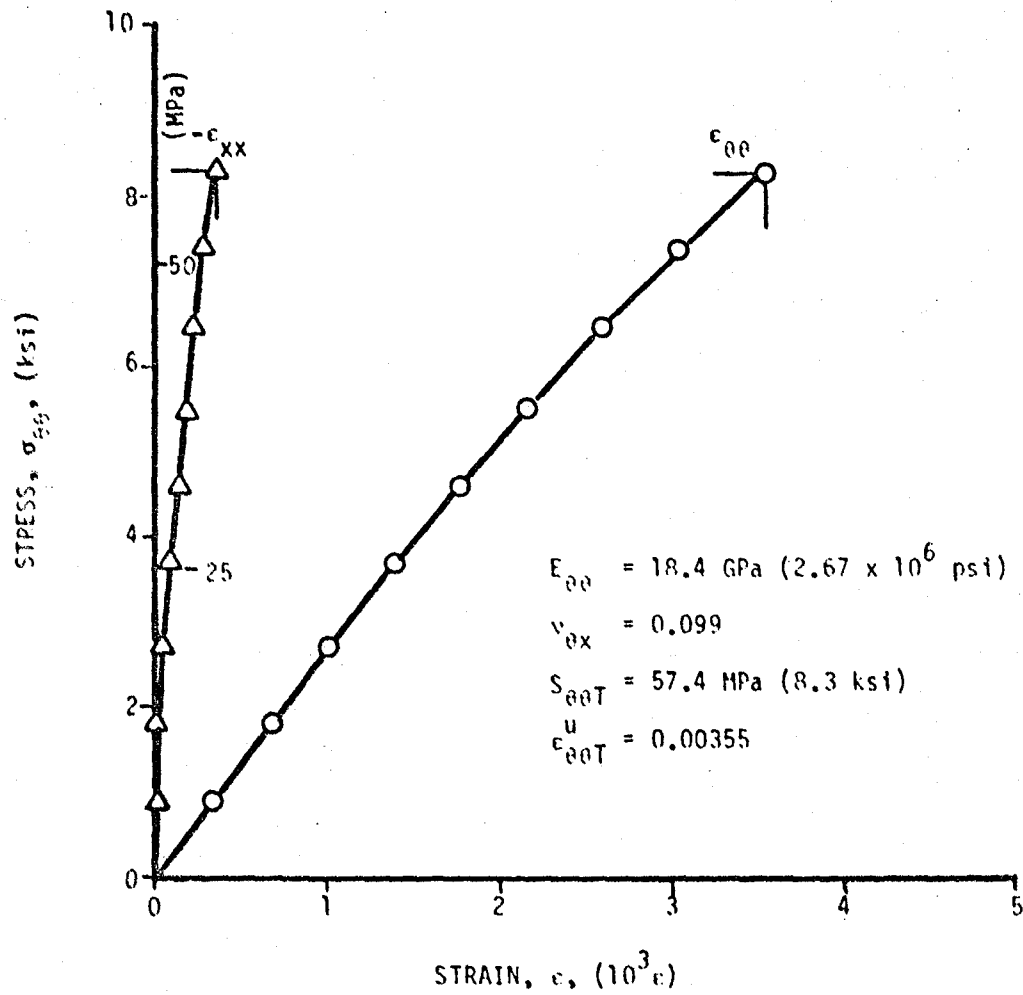


Figure 2-40. Strains in  $[\pm 75]_2$  80AS/20S/PR288 ring specimen under static tensile loading (Specimen No. 21-1).

ORIGINAL PAGE IS  
OF POOR QUALITY

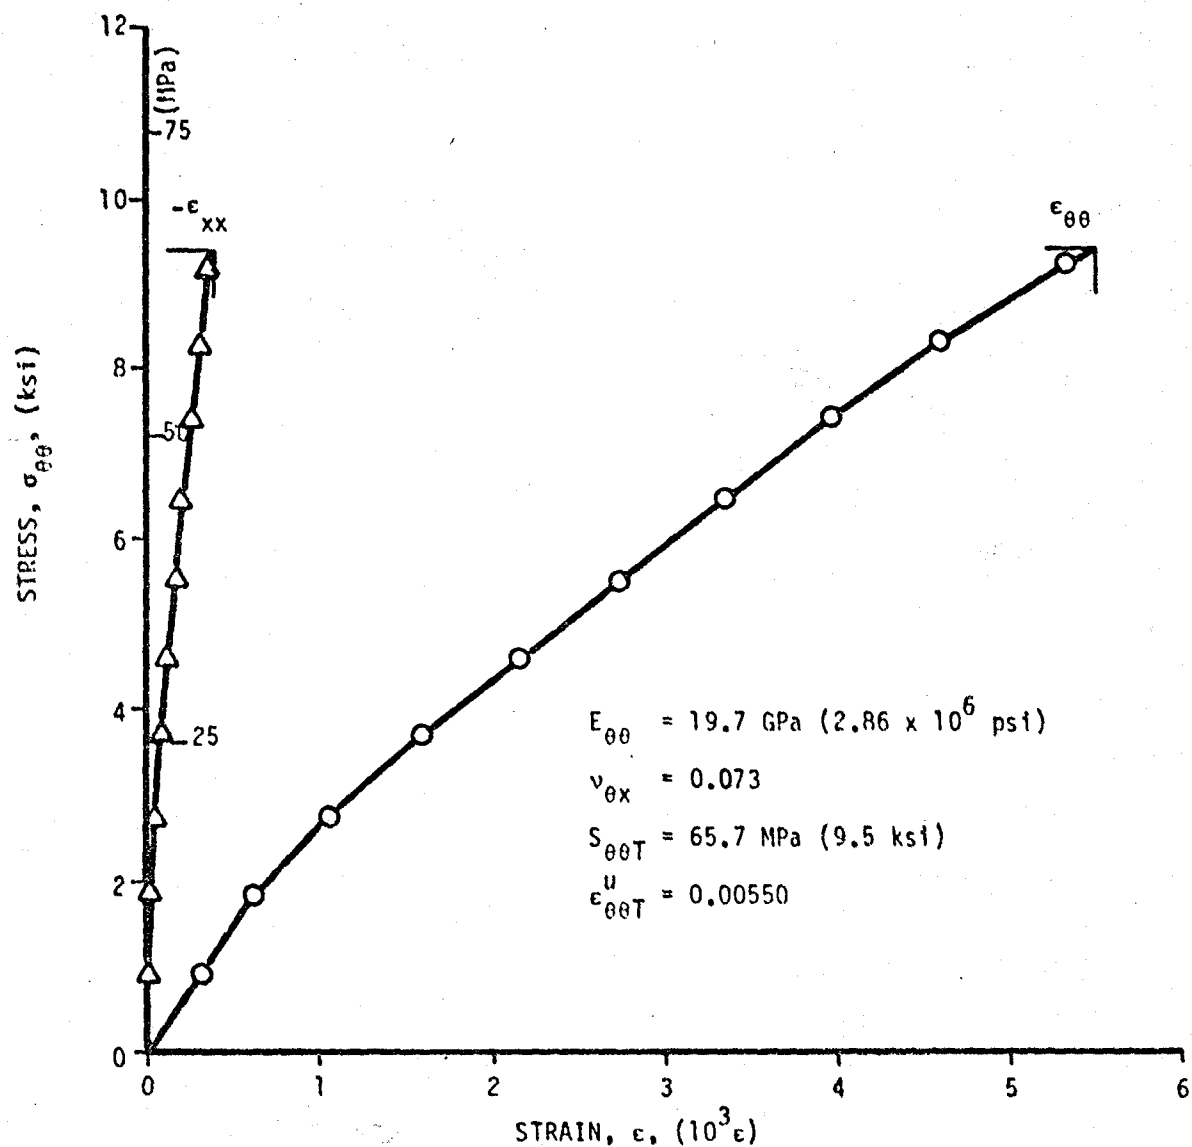


Figure 2-41. Strains in  $[\pm 75]_2$  80AS/20S/PR288 ring specimen under static tensile loading (Specimen No. 21-5).

### 3. INTERMEDIATE STRAIN RATE TENSILE PROPERTIES OF ANGLE-PLY LAMINATES

#### 3.1 $[\pm 15]_{2s}$ LAMINATES

Intermediate rate tensile properties of  $[\pm 15]_{2s}$  SP288/AS graphite/epoxy and 80AS/20S/PR288 graphite/S-glass/epoxy were obtained by testing rings under dynamic internal pressure. Three rings of each material were loaded dynamically using 650 mg of slow burning pistol powder (red dot) in the pressure chamber of the fixture. The circumferential and axial strains in the composite rings and the circumferential strain in the steel calibration ring were recorded in every case.

Strain records for the three graphite/epoxy rings are shown in Figures 3-1, 3-2, and 3-3 (Specimen Nos. 35-7, 35-10, and 35-11). These data were analyzed following the procedures described in Part I of this report (Section 3.3.2). Results in the form of dynamic stress-strain curves are shown in Figures 3-4, 3-5, and 3-6. Results for the three rings tested are tabulated in Table 3-1. The initial strain rates range between  $9s^{-1}$  and  $20s^{-1}$ , and the average (secant) rates between  $36s^{-1}$  and  $52s^{-1}$ . The times to failure range between 184  $\mu s$  and 213  $\mu s$ . The initial and secant moduli of 121 GPa ( $17.5 \times 10^6$  psi) and 123 GPa ( $17.8 \times 10^6$  psi), respectively, are higher than the static modulus of 105 GPa ( $15.2 \times 10^6$  psi) by 15% and 17%, respectively. The average initial and secant Poisson's ratios of 0.80 and 0.81 are a little lower than the static value of 0.86. The average dynamic strength of 1049 MPa (152 ksi) is much higher than the static strength of 823 MPa (119 ksi). The increase in dynamic strength is higher than the increase in dynamic modulus. The average dynamic ultimate strain of 0.0086 is higher than the static value of 0.0078.

Strain records for the three hybrid rings are shown in Figures 3-7, 3-8, and 3-9 (Specimen Nos. 36-6, 36-10, and 36-11). The corresponding dynamic stress-strain curves are shown in Figures 3-10, 3-11, and 3-12. Results are tabulated in Table 3-2. The initial strain rates range between  $16s^{-1}$  and  $18s^{-1}$ , and the average (secant) rates between  $41s^{-1}$  and  $45s^{-1}$ . The time to failure ranges between 222  $\mu s$  and 270  $\mu s$ . The initial and secant moduli of

TABLE 3-1. INTERMEDIATE STRAIN RATE TENSILE PROPERTIES  
OF  $[\pm 15]_{2s}$  SP288/AS GRAPHITE/EPOXY

Specimen Number	Strain Rate ( $\dot{\epsilon}_{\theta\theta}$ ), $s^{-1}$	Modulus ( $E_{\theta\theta}$ ), GPa ( $10^6$ psi)	Poisson's Ratio ( $\nu_{\theta x}$ )
<u>Initial Properties</u>			
35-7	20	124 (17.9)	0.73
35-10	20	124 (17.9)	0.80
35-11	9	115 (16.6)	0.88
<u>Secant Properties</u>			
35-7	52	119 (17.3)	0.78
35-10	43	128 (18.6)	0.82
35-11	36	120 (17.4)	0.84
<u>Terminal Properties</u>			
35-7	134	135 (19.6)	0.52
35-10	80	175 (25.3)	0.68
35-11	88	131 (19.0)	0.80
<u>Ultimate Properties</u>			
	Time to Failure ( $t_f$ ), $\mu s$	Strength ( $S_{\theta\theta T}$ ), MPa (ksi)	Strain ( $\epsilon_{\theta\theta T}^u$ )
35-7	184	1129 (164)	0.0095
35-10	200	1107 (160)	0.0086
35-11	213	911 (132)	0.0076

TABLE 3-2. INTERMEDIATE STRAIN RATE TENSILE PROPERTIES OF  
[±15]<sub>2S</sub> 80AS/20S/PR288 GRAPHITE/S-GLASS/EPOXY

<u>Specimen Number</u>	<u>Strain Rate (<math>\dot{\epsilon}_{\theta\theta}</math>), s<sup>-1</sup></u>	<u>Modulus (E<sub>θθ</sub>), GPa (10<sup>6</sup> psi)</u>	<u>Poisson's Ratio (ν<sub>θx</sub>)</u>
<u>Initial Properties</u>			
36-6	16	104 (15.0)	0.56
36-10	18	112 (16.3)	0.50
36-11	16	97 (14.0)	0.25
<u>Secant Properties</u>			
36-6	43	97 (14.1)	0.55
36-10	45	99 (14.3)	0.65
36-11	41	88 (12.7)	0.30
<u>Terminal Properties</u>			
36-6	124	106 (15.3)	0.58
36-10	244	86 (12.5)	0.49
36-11	268	81 (11.8)	0.45
<u>Ultimate Properties</u>			
	<u>Time to Failure (t<sub>f</sub>), μs</u>	<u>Strength (S<sub>θθT</sub>), MPa (ksi)</u>	<u>Strain (ε<sub>θθT</sub><sup>u</sup>)</u>
36-6	222	932 (135)	0.0096
36-10	228	997 (145)	0.0101
36-11	270	973 (141)	0.0111

104 GPa ( $15.1 \times 10^6$  psi) and 95 GPa ( $13.7 \times 10^6$  psi), respectively, are higher than and equal to, respectively, the initial static modulus of 95 GPa ( $13.7 \times 10^6$  psi). The average initial and secant Poisson's ratios of 0.44 and 0.50 are lower than the static value of 0.68. The average dynamic strength of 968 MPa (140 ksi) is higher than the static strength of 806 MPa (117 ksi). The average dynamic ultimate strain of 0.0103 is higher than the static value of 0.0084.

### 3.2 $[\pm 22.5]_{2s}$ LAMINATES

Intermediate rate tensile properties of  $[\pm 22.5]_{2s}$  SP288/AS graphite/epoxy and 80AS/20S/PR288 graphite/S-glass/epoxy were obtained by testing rings under dynamic internal pressure. Three rings of each material were loaded dynamically using 650 mg pistol powder in the pressure chamber of the fixture.

Strain records for the three graphite/epoxy rings tested are shown in Figures 3-13, 3-14, and 3-15 (Specimen Nos. 33-10, 33-11, and 33-13). The corresponding dynamic stress-strain curves are shown in Figures 3-16, 3-17, and 3-18. Results are tabulated in Table 3-3. The initial strain rates range between  $8s^{-1}$  and  $30s^{-1}$  and the average (secant) between  $40s^{-1}$  and  $48s^{-1}$ . The times to failure range between 187  $\mu s$  and 221  $\mu s$ . The initial and secant moduli of 78.4 GPa ( $11.4 \times 10^6$  psi) and 84.0 GPa ( $12.2 \times 10^6$  psi), respectively, are close to the static initial modulus of 81.4 GPa ( $11.8 \times 10^6$  psi). The average dynamic strength of 770 MPa (112 ksi) is exactly equal to the static strength. The dynamic ultimate strain of 0.0093 is lower than the static value of 0.0103.

Strain records for the three hybrid rings are shown in Figures 3-19, 3-20, and 3-21 (Specimen Nos. 34-2, 34-10, and 34-11). The corresponding dynamic stress-strain curves are shown in Figures 3-22, 3-23, and 3-24. Results are tabulated in Table 3-4. The initial strain rates range between  $9s^{-1}$  and  $31s^{-1}$  and the average (secant) rates between  $35s^{-1}$  and  $57s^{-1}$ . The times to failure range between 181  $\mu s$  and 275  $\mu s$ . The initial and secant moduli of 75.7 GPa ( $11.0 \times 10^6$  psi) and 72.5 GPa ( $10.5 \times 10^6$  psi), respectively, are a little higher than the static initial modulus of 68.5 GPa

TABLE 3-3. INTERMEDIATE STRAIN RATE TENSILE PROPERTIES OF  
[±22.5]<sub>25</sub> SP288/AS GRAPHITE/EPOXY

Specimen Number	Strain Rate ( $\dot{\epsilon}_{\theta\theta}$ ), s <sup>-1</sup>	Modulus ( $E_{\theta\theta}$ ), GPa (10 <sup>6</sup> psi)	Poisson's Ratio ( $\nu_{\theta x}$ )
<u>Initial Properties</u>			
33-10	8	64.9 (9.4)	1.25
33-11	13	69.7 (10.1)	1.30
33-13	30	100.7 (14.6)	1.07
<u>Secant Properties</u>			
33-10	40	81.5 (11.8)	1.18
33-11	47	67.6 (9.8)	1.16
33-13	48	102.8 (14.9)	1.33
<u>Terminal Properties</u>			
33-10	112	56.6 (8.2)	1.25
33-11	195	40.0 (5.8)	1.06
33-13	104	106.3 (15.4)	1.37
<u>Ultimate Properties</u>			
	Time to Failure ( $t_f$ ), $\mu$ s	Strength ( $S_{\theta\theta T}$ ), MPa (ksi)	Strain ( $\epsilon_{\theta\theta T}^u$ )
33-10	221	718 (104)	0.0088
33-11	215	674 (98)	0.0100
33-13	187	920 (133)	0.0090

TABLE 3-4. INTERMEDIATE STRAIN RATE TENSILE PROPERTIES OF  
 $[\pm 22.5]_{2s}$  80AS/20S/PR288 GRAPHITE/S-GLASS/EPOXY

Specimen Number	Strain Rate ( $\dot{\epsilon}_{\theta\theta}$ ), $s^{-1}$	Modulus ( $E_{\theta\theta}$ ), GPa ( $10^6$ psi)	Poisson's Ratio ( $\nu_{\theta\theta}$ )
<u>Initial Properties</u>			
34-2	9	71.1 (10.3)	1.33
34-10	31	82.8 (12.0)	1.00
34-11	11	73.3 (10.6)	0.99
<u>Secant Properties</u>			
34-2	50	73.6 (10.7)	0.83
34-10	57	77.0 (11.2)	1.16
34-11	35	66.2 (9.6)	1.08
<u>Terminal Properties</u>			
34-2	160	62.1 (9.0)	1.17
34-10	120	78.7 (11.4)	1.42
34-11	337	69.7 (10.1)	1.25
<u>Ultimate Properties</u>			
	Time to Failure ( $t_f$ ), $\mu s$	Strength ( $S_{\theta\theta T}$ ), MPa (ksi)	Strain ( $\epsilon_{\theta\theta T}^u$ )
34-2	224	818 (118)	0.0111
34-10	181	800 (116)	0.0104
34-11	275	641 (93)	0.0097



( $9.9 \times 10^6$  psi). The average dynamic strength of 752 MPa (109 ksi) is higher than the static strength of 653 MPa (94.6 ksi). The dynamic strain of 0.0104 is exactly equal to the static value.

### 3.3 $[\pm 30]_{2S}$ LAMINATES

Intermediate rate tensile properties of  $[\pm 30]_{2S}$  SP288/AS graphite/epoxy and 80AS/20S/PR288 graphite/S-glass/epoxy were obtained by testing three rings of each material under dynamic internal pressure. The pressure was produced by detonating 650 mg pistol powder in the pressure chamber of the fixture.

Strain records for the three graphite/epoxy rings tested are shown in Figures 3-25, 3-26, and 3-27 (Specimen Nos. 28-2, 28-12, and 28-13). The corresponding dynamic stress-strain curves are shown in Figures 3-28, 3-29, and 3-30. Results are tabulated in Table 3-5. The initial strain rates range between  $10s^{-1}$  and  $17s^{-1}$ , and the average (secant) rates between  $49s^{-1}$  and  $73s^{-1}$ . The times to failure range between 195  $\mu s$  and 237  $\mu s$ . The initial and secant moduli of 48.4 GPa ( $7.02 \times 10^6$  psi) and 44.7 GPa ( $6.48 \times 10^6$  psi), respectively, are noticeably lower than the static initial modulus of 58.6 GPa ( $8.50 \times 10^6$  psi). The average dynamic strength of 571 MPa ( $83 \times 10^6$  psi) is almost equal to the static strength of 566 MPa (82 ksi). The dynamic ultimate strain of 0.0128 is almost equal to the static value of 0.0132.

Strain records for the three hybrid rings are shown in Figures 3-31, 3-32, and 3-33 (Specimen Nos. 54-2, 54-3, and 54-5). The corresponding dynamic stress-strain curves are shown in Figures 3-34, 3-35, and 3-36. Results are tabulated in Table 3-6. The initial strain rates range between  $12s^{-1}$  and  $22s^{-1}$ , and the average (secant) rates between  $56s^{-1}$  and  $85s^{-1}$ . The times to failure range between 179  $\mu s$  and 224  $\mu s$ . The initial and secant moduli of 43.5 GPa ( $6.31 \times 10^6$  psi) and 41.9 GPa ( $6.07 \times 10^6$  psi), respectively, are a little lower than the static value of 44.9 GPa ( $6.51 \times 10^6$  psi). The dynamic initial and secant Poisson's ratios of 1.11 and 1.23 are lower than the static value of 1.26. The average dynamic strength of 611 MPa (89 ksi) is higher than the static strength of 503 MPa (73 ksi). The dynamic ultimate strain of 0.0144 is very close to the static value of 0.0139 as in the case mentioned before.

TABLE 3-5. INTERMEDIATE STRAIN RATE TENSILE PROPERTIES OF  
 $[\pm 30]_{2s}$  SP288/AS GRAPHITE/EPOXY

Specimen Number	Strain Rate ( $\dot{\epsilon}_{\theta\theta}$ ), $s^{-1}$	Modulus ( $E_{\theta\theta}$ ), GPa ( $10^6$ psi)	Poisson's Ratio ( $\nu_{\theta x}$ )
<u>Initial Properties</u>			
28-2	17	43.8 (6.35)	1.09
28-12	10	46.6 (6.75)	1.10
28-13	10	54.9 (7.95)	0.83
<u>Secant Properties</u>			
28-2	73	41.1 (5.96)	1.04
28-12	49	42.9 (6.22)	1.27
28-13	53	50.1 (7.26)	1.19
<u>Terminal Properties</u>			
28-2	281	44.2 (6.40)	1.14
28-12	252	27.6 (4.00)	1.41
28-13	270	42.1 (6.10)	1.44
<u>Ultimate Properties</u>			
	Time to Failure ( $t_f$ ), $\mu s$	Strength ( $S_{\theta\theta T}$ ), MPa (ksi)	Strain ( $\epsilon_{\theta\theta T}^u$ )
28-2	195	588 (85)	0.0143
28-12	237	504 (73)	0.0117
28-13	236	621 (90)	0.0124

TABLE 3-6. INTERMEDIATE STRAIN RATE TENSILE PROPERTIES OF  
[±30]<sub>2s</sub> 80AS/20S/PR288 GRAPHITE/S-GLASS/EPOXY

Specimen Number	Strain Rate ( $\dot{\epsilon}_{\theta\theta}$ ), s <sup>-1</sup>	Modulus ( $E_{\theta\theta}$ ), GPa (10 <sup>6</sup> psi)	Poisson's Ratio ( $\nu_{\theta x}$ )
<u>Initial Properties</u>			
54-2	17	40.0 (5.80)	1.11
54-3	22	44.9 (6.50)	1.11
54-5	12	45.7 (6.63)	1.12
<u>Secant Properties</u>			
54-2	56	38.9 (5.63)	1.16
54-3	76	38.9 (5.63)	1.39
54-5	85	47.9 (6.94)	1.14
<u>Terminal Properties</u>			
54-2	251	30.4 (4.40)	1.36
54-3	229	34.6 (5.02)	1.53
54-5	397	60.0 (8.70)	1.40
<u>Ultimate Properties</u>			
	Time to Failure ( $t_f$ ), $\mu$ s	Strength ( $S_{\theta\theta T}$ ), MPa (ksi)	Strain ( $\epsilon_{\theta\theta T}^u$ )
54-2	224	490 (71)	0.0126
54-3	179	528 (77)	0.0136
54-5	200	814 (118)	0.0170

### 3.4 $[\pm 45]_{2s}$ LAMINATES

Intermediate strain rate tensile properties of  $[\pm 45]_{2s}$  SP288/AS graphite/epoxy and 80AS/20S/PR288 graphite/S-glass/epoxy were obtained by testing rings under dynamic internal pressure. Four rings of each material were loaded dynamically using 650 mg pistol powder in the pressure chamber of the fixture.

Strain records for the four graphite/epoxy rings tested are shown in Figures 3-37 through 3-40 (Specimen Nos. 24-11, 52-2, 52-3, and 52-4). The corresponding dynamic stress-strain curves are shown in Figures 3-41 through 3-44. Results are tabulated in Table 3-7. The initial strain rates range between  $10s^{-1}$  and  $17s^{-1}$  and the average (secant) rates between  $66s^{-1}$  and  $101s^{-1}$ . The times to failure range between 300  $\mu s$  and 348  $\mu s$ . The initial and secant moduli of 19.1 GPa ( $2.77 \times 10^6$  psi) and 17.6 GPa ( $2.55 \times 10^6$  psi), respectively, are both lower than the static modulus of 20.4 GPa ( $2.95 \times 10^6$  psi). This difference may be due in part to the fact that three of the specimens were taken from a different tube (No. 52) which was fabricated much later than tube No. 24 from which the static specimens came. The moduli for Specimen No. 24-11 are much closer to the static modulus. The average dynamic Poisson's ratio of 0.85 is higher than the static value of 0.69. The average dynamic strength of 494 MPa (72 ksi) is much higher than the low bound of 224 MPa (32.5 ksi) established by static testing. On the other hand, the dynamic ultimate strain of 0.0279 is lower than the lower bound established by static testing. Again, the value of 0.0348 for Specimen No. 24-11 is more in line with the static results.

Strain records for the four hybrid rings are shown in Figure 3-45 through 3-48 (Specimen Nos. 25-9, 53-1, 53-4, and 53-5). The corresponding dynamic stress-strain curves are shown in Figures 3-49 through 3-52. Results are tabulated in Table 3-8. The initial strain rates range between  $7s^{-1}$  and  $30s^{-1}$  and the average (secant) rates between  $81s^{-1}$  and  $163s^{-1}$ . The times to failure range between 171  $\mu s$  and 344  $\mu s$ . The initial modulus of 21.1 GPa ( $3.06 \times 10^6$  psi) is only slightly lower than the static modulus of 21.5 GPa ( $3.12 \times 10^6$  psi). The overall average Poisson's ratio of 0.71 is a little lower than the static value of 0.74. The average dynamic strength of 371 MPa (54 ksi) is much higher than the lower bound of 191 MPa (27.7 ksi) established by static testing. The dynamic ultimate strain of 0.0270 is very close to the lower bound of 0.0265 established by static testing.

TABLE 3-7. INTERMEDIATE STRAIN RATE TENSILE PROPERTIES OF  
 $[\pm 45]_{2s}$  SP288/AS GRAPHITE/EPOXY

Specimen Number	Strain Rate ( $\dot{\epsilon}_{\theta\theta}$ ), $s^{-1}$	Modulus ( $E_{\theta\theta}$ ), GPa ( $10^6$ psi)	Poisson's Ratio ( $\nu_{\theta x}$ )
<u>Initial Properties</u>			
24-11	10	20.0 (2.90)	0.83
52-2	15	17.3 (2.50)	0.95
52-3	12	20.3 (2.94)	0.89
52-4	17	18.8 (2.73)	0.92
<u>Secant Properties</u>			
24-11	101	19.8 (2.87)	0.94
52-2	96	15.7 (2.28)	0.65
52-3	66	16.0 (2.32)	0.77
52-4	75	18.8 (2.73)	0.84
<u>Terminal Properties</u>			
24-11	483	10.6 (1.53)	0.95
52-2	421	10.5 (1.52)	0.62
52-3	250	9.2 (1.33)	0.95
52-4	280	15.7 (2.27)	0.86
<u>Ultimate Properties</u>			
	Time to Failure ( $t_f$ ), $\mu s$	Strength ( $S_{\theta\theta T}$ ), MPa (ksi)	Strain ( $\epsilon_{\theta\theta T}^u$ )
24-11	344	690 (100)	0.0348
52-2	325	490 (71)	0.0312
52-3	348	366 (53)	0.0228
52-4	300	428 (62)	0.0227

TABLE 3-8. INTERMEDIATE STRAIN RATE TENSILE PROPERTIES OF  
 $[\pm 45]_{2s}$  80AS/20S/PR288 GRAPHITE/S-GLASS/EPOXY

Specimen Number	Strain Rate ( $\dot{\epsilon}_{\theta\theta}$ ), $s^{-1}$	Modulus ( $E_{\theta\theta}$ ), GPa ( $10^6$ psi)	Poisson's Ratio ( $\nu_{\theta x}$ )
<u>Initial Properties</u>			
25-9	13	15.4 (2.24)	0.91
53-1	7	24.7 (3.58)	0.87
53-4	17	17.8 (2.58)	0.76
53-5	30	26.4 (3.83)	0.56
<u>Secant Properties</u>			
25-9	103	13.6 (1.98)	-
53-1	163	14.8 (2.15)	0.60
53-4	96	12.2 (1.77)	0.53
53-5	81	14.2 (2.06)	0.90
<u>Terminal Properties</u>			
25-9	333	13.2 (1.92)	-
53-1	427	9.6 (1.39)	0.53
53-4	395	10.4 (1.50)	0.54
53-5	395	11.6 (1.68)	0.95
<u>Ultimate Properties</u>			
	<u>Time to Failure (<math>t_f</math>), <math>\mu s</math></u>	<u>Strength (<math>S_{\theta\theta T}</math>), MPa (ksi)</u>	<u>Strain (<math>\epsilon_{\theta\theta T}^u</math>)</u>
25-9	344	483 (70)	0.0354
53-1	171	414 (60)	0.0279
53-4	260	304 (44)	0.0249
53-5	244	283 (41)	0.0199

### 3.5 $[\pm 60]_{2s}$ LAMINATES

Intermediate strain rate tensile properties of  $[\pm 60]_{2s}$  SP288/AS graphite/epoxy and 80AS/20S/PR288 graphite/S-glass/epoxy were obtained by testing rings under dynamic internal pressure. Three rings of each material were loaded dynamically using 650 mg pistol powder in the pressure chamber of the fixture.

Strain records for the three graphite/epoxy rings tested are shown in Figures 3-53, 3-54, and 3-55 (Specimen Nos. 22-9, 22-10, and 22-11). The corresponding dynamic stress-strain curves are shown in Figures 3-56, 3-57, and 3-58. Results are tabulated in Table 3-9. The initial strain rates range between  $16s^{-1}$  and  $27s^{-1}$ , and the average (secant) rates between  $44s^{-1}$  and  $84s^{-1}$ . The times to failure range between 196  $\mu s$  and 281  $\mu s$ . The initial and secant moduli of 23.0 GPa ( $3.34 \times 10^6$  psi) and 13.9 GPa ( $2.01 \times 10^6$  psi), respectively, are higher than the initial static modulus of 13.4 GPa ( $1.95 \times 10^6$  psi) by 71% and 3%, respectively. The average Poisson's ratio of 0.32 is identical to the static value. The average dynamic strength of 182 MPa (26.4 ksi) is appreciably higher than the static strength of 105 MPa (15.2 ksi), by approximately the same percentage (73%) as the initial modulus. The average dynamic ultimate strain of 0.0134 is slightly higher than the static value of 0.0120.

Strain records for the three hybrid rings tested are shown in Figures 3-59, 3-60, and 3-61 (Specimen Nos. 23-7, 23-10, and 23-11). The corresponding dynamic stress-strain curves are shown in Figures 3-62, 3-63, and 3-64. Results are tabulated in Table 3-10. The initial strain rates range between  $20s^{-1}$  and  $35s^{-1}$ , and the average (secant) rates between  $51s^{-1}$  and  $75s^{-1}$ . The times to failure range between 155  $\mu s$  and 219  $\mu s$ . The initial modulus of 24.7 GPa ( $3.58 \times 10^6$  psi) is much higher than the static modulus of 15.2 GPa ( $2.20 \times 10^6$  psi). The average initial and secant Poisson's ratio of 0.31 is only slightly higher than the static value of 0.29. The average dynamic strength of 155.5 MPa (22.5 ksi) is much higher than the static strength of 94.8 MPa (13.7 ksi). The increase in dynamic strength outpaces the increase in dynamic modulus. The average dynamic ultimate strain of 0.0112 is higher than the static value of 0.0087.

TABLE 3-9. INTERMEDIATE STRAIN RATE TENSILE PROPERTIES OF  
 $[\pm 60]_{2s}$  SP288/AS GRAPHITE/EPOXY

Specimen Number	Strain Rate ( $\dot{\epsilon}_{\theta\theta}$ ), $s^{-1}$	Modulus ( $E_{\theta\theta}$ ), GPa ( $10^6$ psi)	Poisson's Ratio ( $\nu_{\theta x}$ )
<u>Initial Properties</u>			
22-9	27	22.5 (3.26)	0.15
22-10	23	23.6 (3.42)	0.28
22-11	16	23.0 (3.33)	0.33
<u>Secant Properties</u>			
22-9	44	15.0 (2.17)	0.47
22-10	84	12.5 (1.82)	0.31
22-11	52	14.1 (2.04)	0.38
<u>Terminal Properties</u>			
22-9	138	9.3 (1.35)	0.43
22-10	205	8.5 (1.23)	0.34
22-11	156	18.5 (2.68)	0.35
<u>Ultimate Properties</u>			
	Time to Failure ( $t_f$ ), $\mu s$	Strength ( $S_{\theta\theta T}$ ), MPa (ksi)	Strain ( $\epsilon_{\theta\theta T}^u$ )
22-9	196	129 (18.7)	0.0086
22-10	200	210 (30.5)	0.0168
22-11	281	207 (30.0)	0.0147



TABLE 3-10. INTERMEDIATE STRAIN RATE TENSILE PROPERTIES OF  
 $[\pm 60]_2$  80AS/20S/PR288 GRAPHITE/S-GLASS/EPOXY

Specimen Number	Strain Rate ( $\dot{\epsilon}_{\theta\theta}$ ), $s^{-1}$	Modulus ( $E_{\theta\theta}$ ), GPa ( $10^6$ psi)	Poisson's Ratio ( $\nu_{\theta x}$ )
<u>Initial Properties</u>			
23-7	35	17.6 (2.55)	0.25
23-10	23	25.4 (3.67)	0.26
23-11	20	31.1 (4.51)	0.22
<u>Secant Properties</u>			
23-7	75	15.7 (2.28)	0.39
23-10	51	12.7 (1.84)	0.34
23-11	51	13.2 (1.91)	0.41
<u>Terminal Properties</u>			
23-7	163	12.9 (1.88)	0.41
23-10	153	9.0 (1.30)	0.34
23-11	180	7.8 (1.13)	0.30
<u>Ultimate Properties</u>			
	Time to Failure ( $t_f$ ), $\mu s$	Strength ( $S_{\theta\theta T}$ ), MPa (ksi)	Strain ( $\epsilon_{\theta\theta T}^u$ )
23-7	155	182.2 (26.4)	0.0116
23-10	219	142.1 (20.6)	0.0112
23-11	210	142.1 (20.6)	0.0108

### 3.6 $[\pm 67.5]_{2s}$ LAMINATES

Intermediate strain rate tensile properties of  $[\pm 67.5]_{2s}$  SP288/AS graphite/epoxy and 80AS/20S/PR288 graphite/S-glass/epoxy were obtained by testing rings under dynamic internal pressure. Three rings of each material were loaded dynamically using 650 mg pistol powder in the pressure chamber of the fixture.

Strain records for the three graphite/epoxy rings tested are shown in Figures 3-65, 3-66, and 3-67 (Specimen Nos. 26-10, 26-11, and 26-13). The corresponding dynamic stress-strain curves are shown in Figure 3-68, 3-69, and 3-70. Results are tabulated in Table 3-11. The initial strain rates range between  $19s^{-1}$  and  $35s^{-1}$  and the average (secant) rates between  $58s^{-1}$  and  $89s^{-1}$ . The times to failure vary between 123  $\mu s$  and 158  $\mu s$ . The initial and secant moduli of 17.3 GPa ( $2.51 \times 10^6$  psi) and 12.8 GPa ( $1.86 \times 10^6$  psi), respectively, are higher than the initial static modulus of 12.0 GPa ( $1.74 \times 10^6$  psi). The average initial and secant Poisson's ratio is equal to the static value of 0.17. The average dynamic strength of 132.2 MPa (19.2 ksi) is higher than the static strength of 85.1 MPa (12.3 ksi) by 56%. The average dynamic ultimate strain of 0.0103 is higher than the static value of 0.0081.

Strain records for the three hybrid rings tested are shown in Figures 3-71, 3-72, and 3-73 (Specimen Nos. 27-10, 27-11, and 27-13). The corresponding dynamic stress-strain curves are shown in Figures 3-74, 3-75, and 3-76. Results are tabulated in Table 3-12. The initial strain rates range between  $23s^{-1}$  and  $49s^{-1}$  and the average (secant) rates between  $56s^{-1}$  and  $71s^{-1}$ . The times to failure vary between 130  $\mu s$  and 151  $\mu s$ . The initial and secant moduli of 20.3 GPa ( $2.94 \times 10^6$  psi) and 15.7 GPa ( $2.28 \times 10^6$  psi), respectively, are higher than the initial static modulus of 14.4 GPa ( $2.08 \times 10^6$  psi) by 41% and 10%, respectively. The average initial and secant Poisson's ratio of 0.14 is slightly lower than the static value of 0.16. The average dynamic strength of 136.6 MPa (19.8 ksi) is much higher than the static strength of 76.1 MPa (11.0 ksi) by a higher percentage than the dynamic modulus. The average dynamic ultimate strain of 0.0087 is higher than the static value of 0.0062.

TABLE 3-11. INTERMEDIATE STRAIN RATE TENSILE PROPERTIES OF  
 $[\pm 67.5]_{2s}$  SP288/AS GRAPHITE/EPOXY

Specimen Number	Strain Rate ( $\dot{\epsilon}_{\theta\theta}$ ), $s^{-1}$	Modulus ( $E_{\theta\theta}$ ), GPa ( $10^6$ psi)	Poisson's Ratio ( $\nu_{\theta x}$ )
<u>Initial Properties</u>			
26-10	23	15.0 (2.18)	0.21
26-11	35	13.3 (1.93)	0.14
26-13	19	23.6 (3.41)	0.11
<u>Secant Properties</u>			
26-10	73	12.7 (1.85)	0.17
26-11	89	13.8 (2.00)	0.20
26-13	58	11.9 (1.73)	0.16
<u>Terminal Properties</u>			
26-10	169	8.0 (1.16)	0.21
26-11	182	14.0 (2.04)	0.15
26-13	150	3.3 (0.48)	0.25
<u>Ultimate Properties</u>			
	Time to Failure ( $t_f$ ), $\mu s$	Strength ( $S_{\theta\theta T}$ ), MPa (ksi)	Strain ( $\epsilon_{\theta\theta T}^u$ )
26-10	146	136.3 (19.8)	0.0107
26-11	123	150.1 (21.8)	0.0109
26-13	158	109.7 (15.9)	0.0092

TABLE 3-12. INTERMEDIATE STRAIN RATE TENSILE PROPERTIES OF  
 $[\pm 67.5]_{2s}$  80AS/20S/PR288 GRAPHITE/S-GLASS/EPOXY

Specimen Number	Strain Rate ( $\dot{\epsilon}_{\theta\theta}$ ), $s^{-1}$	Modulus ( $E_{\theta\theta}$ ), GPa ( $10^6$ psi)	Poisson's Ratio ( $\nu_{\theta x}$ )
<u>Initial Properties</u>			
27-10	24	16.8 (2.43)	0.09
27-11	49	20.7 (3.00)	0.13
27-13	23	23.5 (3.40)	0.16
<u>Secant Properties</u>			
27-10	56	13.8 (1.99)	0.10
27-11	71	16.4 (2.38)	0.17
27-13	56	17.0 (2.47)	0.14
<u>Terminal Properties</u>			
27-10	119	7.2 (1.05)	0.16
27-11	148	25.2 (3.66)	0.26
27-13	136	9.3 (1.35)	0.19
<u>Ultimate Properties</u>			
	Time to Failure ( $t_f$ ), $\mu s$	Strength ( $S_{\theta\theta T}$ ), MPa (ksi)	Strain ( $\epsilon_{\theta\theta T}^u$ )
27-10	151	115.6 (16.8)	0.0084
27-11	130	151.1 (21.9)	0.0092
27-13	150	143.2 (20.8)	0.0084

### 3.7 $[\pm 75]_{2s}$ LAMINATES

Intermediate strain rate tensile properties of  $[\pm 75]_{2s}$  SP288/AS graphite/epoxy and 80AS/20S/PR288 graphite/S-glass/epoxy were obtained by testing rings under dynamic internal pressure. Three rings of each material were loaded dynamically using 650 mg pistol powder in the pressure chamber of the fixture.

Valid data were obtained only for one of the three graphite/epoxy rings tested, Specimen No. 20-12. Strain records and the corresponding dynamic stress-strain curve for this specimen are shown in Figures 3-77 and 3-78, respectively. Results are tabulated in Table 3-13. The initial and secant strain rates are  $19s^{-1}$  and  $45s^{-1}$ , respectively, and the time to failure is 201  $\mu s$ . The initial modulus of 19.7 GPa ( $2.86 \times 10^6$  psi) is much higher than the static modulus of 11.2 GPa ( $1.63 \times 10^6$  psi). The average Poisson's ratio of 0.06 is lower than the static value of 0.09. The dynamic strength of 98.3 MPa (14.2 ksi) is higher than the static strength of 74.8 MPa (10.8 ksi) by 31%. The dynamic ultimate strain of 0.0090 is also higher than the static value of 0.0076 by 18%.

Strain records for the three hybrid rings tested are shown in Figures 3-79, 3-80, and 3-81 (Specimen Nos. 21-10, 21-11, and 21-12). The corresponding dynamic stress-strain curves are shown in Figures 3-82, 3-83, and 3-84. Results are tabulated in Table 3-14. The initial strain rates range between  $28s^{-1}$  and  $37s^{-1}$  and the average (secant) rates between  $62s^{-1}$  and  $68s^{-1}$ . The times to failure range between 107  $\mu s$  and 111  $\mu s$ . The initial modulus of 16.9 GPa ( $2.45 \times 10^6$  psi) is a little higher than the static modulus of 15.5 GPa ( $2.25 \times 10^6$  psi). The overall average Poisson's ratio of 0.08 is slightly lower than the static value of 0.10. The average dynamic strength of 94.9 MPa (13.8 ksi) is higher than the static strength of 61.4 MPa (8.9 ksi) by 55%. The dynamic ultimate strain of 0.0070 is also higher than the static value of 0.0047 by 49%.

TABLE 3-13. INTERMEDIATE STRAIN RATE TENSILE PROPERTIES OF  
 $[\pm 75]_{2s}$  SP288/AS GRAPHITE/EPCXY

Specimen Number	Strain Rate ( $\dot{\epsilon}_{\theta\theta}$ ), $s^{-1}$	Modulus ( $\bar{E}_{\theta\theta}$ ), GPa ( $10^6$ psi)	Poisson's Ratio ( $\nu_{\theta x}$ )
<u>Initial Properties</u>			
20-12	19	19.7 (2.86)	-
<u>Secant Properties</u>			
20-12	45	10.9 (1.58)	0.04
<u>Terminal Properties</u>			
20-12	132	6.0 (0.87)	0.08
<u>Ultimate Properties</u>			
	Time to Failure ( $t_f$ ), $\mu s$	Strength ( $S_{\theta\theta T}$ ), MPa (ksi)	Strain ( $\epsilon_{\theta\theta T}^u$ )
20-12	201	98.3 (14.2)	0.0090

TABLE 3-14. INTERMEDIATE STRAIN RATE TENSILE PROPERTIES OF  
[±75]<sub>2s</sub> 80AS/20S/PR288 GRAPHITE/S-GLASS/EPOXY

Specimen Number	Strain Rate ( $\dot{\epsilon}_{00}$ ), s <sup>-1</sup>	Modulus ( $E_{00}$ ), GPa (10 <sup>6</sup> psi)	Poisson's Ratio ( $\nu_{0x}$ )
<u>Initial Properties</u>			
21-10	36	15.4 (2.22)	-
21-11	28	16.9 (2.45)	-
21-12	37	18.5 (2.68)	-
<u>Secant Properties</u>			
21-10	68	13.4 (1.94)	0.04
21-11	52	8.4 (1.21)	0.04
21-12	62	18.5 (2.68)	0.05
<u>Terminal Properties</u>			
21-10	128	11.5 (1.66)	0.07
21-11	108	7.7 (1.11)	0.11
21-12	113	15.9 (2.30)	0.14
<u>Ultimate Properties</u>			
	Time to Failure ( $t_f$ ), $\mu$ s	Strength ( $S_{00T}$ ), MPa (ksi)	Strain ( $\epsilon_{00T}^U$ )
21-10	111	101.8 (14.8)	0.0076
21-11	107	55.2 (8.0)	0.0066
21-12	111	127.7 (18.5)	0.0069

C - 2

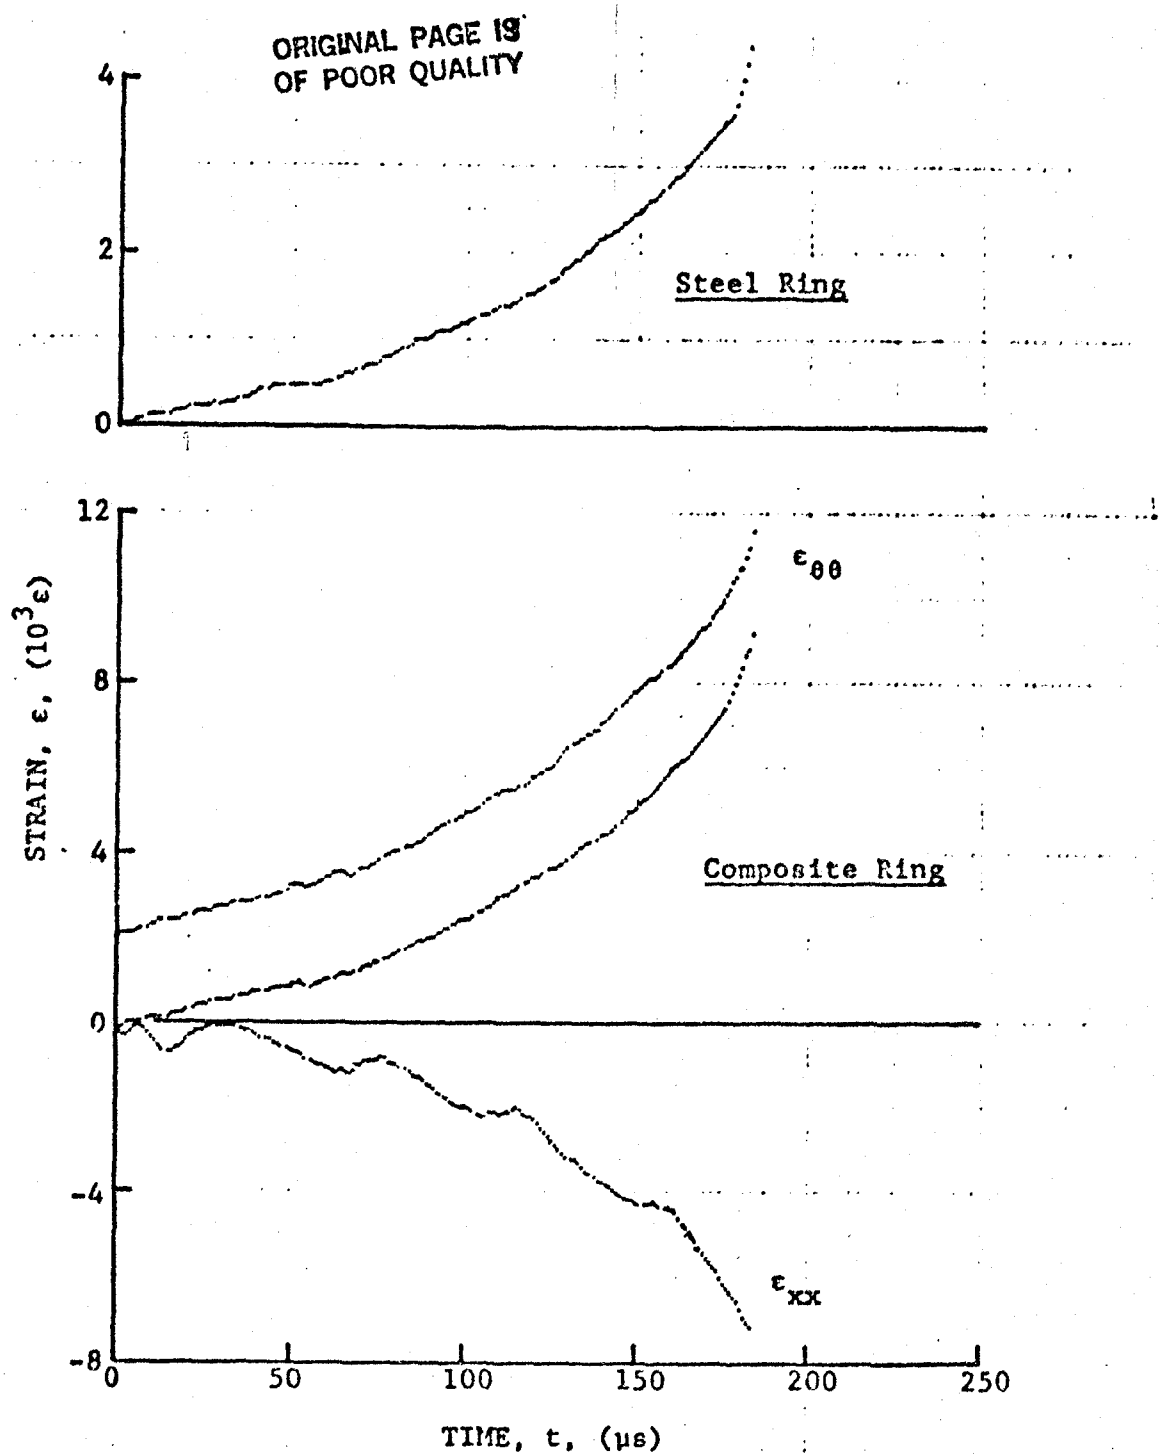


Figure 3-1. Strain records in steel ring and  $[\pm 15]_2$  SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 35-7 (0.65 g shotgun powder).



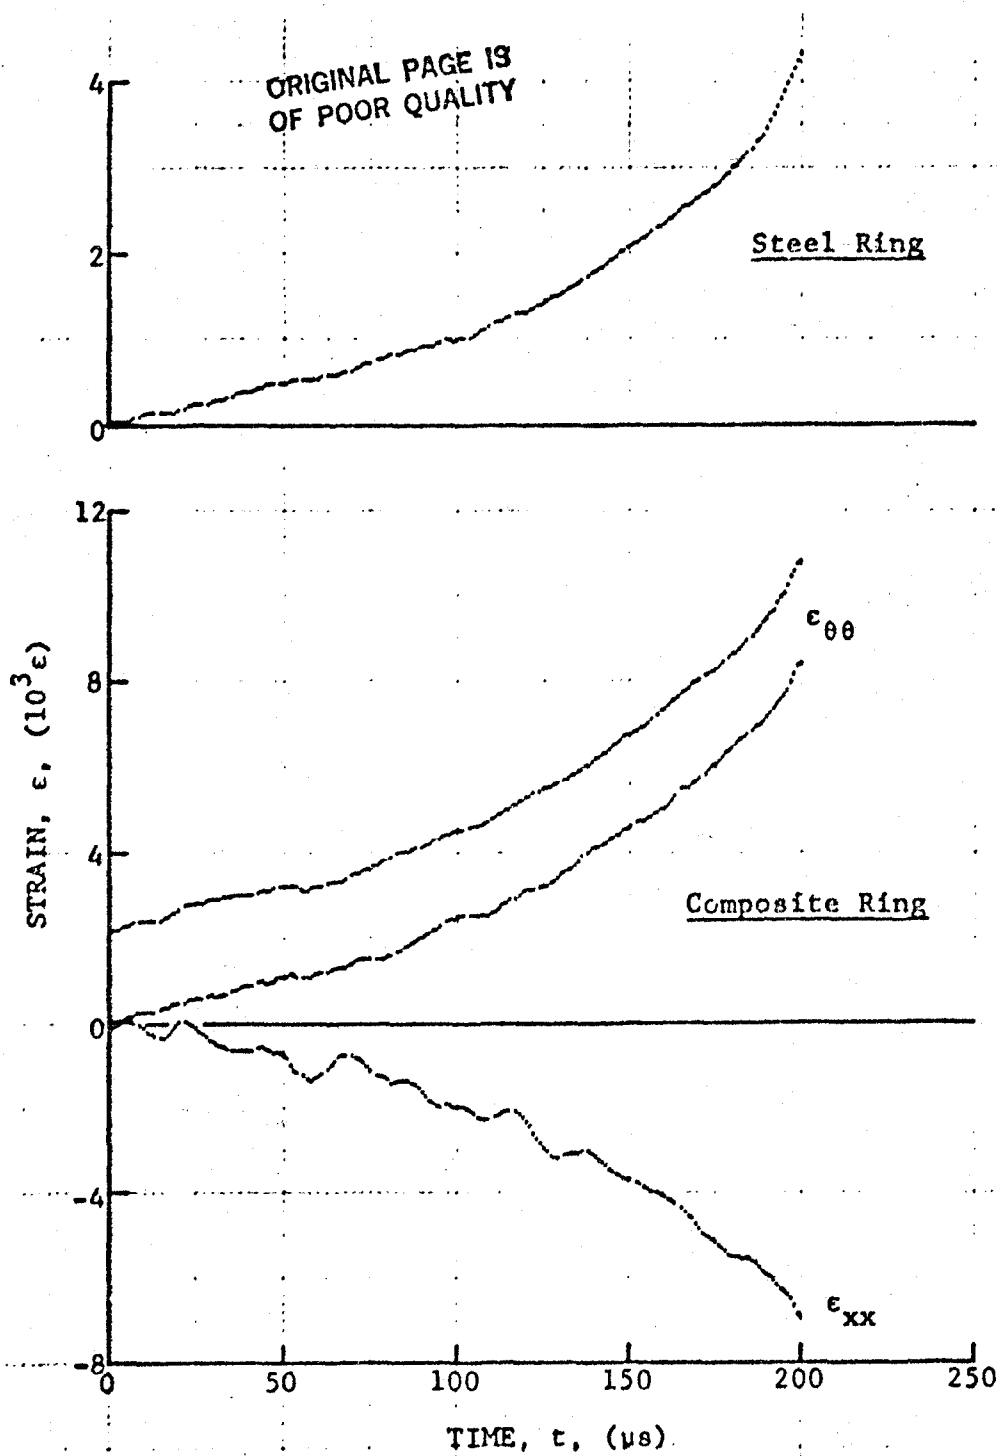


Figure 3-2. Strain records in steel ring and  $[\pm 15]_{2s}$  SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 35-10 (0.65 g shotgun powder).

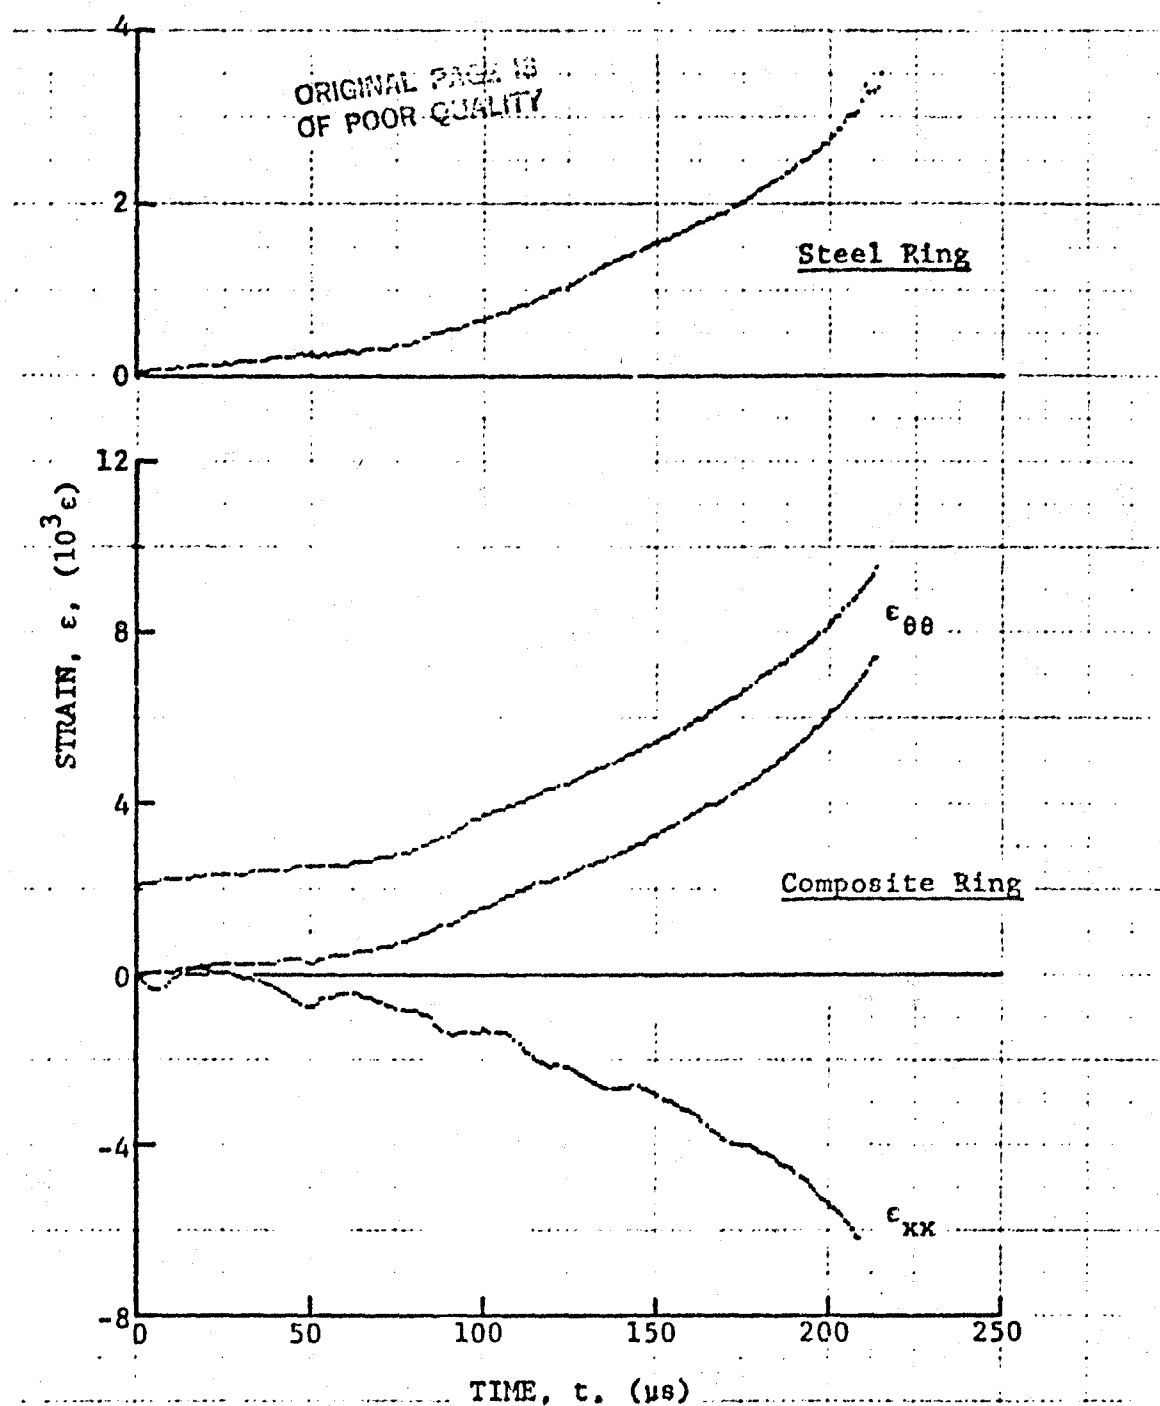


Figure 3-3. Strain records in steel ring and  $[\pm 15]_2$  SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 35-11 (0.65 g shotgun powder).

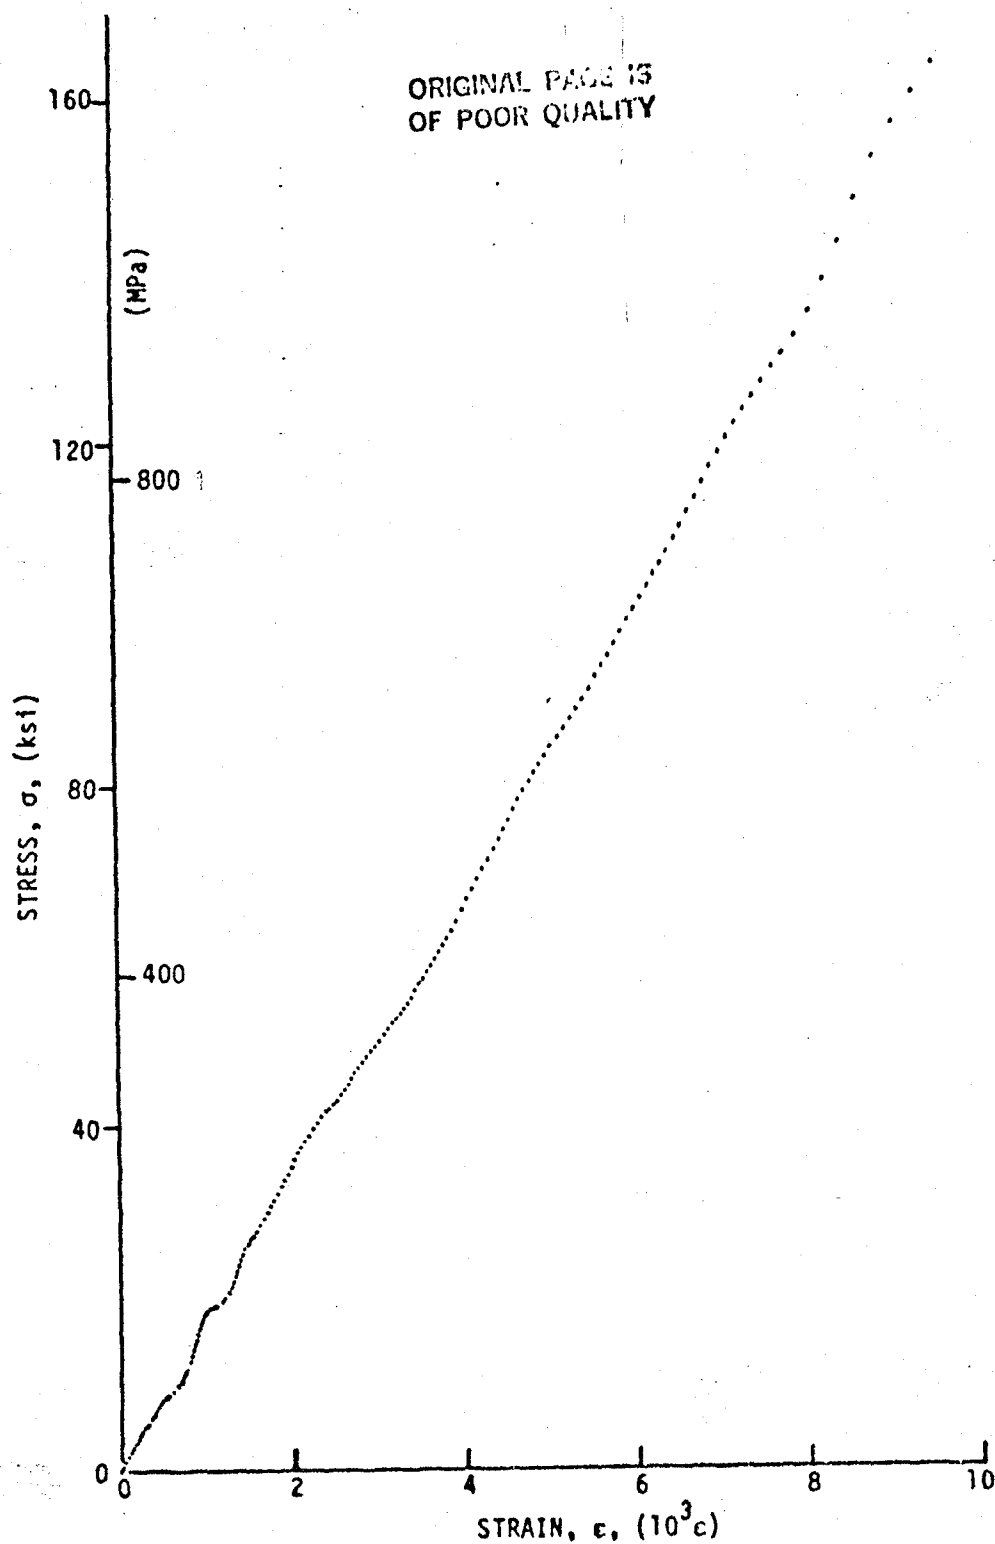


Figure 3-4. Stress-strain curves for dynamically loaded  $[\pm 15]_{2s}$  SP288/AS graphite/epoxy ring, Specimen No. 35-7.

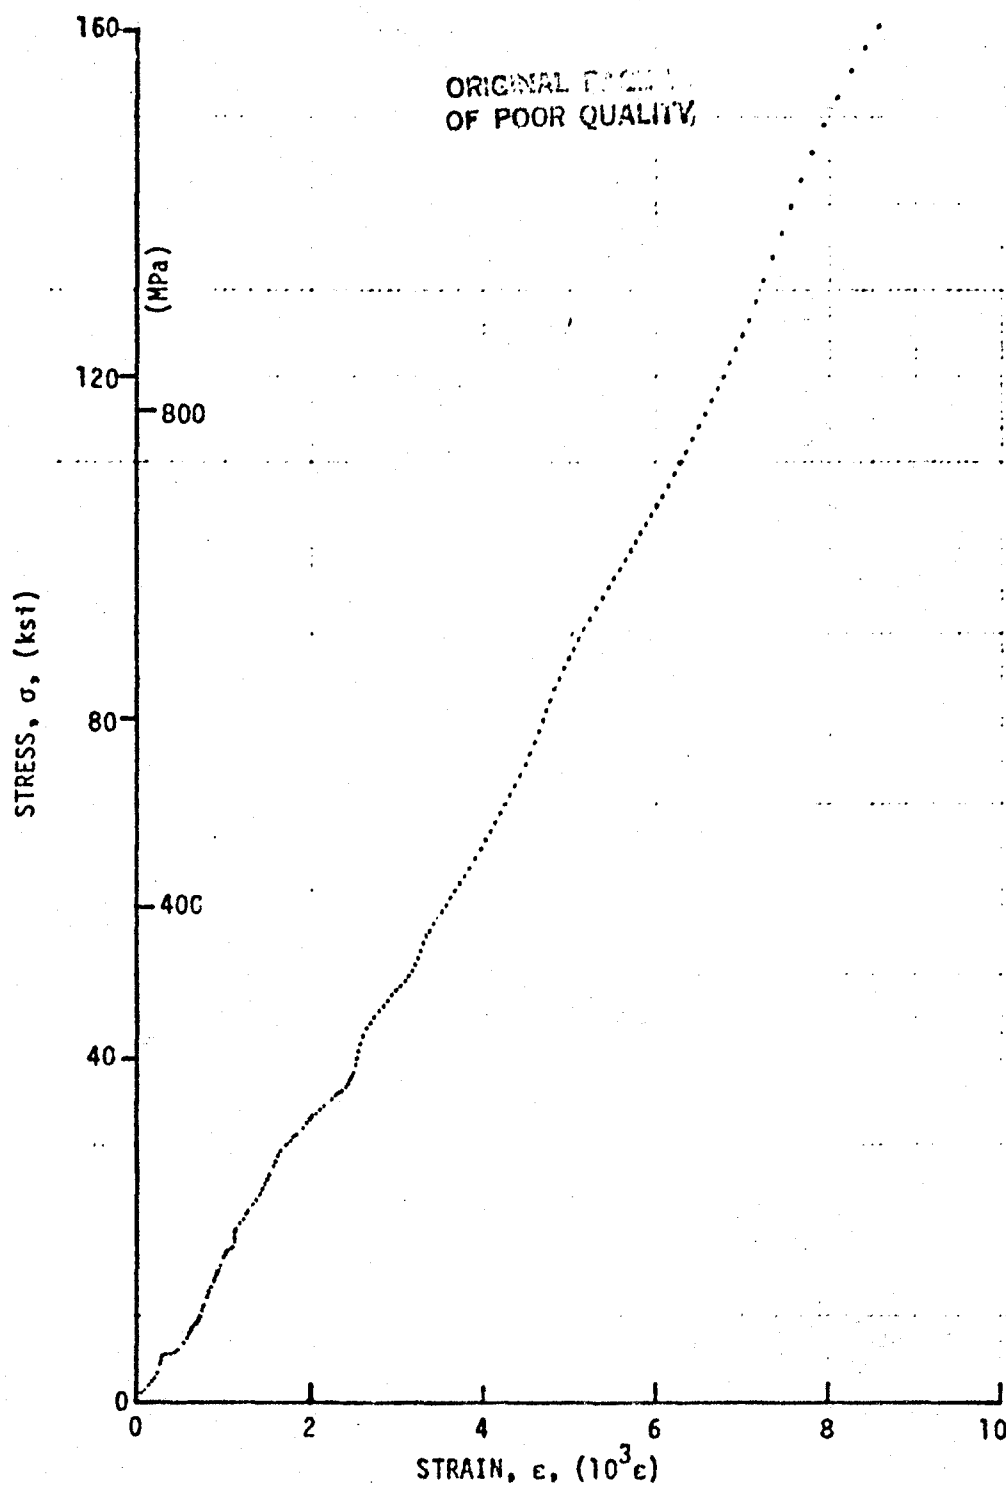


Figure 3-5. Stress-strain curves for dynamically loaded  $[\pm 15]_{2s}$  SP288/AS graphite/epoxy ring, Specimen No. 35-10.

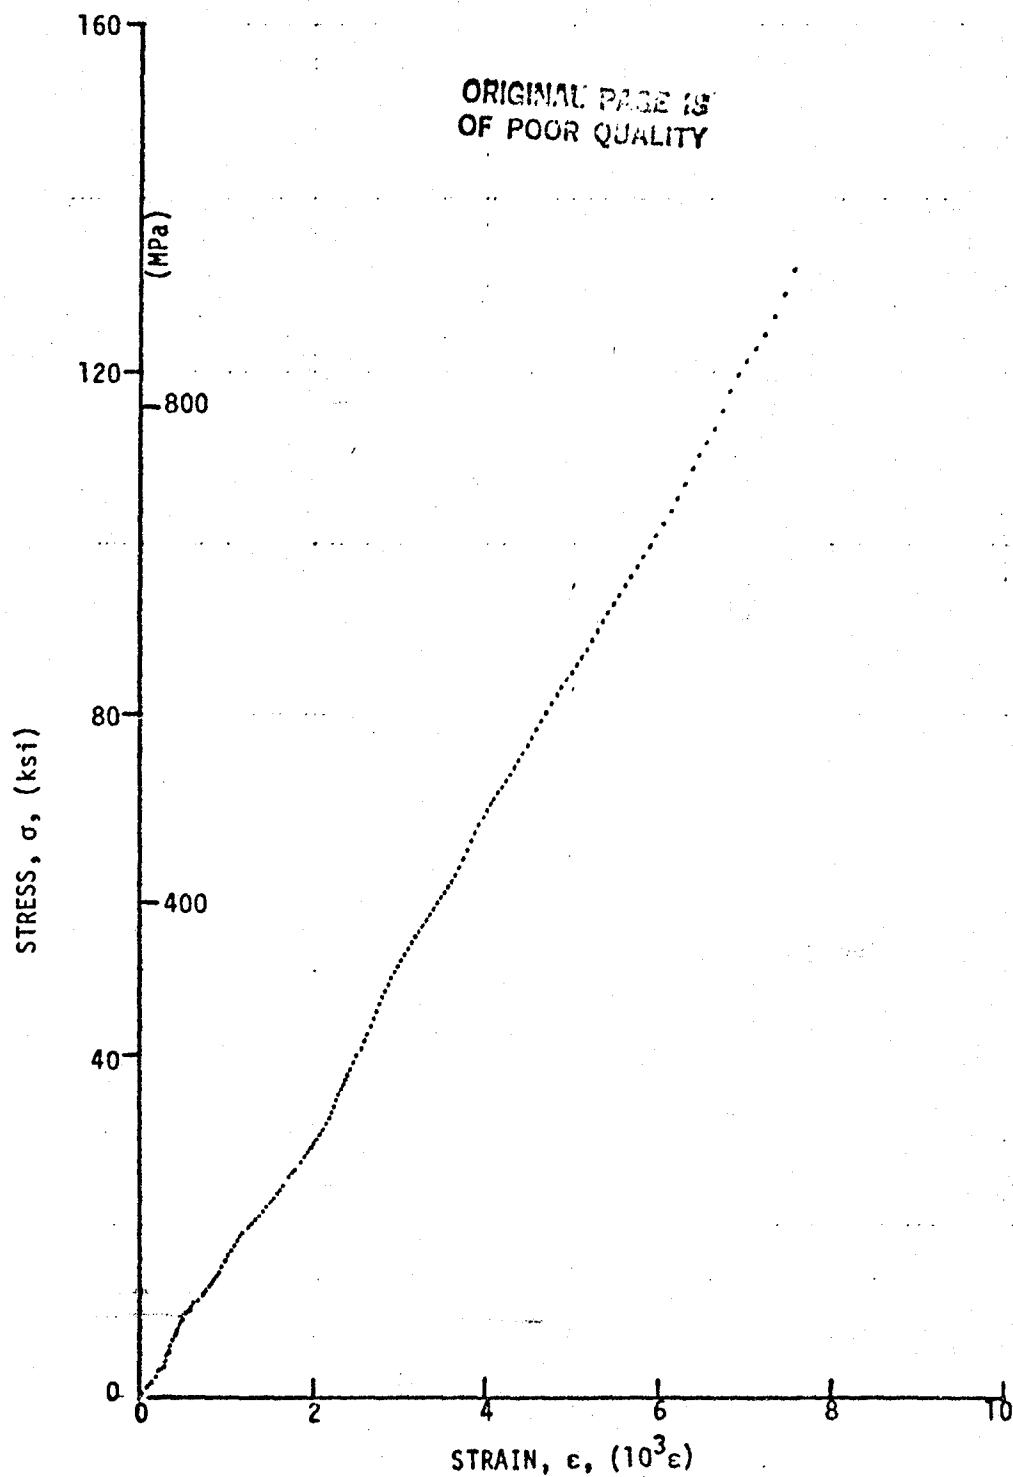


Figure 3-6. Stress-strain curves for dynamically loaded  $[\pm 15]_{2s}$  SP288/AS graphite/epoxy ring, Specimen No. 35-11.

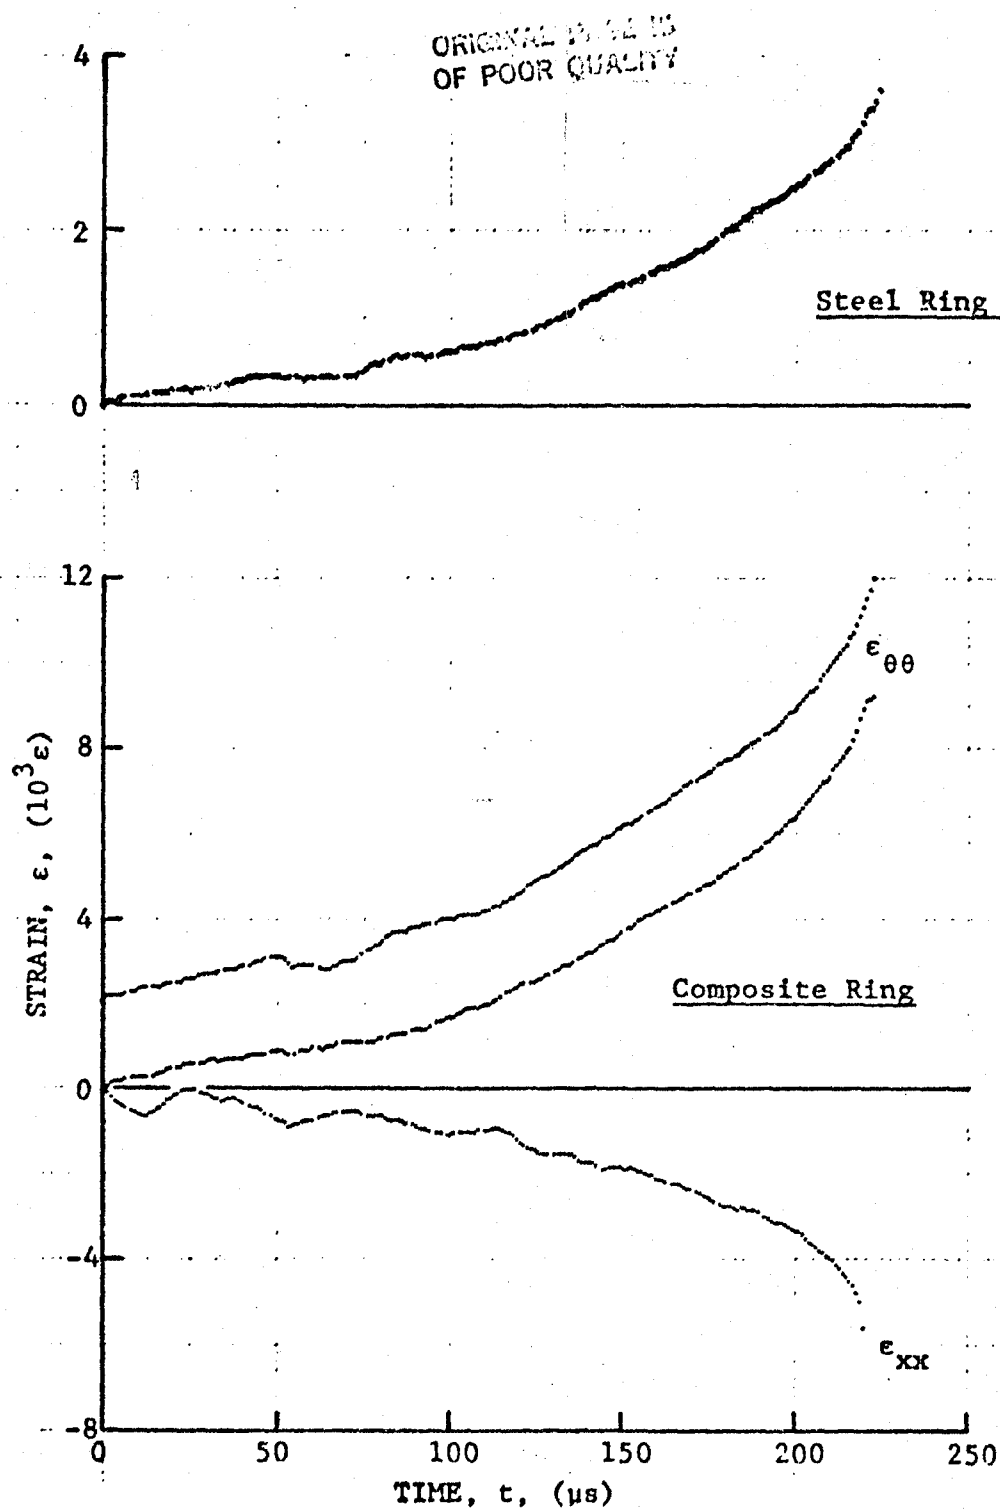


Figure 3-7. Strain records in steel ring and 80AS/20S/PR288  $[\pm 15]_2$ s graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 36-6 (0.65 g shotgun powder).

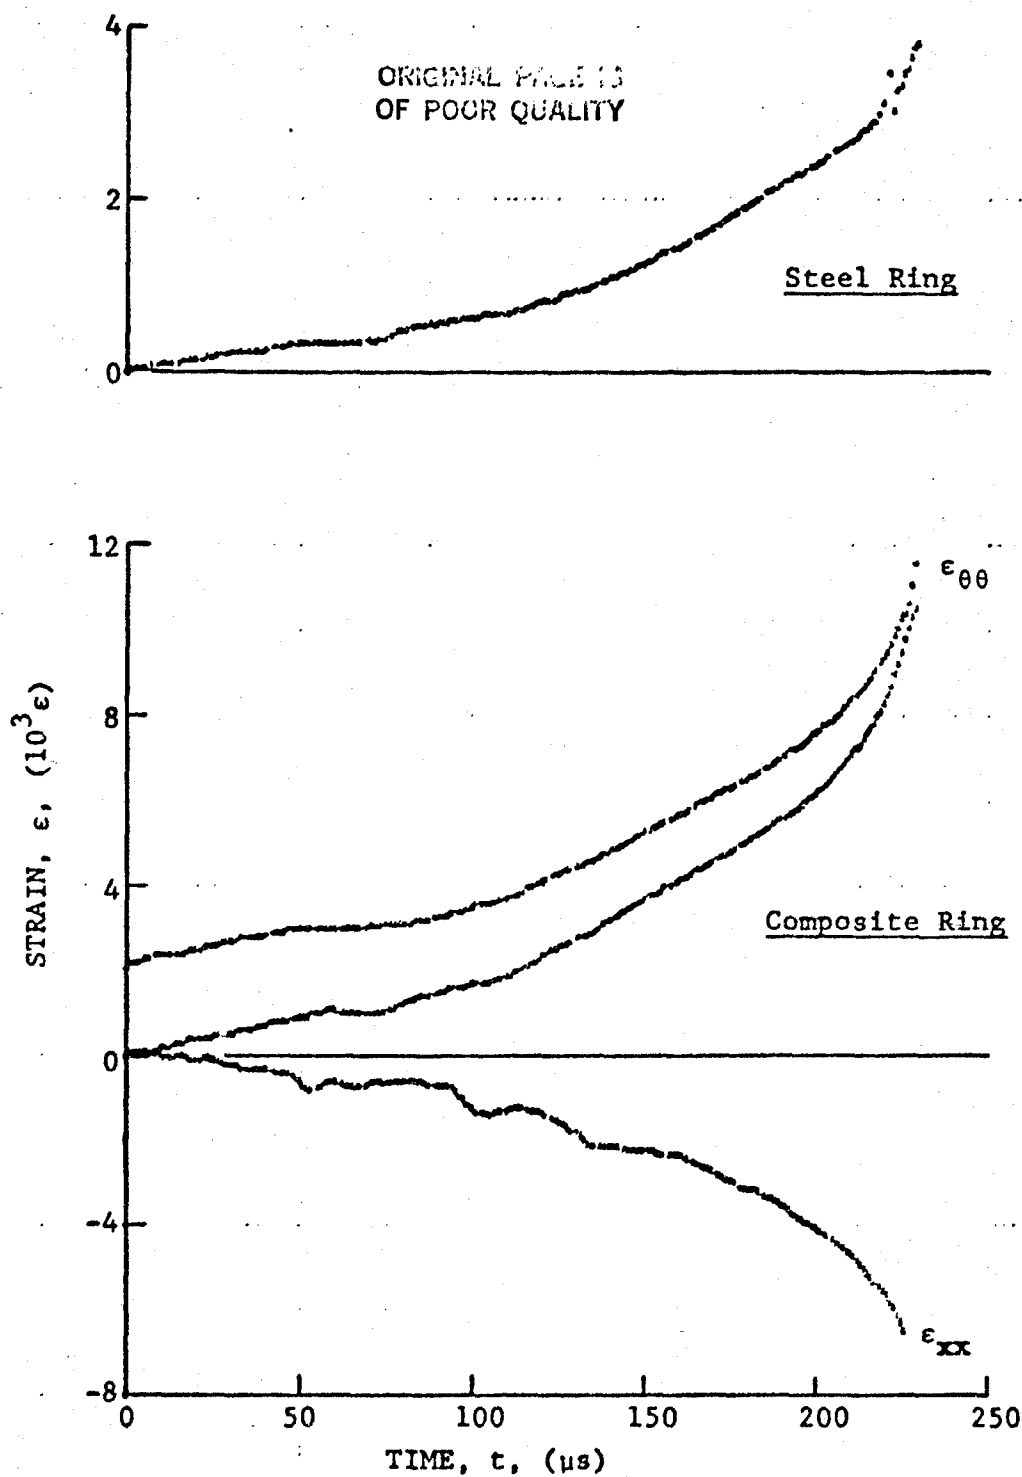


Figure 3-8. Strain records in steel ring and 80AS/20S/PR288  
[ $\pm 15$ ]<sub>2s</sub> graphite/S-glass/epoxy ring under dynamic loading  
for Specimen No. 36-10 (0.65 g shotgun powder).

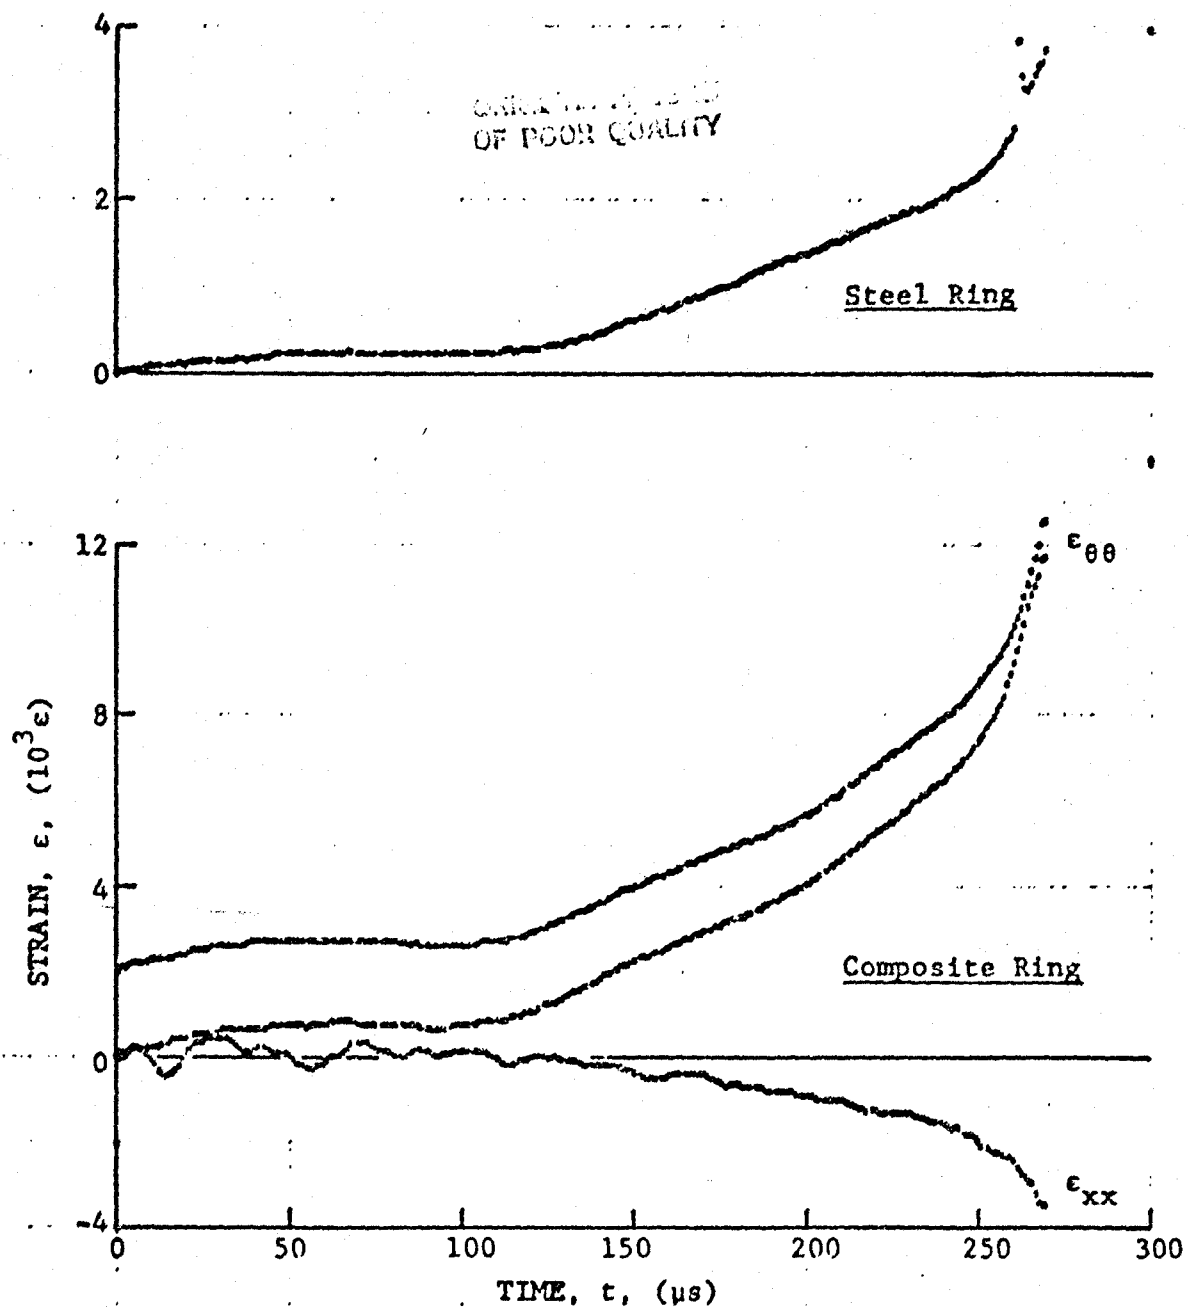


Figure 3-9. Strain records in steel ring and 80AS/20S/PR288  
 $[\pm 15]_{2s}$  graphite/S-glass/epoxy ring under dynamic loading  
 for Specimen No. 36-11 (0.65 g shotgun powder).



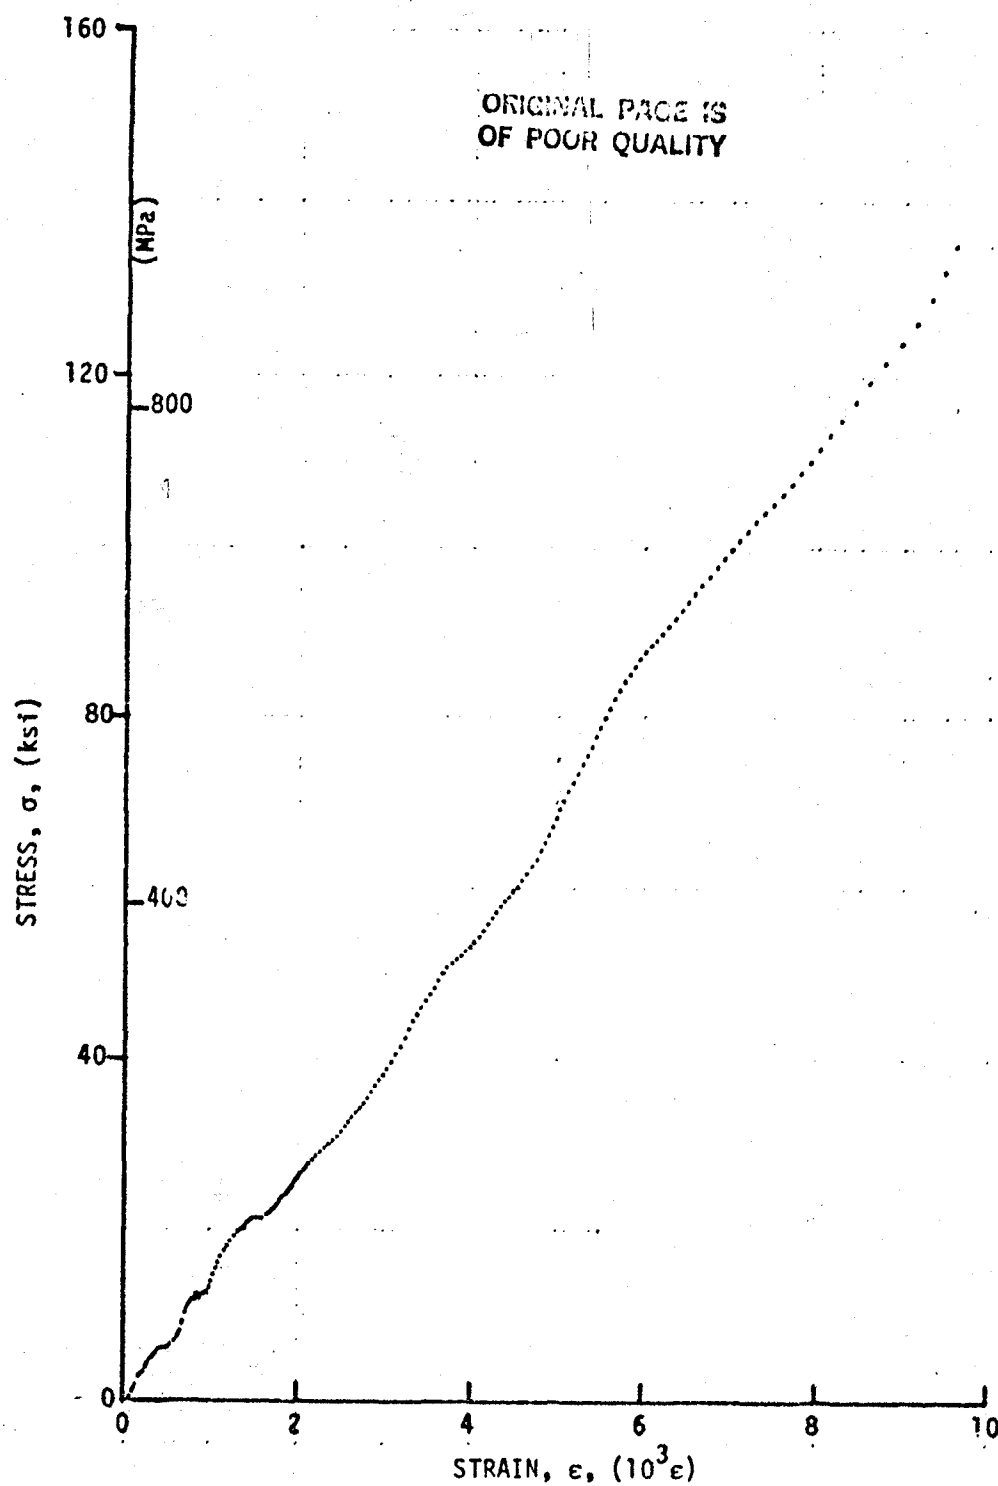


Figure 3-10. Stress-strain curves for dynamically loaded  $[\pm 15]_2^s$  80AS/20S/PR288 graphite/S-glass/epoxy ring, Specimen No. 36-6.

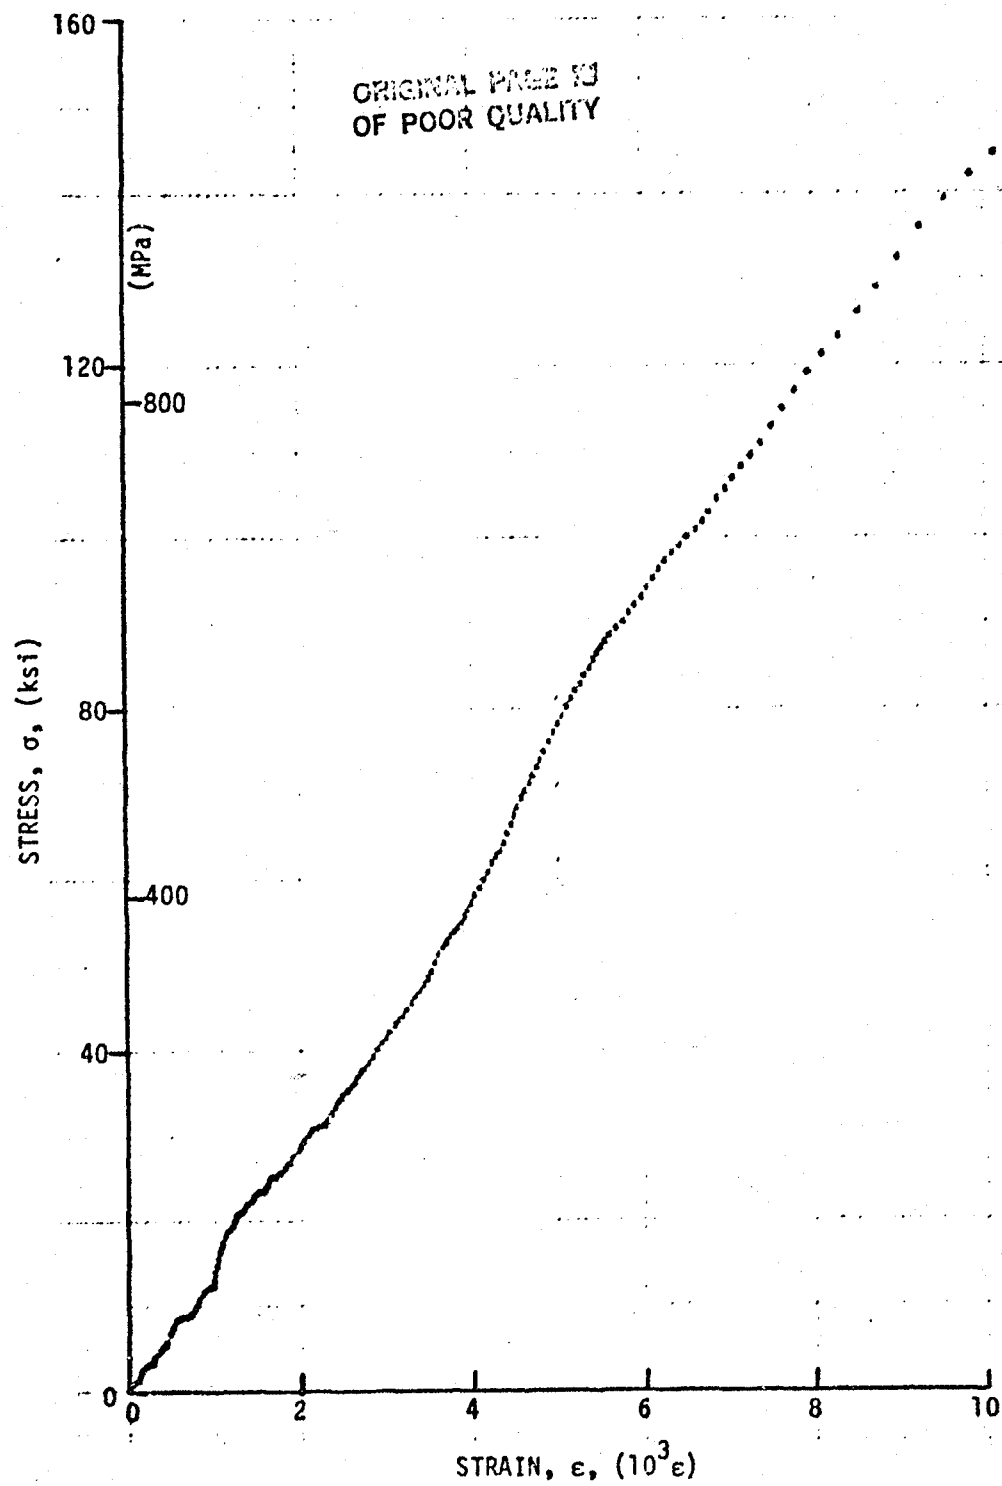


Figure 3-11. Stress-strain curves for dynamically loaded  $[\pm 15]_{2s}$  80AS/20S/PR288 graphite/S-glass/epoxy ring, Specimen No. 36-10.

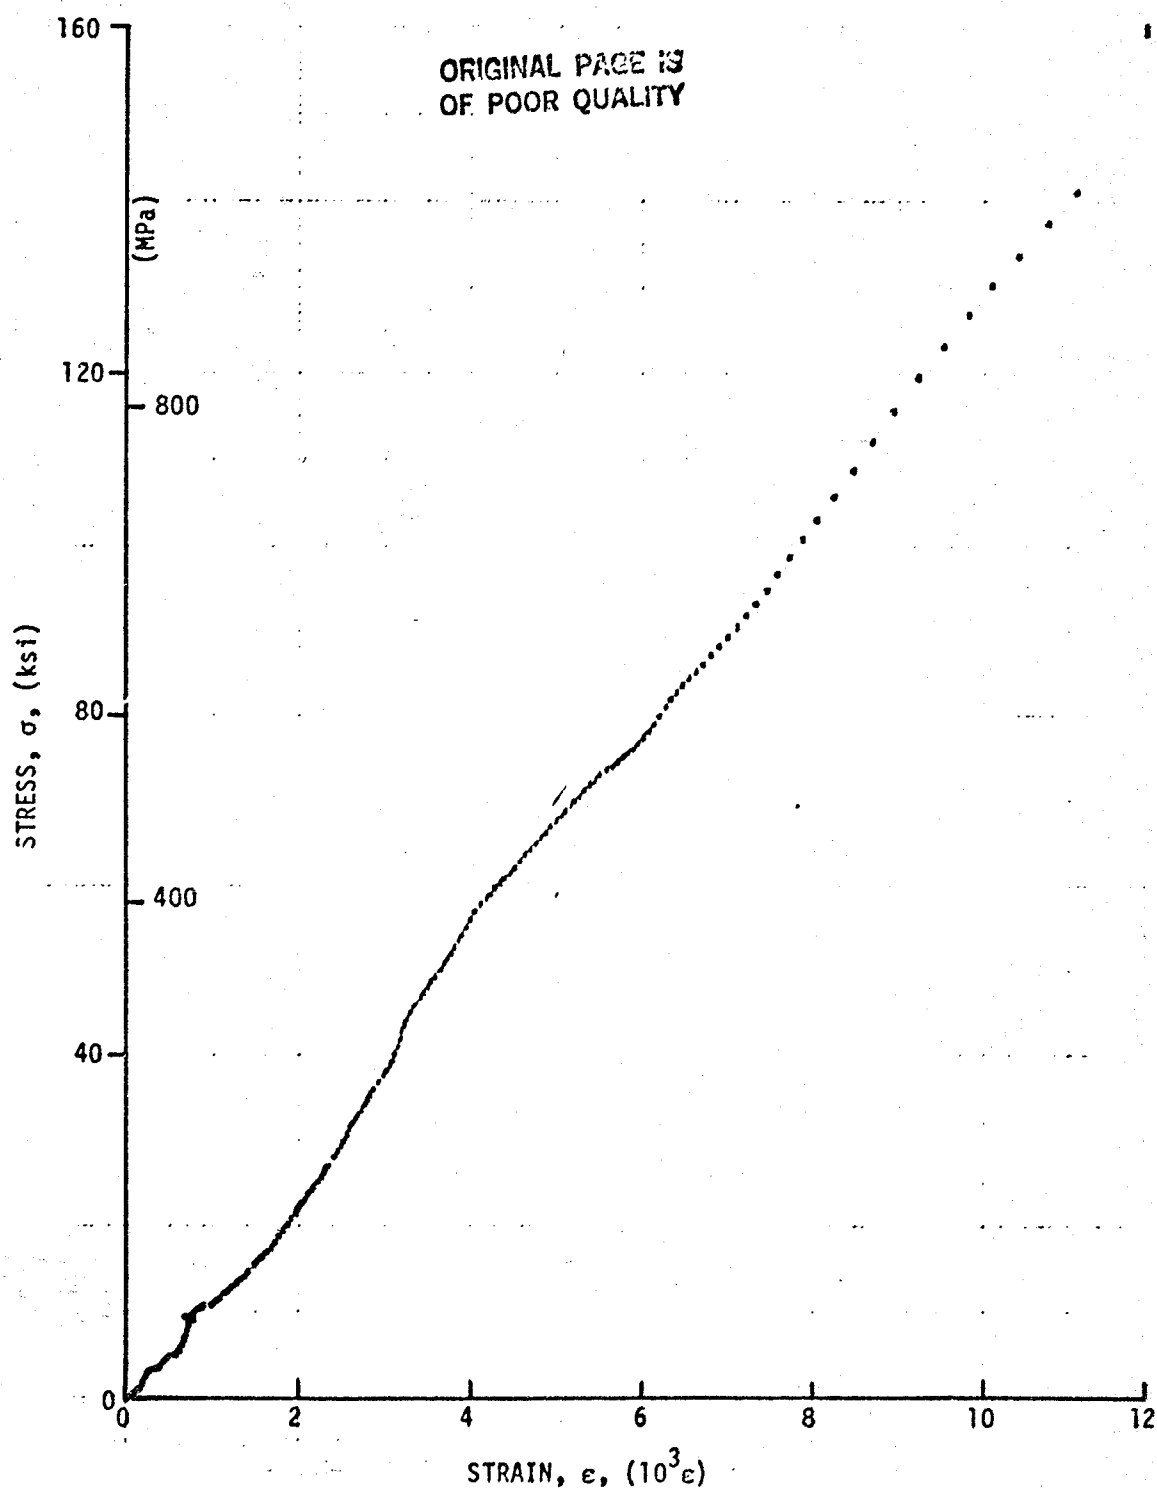


Figure 3-12. Stress-strain curves for dynamically loaded  $[\pm 15]_{2s}$  80AS/20S/PR288 graphite/S-glass/epoxy ring, Specimen No. 36-11.

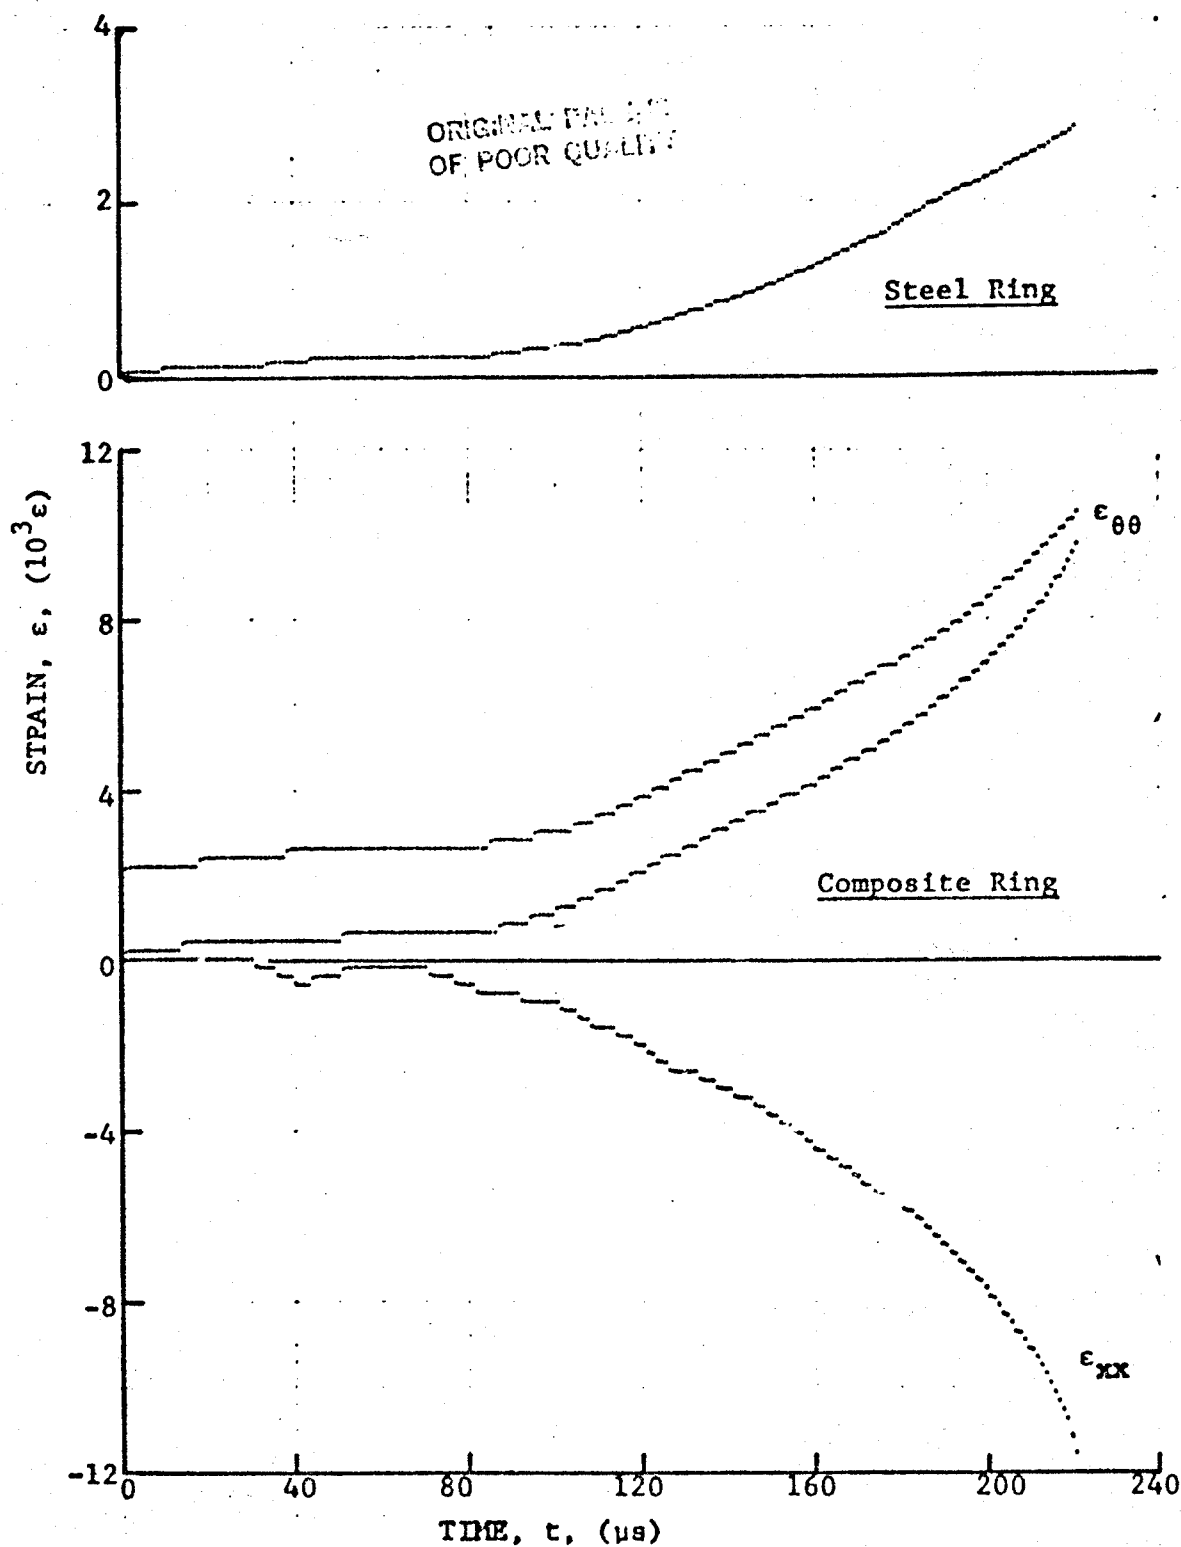


Figure 3-13. Strain records in steel ring and  $[\pm 22.5]_2$  SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 33-10 (0.65 g shotgun powder).

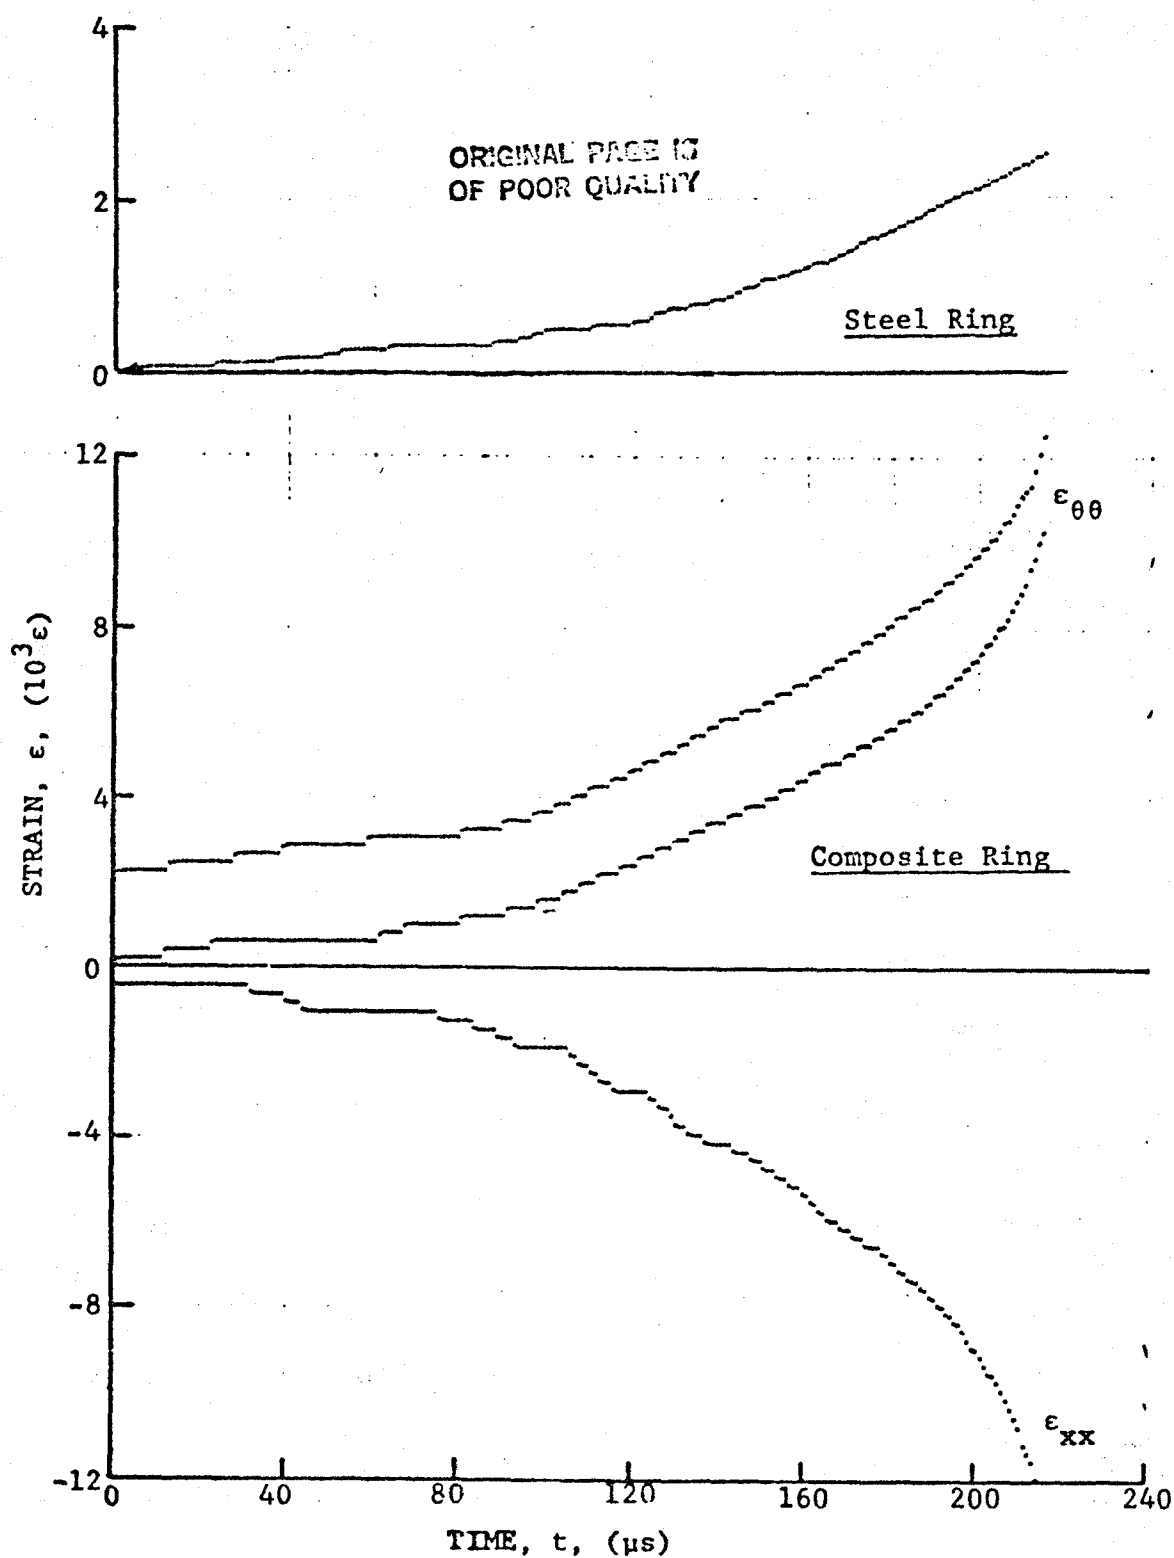


Figure 3-14. Strain records in steel ring and  $[\pm 22.5]_{2s}$  SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 33-11 (0.65 g shotgun powder).

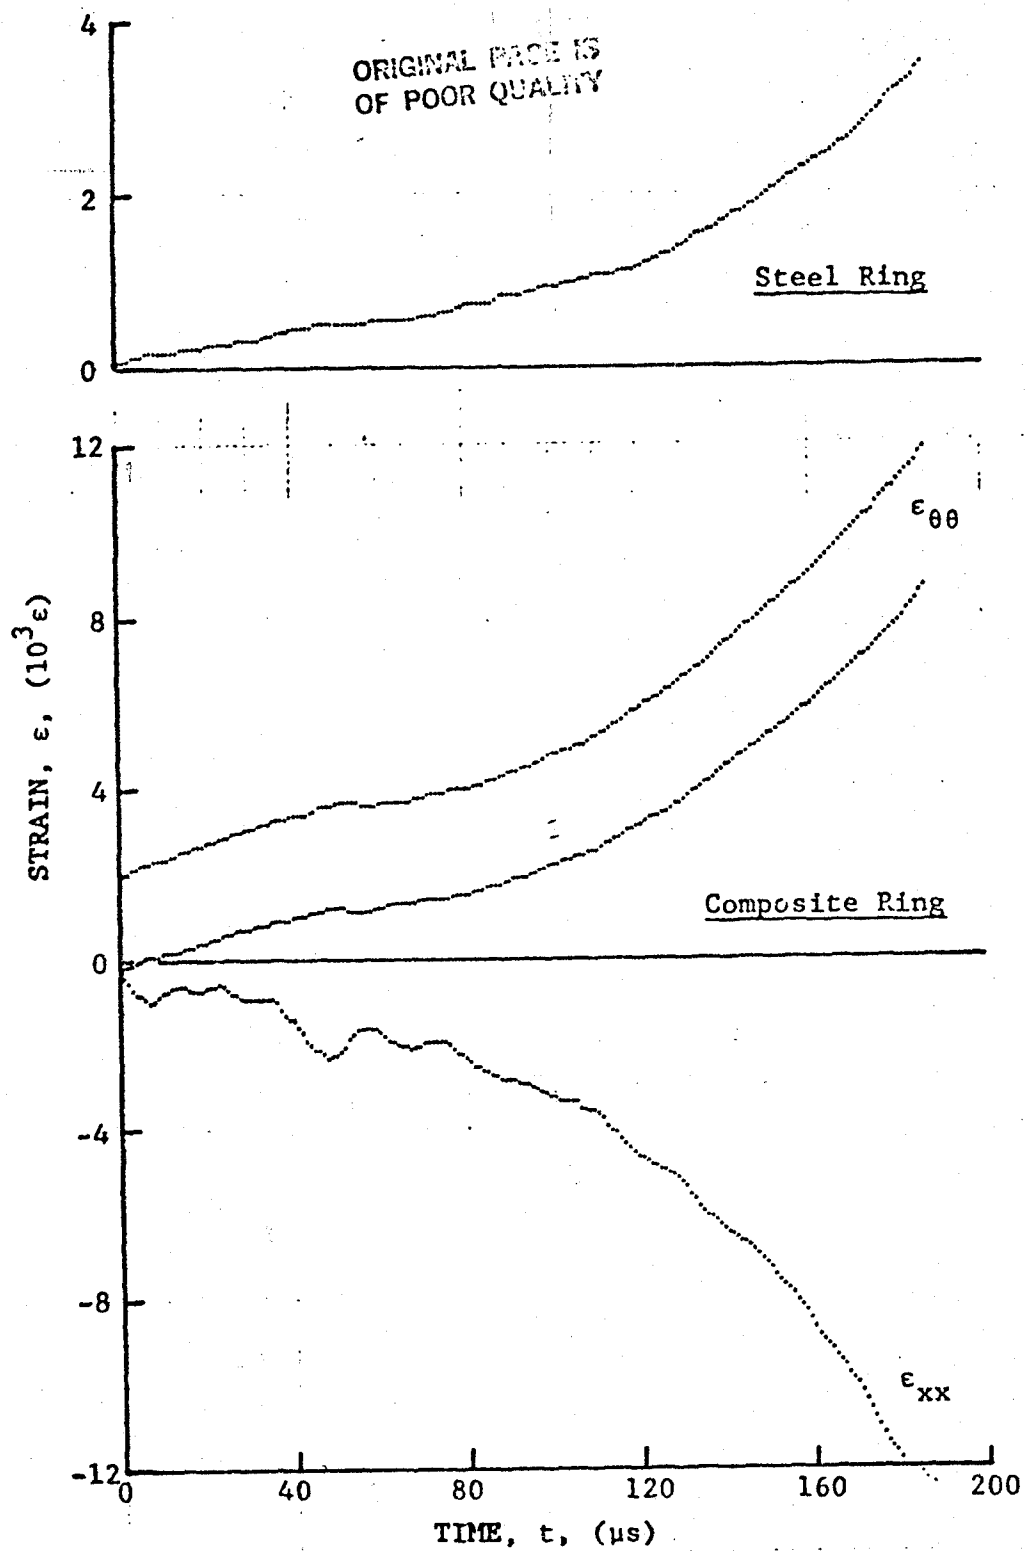


Figure 3-15. Strain records in steel ring and  $[\pm 22.5]_{2s}$  SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 33-13 (0.65 g shotgun powder).

ORIGINAL PAGE IS  
OF POOR QUALITY

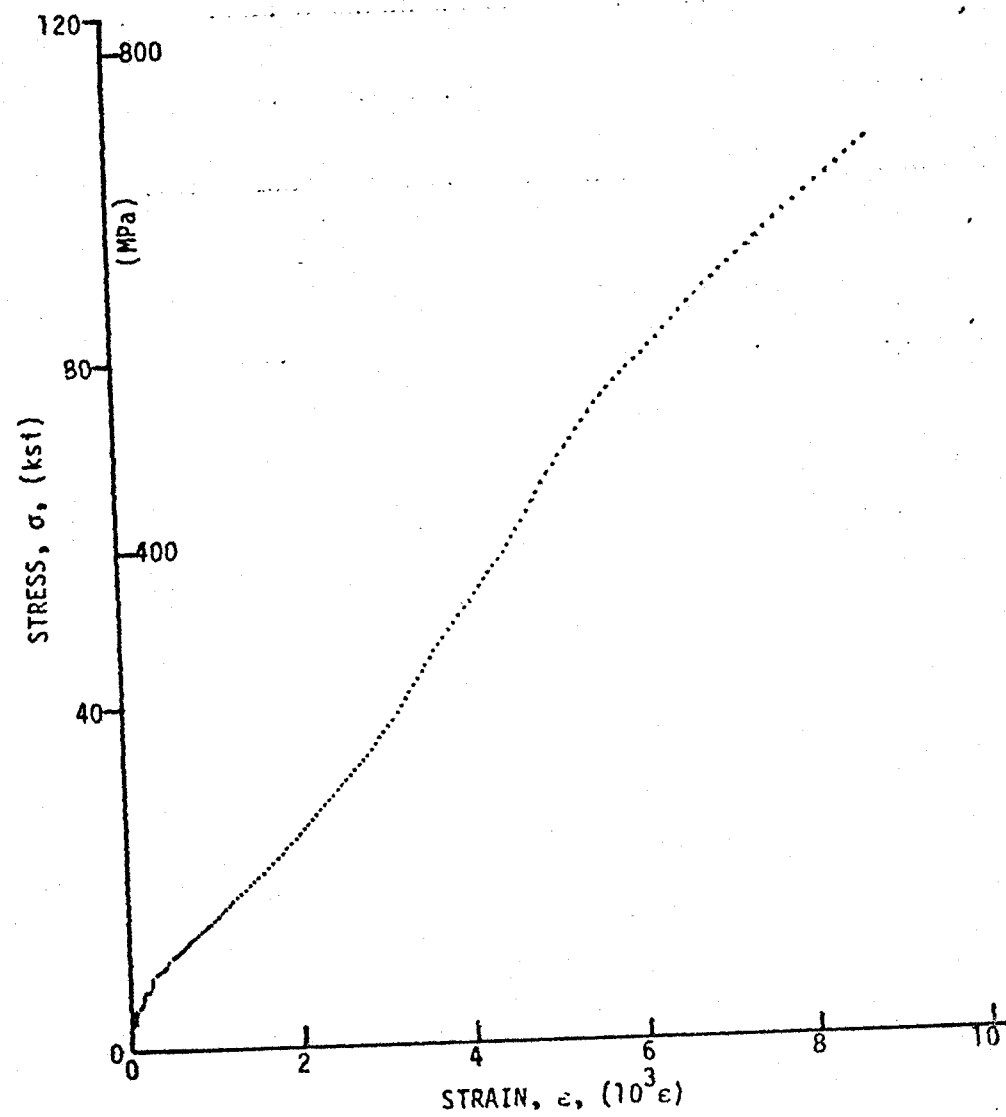


Figure 3-16. Stress-strain curves for dynamically loaded [±22.5]<sub>2s</sub> SP288/AS graphite/epoxy ring, Specimen No. 33-10.

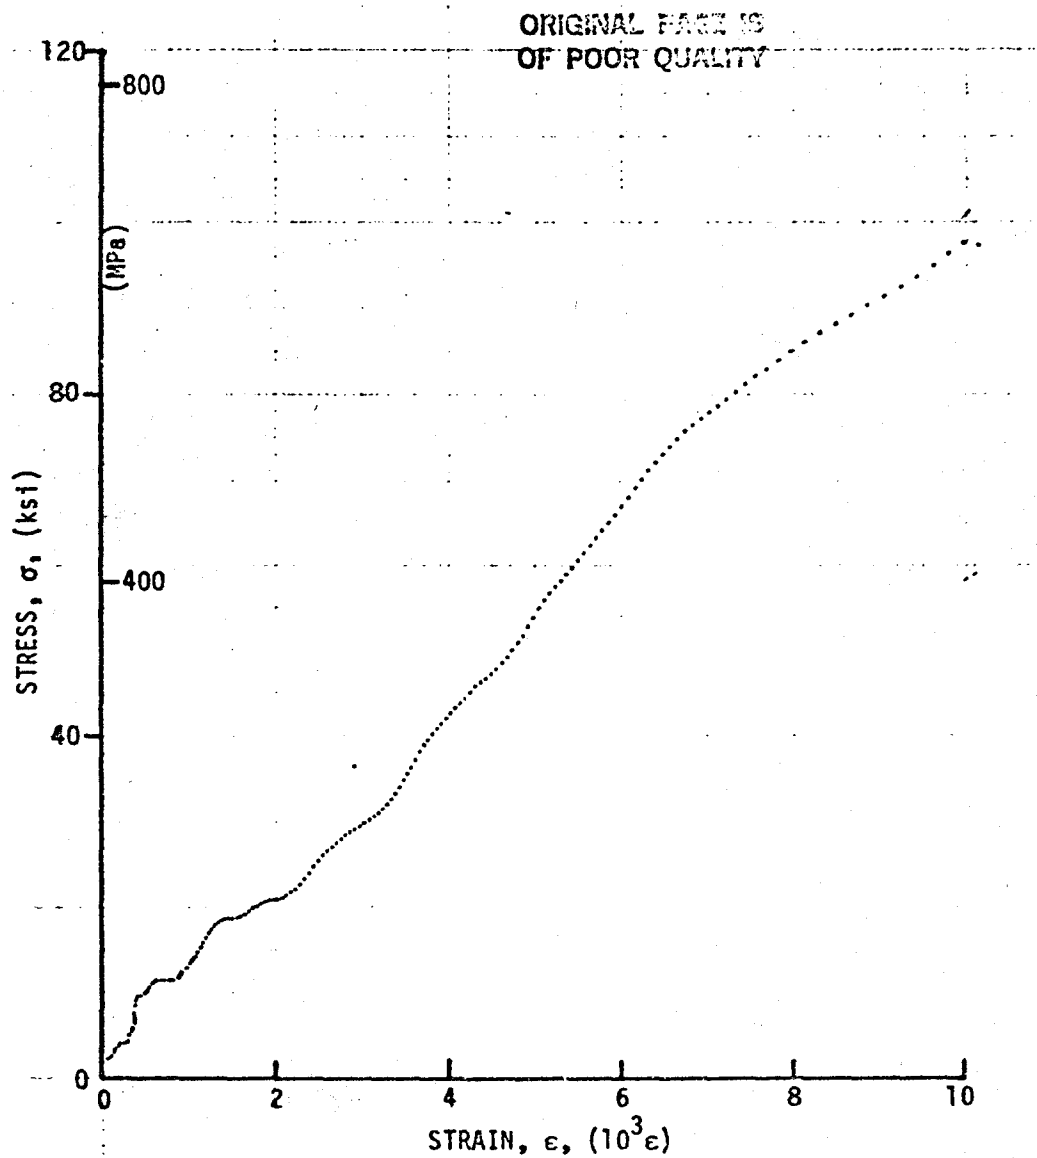


Figure 3-17. Stress-strain curves for dynamically loaded  $[\pm 22.5]_{2s}$  SP288/AS graphite/epoxy ring, Specimen No. 33-11.



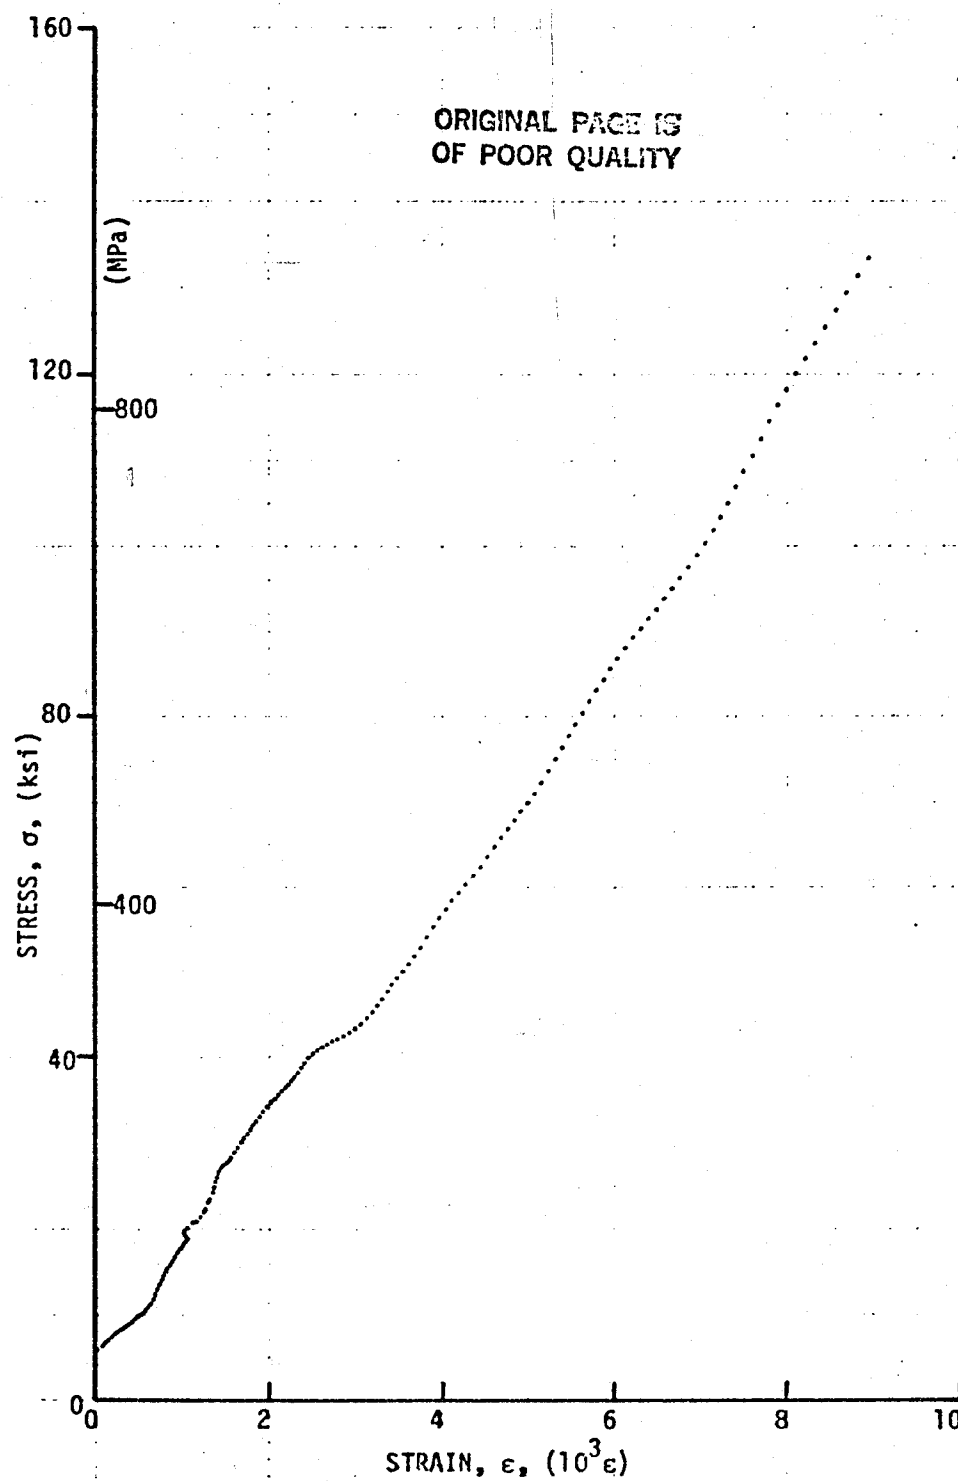


Figure 3-18. Stress-strain curves for dynamically loaded  $[\pm 22.5]_{2s}$  SP288/AS graphite/epoxy ring, Specimen No. 33-13.

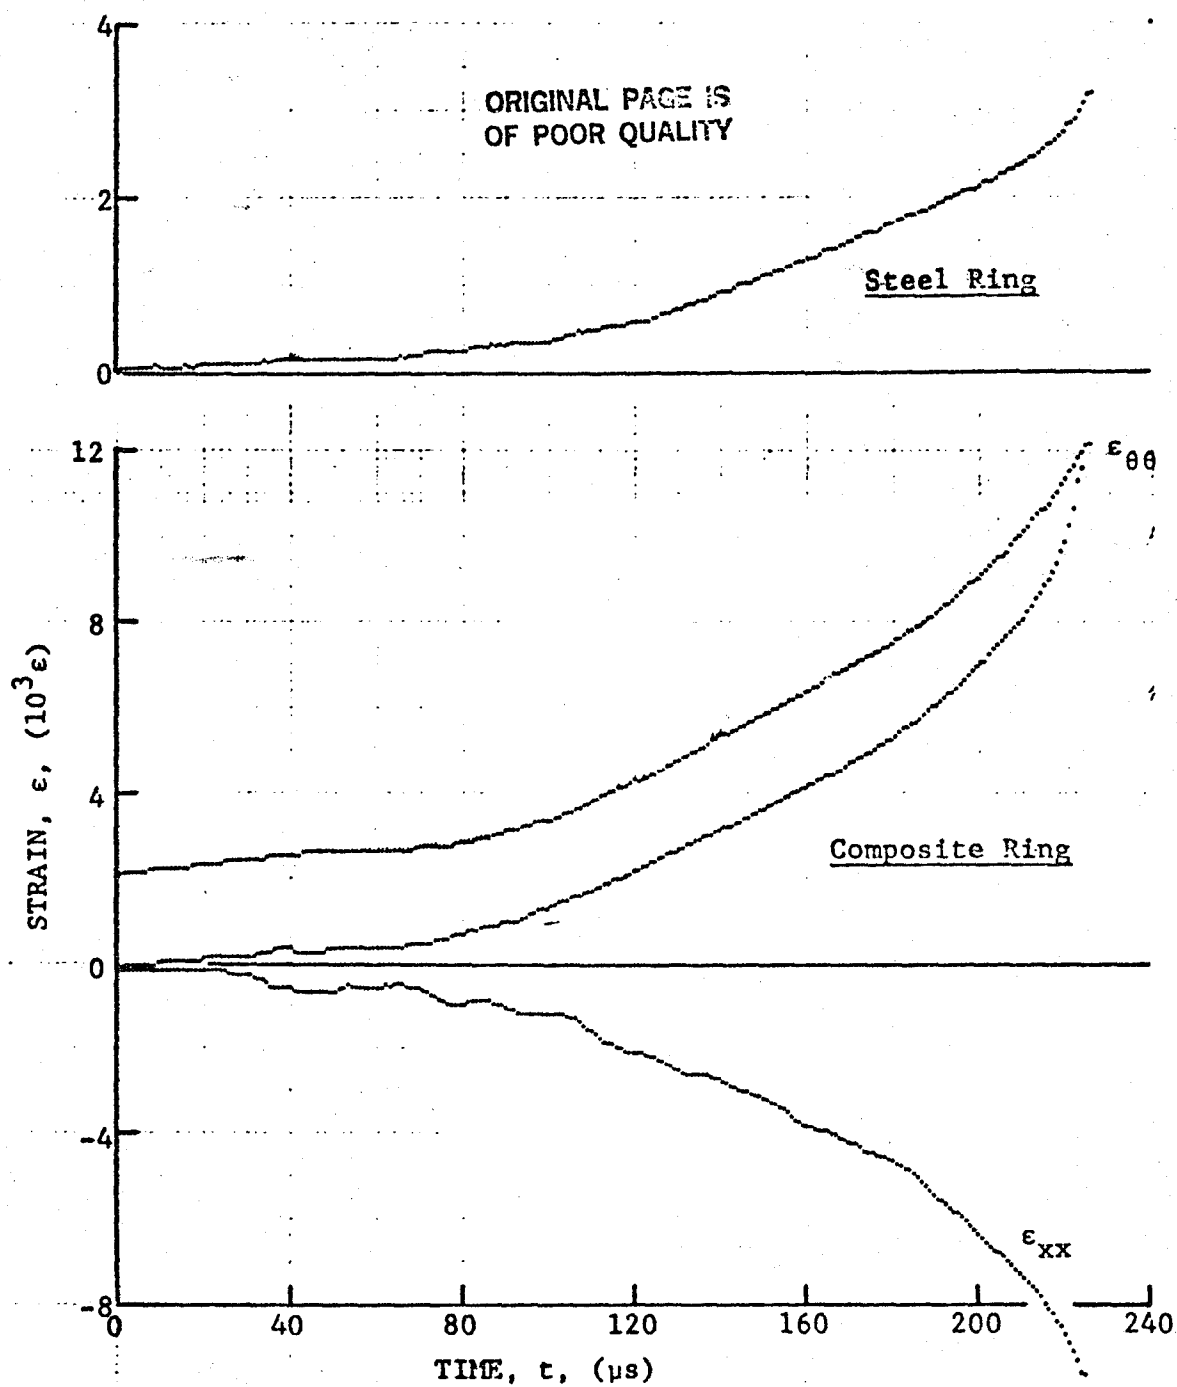


Figure 3-19. Strain records in steel ring and 80AS/20S/PR288 [ $\pm 22.5$ ]<sub>25</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 34-2 (0.65 g shotgun powder).

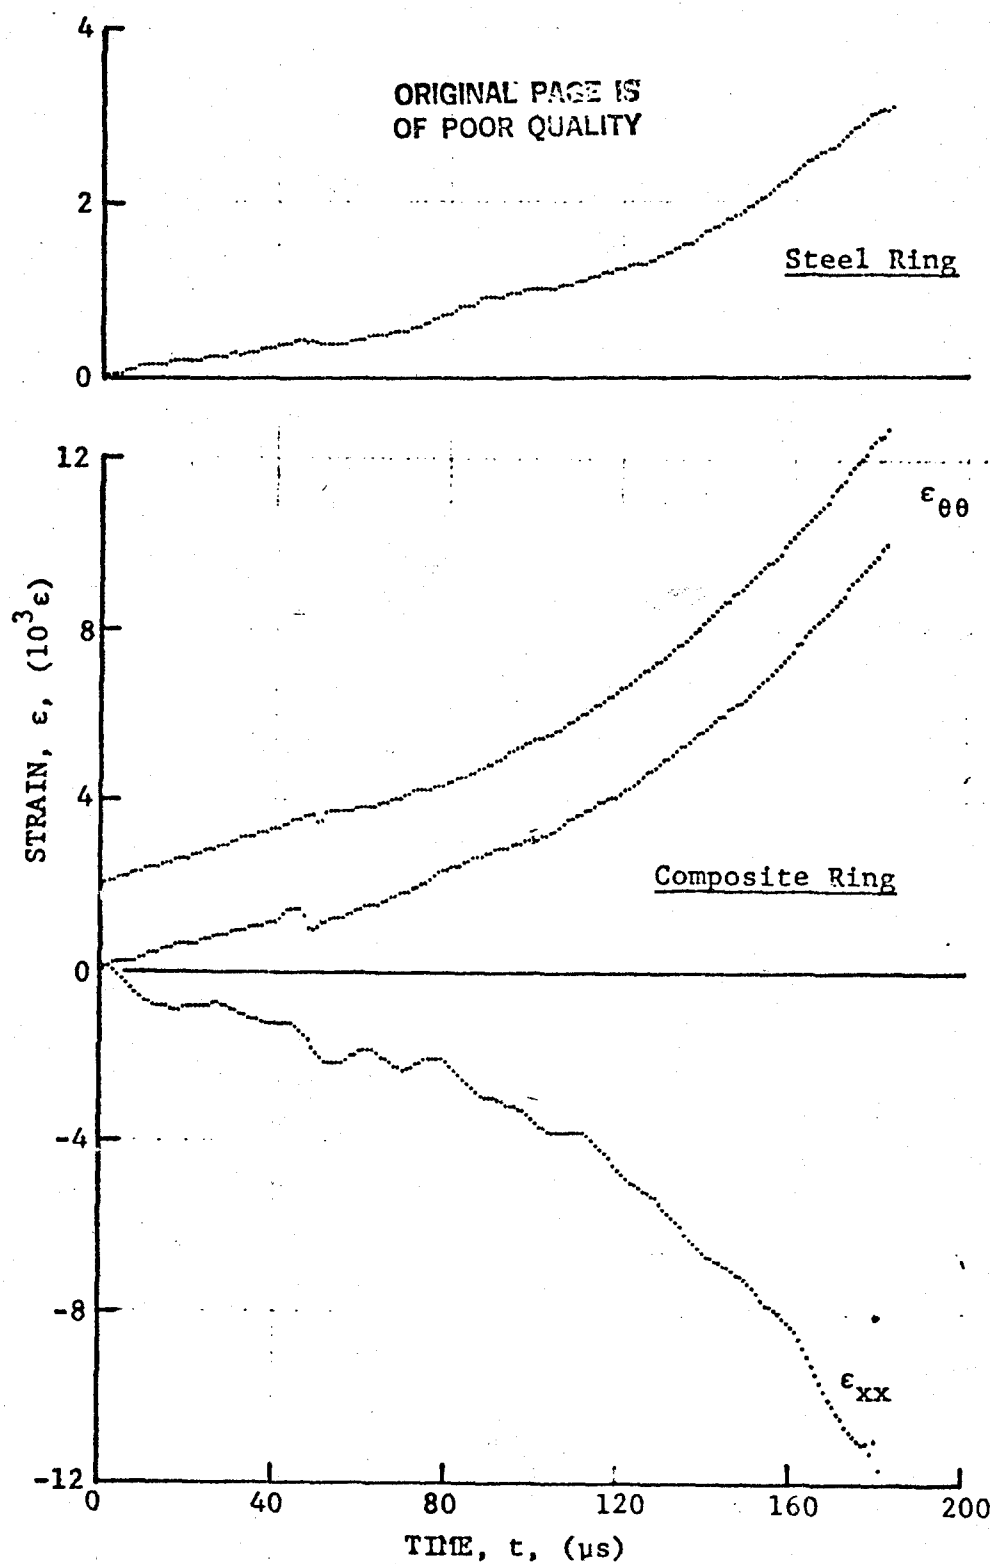


Figure 3-20. Strain records in steel ring and 80AS/20S/PR288 [ $\pm 22.5$ ]<sub>2s</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 34-10 (0.65 g shotgun powder).

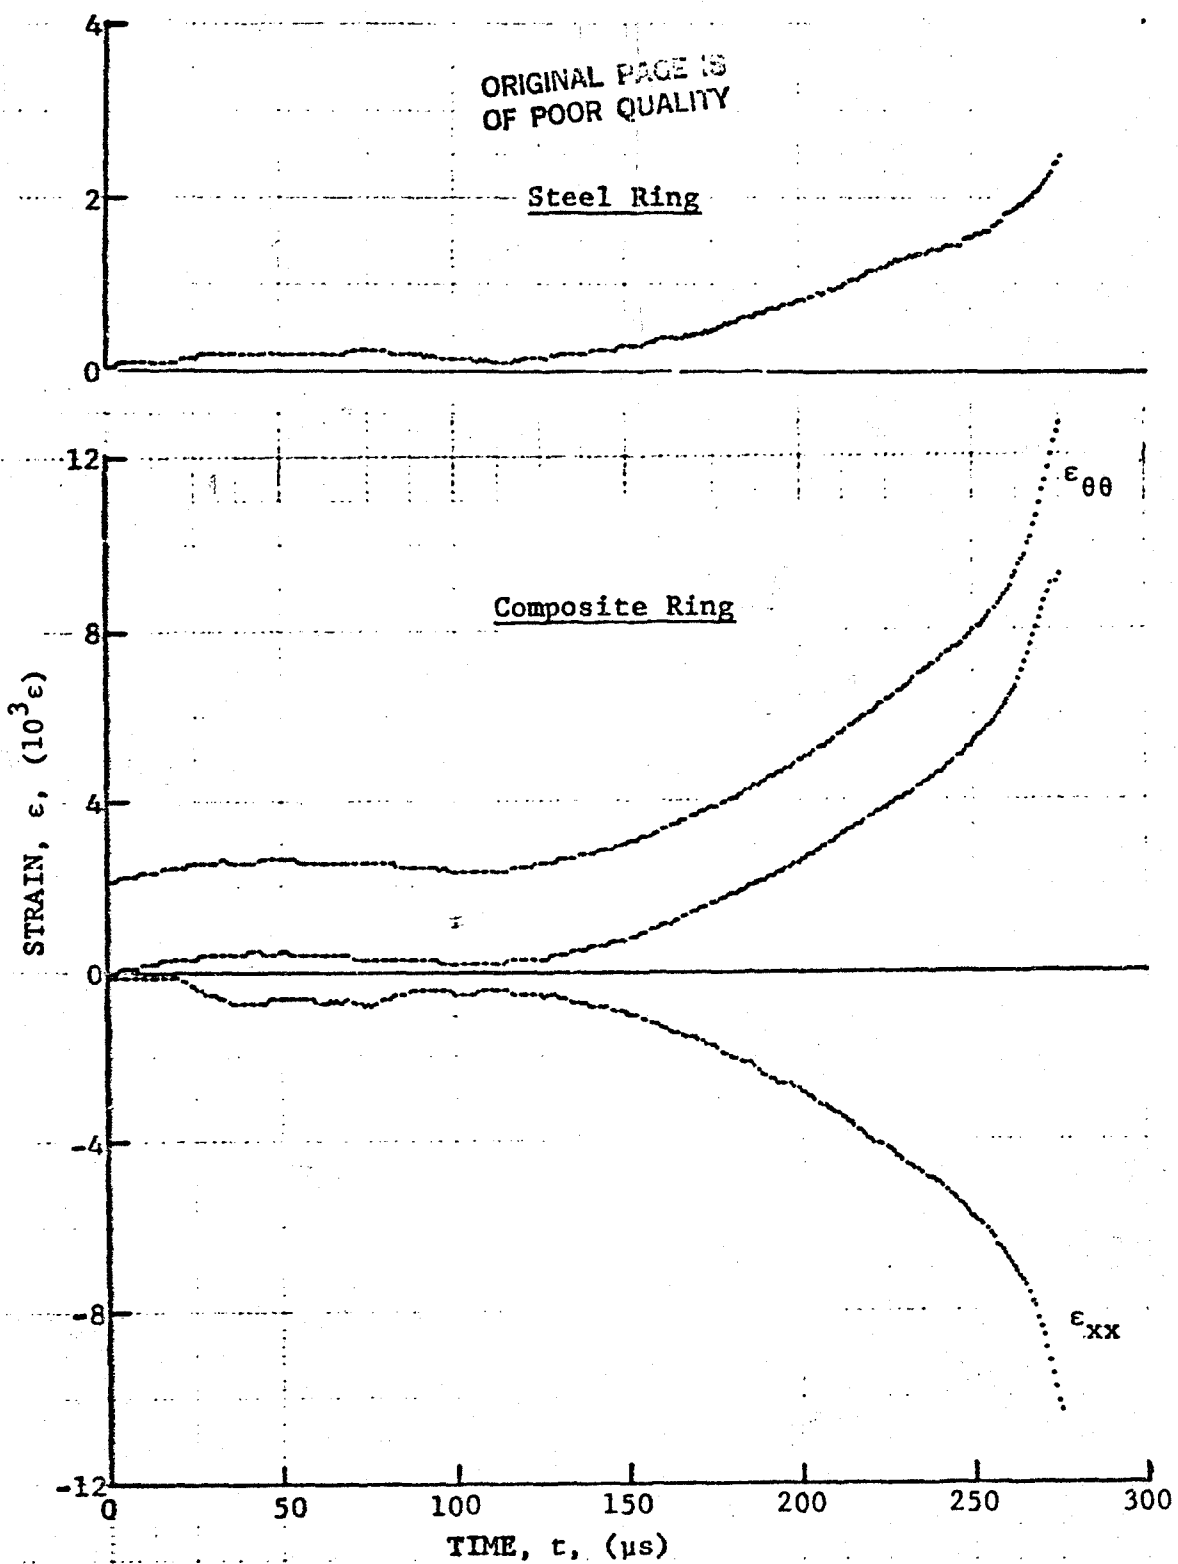


Figure 3-21. Strain records in steel ring and 80AS/20S/PR288 [ $\pm 22.5$ ]<sub>2s</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 34-11 (0.65 g shotgun powder).

ORIGINAL PAGE IS  
OF POOR QUALITY

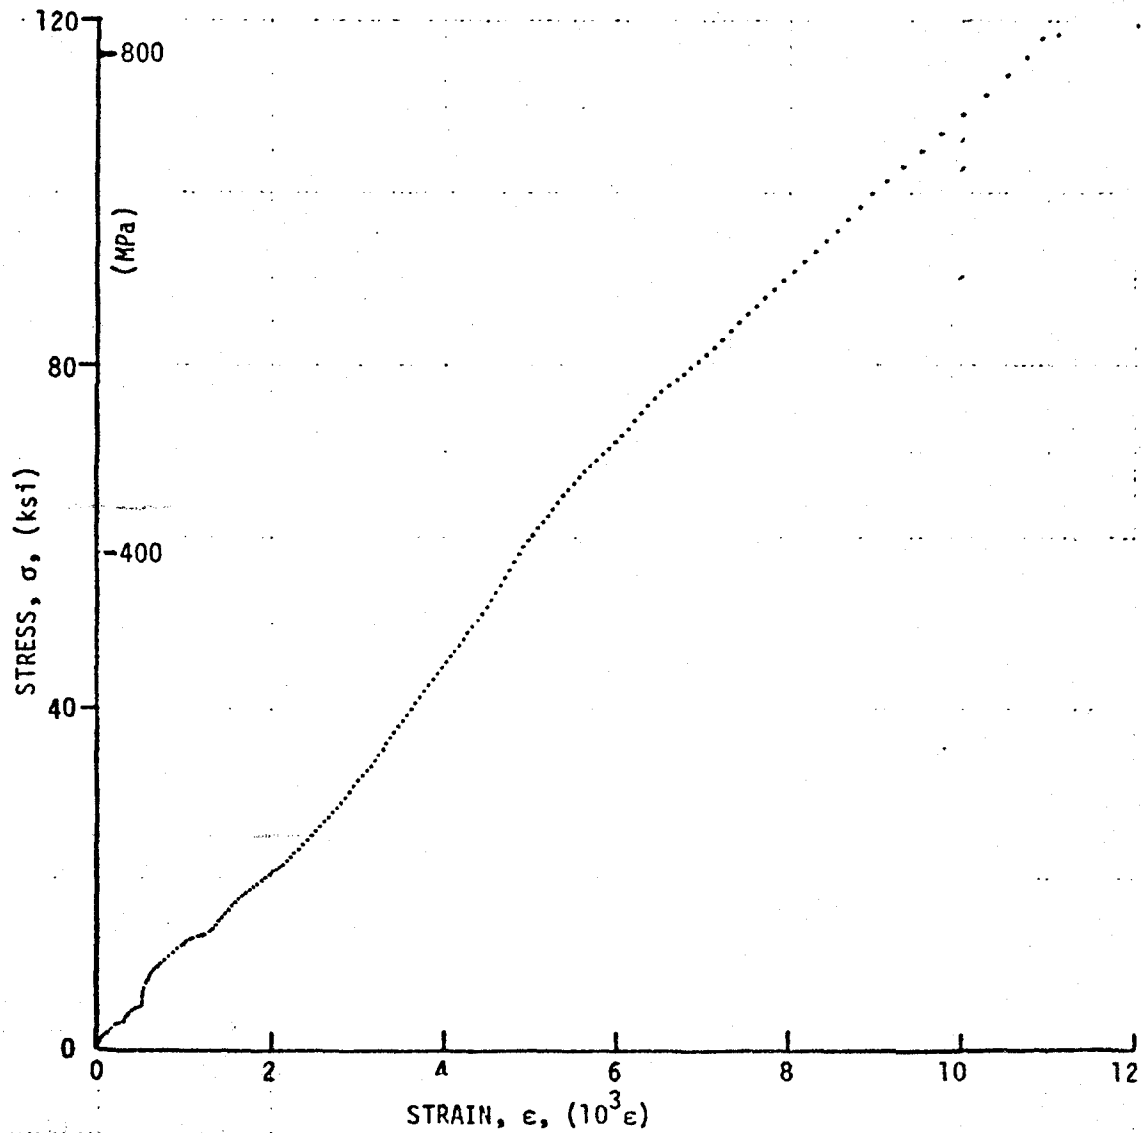


Figure 3-22. Stress-strain curves for dynamically loaded  $[\pm 22.5]_{2s}$  80AS/20S/PR288 graphite/S-glass/epoxy ring, Specimen No. 34-2.

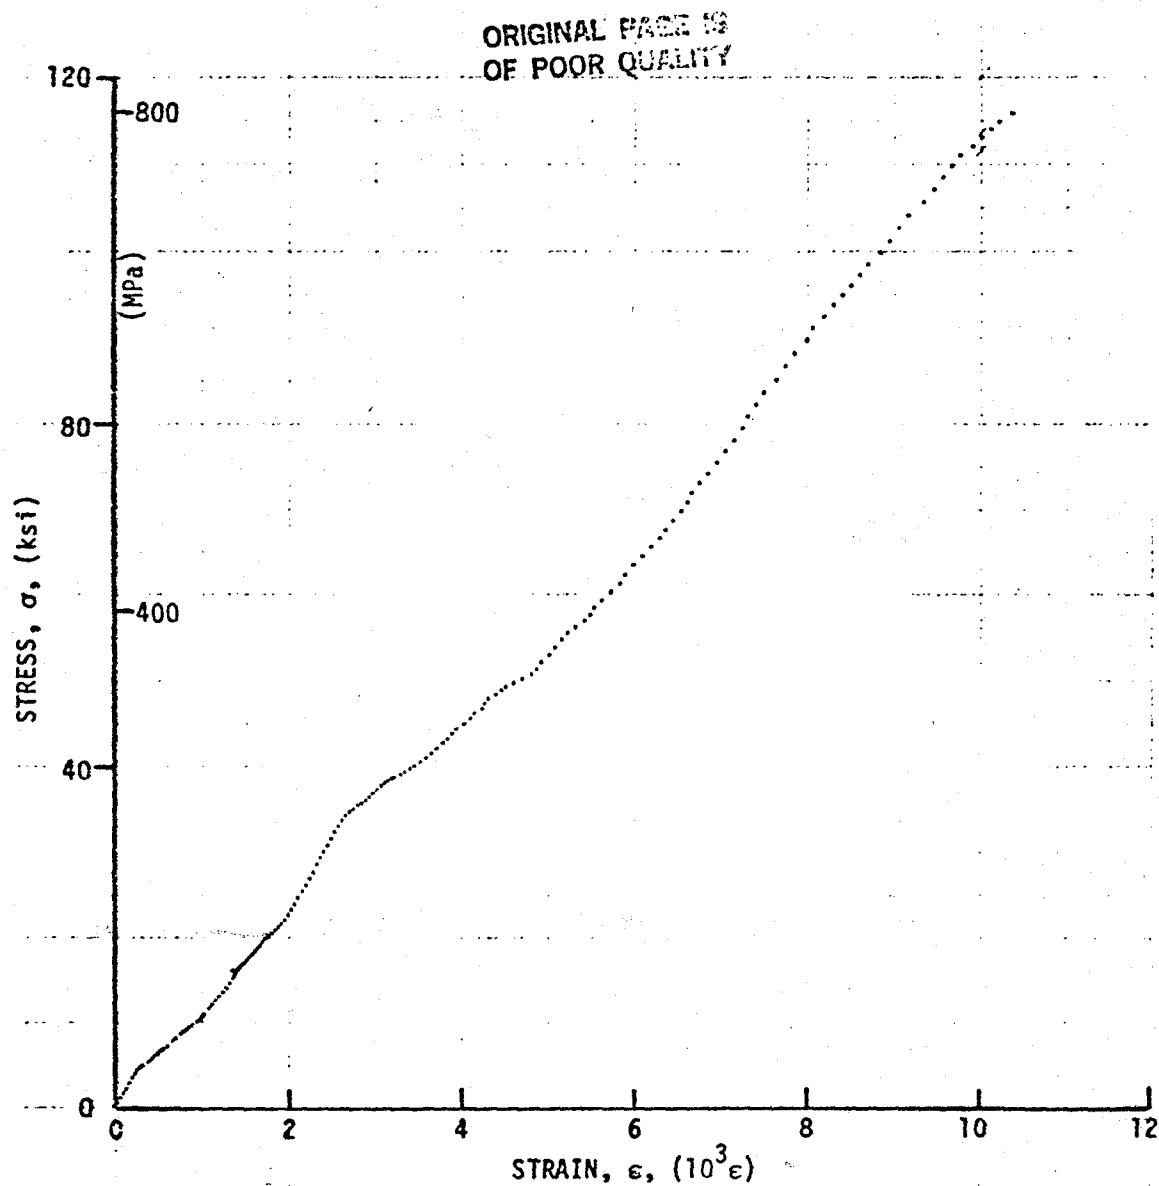


Figure 3-23. Stress-strain curves for dynamically loaded  $[\pm 22.5]_{2s}$  80AS/20S/PR288 graphite/S-glass/epoxy ring, Specimen No. 34-10.

ORIGINAL PAGE IS  
OF POOR QUALITY

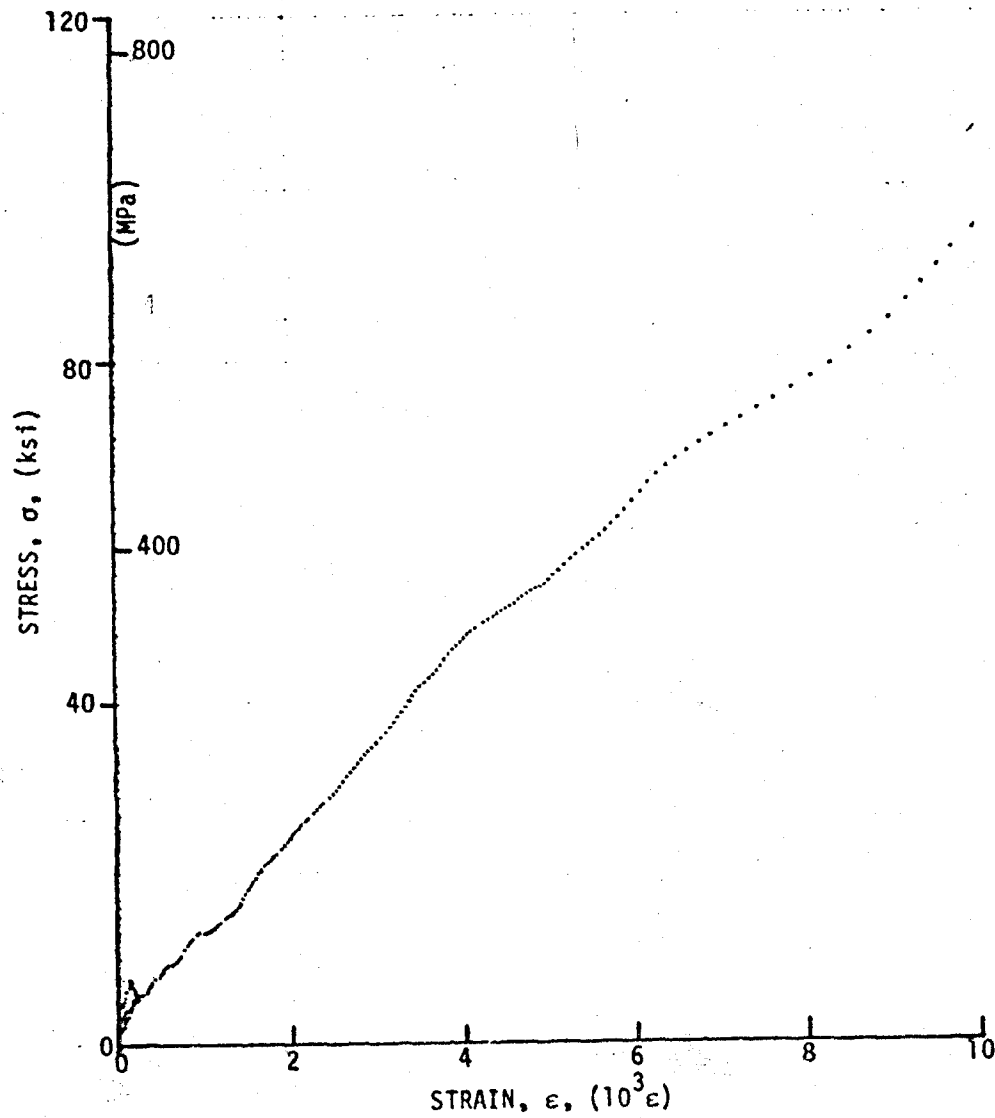


Figure 3-24. Stress-strain curves for dynamically loaded  $[\pm 22.5]_{2s}$  80AS/20S/PR288 graphite/S-glass/epoxy ring, Specimen No. 34-11.

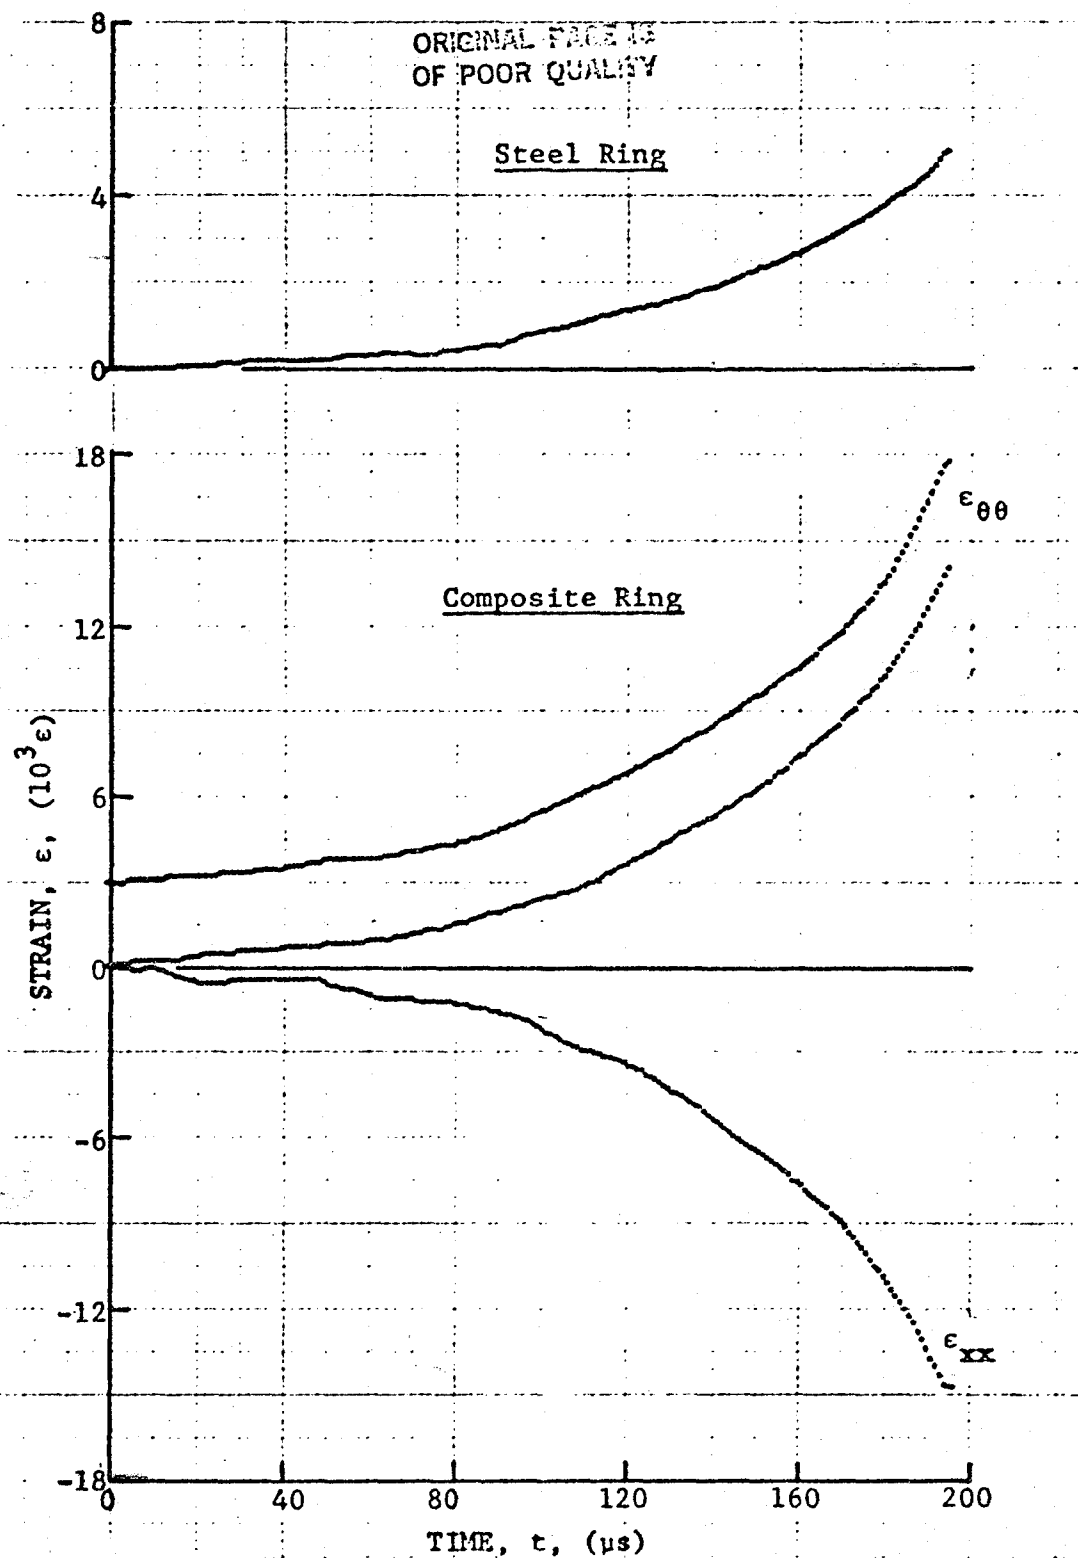


Figure 3-25. Strain records in steel ring and  $[\pm 30]_{2S}$  SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 28-2 (0.65 g shotgun powder).



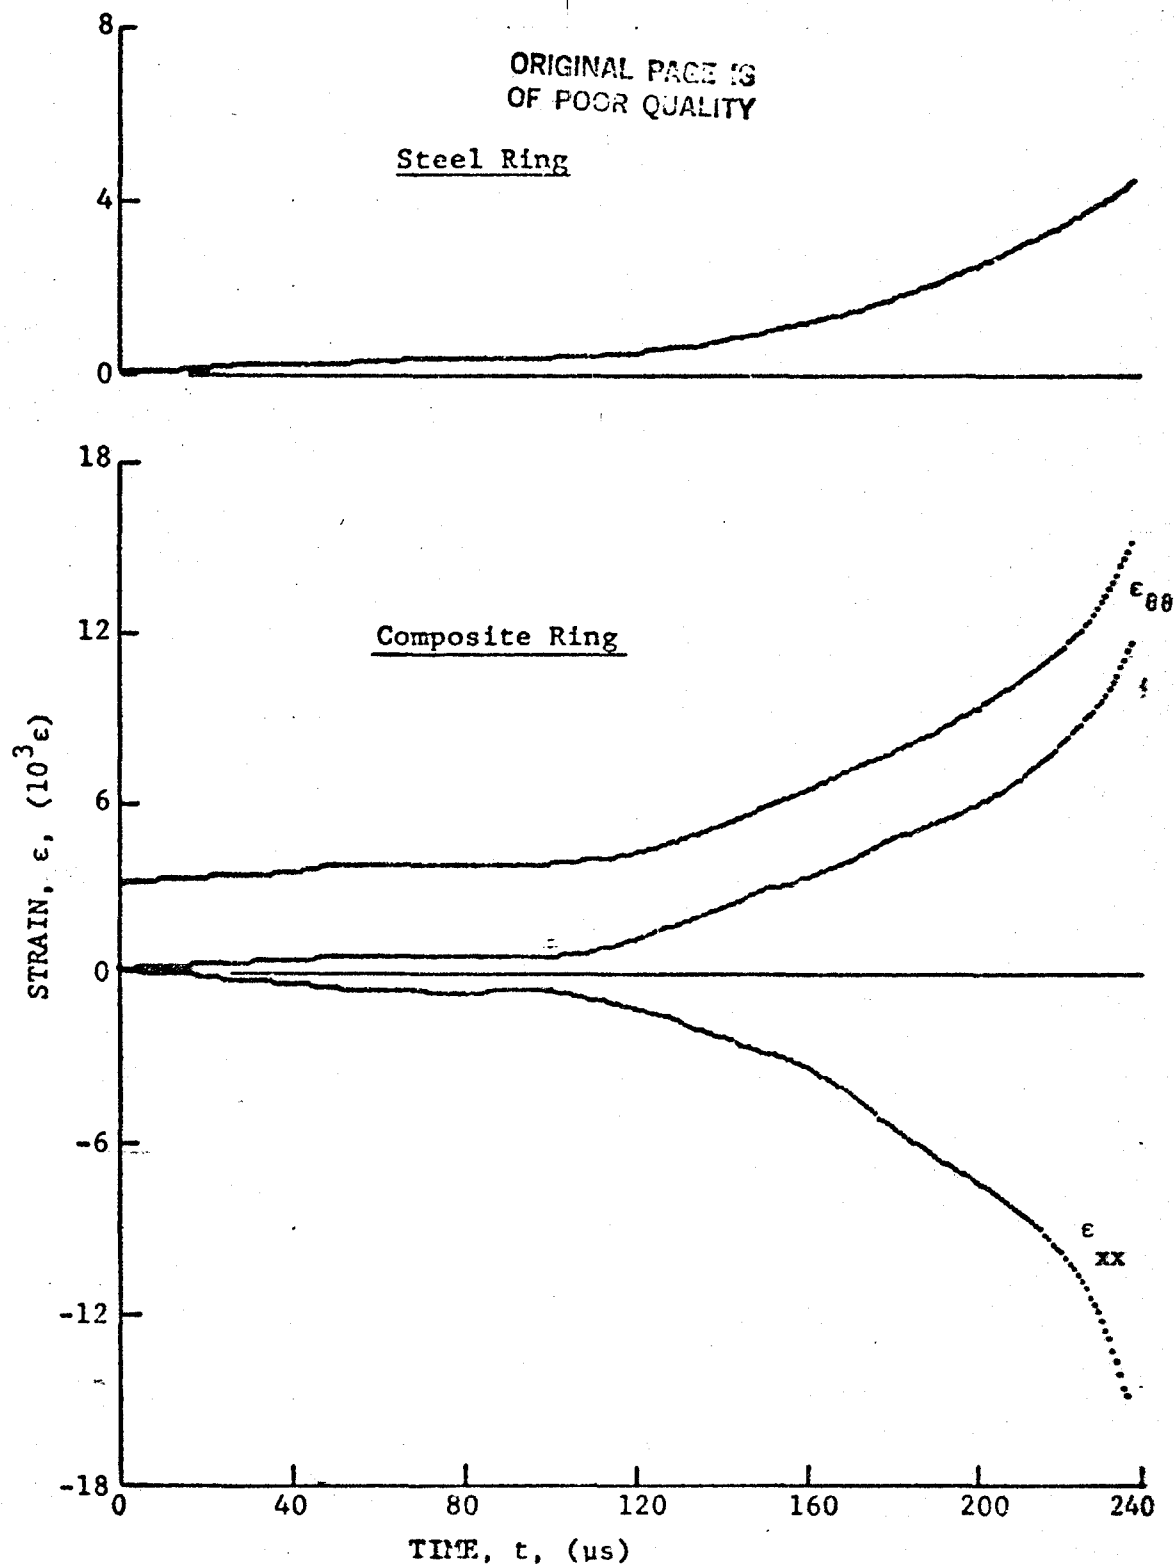


Figure 3-26. Strain records in steel ring and  $[\pm 30]_{2S}$  SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 28-12 (0.65 g shotgun powder).

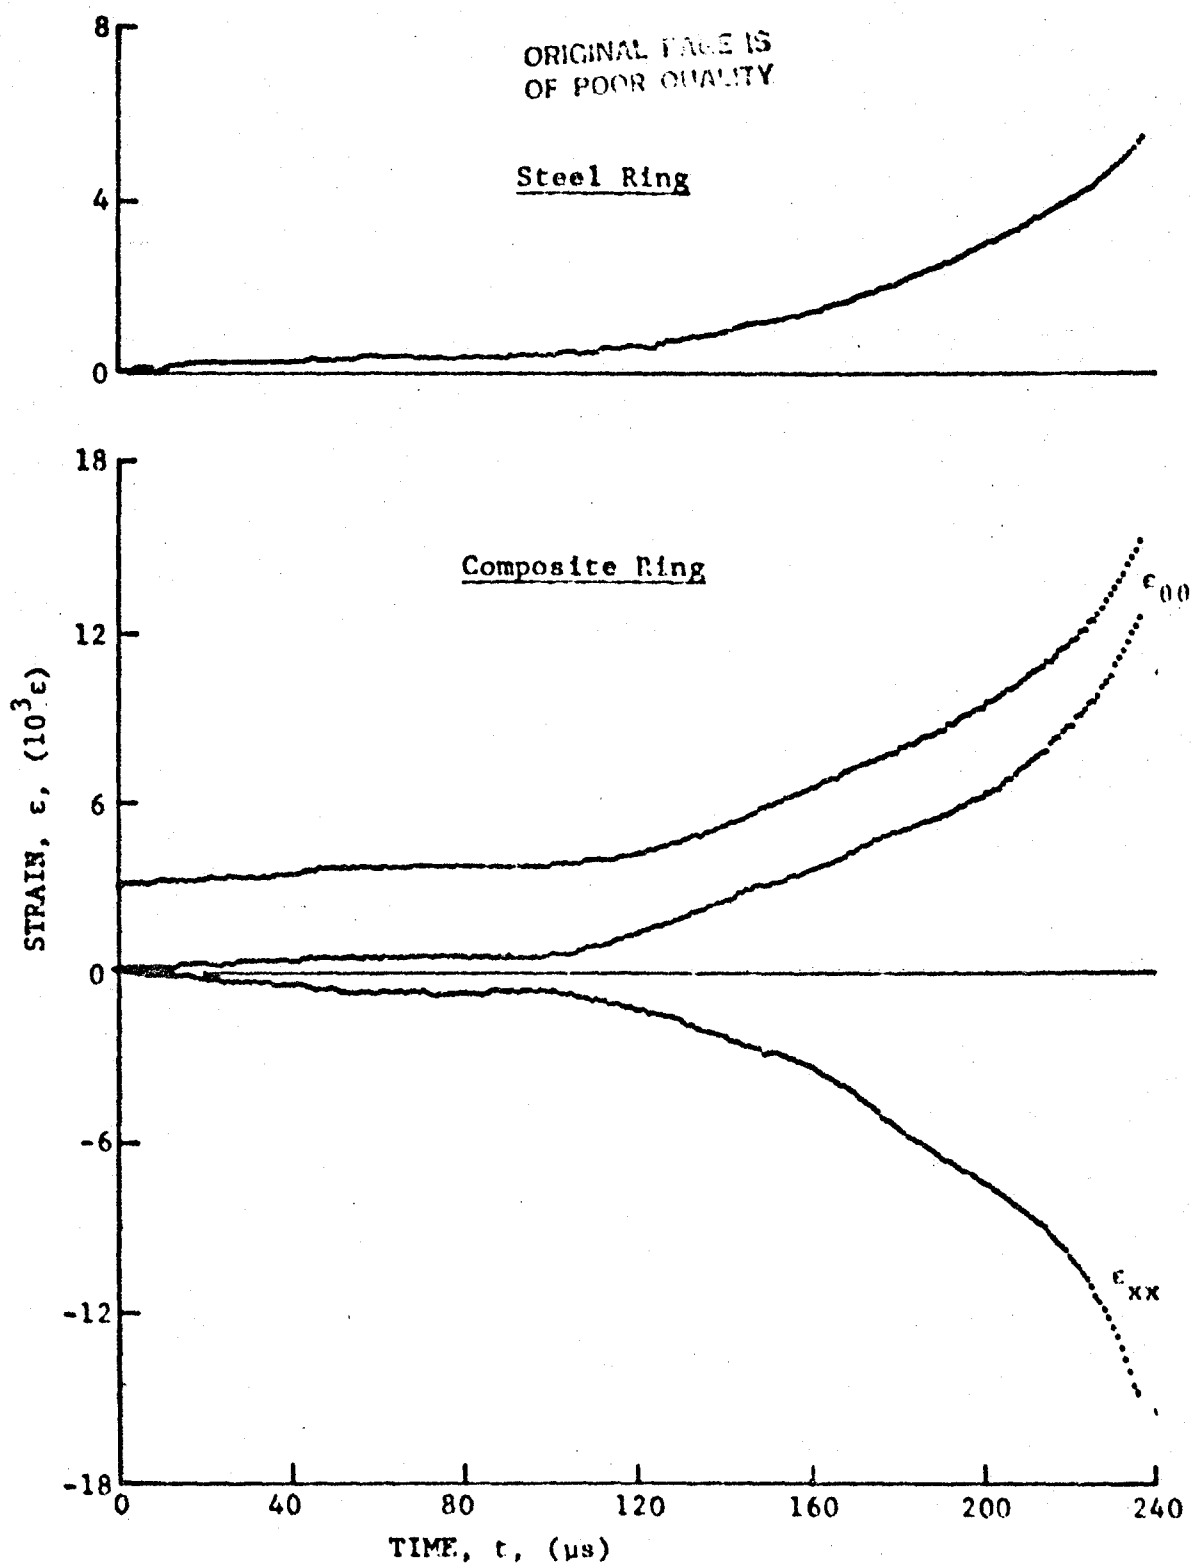


Figure 3-27. Strain records in steel ring and  $[\pm 30]_{2s}$  SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 28-13 (0.65 g shotgun powder).

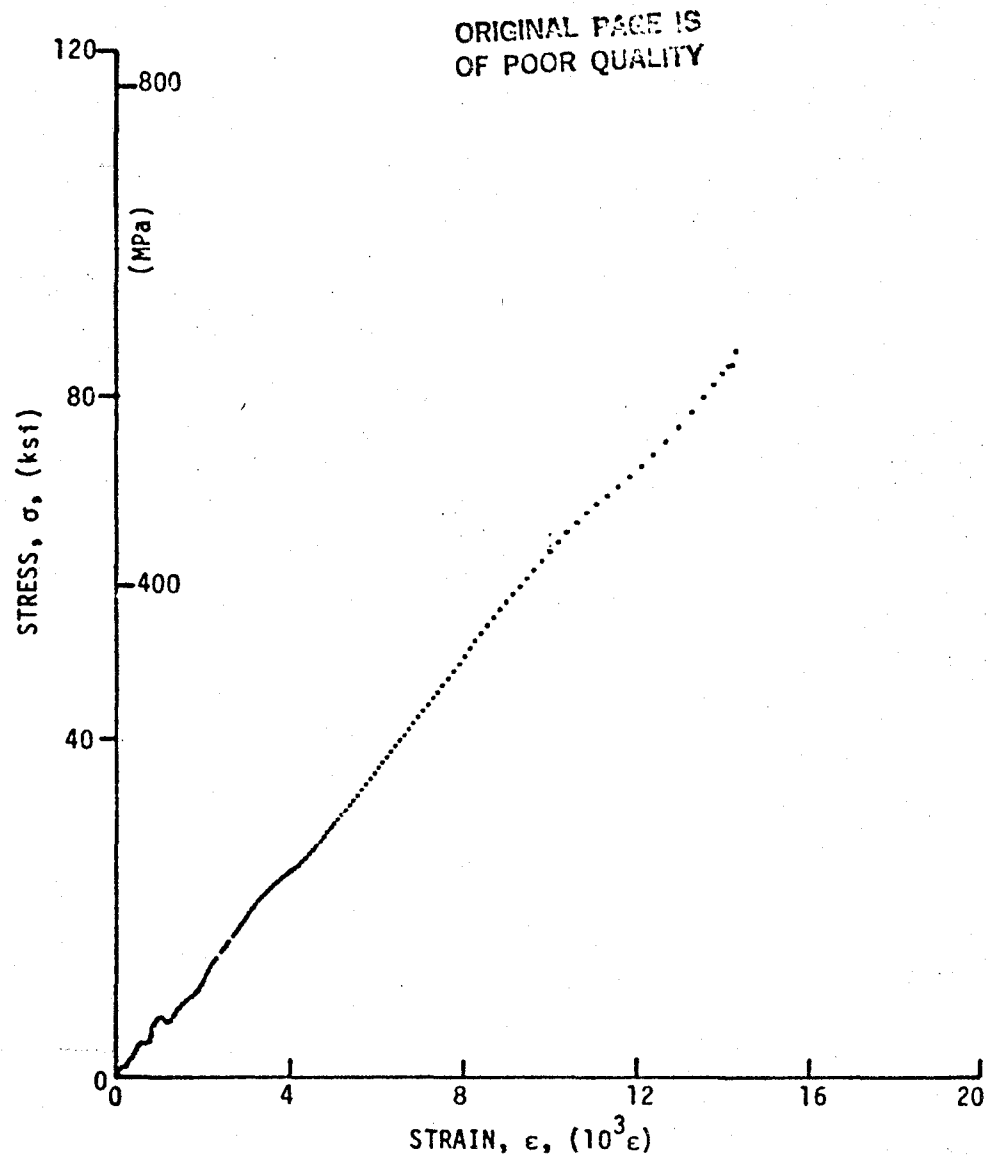


Figure 3-28. Stress-strain curves for dynamically loaded [ $\pm 30_{2s}$ ] SP288/AS graphite/epoxy ring, Specimen No. 28-2.

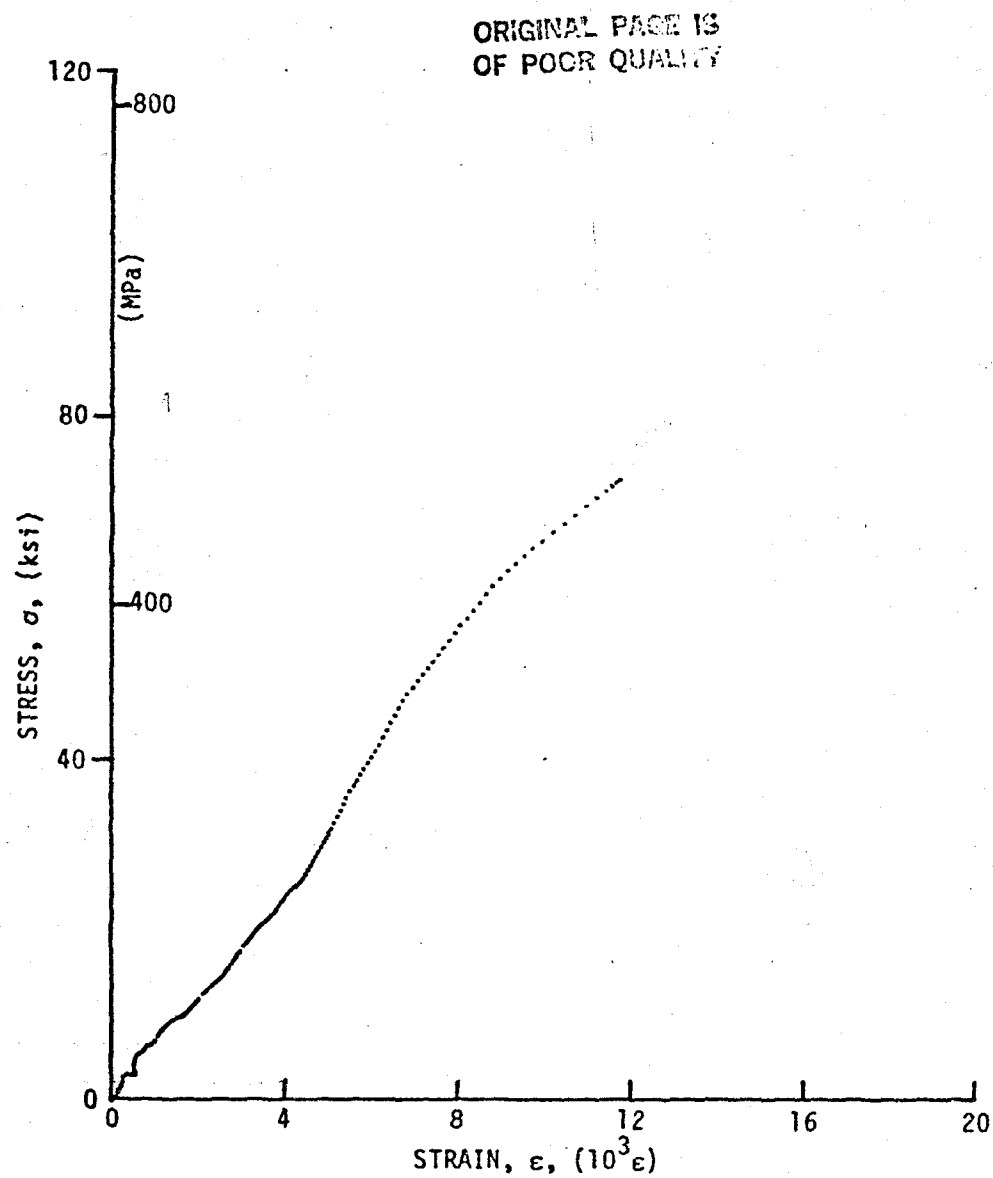


Figure 3-29. Stress-strain curves for dynamically loaded  $[\pm 30]_{2s}$  SP288/AS graphite/epoxy ring, Specimen No. 28-12.

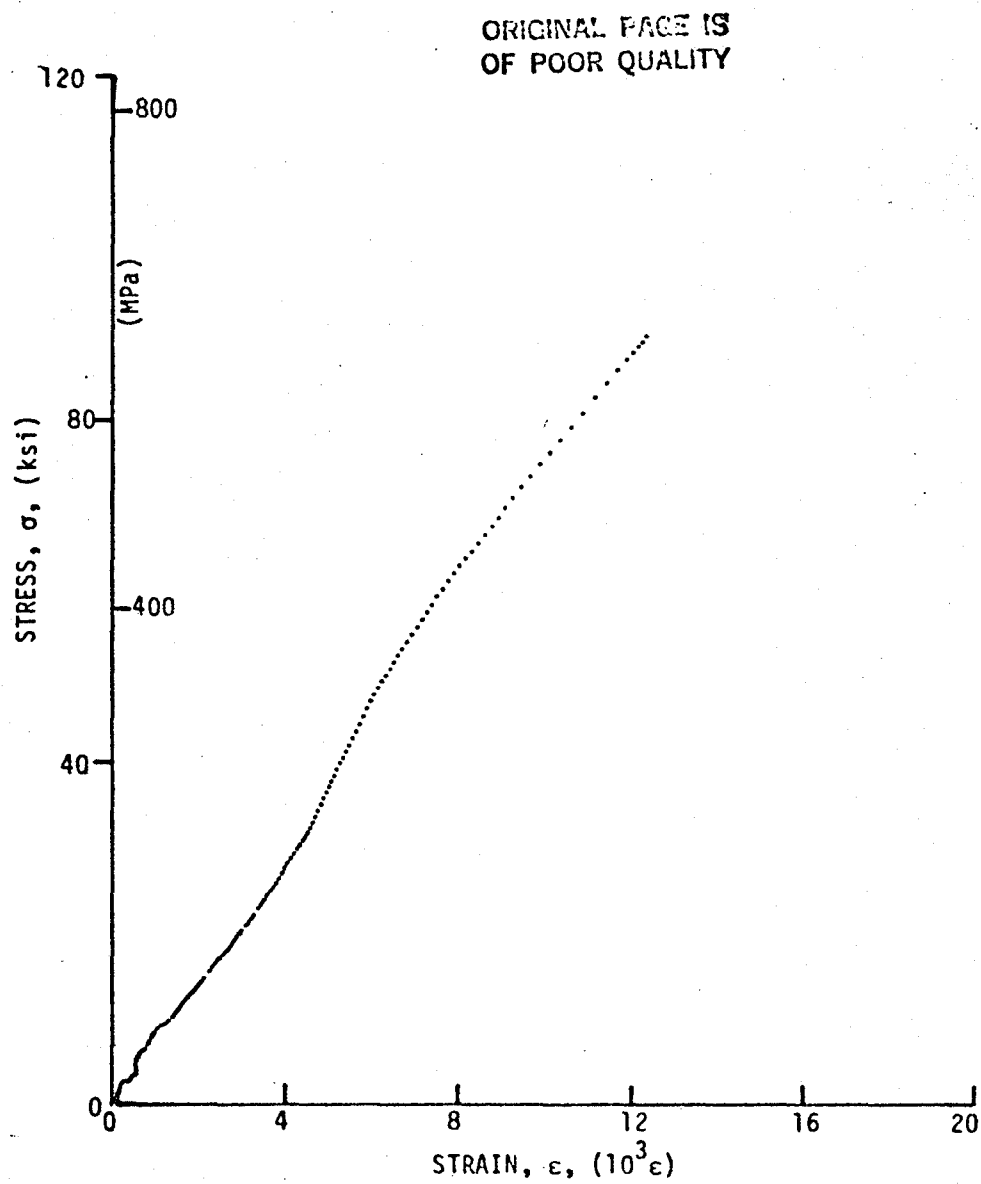


Figure 3-30. Stress-strain curves for dynamically loaded  $[\pm 30]_{2s}$  SP288/AS graphite/epoxy ring, Specimen No. 28-13.

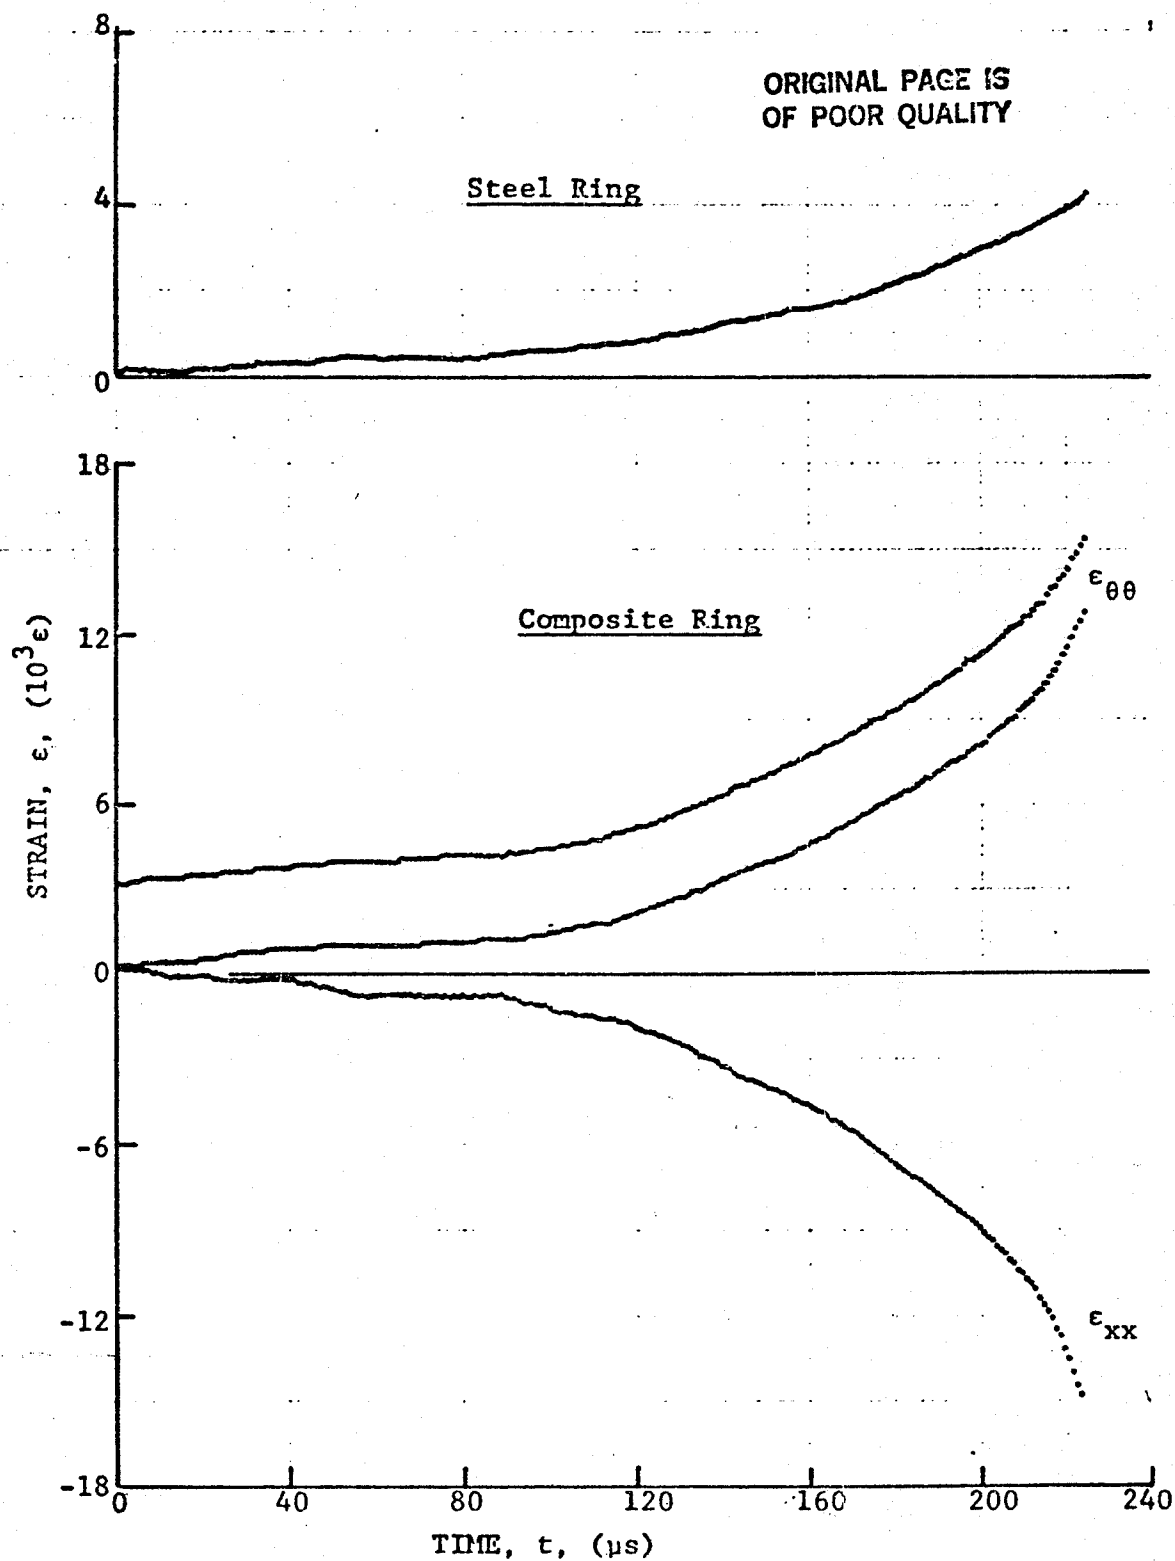


Figure 3-31. Strain records in steel ring and 80AS/20S/PR288  $[\pm 30]_{2s}$  graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 54-2 (0.65 g shotgun powder).

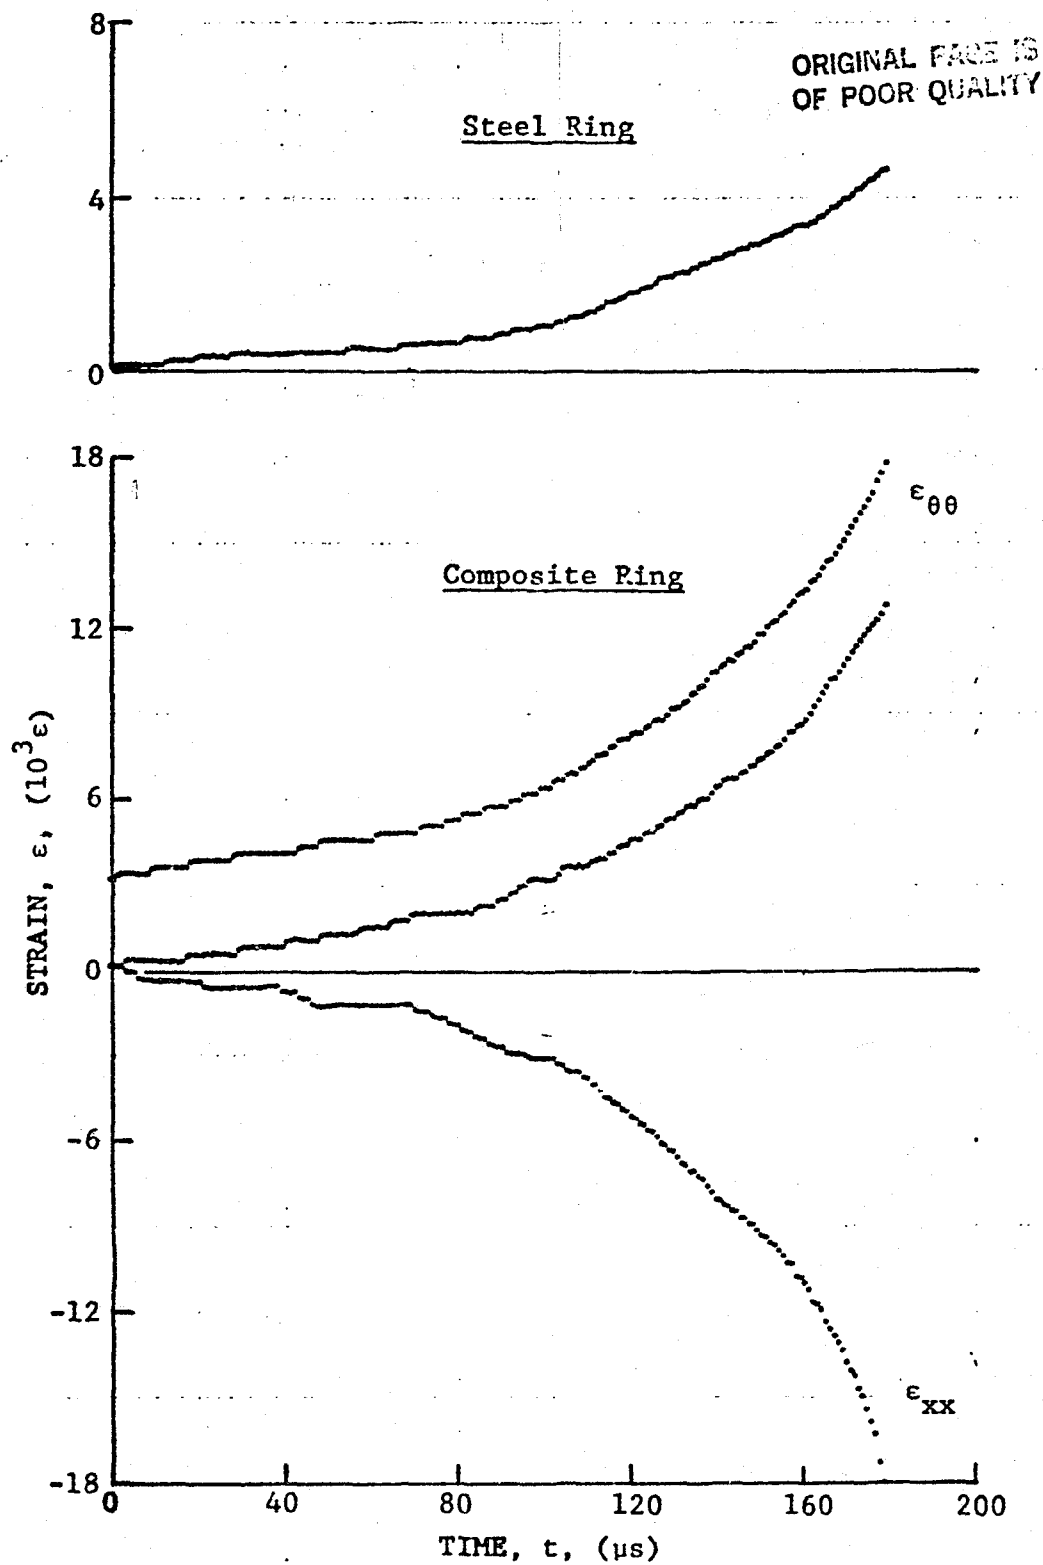


Figure 3-32. Strain records in steel ring and 80AS/20S/PR288 [ $\pm 30$ ]<sub>2s</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 54-3 (0.65 g shotgun powder).

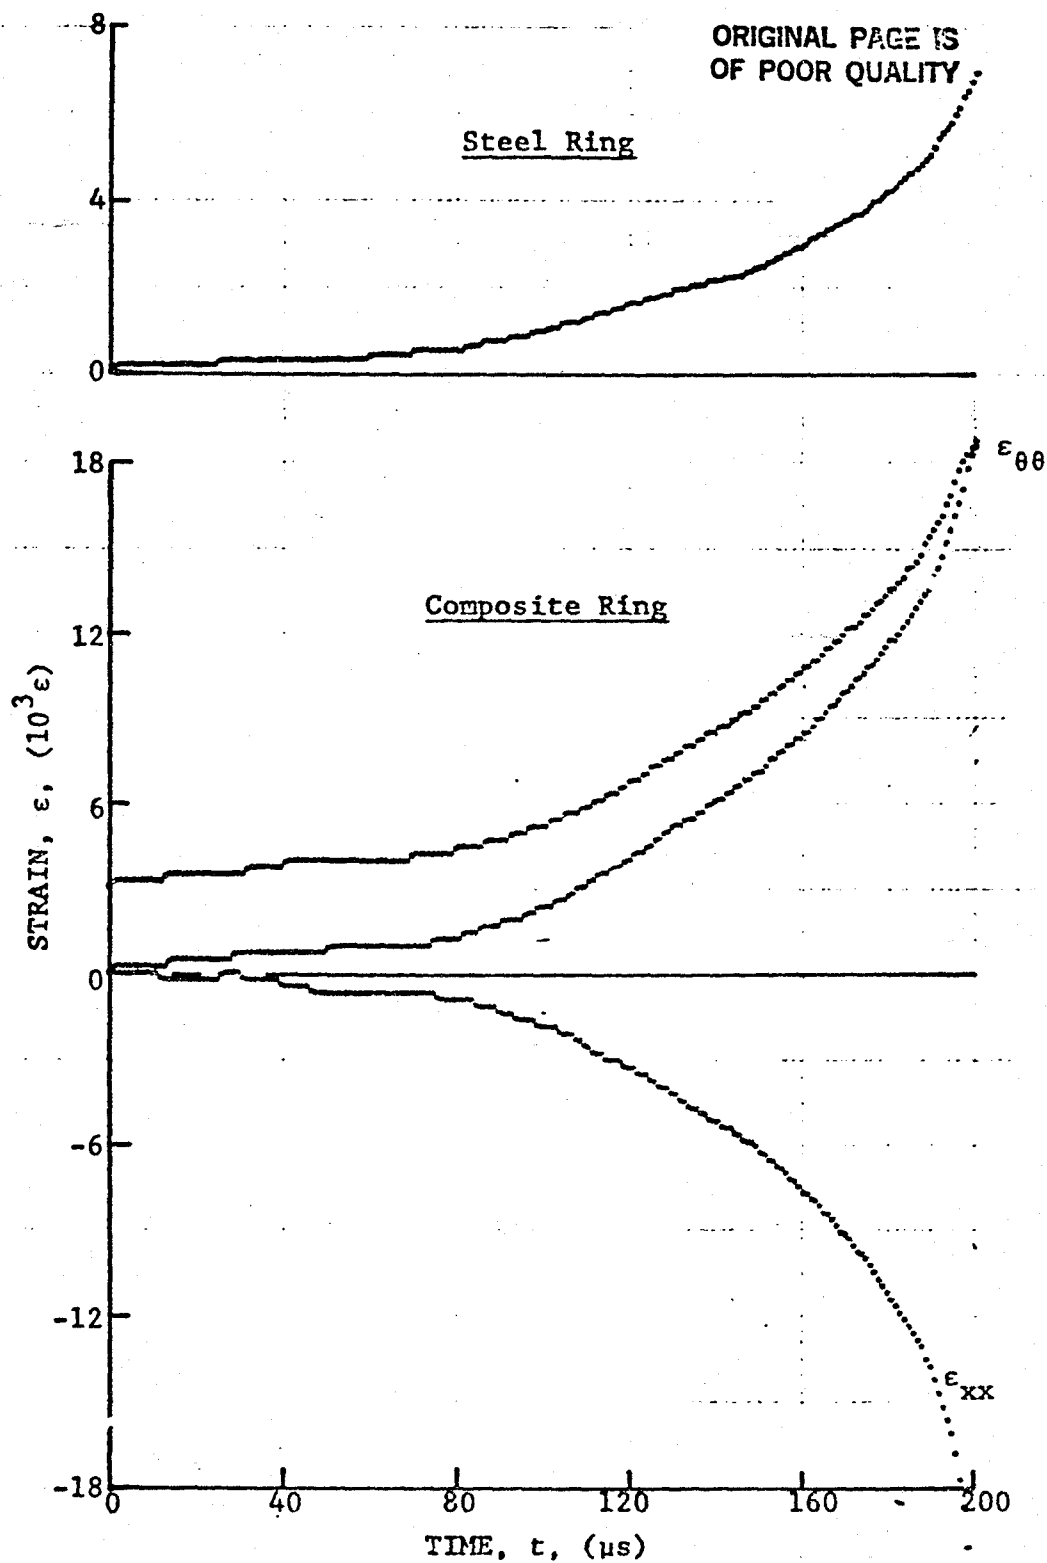


Figure 3-33. Strain records in steel ring and 80AS/20S/PR288  $[\pm 30]_{2s}$  graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 54-5 (0.65 g shotgun powder).



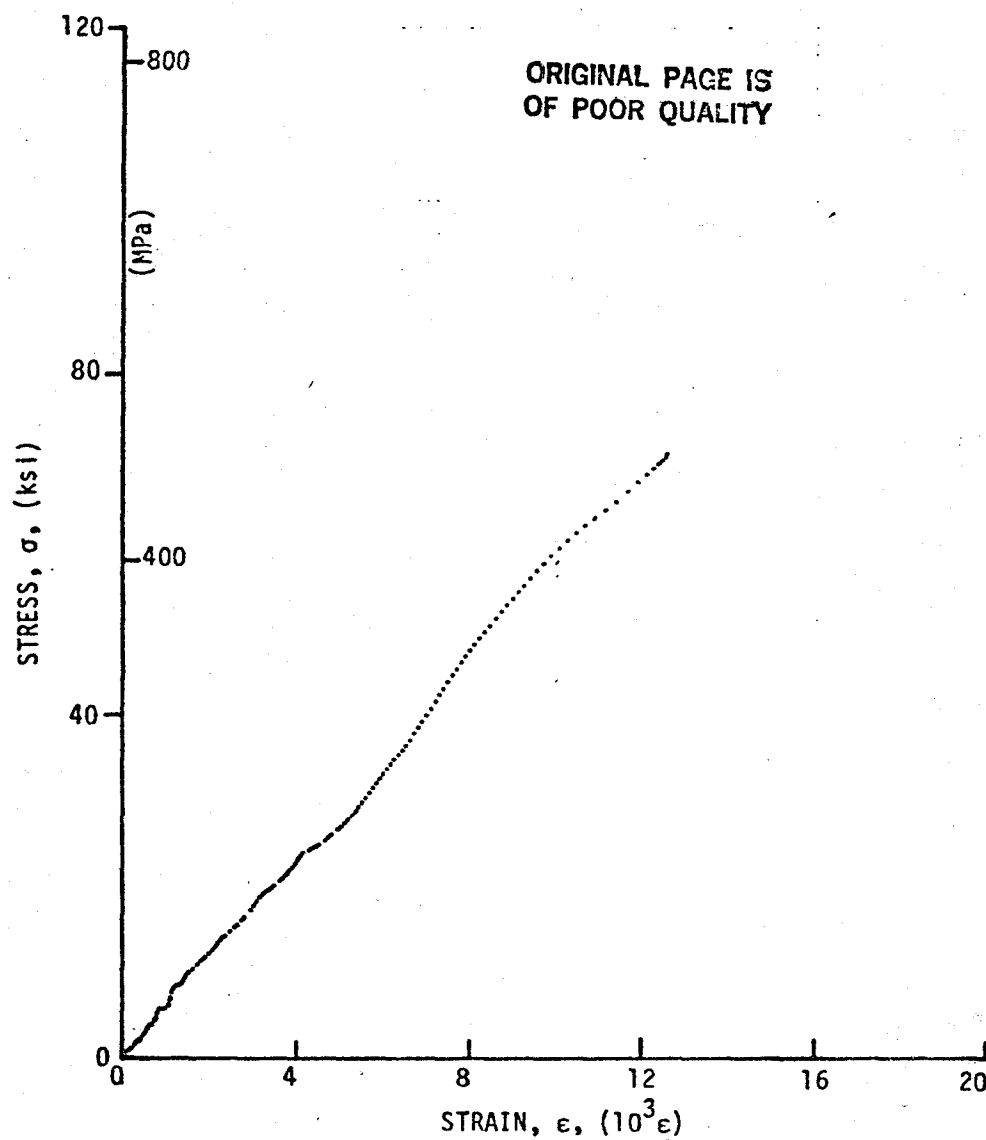


Figure 3-34. Stress-strain curves for dynamically loaded  $[\pm 30]_2$ s 80AS/20S/PR288 graphite/S-glass/epoxy ring, Specimen No. 54-2.

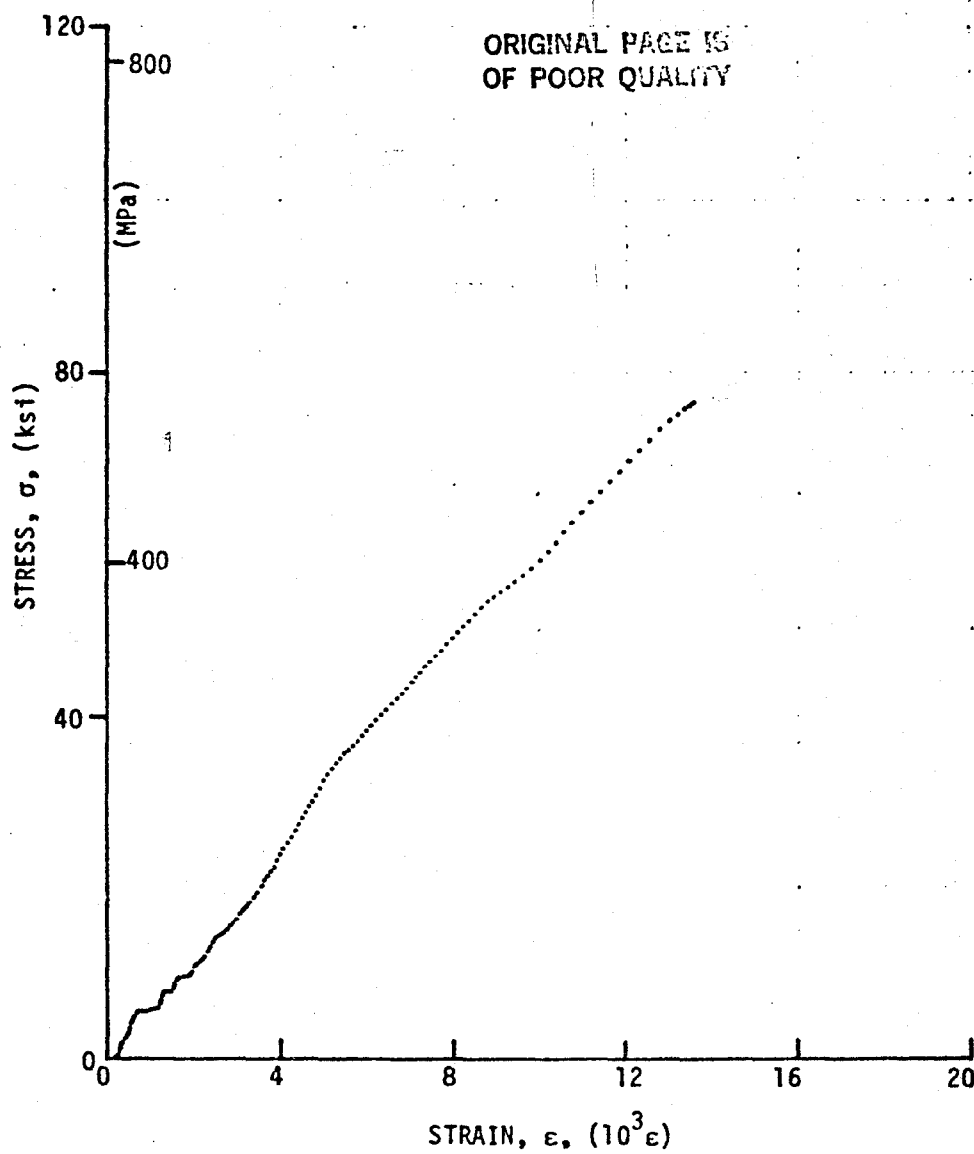


Figure 3-35. Stress-strain curves for dynamically loaded  $[\pm 30]_{2s}$  80AS/20S/PR288 graphite/S-glass/epoxy ring, Specimen No. 54-3.

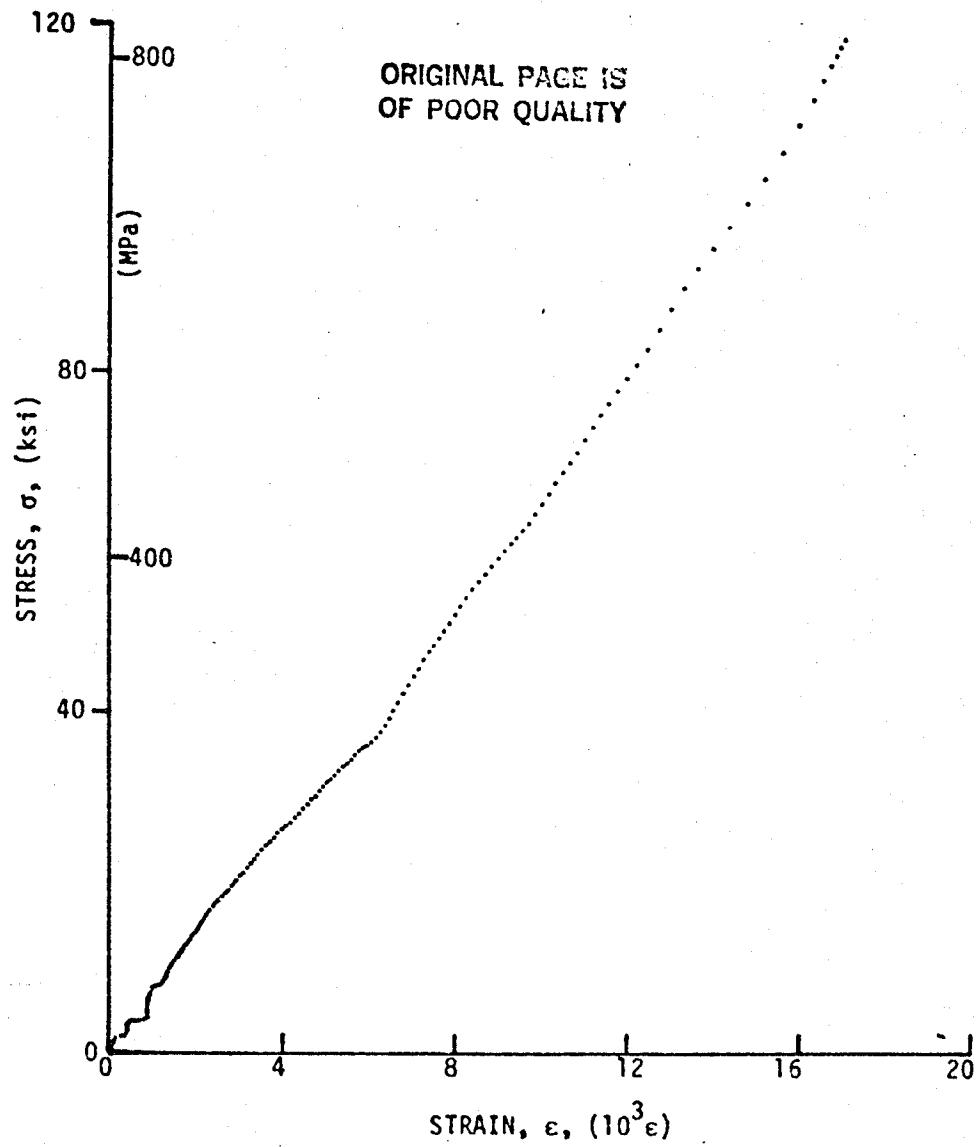


Figure 3-36. Stress-strain curves for dynamically loaded  $[\pm 30]_{2s}$  80AS/20S/PR288 graphite/S-glass/epoxy ring, Specimen No. 54-5.

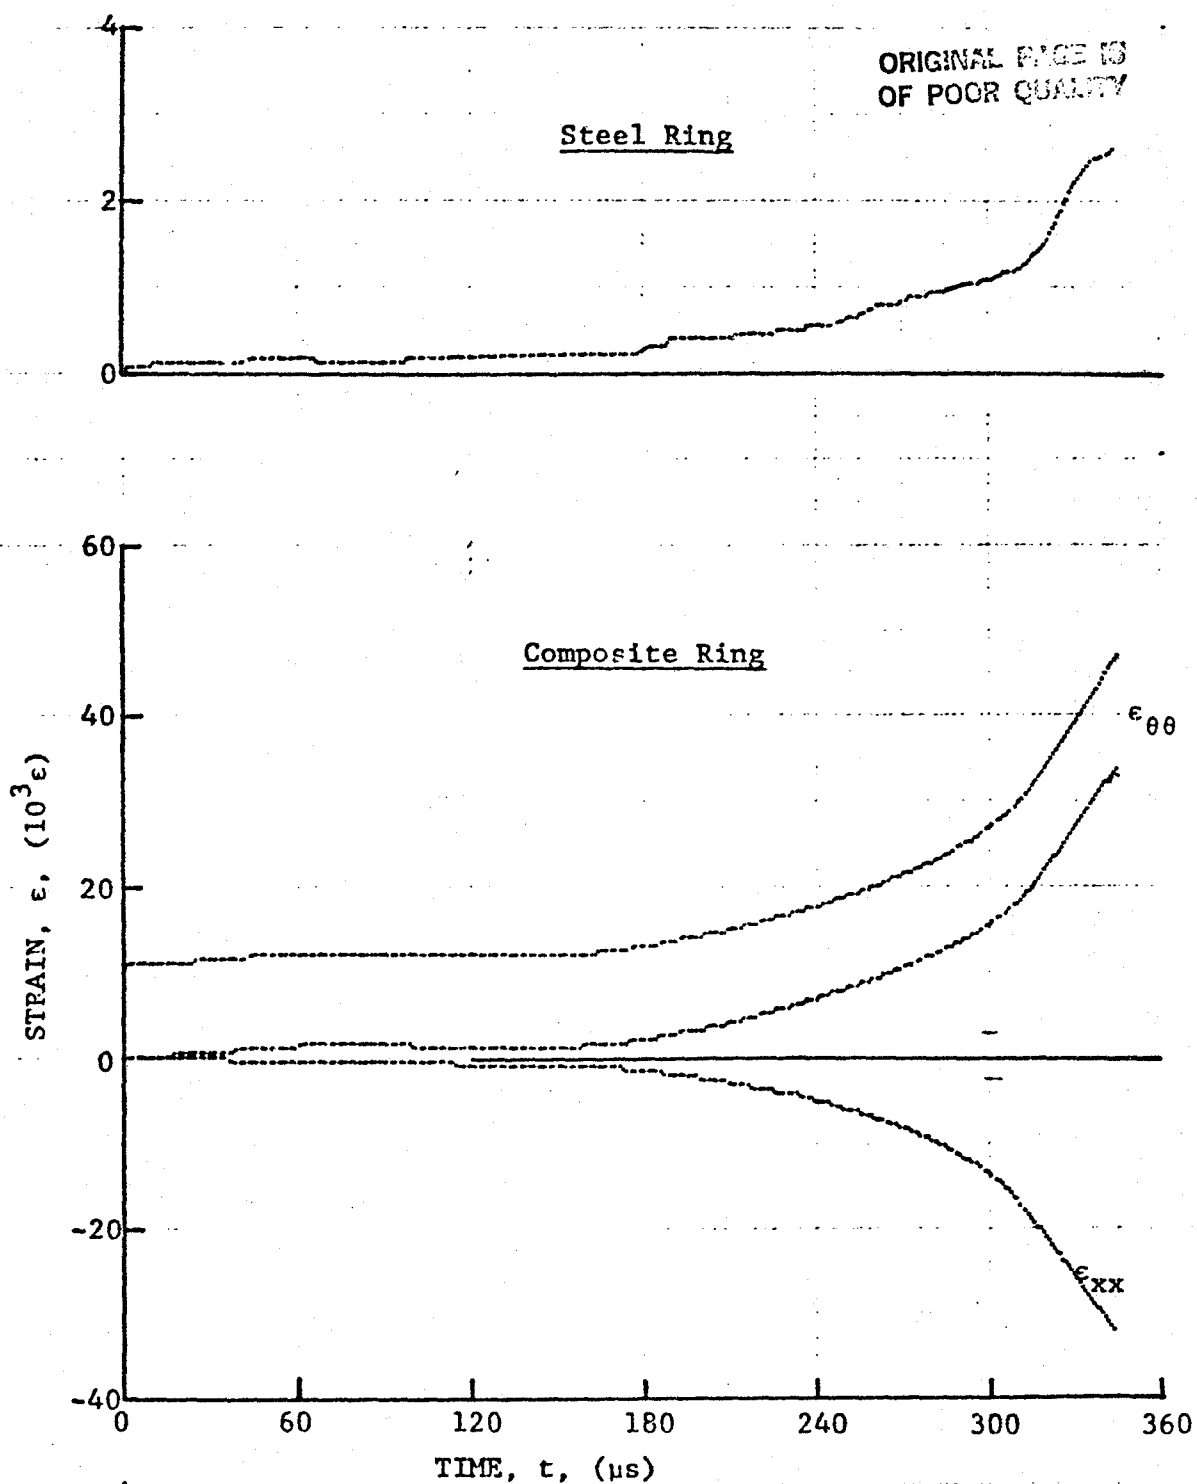


Figure 3-37. Strain records in steel ring and  $[\pm 45]_{2s}$  SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 24-11 (0.65 g shotgun powder).

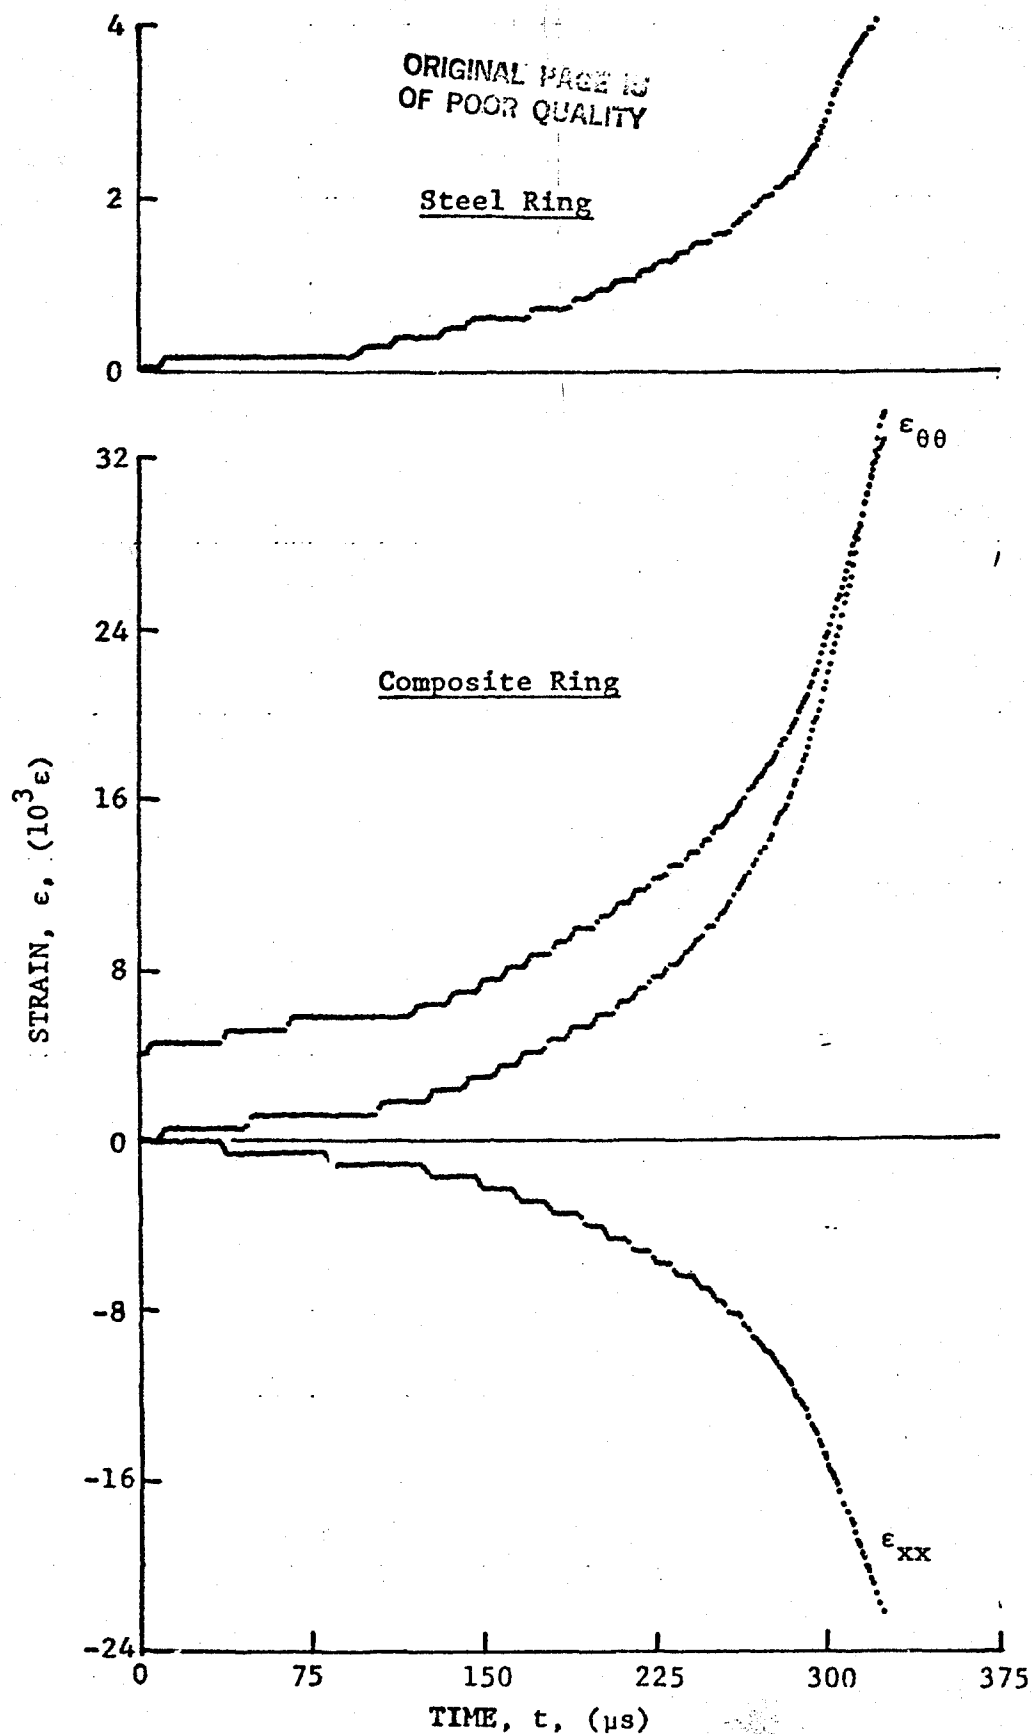


Figure 3-38. Strain records in steel ring and  $[\pm 45]_{2s}$  SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 52-2 (0.65 g shotgun powder).

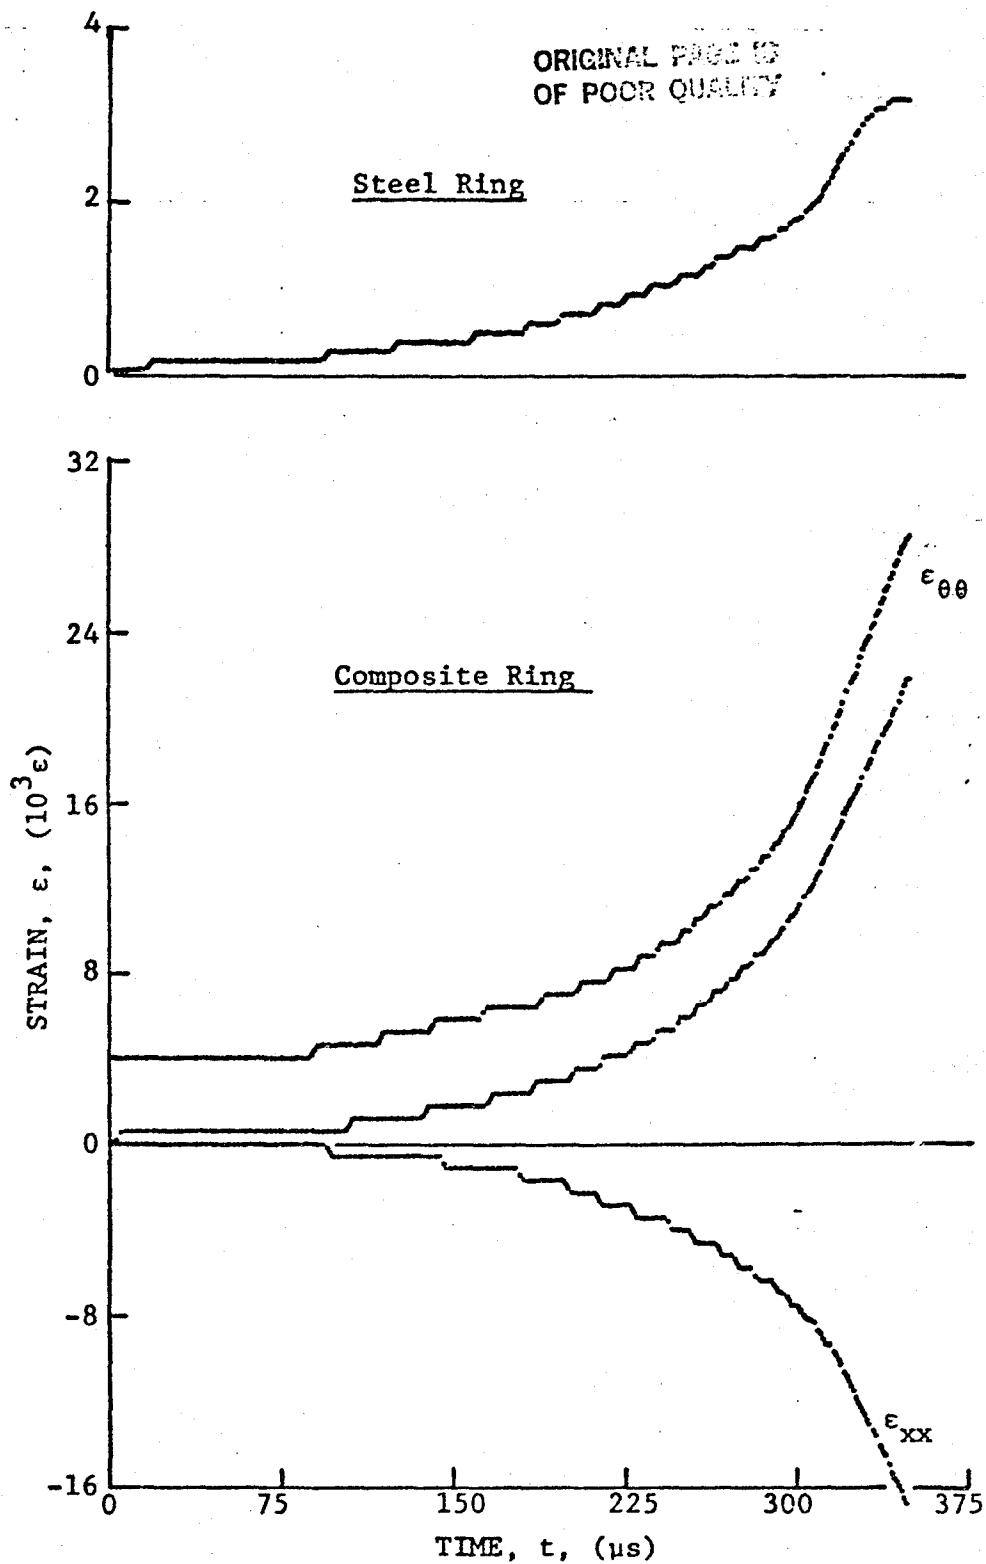


Figure 3-39. Strain records in steel ring and  $[\pm 45]_{2s}$  SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 52-3 (0.65 g shotgun powder).

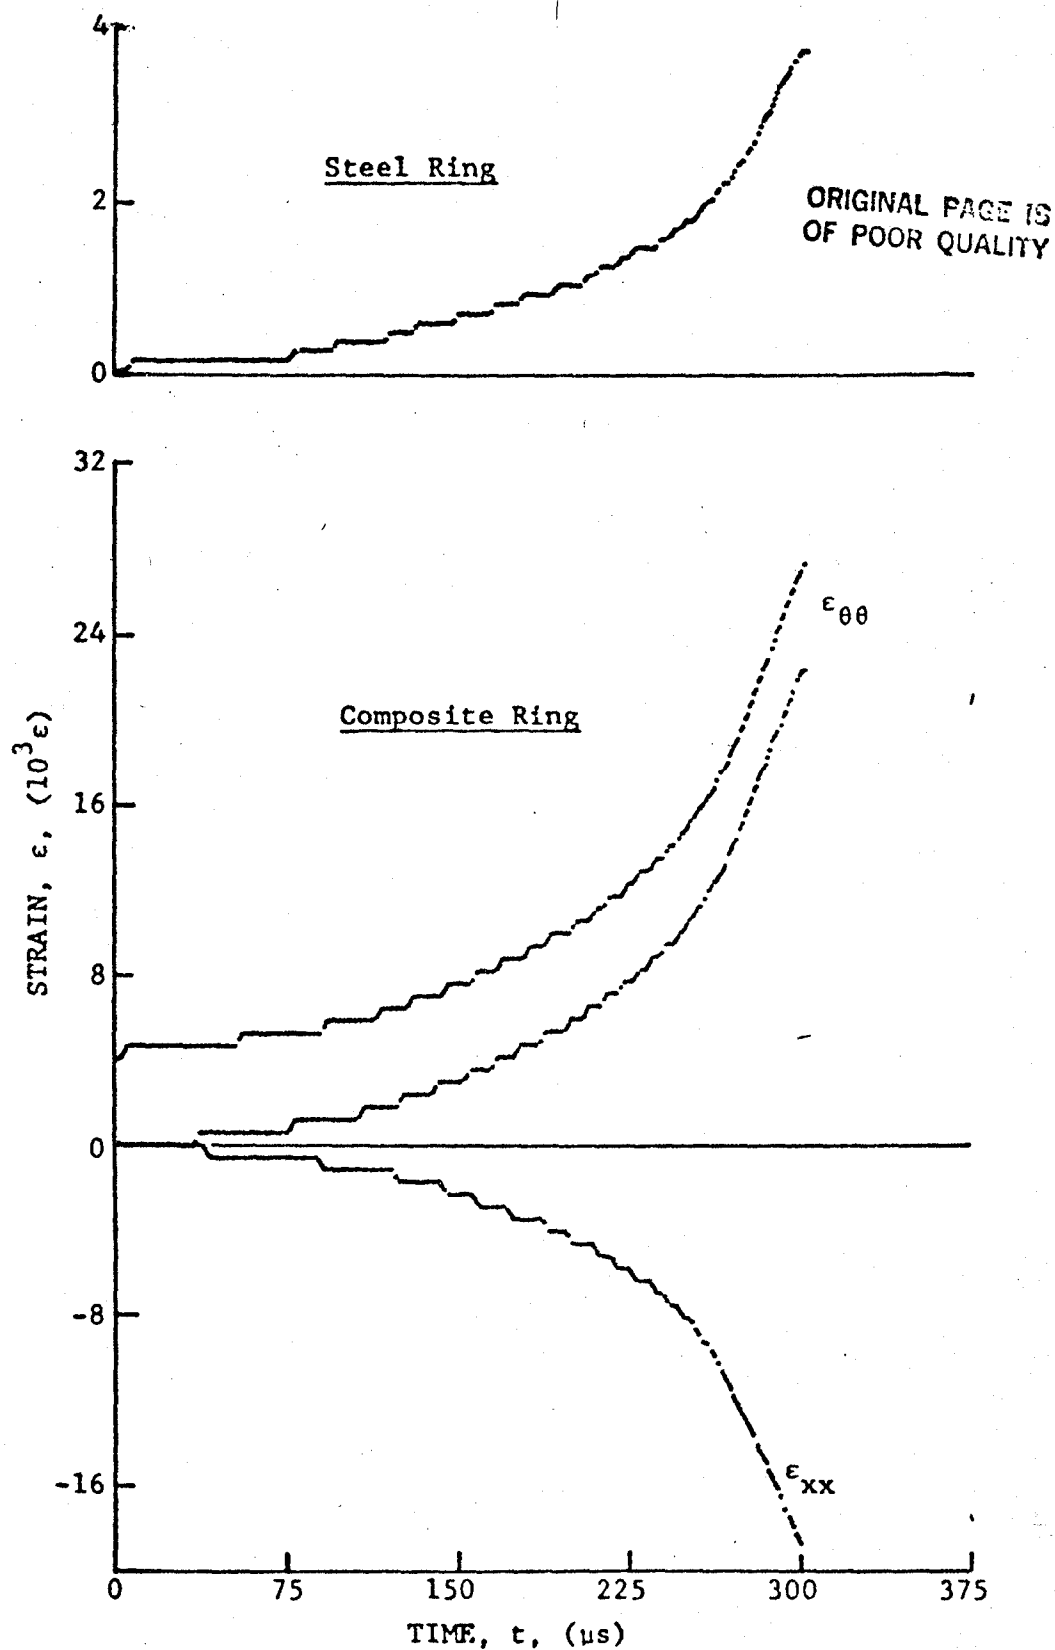


Figure 3-40. Strain records in steel ring and  $[\pm 45]_{25}$  SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 52-4 (0.65 g shotgun powder).

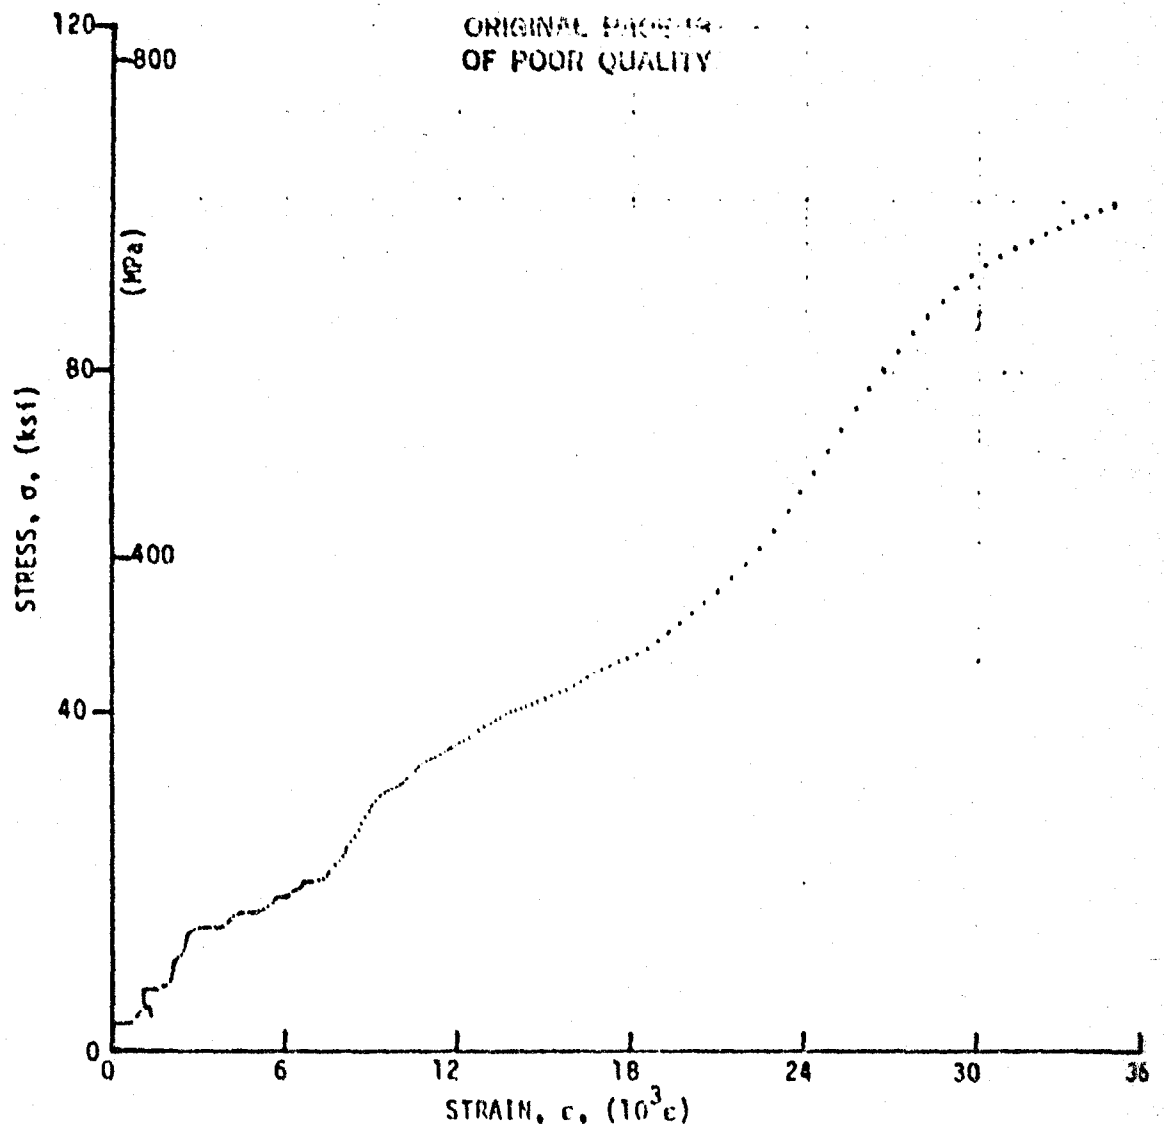


Figure 3-41. Stress-strain curves for dynamically loaded  $[\pm 45]_{2s}$  SP288/AS graphite/epoxy ring, Specimen No. 24-11.



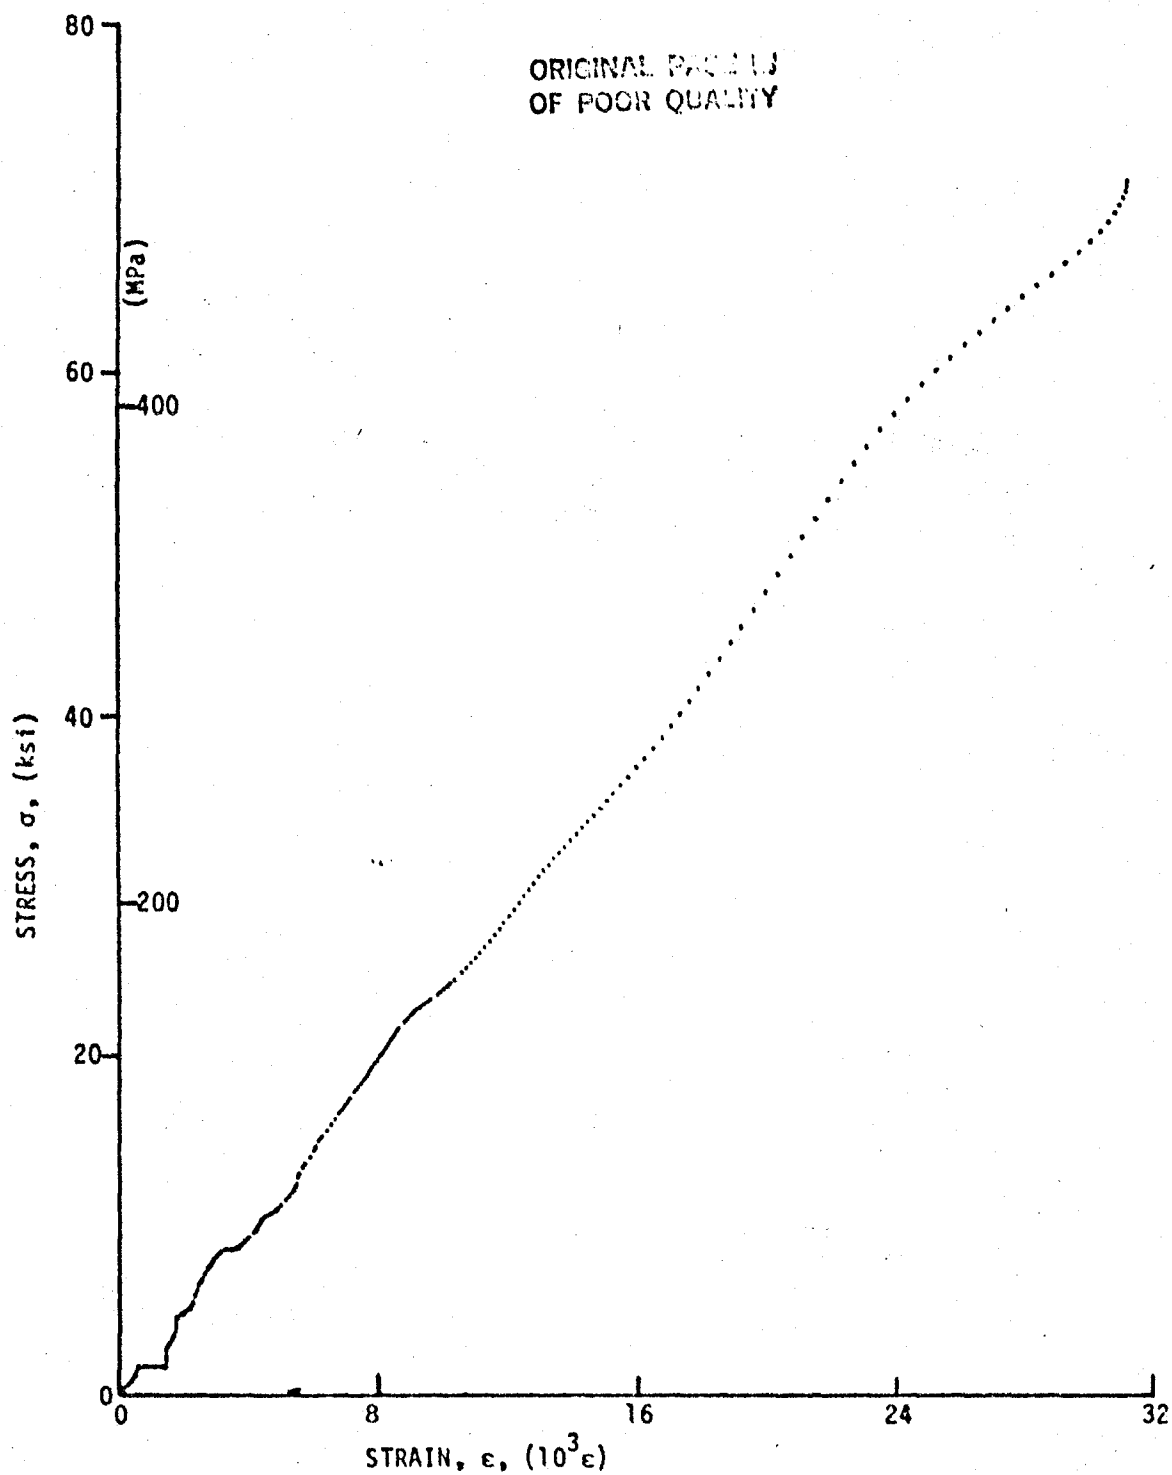


Figure. 3-42. Stress-strain curves for dynamically loaded  $[\pm 45]_{2s}$  SP288/AS graphite/epoxy ring, Specimen No. 52-2.

ORIGINAL PAGE IS  
OF POOR QUALITY

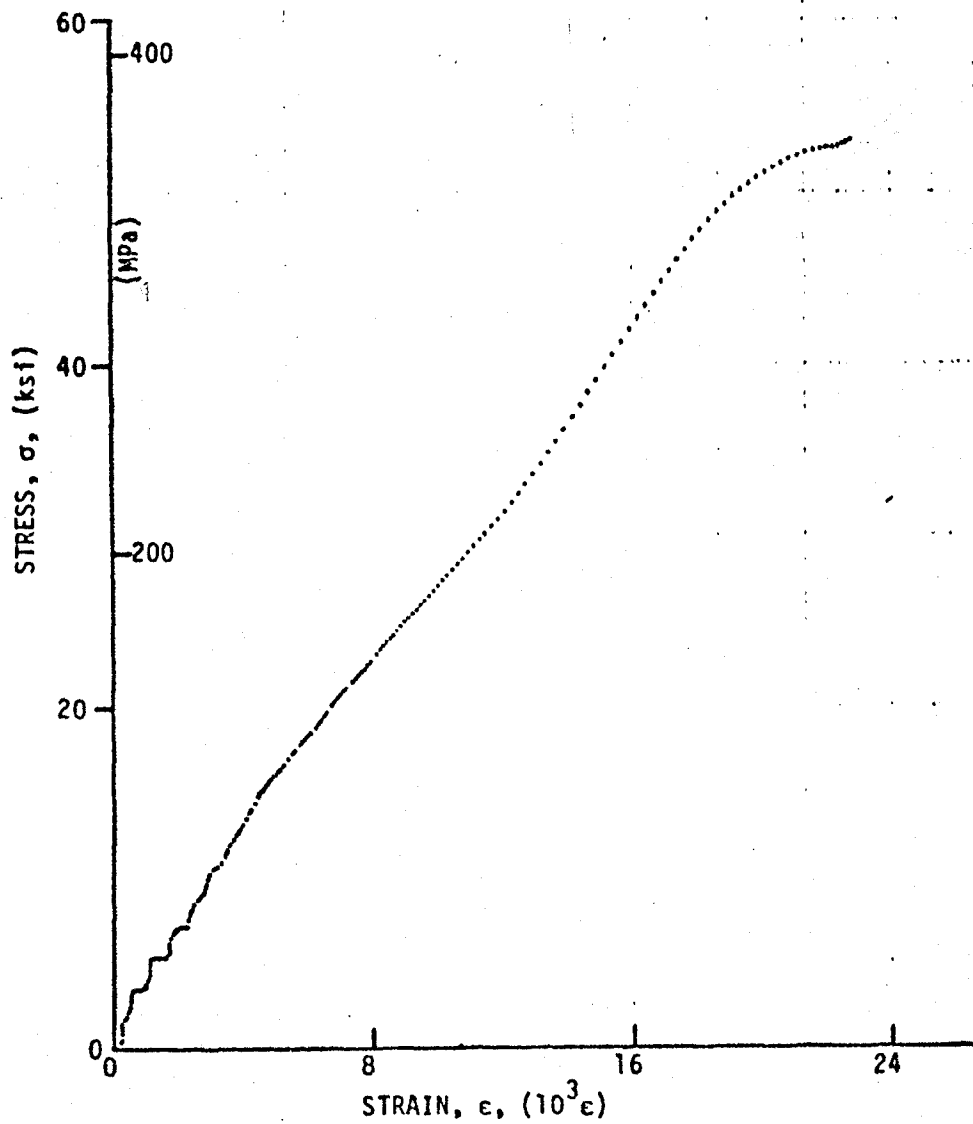


Figure 3-43. Stress-strain curves for dynamically loaded  $[\pm 45]_{2s}$  SP288/AS graphite/epoxy ring, Specimen No. 52-3.

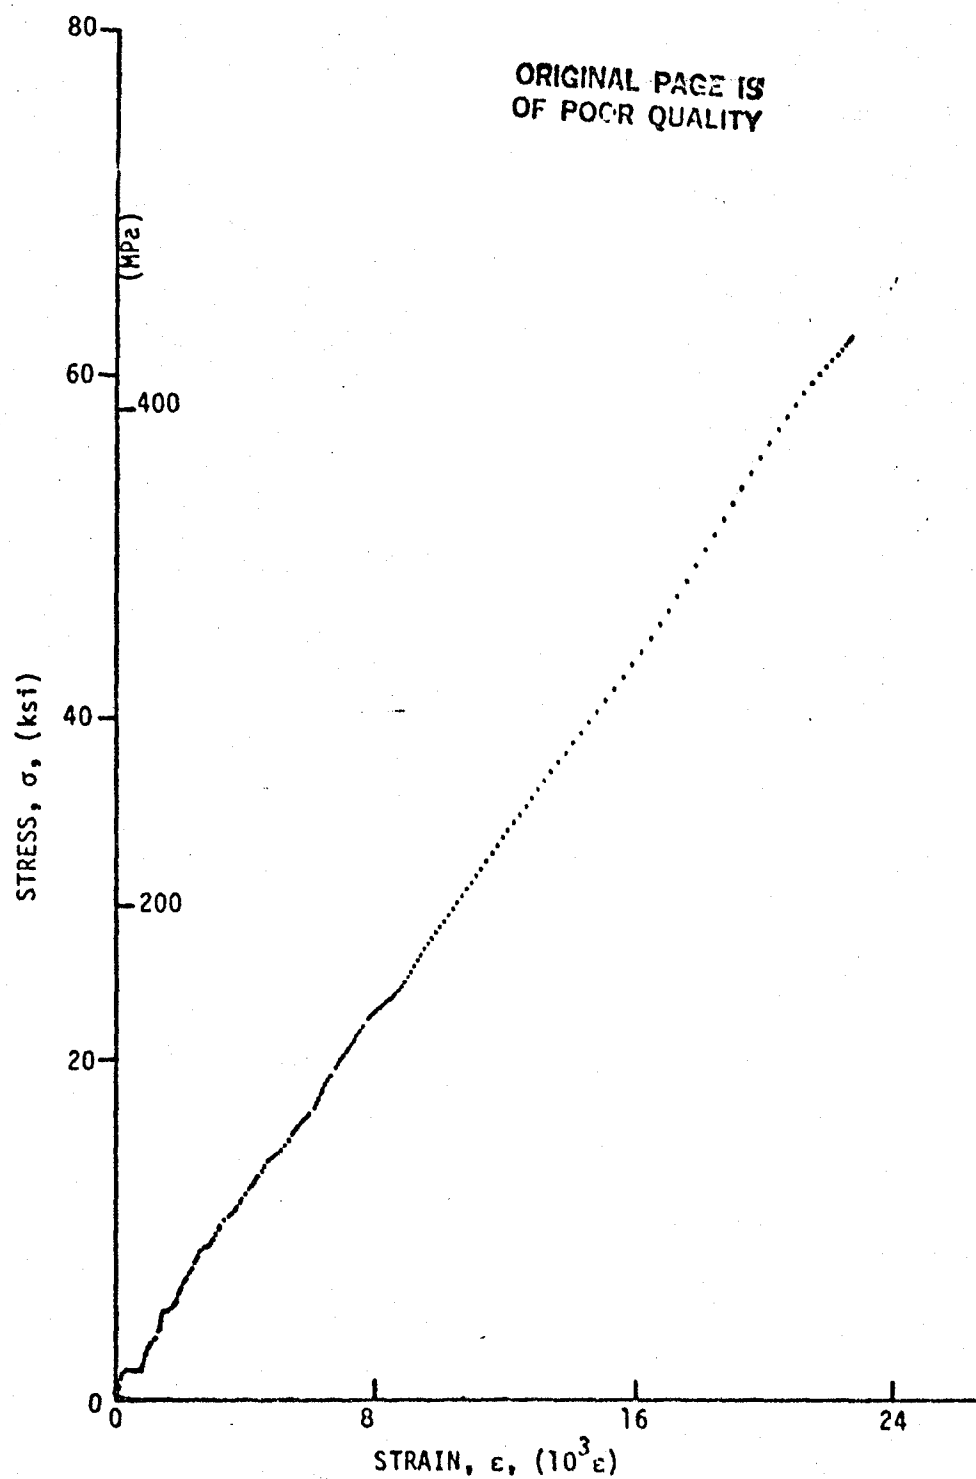


Figure 3-44. Stress-strain curves for dynamically loaded  $[\pm 45]_{2s}$  SP288/AS graphite/epoxy ring, Specimen No. 52-4.

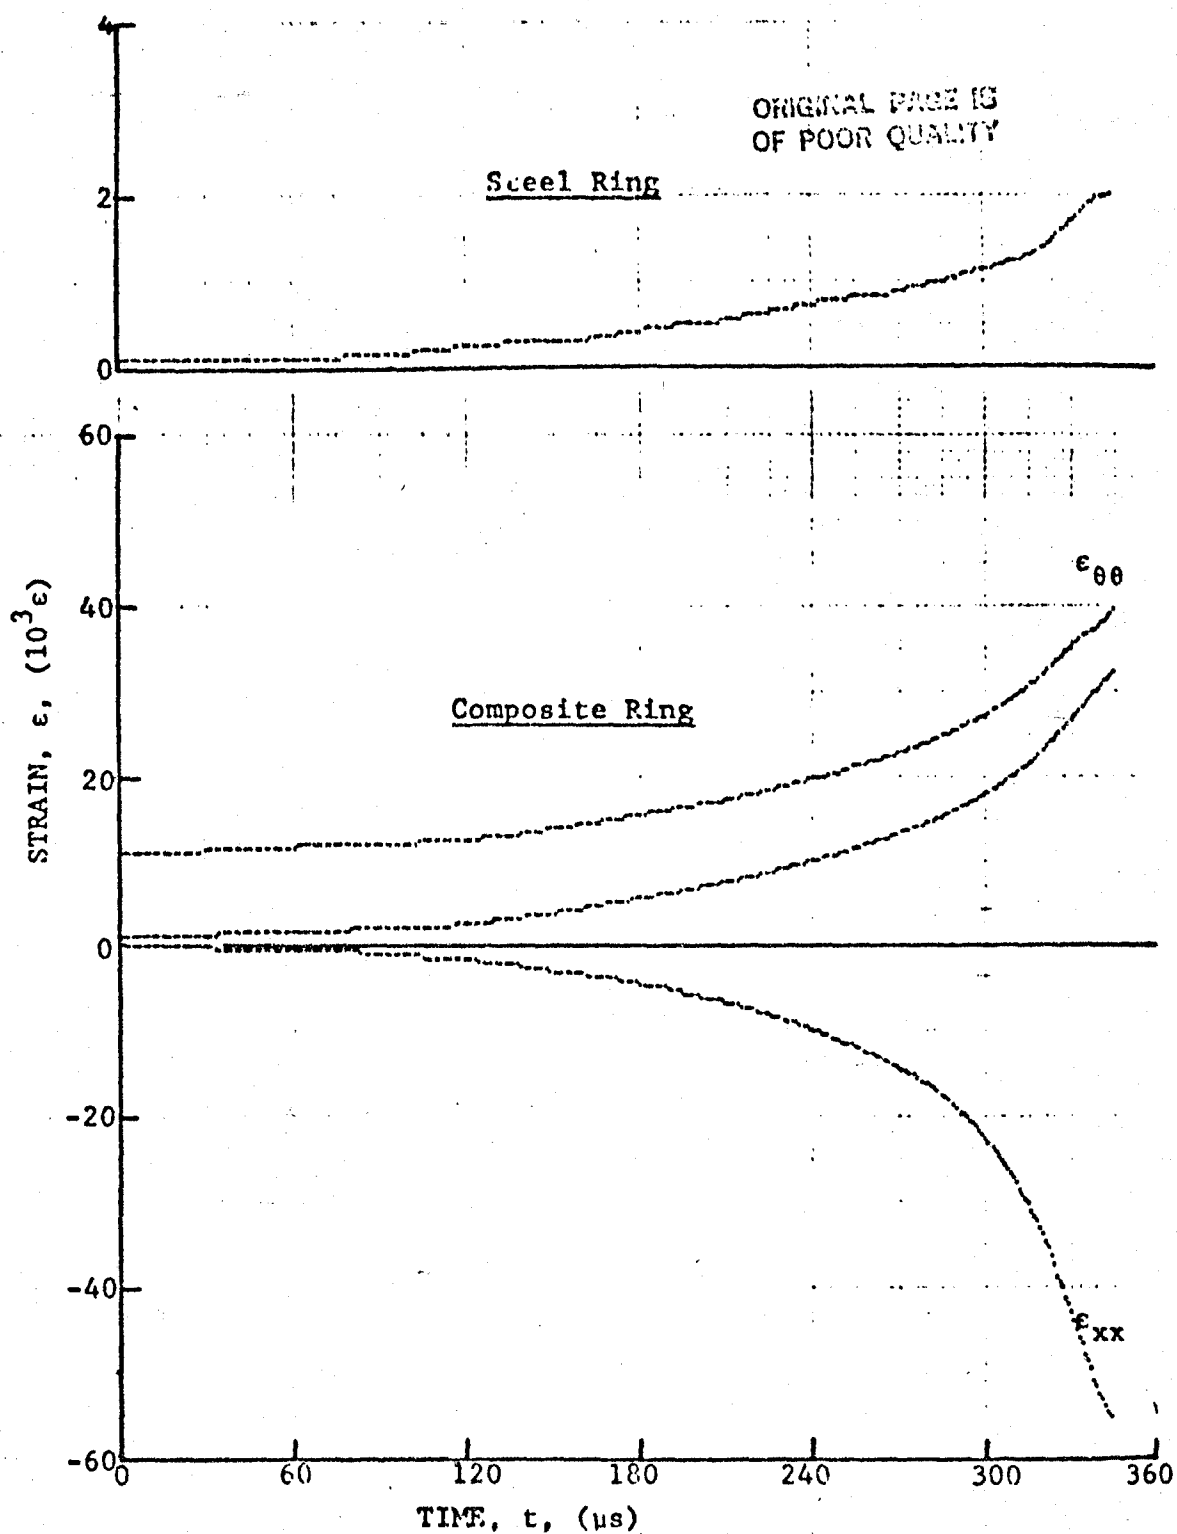


Figure 3-45. Strain records in steel ring and 80AS/20S/PR288 [ $\pm 45$ ]<sub>2s</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 25-9 (0.65 g shotgun powder).

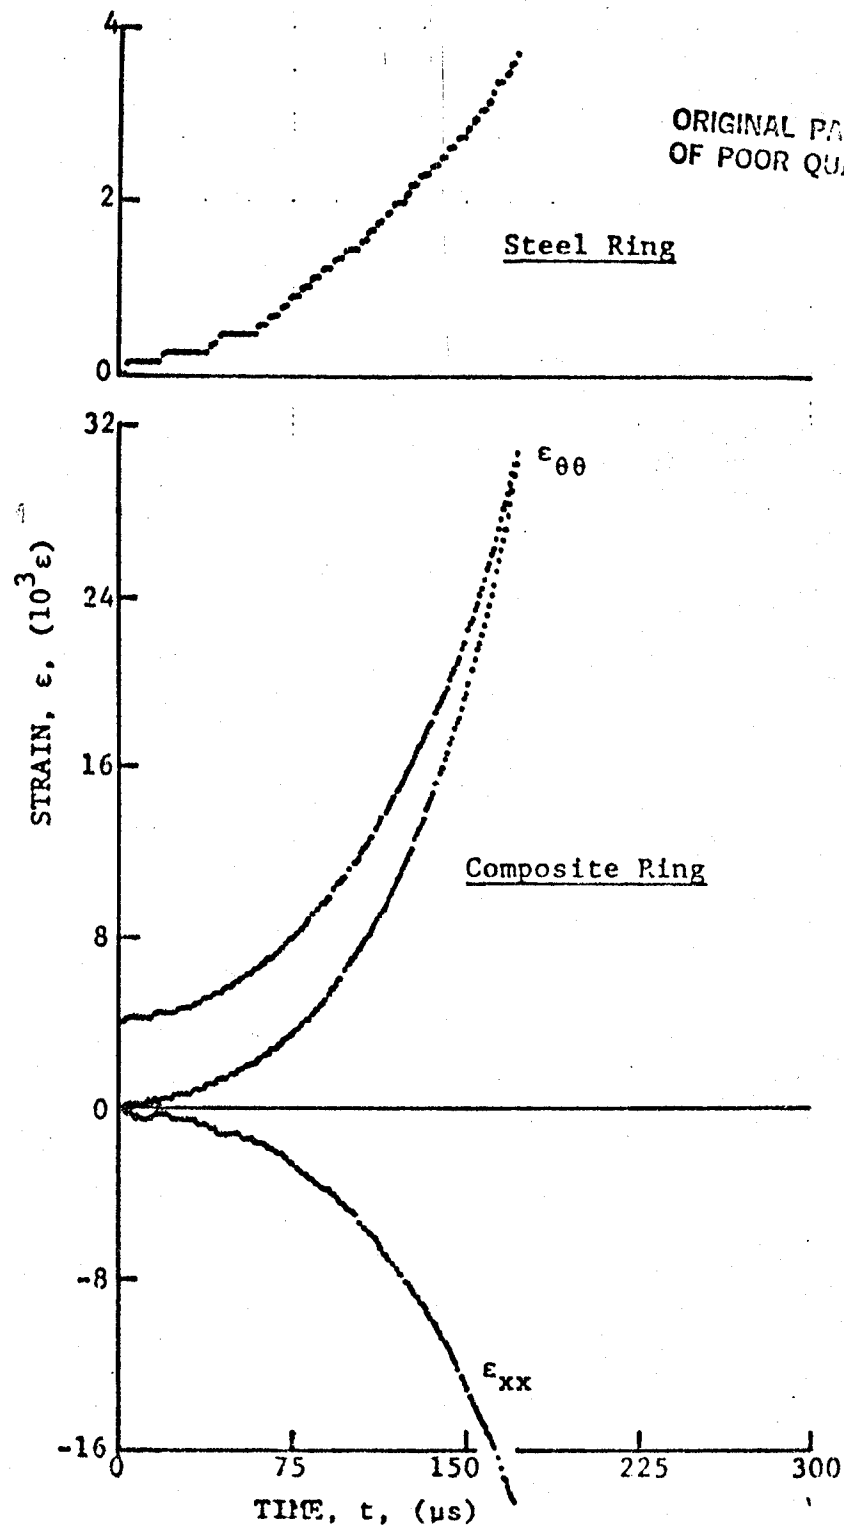


Figure 3-46. Strain records in steel ring and 80AS/20S/PR288  $[\pm 45]_{2s}$  graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 53-1 (0.65 g shotgun powder).

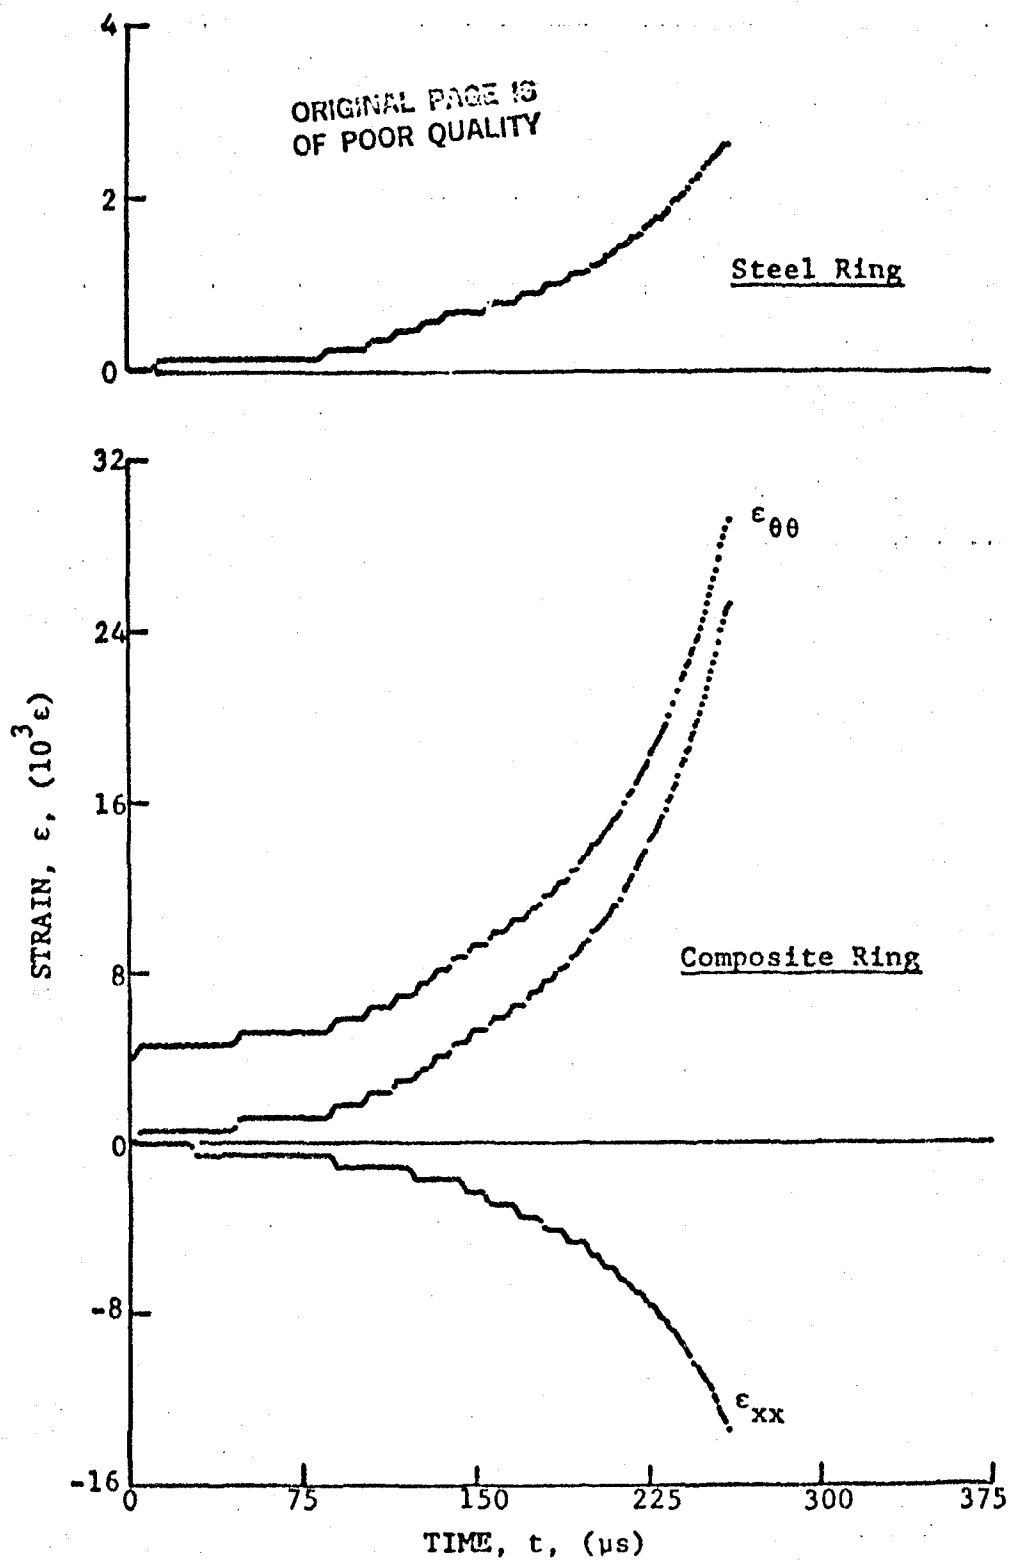


Figure 3-47. Strain records in steel ring and 80AS/20S/PR288 [ $\pm 45$ ]<sub>2s</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 53-4 (0.65 g shotgun powder).

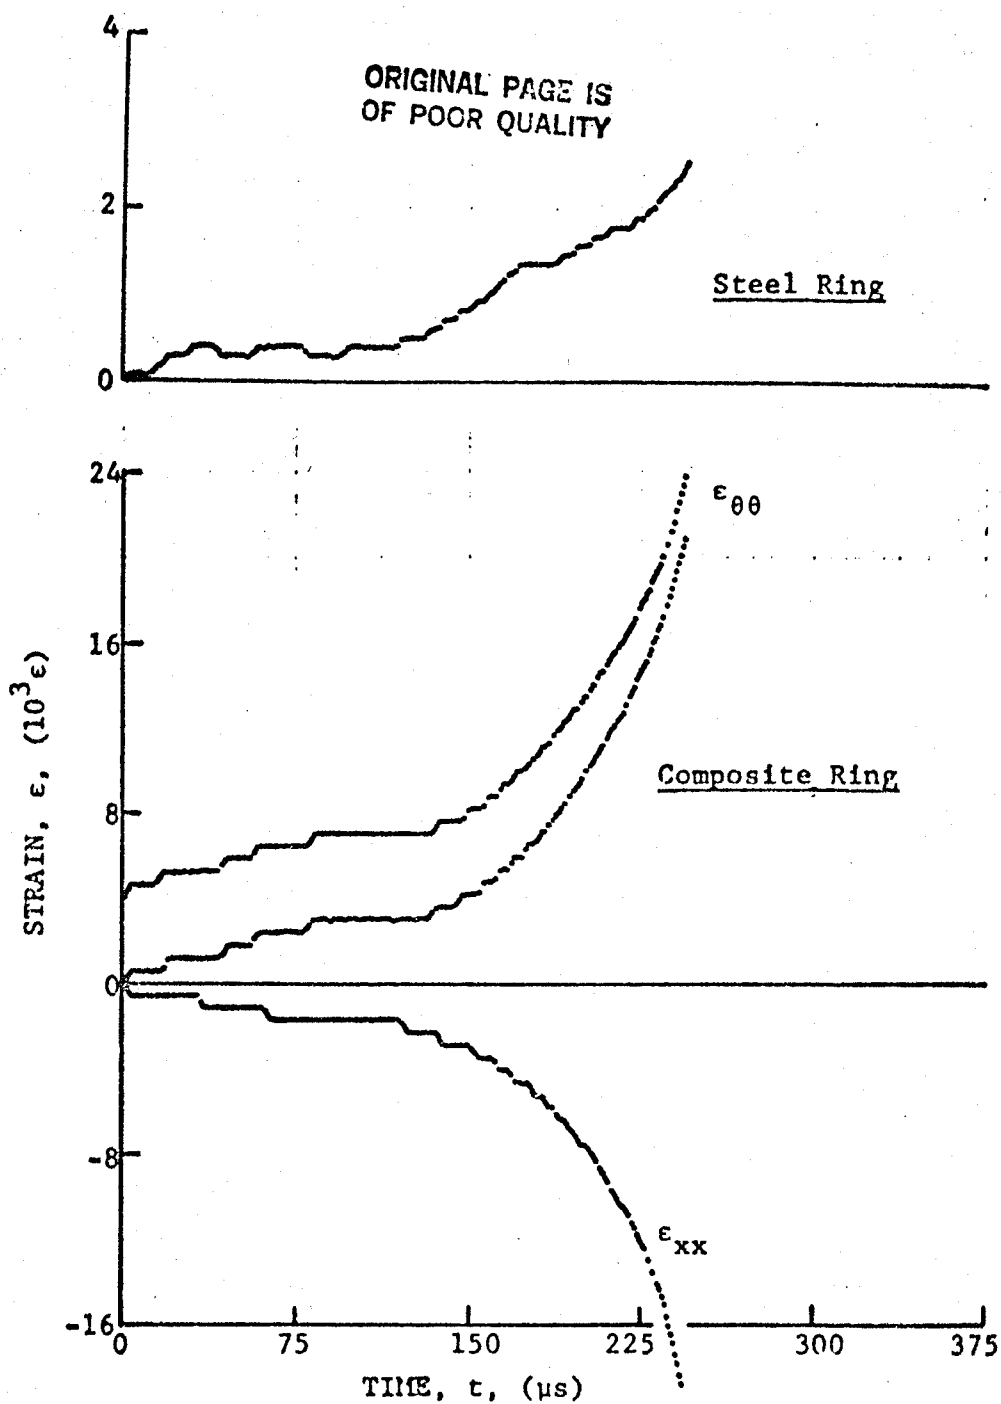


Figure 3-48. Strain records in steel ring and 80AS/20S/PR288 [ $\pm 45$ ]<sub>2s</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 53-5 (0.65 g shotgun powder).

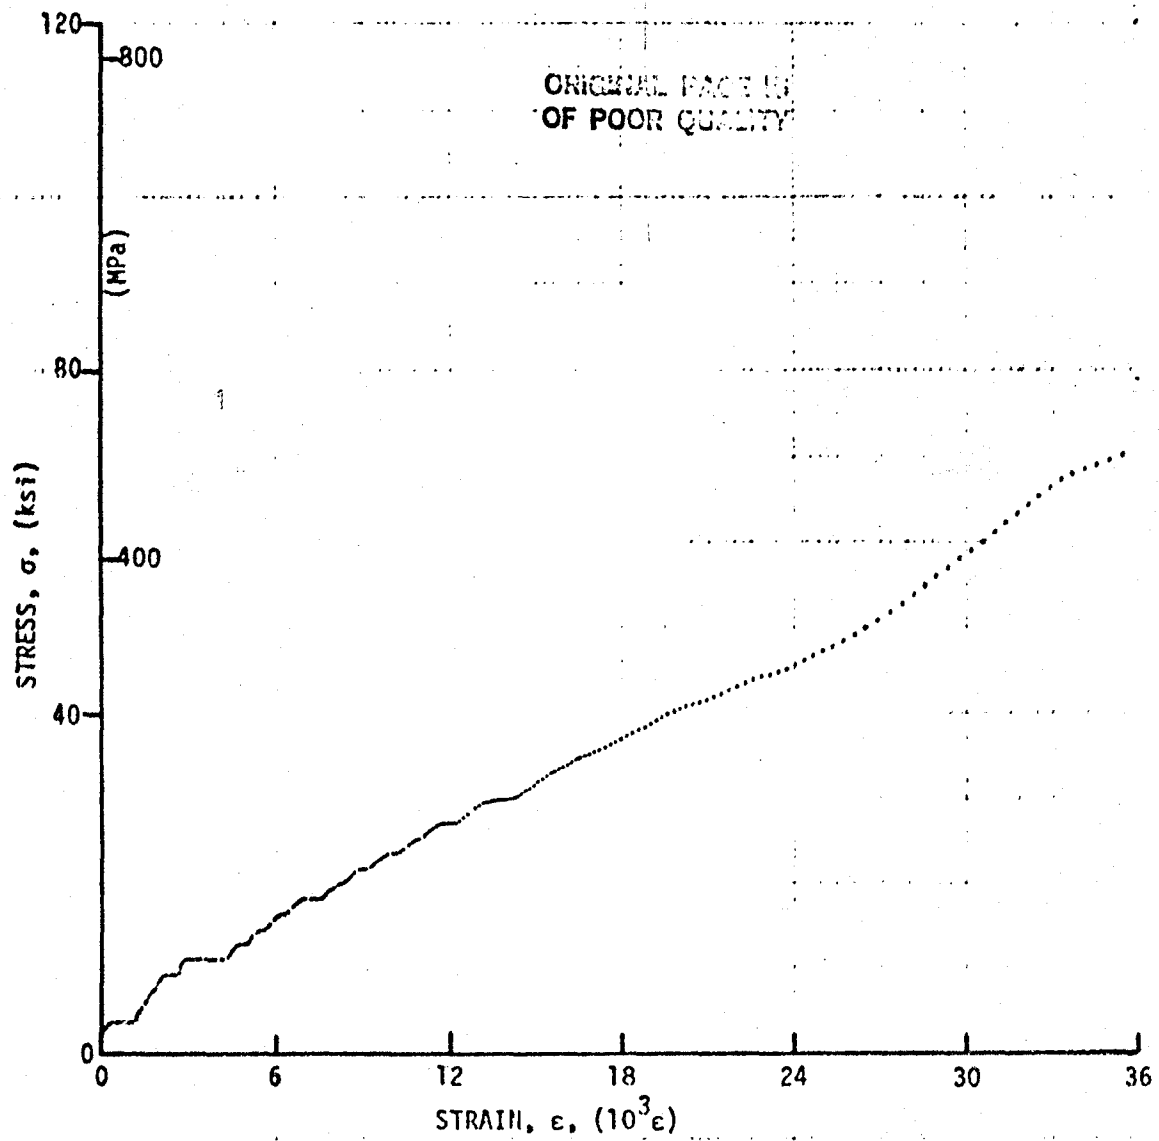


Figure 3-49. Stress-strain curves for dynamically loaded  $[\pm 45]_{2s}$  80AS/20S/PR288 graphite/S-glass/epoxy ring, Specimen No. 25-9.



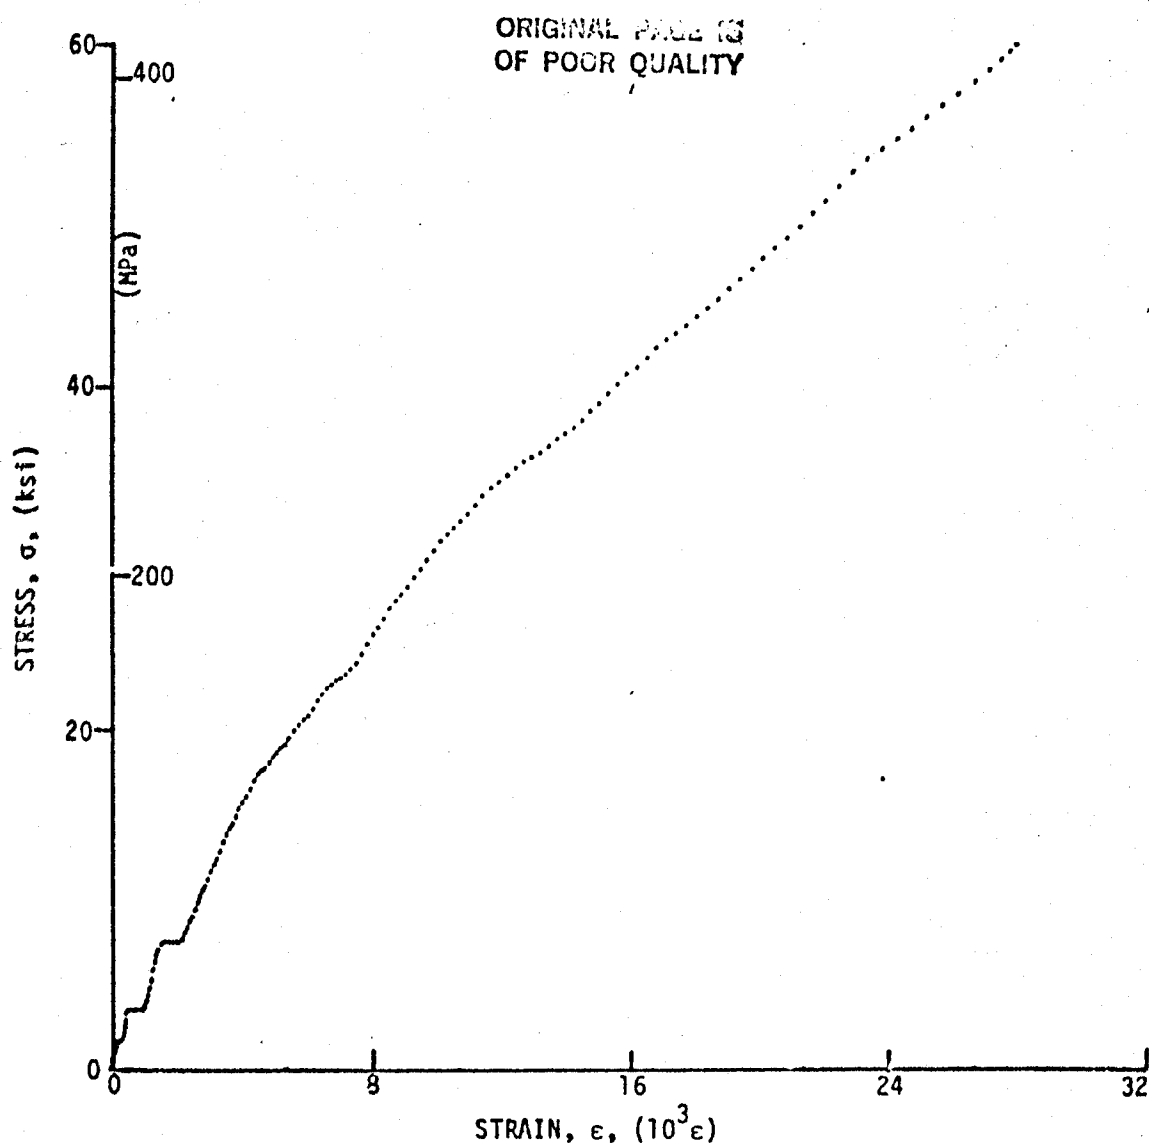


Figure 3-50. Stress-strain curves for dynamically loaded  $[\pm 45]_{2s}$  80AS/20S/PR288 graphite/S-glass/epoxy ring, Specimen No. 53-1.

ORIGINAL PAGE IS  
OF POOR QUALITY

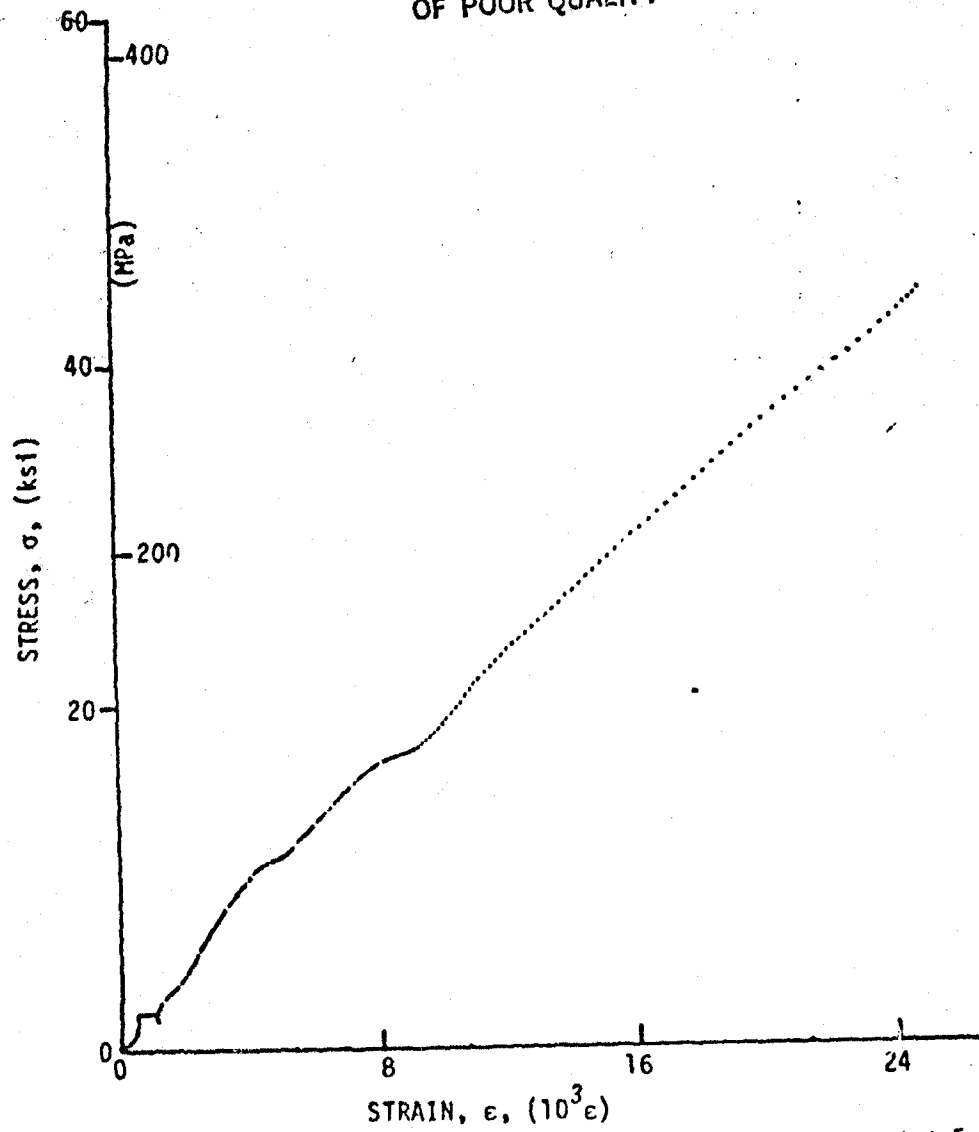


Figure 3-51. Stress-strain curves for dynamically loaded  $[\pm 45]_{2s}$  80AS/20S/PR288 graphite/S-glass/epoxy ring, Specimen No. 53-4.

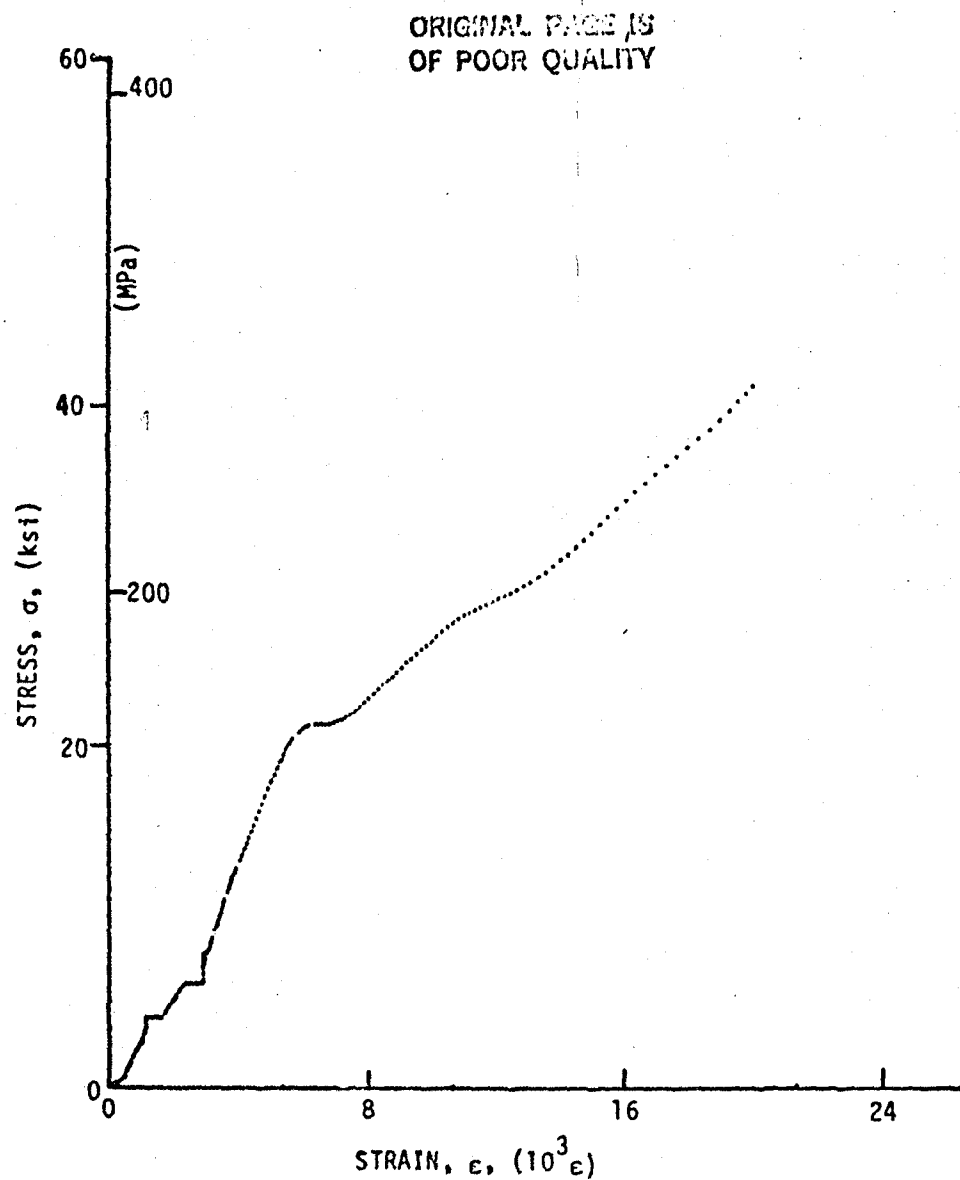


Figure 3-52. Stress-strain curves for dynamically loaded  $[\pm 45]_{2s}$  80AS/20S/PR288 graphite/S-glass/epoxy ring, Specimen No. 53-5.

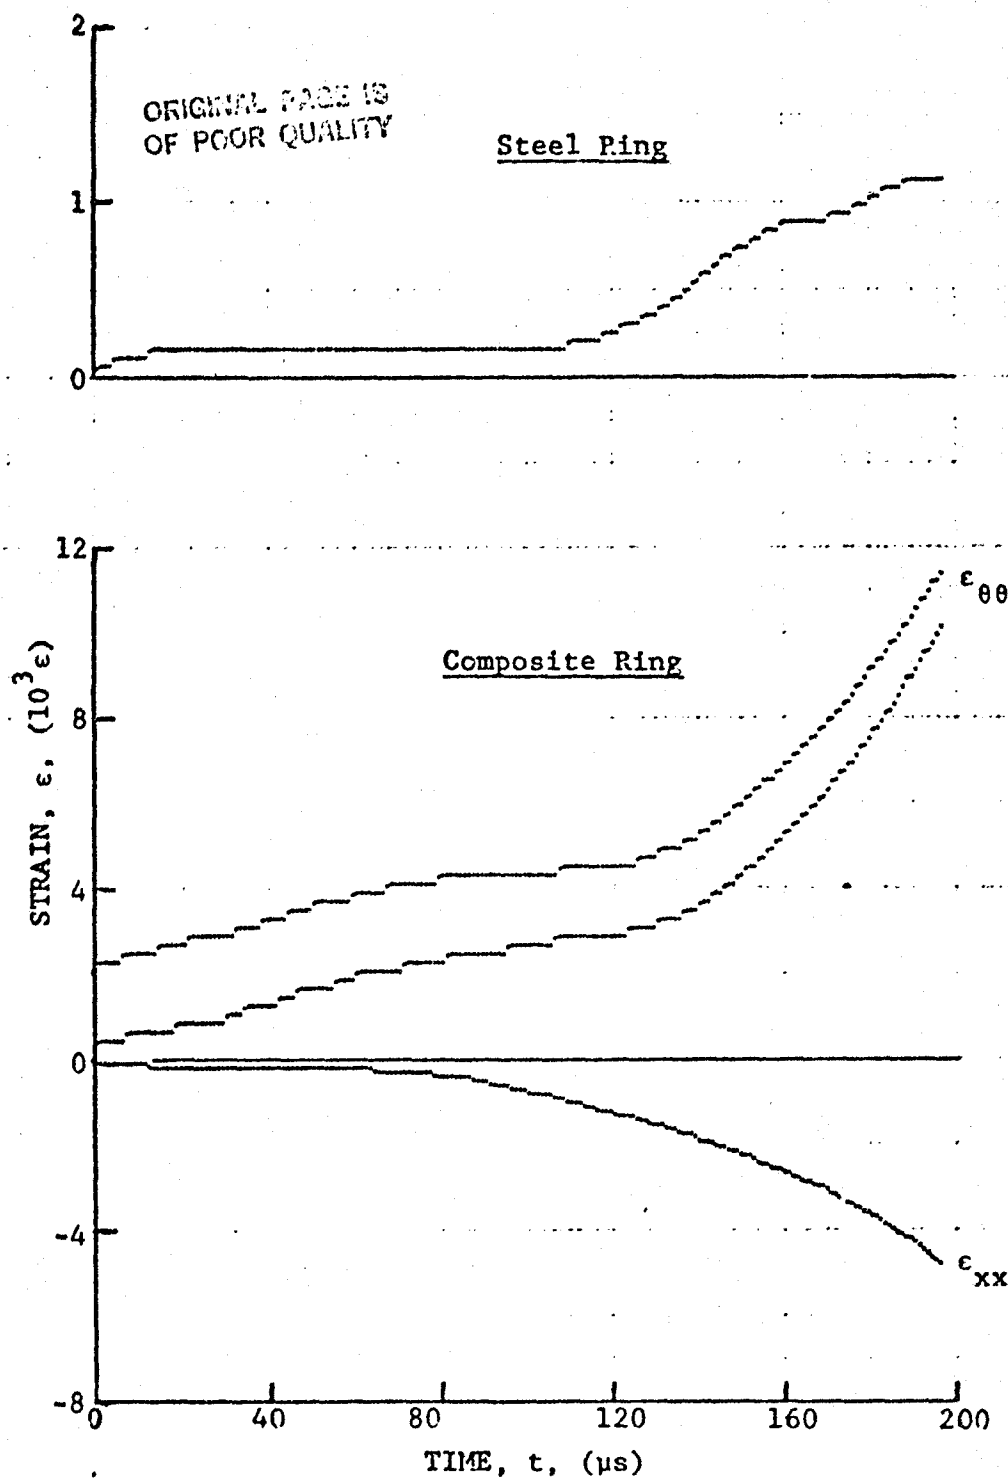


Figure 3-53. Strain records in steel ring and  $[\pm 60]_{2s}$  SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 22-9 (0.65 g shotgun powder).

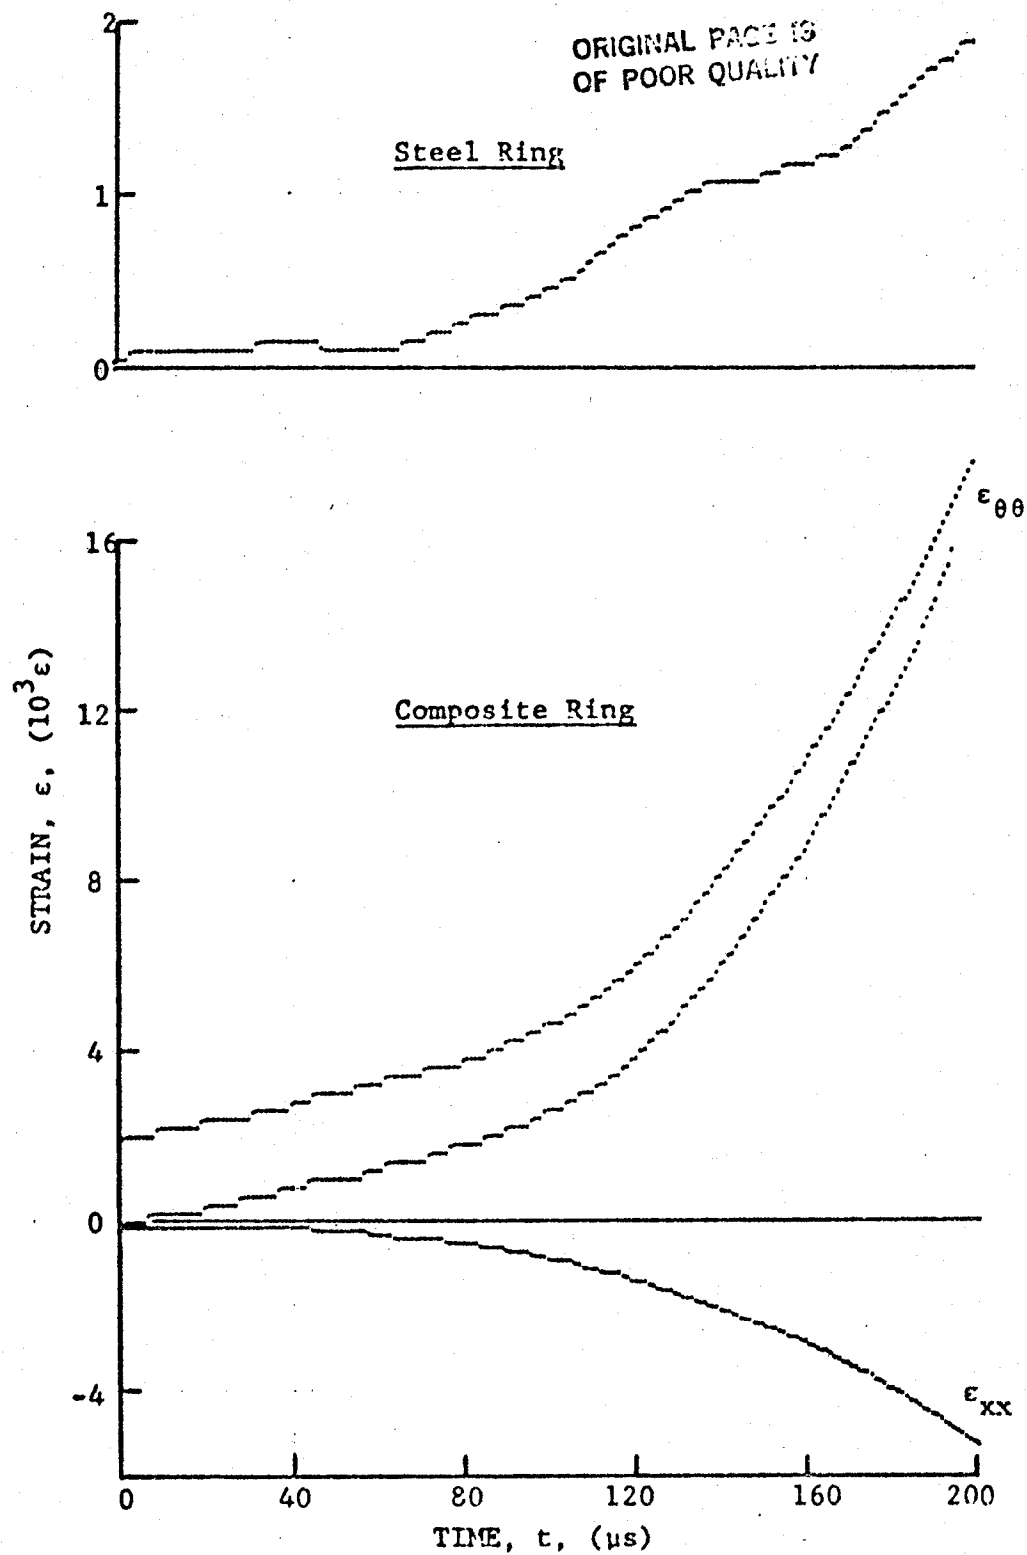


Figure 3-54. Strain records in steel ring and  $[\pm 60]_{2s}$  SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 22-10 (0.65 g shotgun powder).

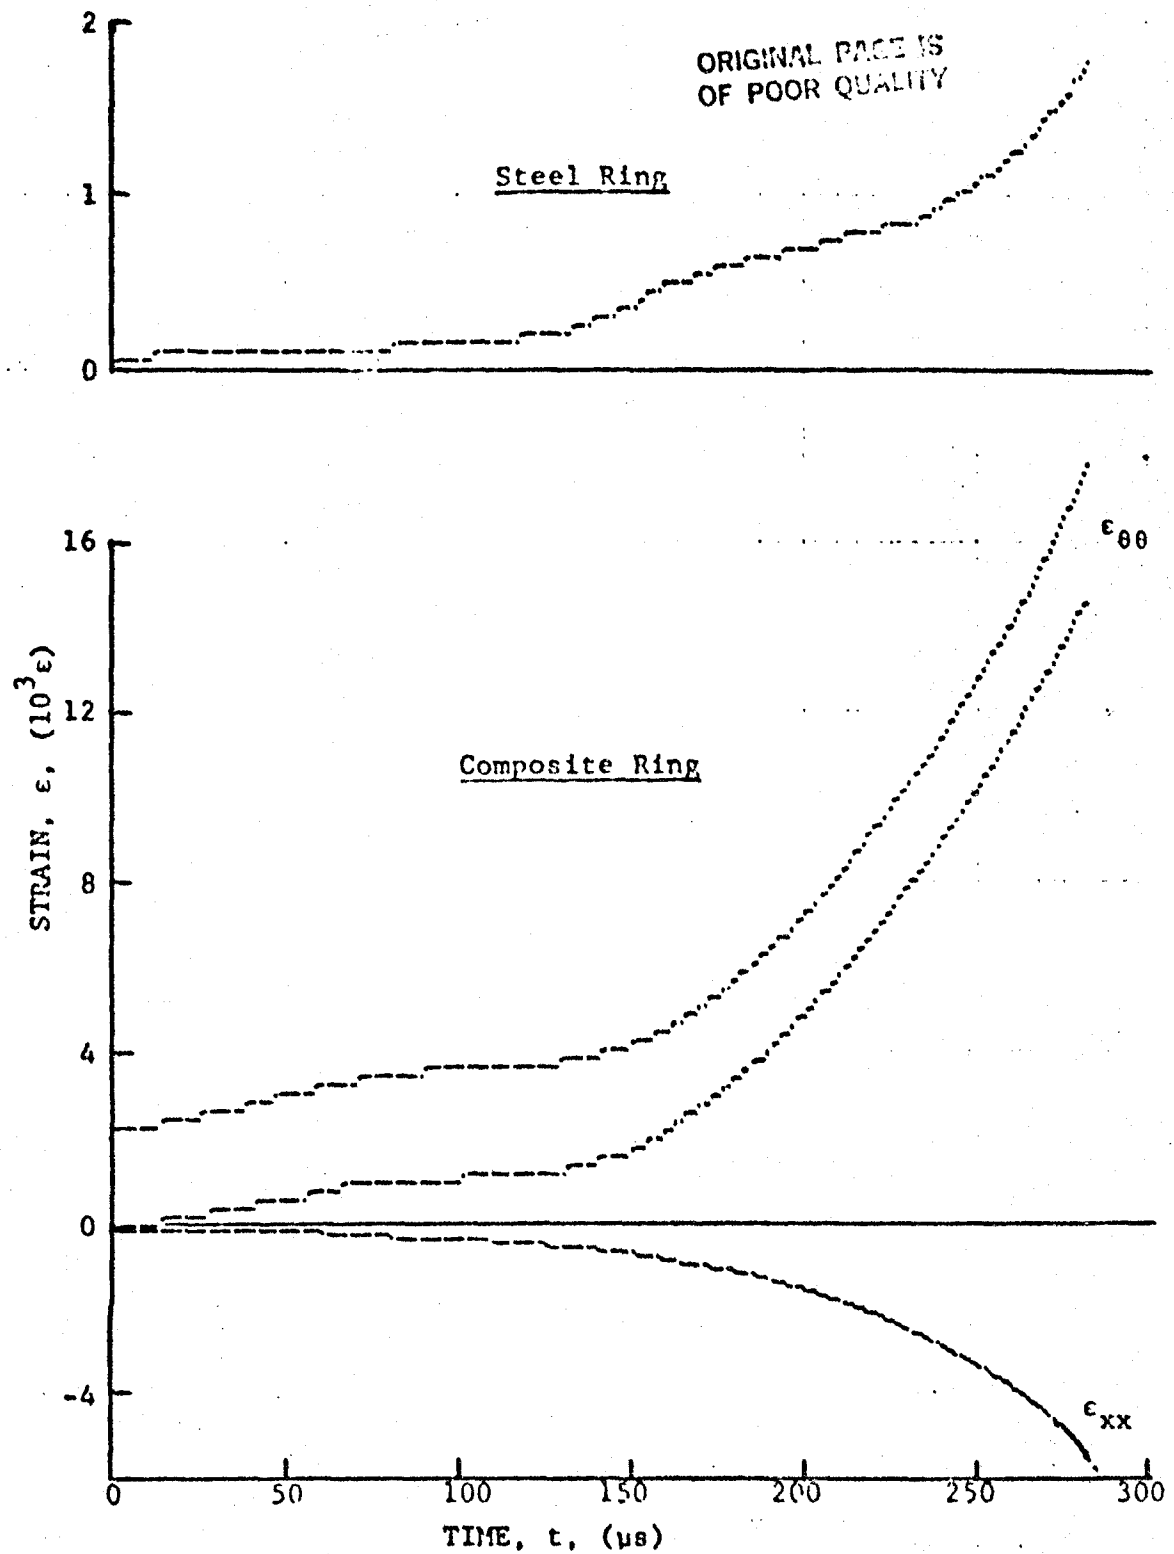


Figure 3-55. Strain records in steel ring and  $[\pm 60]_2$  SP280/AS graphite/epoxy ring under dynamic loading for Specimen No. 22-11 (0.65 g shotgun powder).

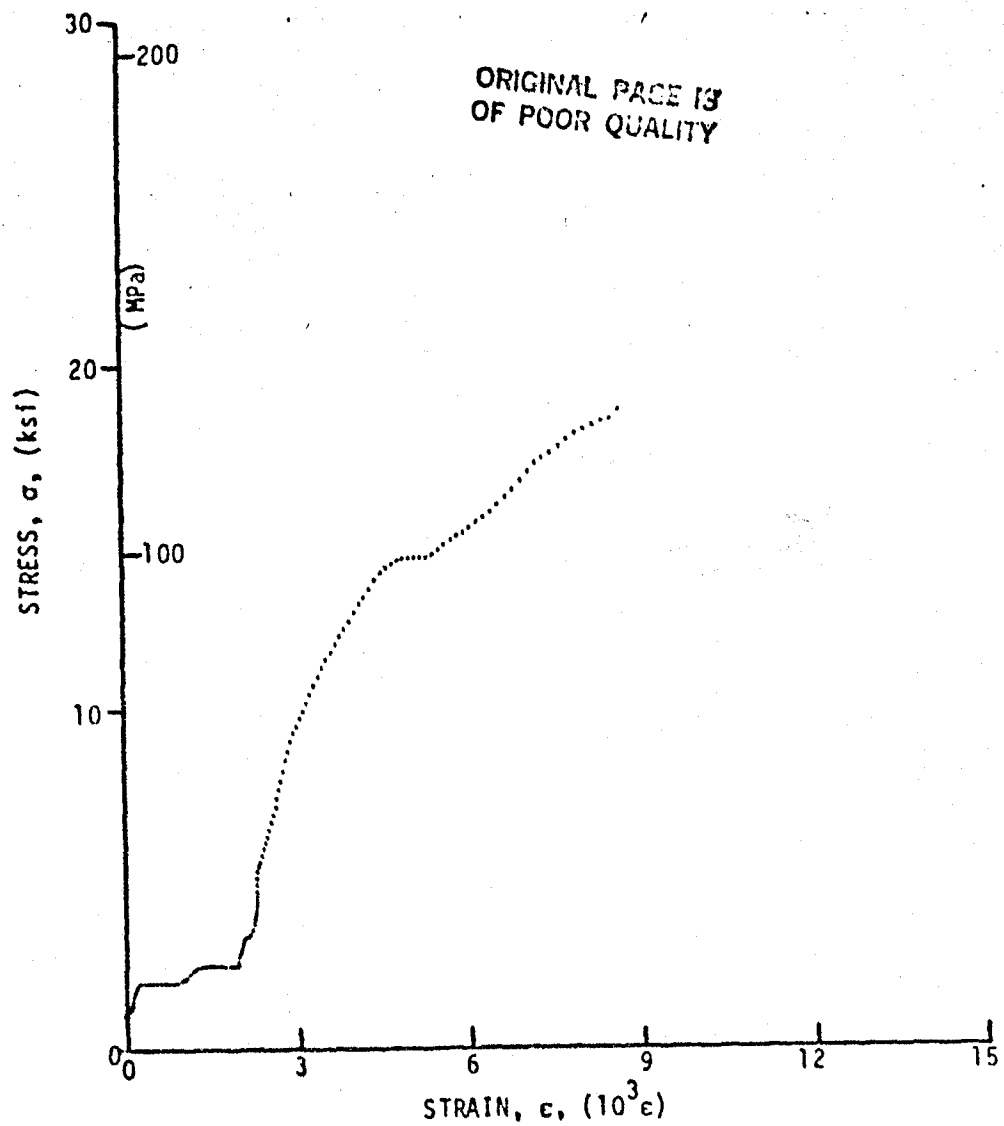


Figure 3-56. Stress-strain curve for dynamically loaded  $[\pm 60]_{2s}$  SP288/AS graphite/epoxy ring, Specimen No. 22-9.

ORIGINAL PAGE IS  
OF POOR QUALITY

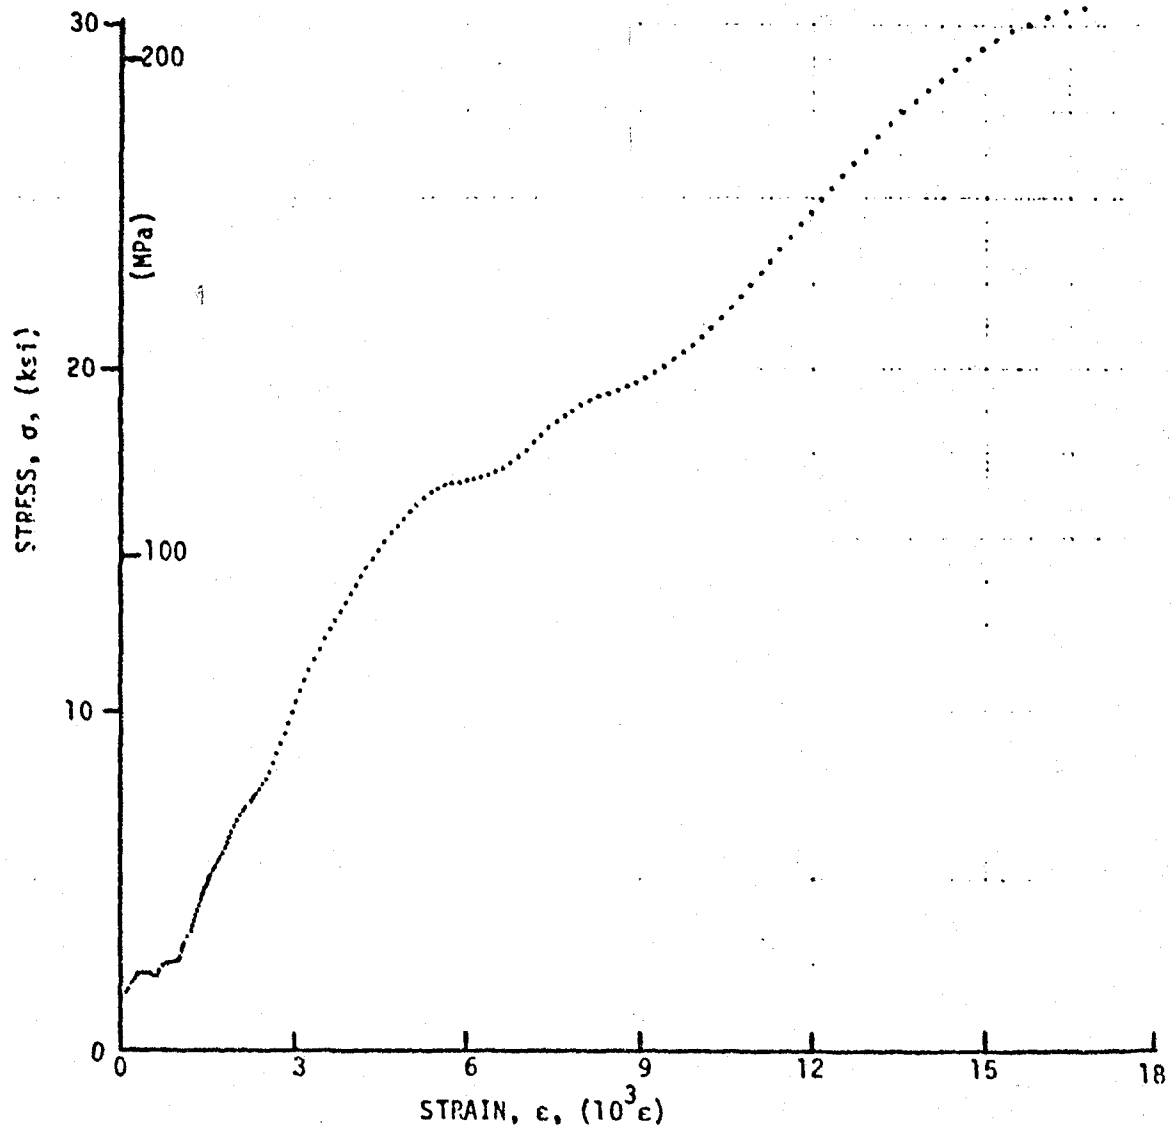


Figure 3-57. Stress-strain curve for dynamically loaded [±60]<sub>2s</sub>  
SP288/AS graphite/epoxy ring, Specimen No. 22-10.



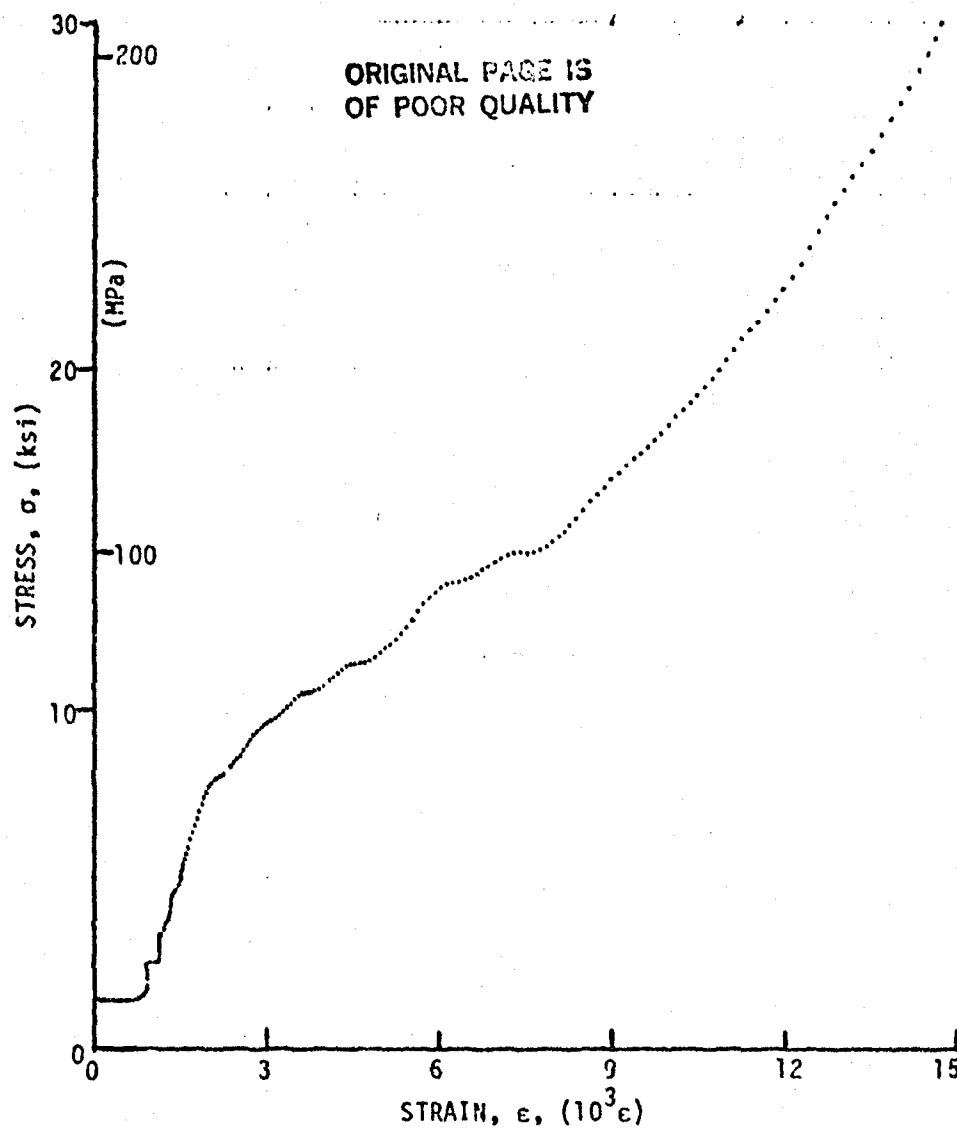


Figure 3-58. Stress-strain curve for dynamically loaded  $[\pm 60]_{2s}$  SP288/AS graphite/epoxy ring, Specimen No. 22-11.

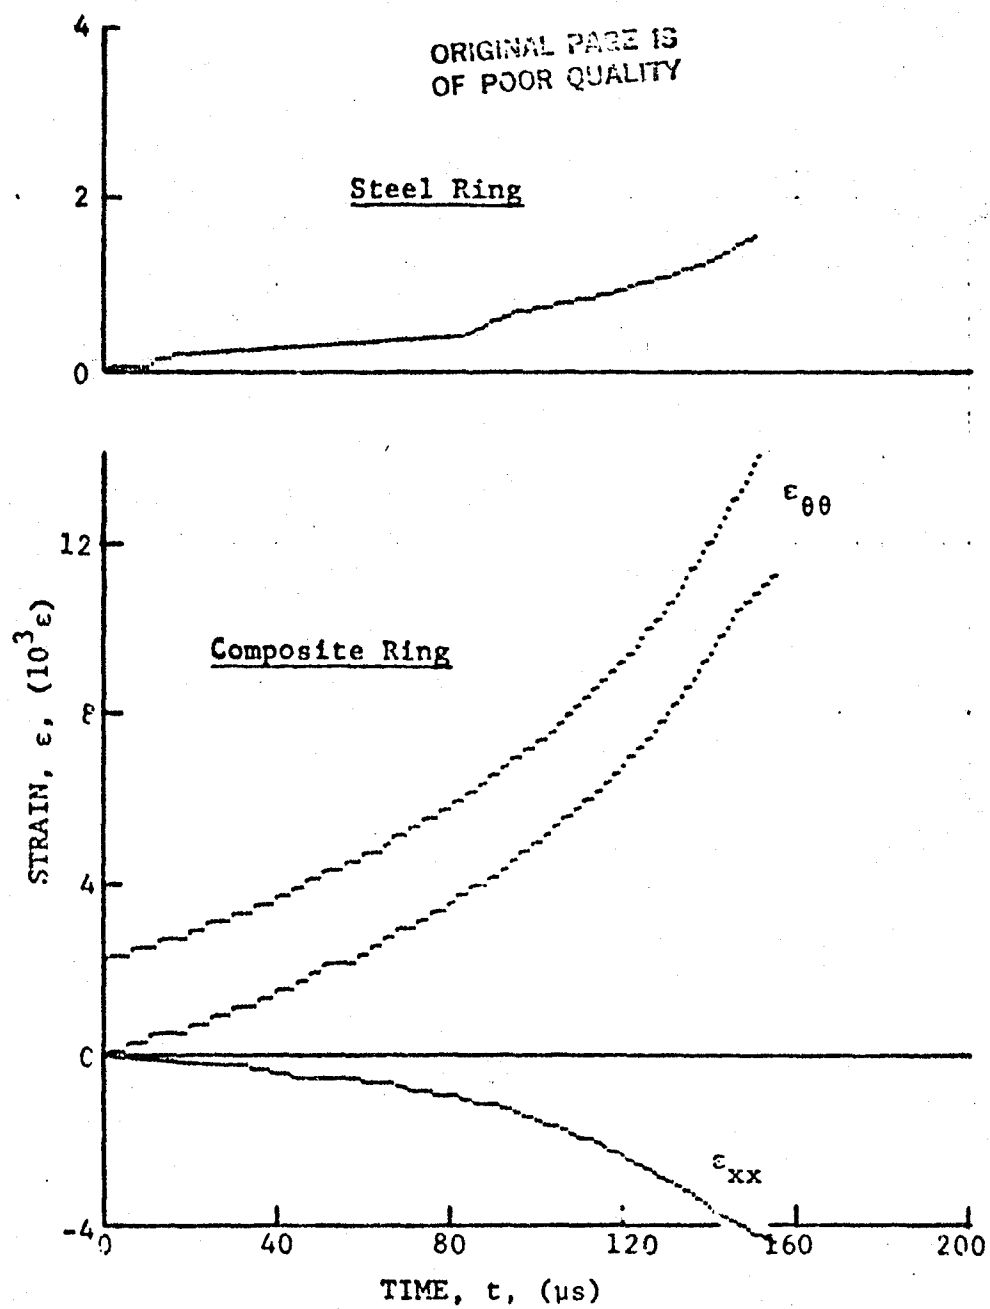


Figure 3-59. Strain records in steel ring and 80AS/20S/PR288  $[\pm 60]_{2s}$  graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 23-7 (0.65 g shotgun powder).

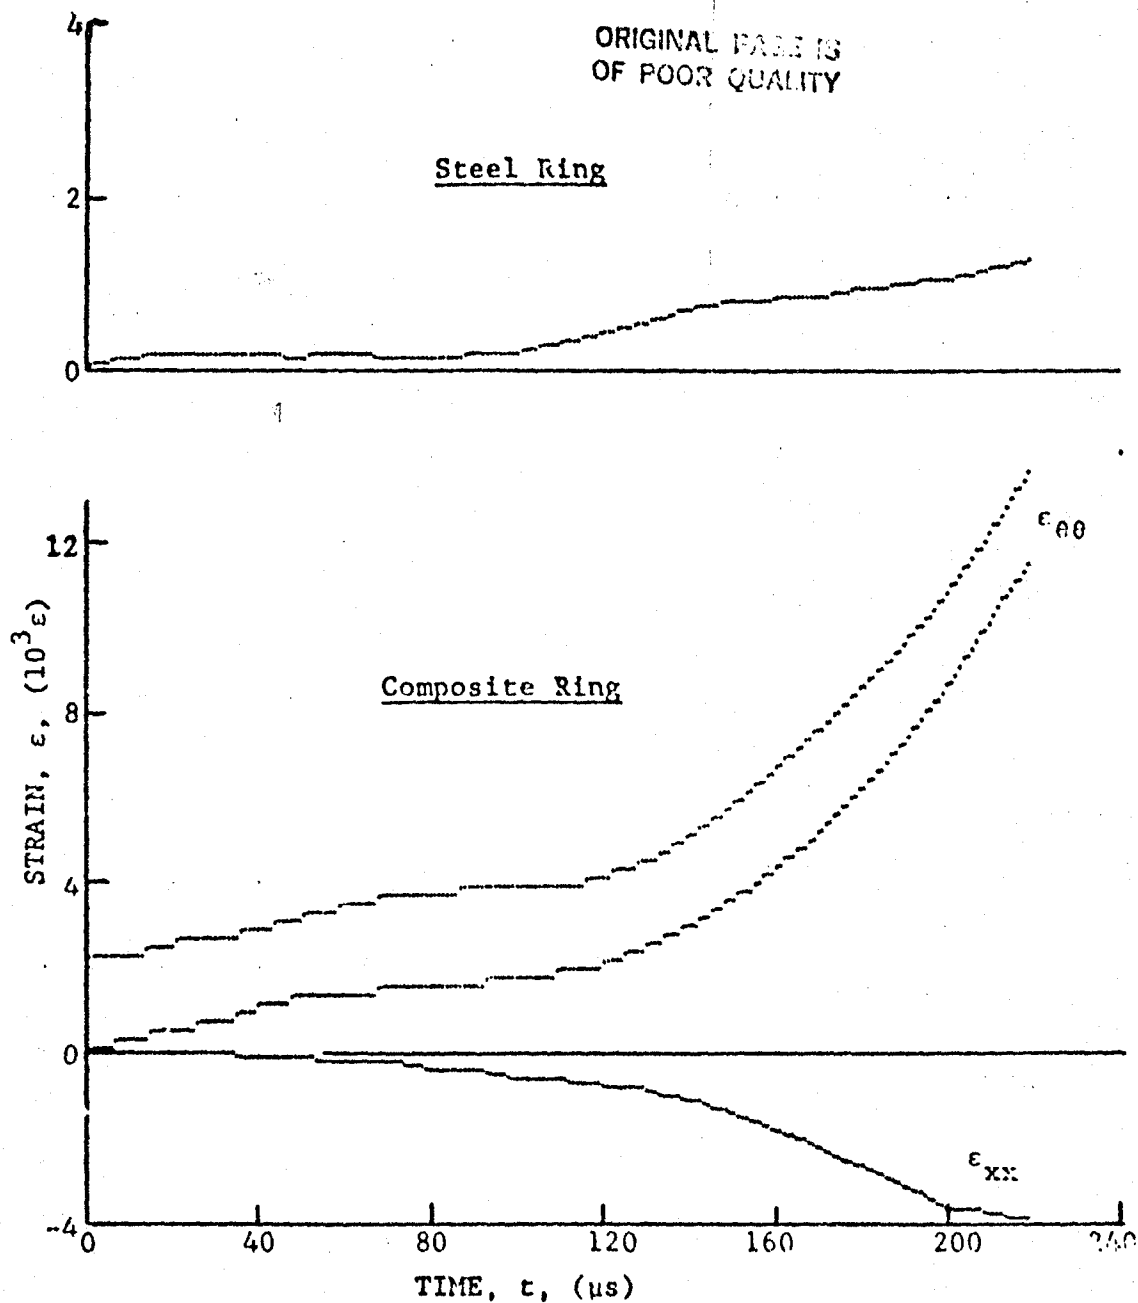


Figure 3-60. Strain records in steel ring and 80AS/20S/PR288  $[\pm 60]_{2s}$  graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 23-10 (0.65 g shotgun powder).

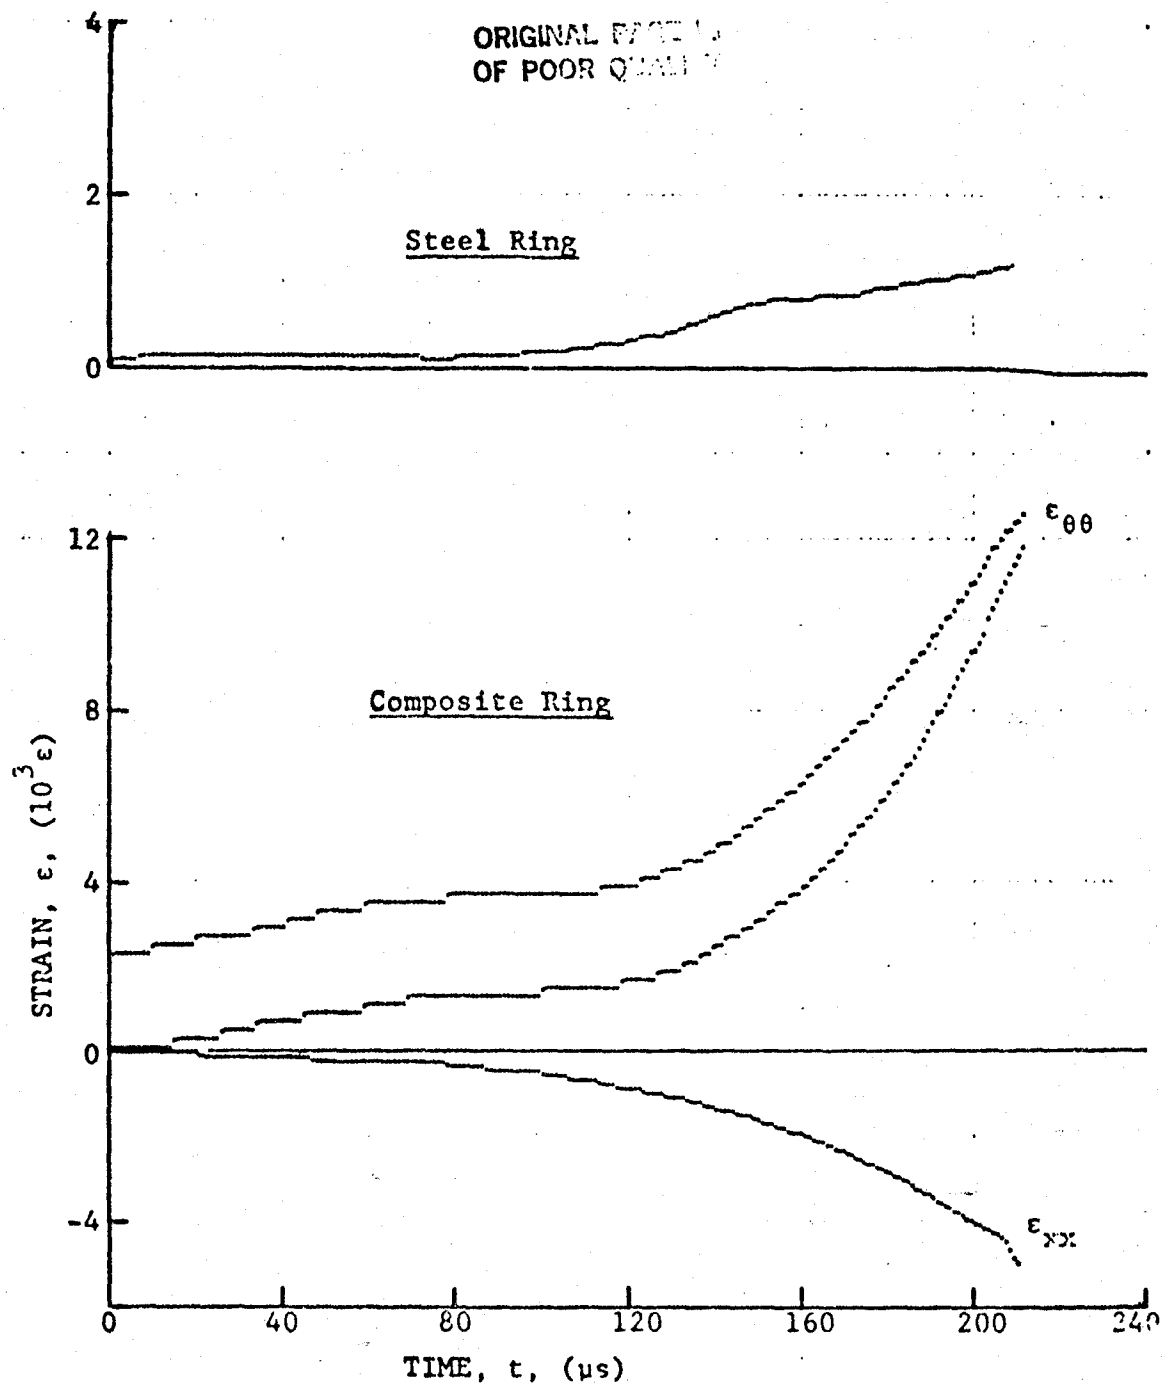


Figure 3-61. Strain records in steel ring and 80AS/20S/PR288  $[\pm 60]_{2s}$  graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 23-11 (0.65 g shotgun powder).

ORIGINAL PAGE IS  
OF POOR QUALITY

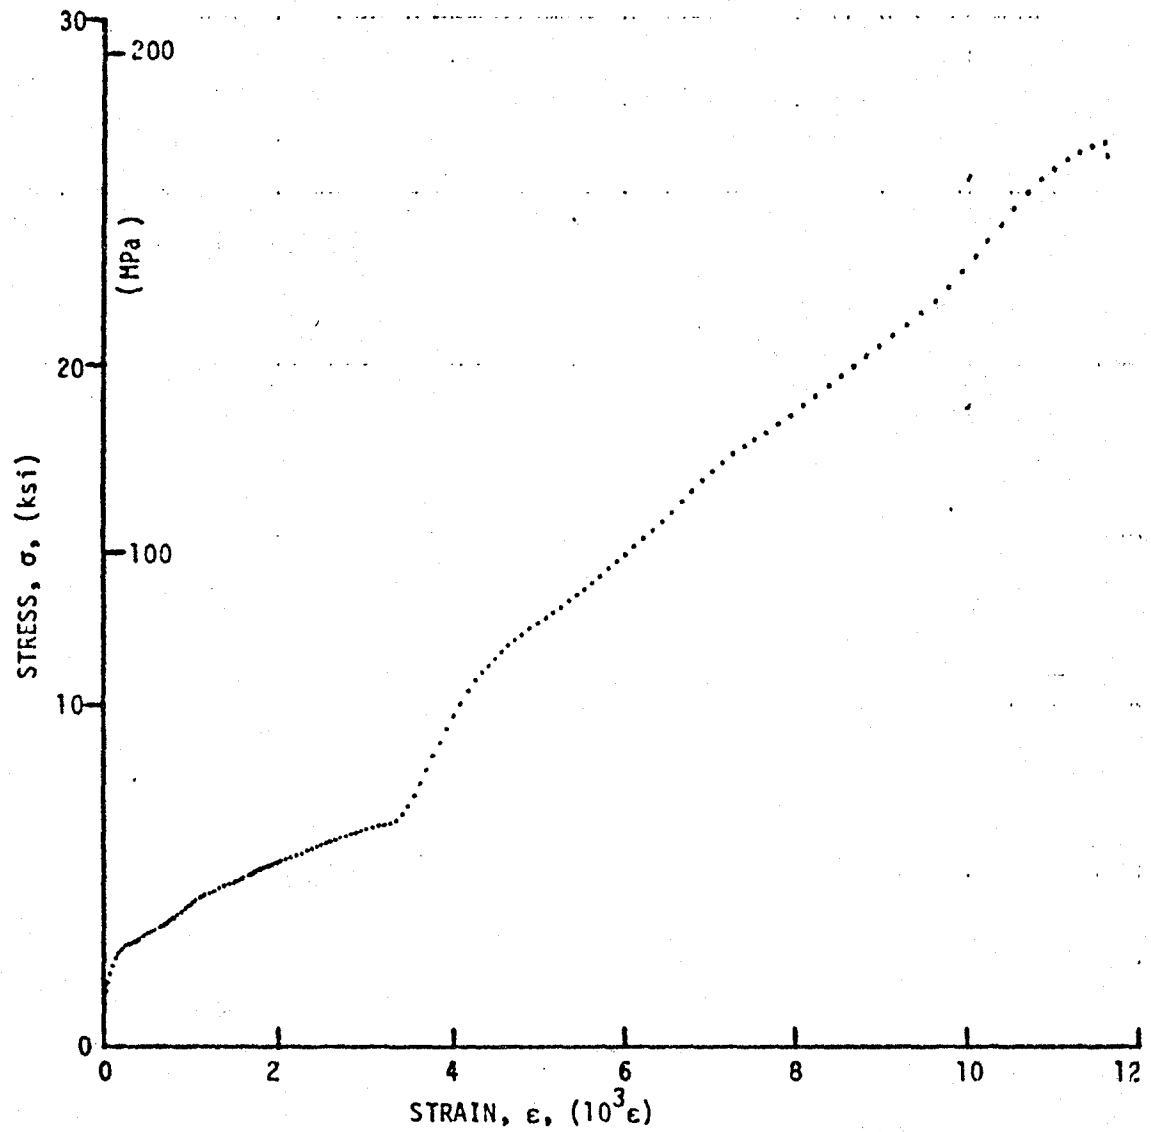


Figure 3-62. Stress-strain curve for dynamically loaded  $[\pm 60]_2^s$  80AS/20S/PR288 graphite/S-glass/epoxy ring, Specimen No. 23-7.

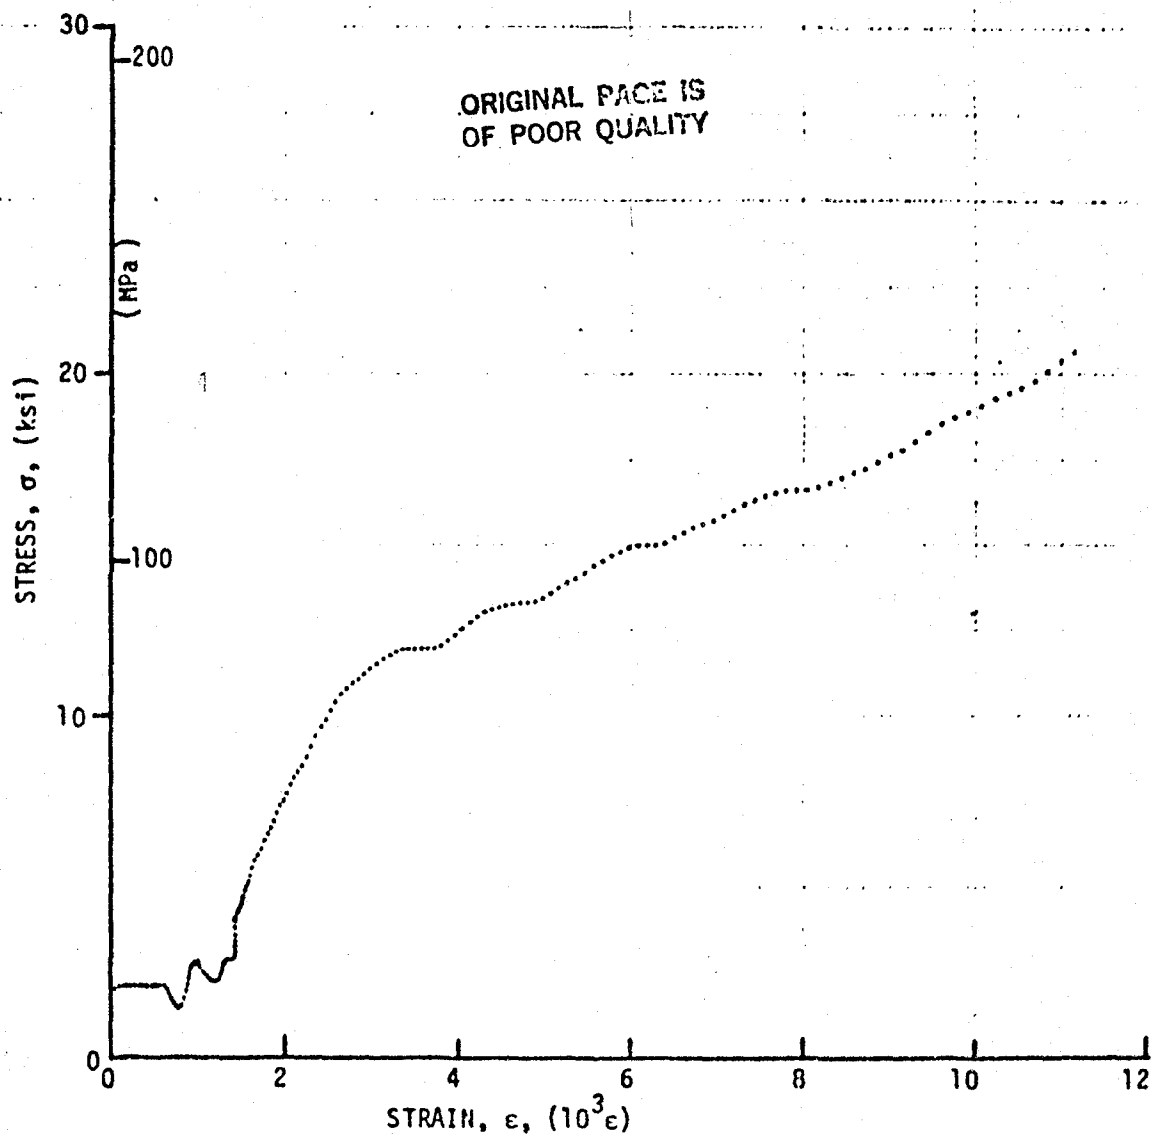


Figure 3-63. Stress-strain curve for dynamically loaded  $[\pm 60]_{2s}$  80AS/20S/PR288 graphite/S-glass/epoxy ring, Specimen No. 23-10.

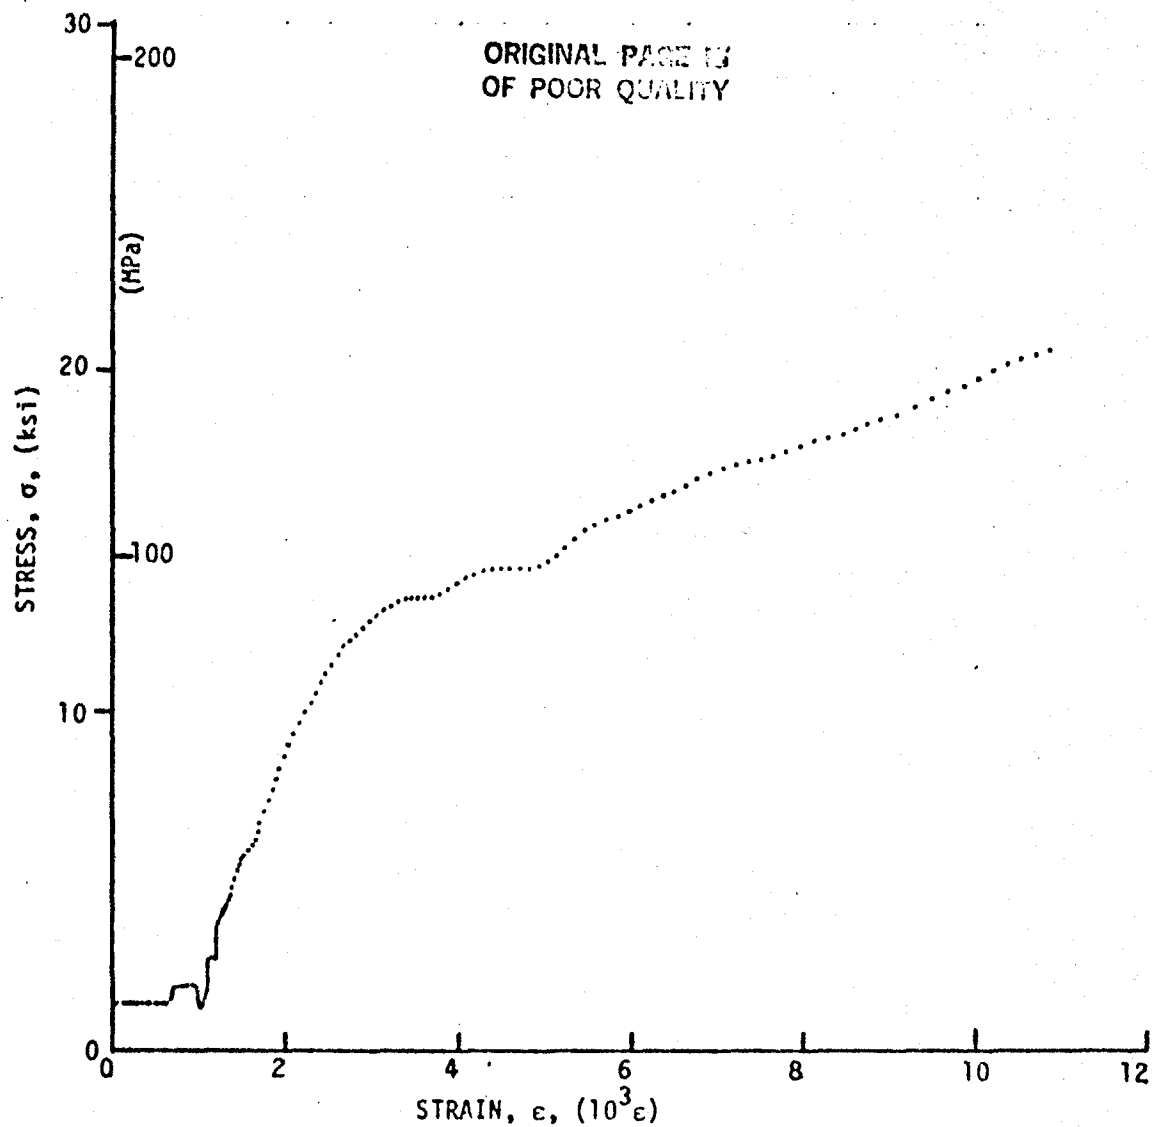


Figure 3-64. Stress-strain curve for dynamically loaded  $[\pm 60]_2^s$  80AS/20S/PR288 graphite/S-glass/epoxy ring, Specimen No. 23-11.

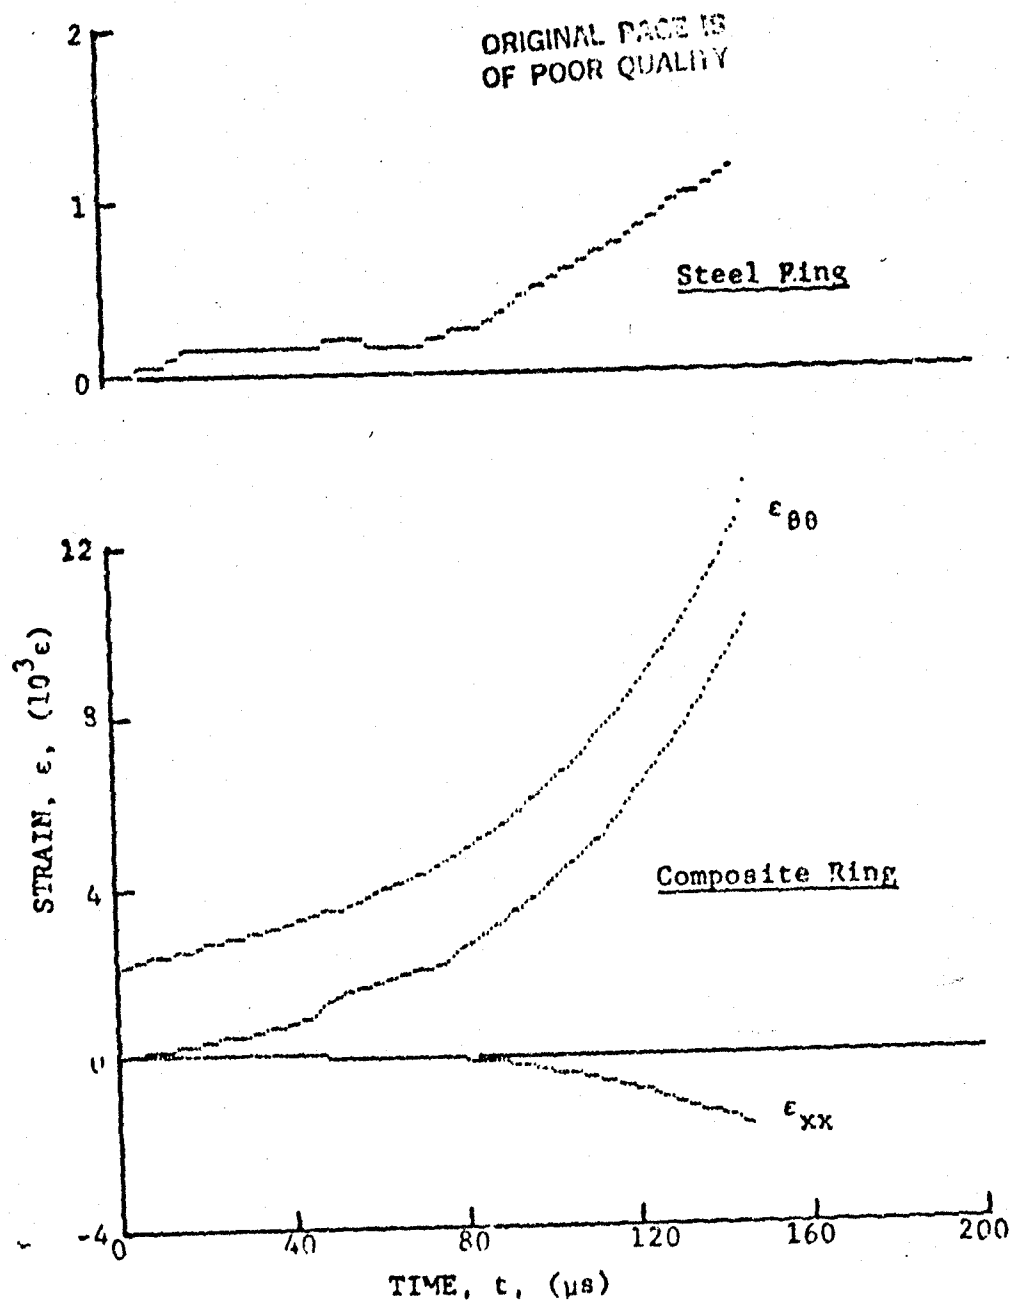


Figure 3-65. Strain records in steel ring and  $[\pm 67.5]_{2s}$  SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 26-10 (0.65 g shotgun powder).



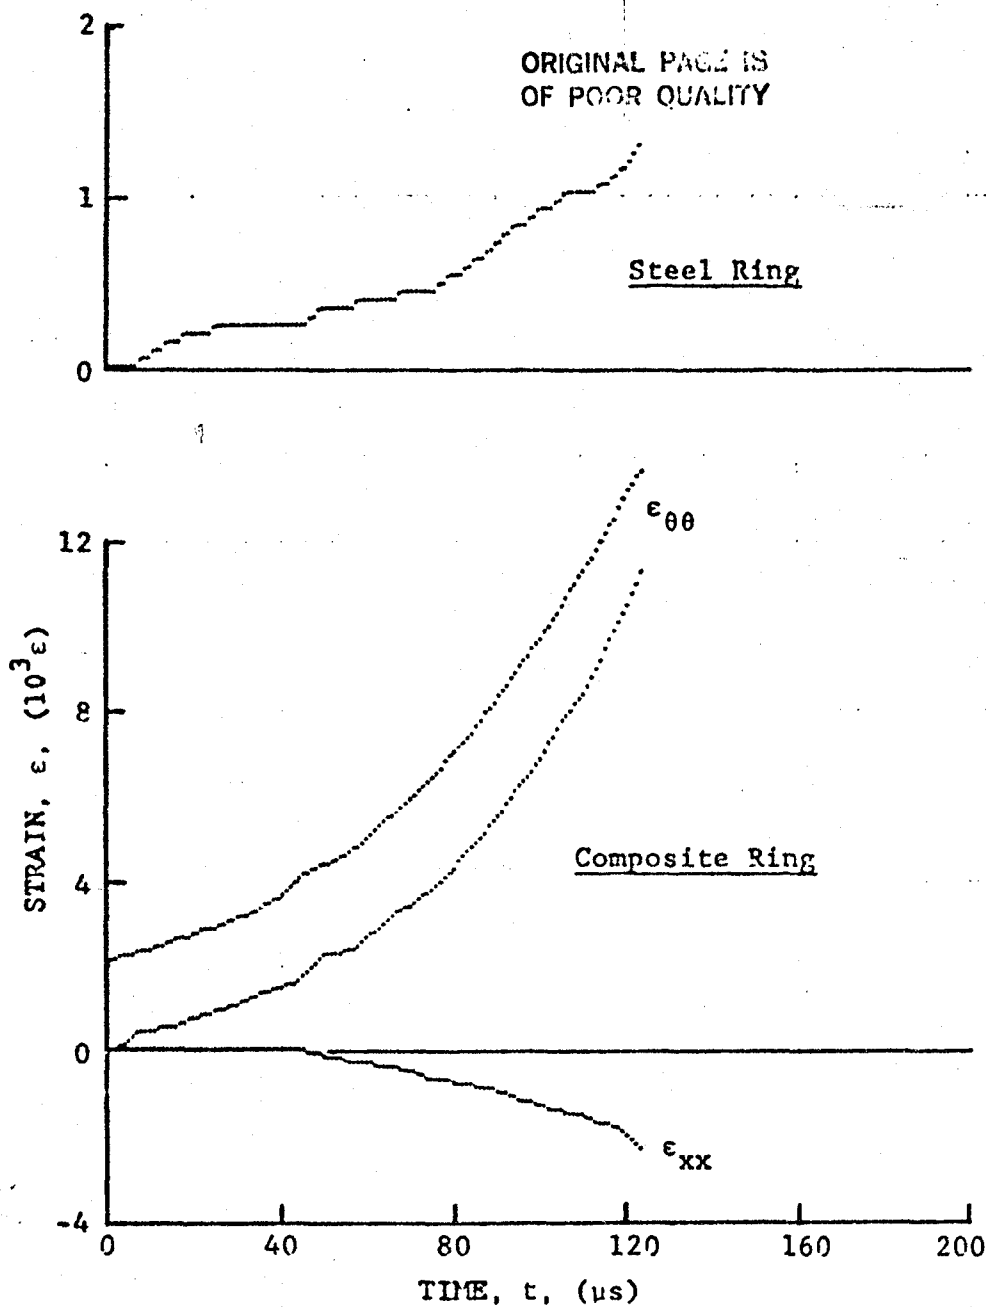


Figure 3-66. Strain records in steel ring and  $[\pm 67.5]_{2s}$  SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 26-11 (0.65 g shotgun powder).

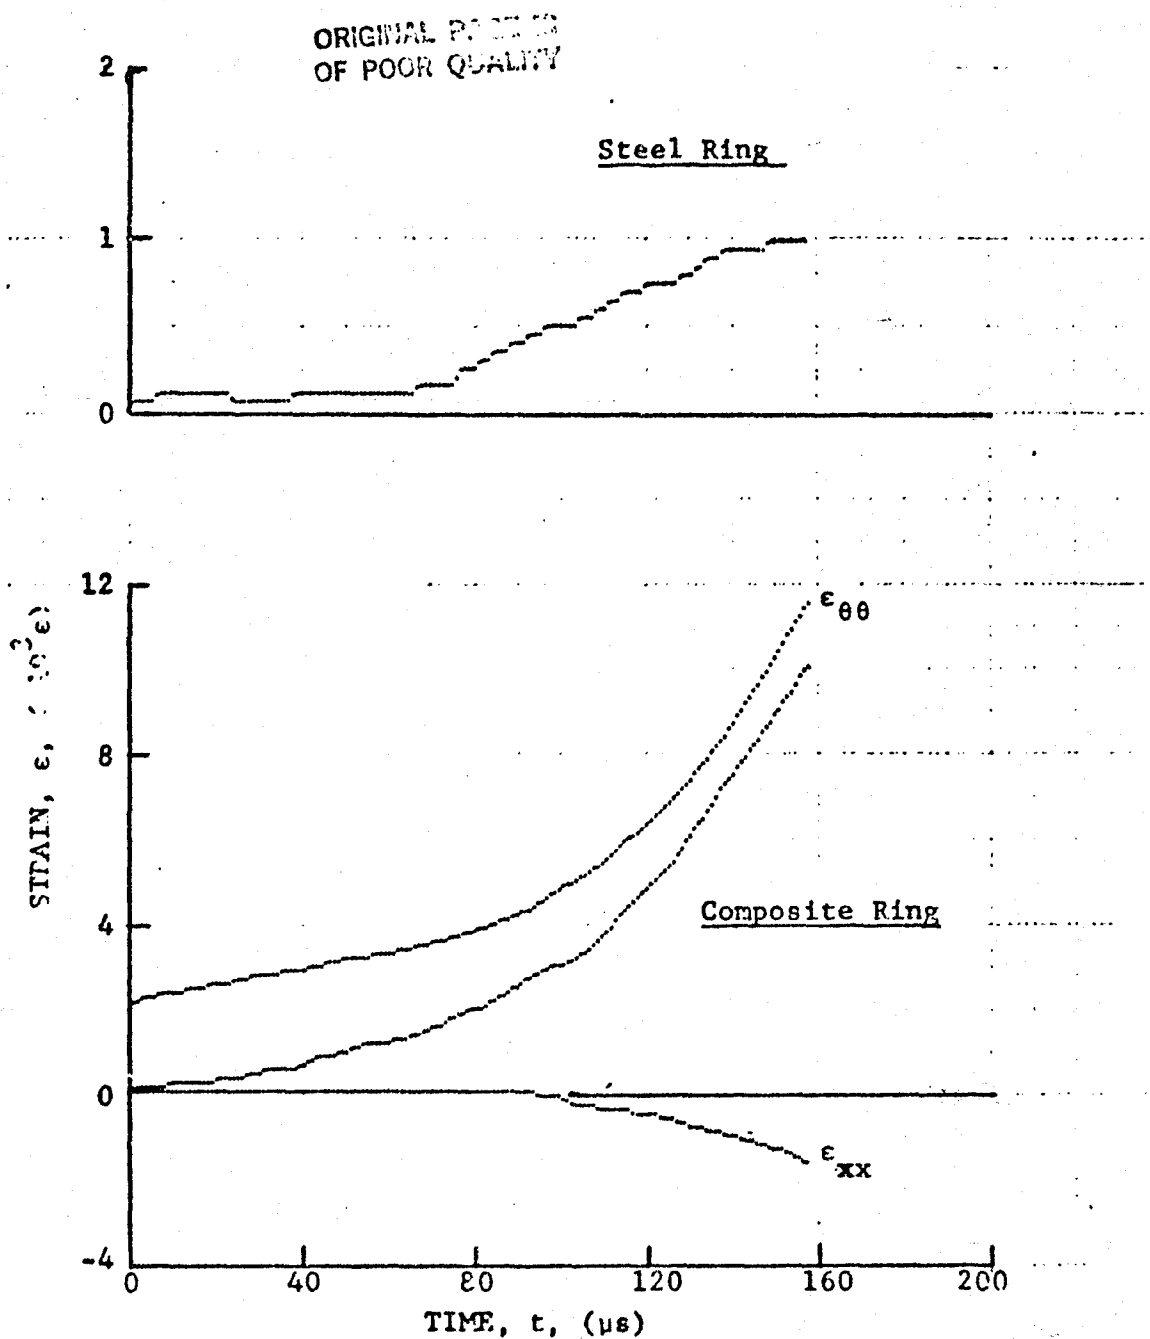


Figure 3-67. Strain records in steel ring and  $[\pm 67.5]_2$  SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 26-13 (0.65 g shotgun powder).

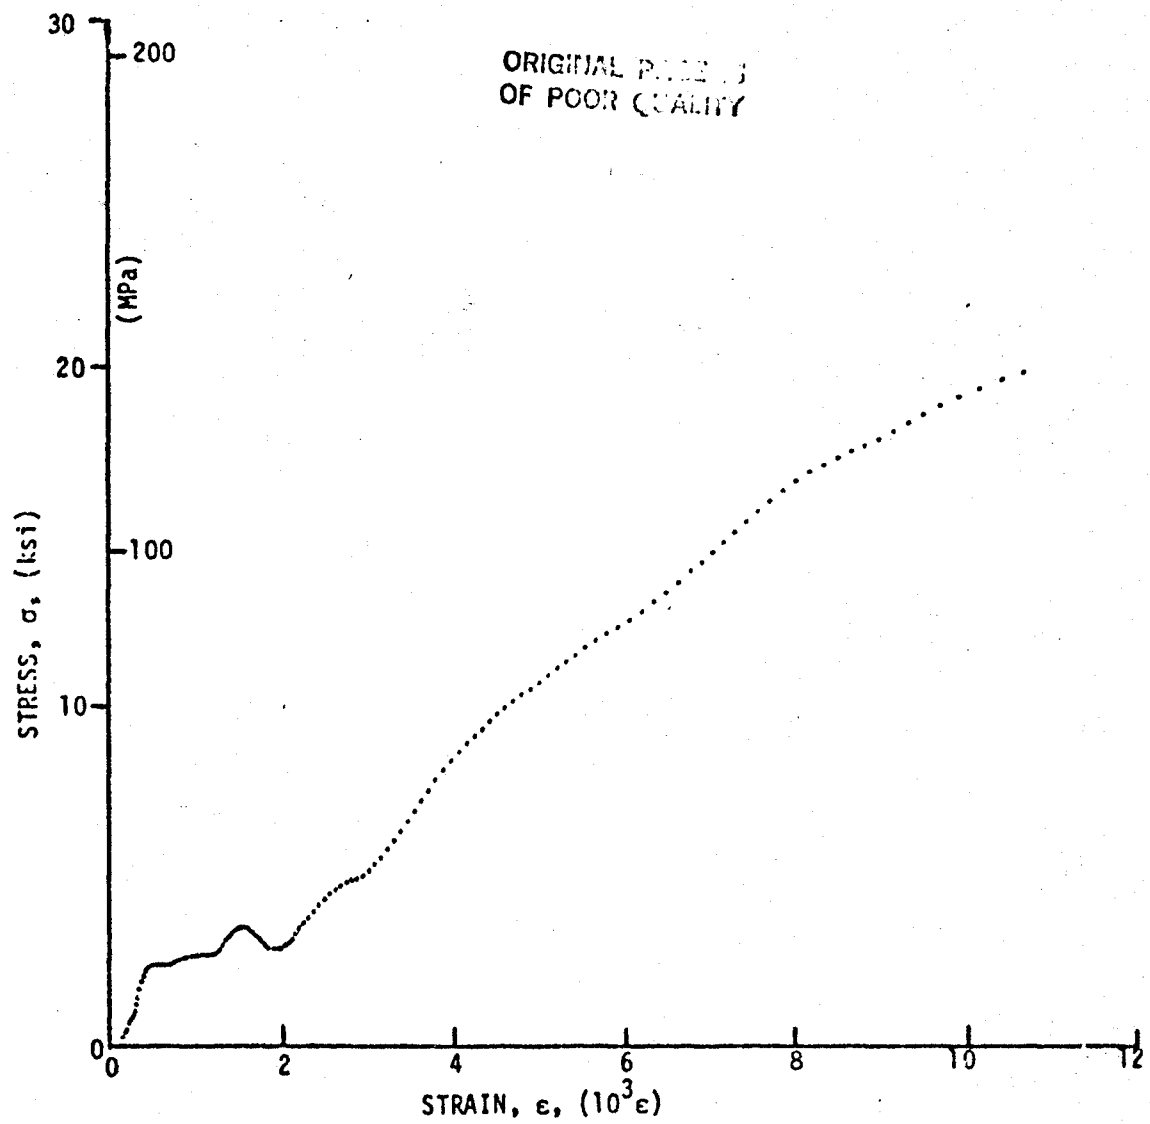


Figure 3-68. Stress-strain curve for dynamical loading; loaded  $[\pm 67.5]_{2s}$   
SP288/AS graphite/epoxy ring, Specimen No. 26-10.

ORIGINAL PAGE IS  
OF POOR QUALITY

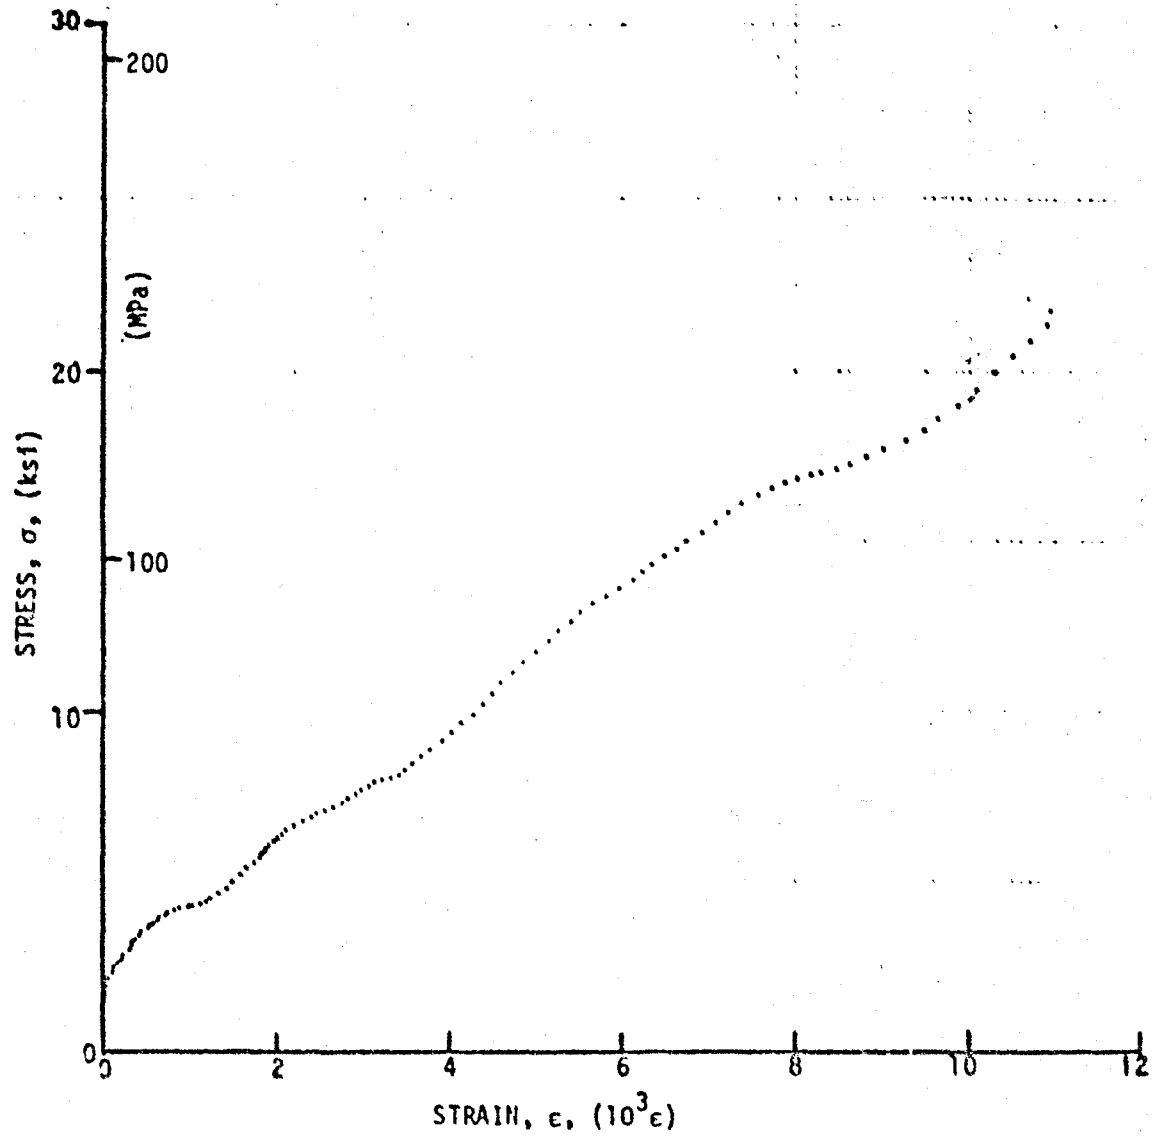


Figure 3-69. Stress-strain curve for dynamically loaded [±67.5]<sub>2s</sub> SP288/AS graphite/epoxy ring, Specimen No. 26-11.

ORIGINAL FIGURE 13  
OF POOR QUALITY

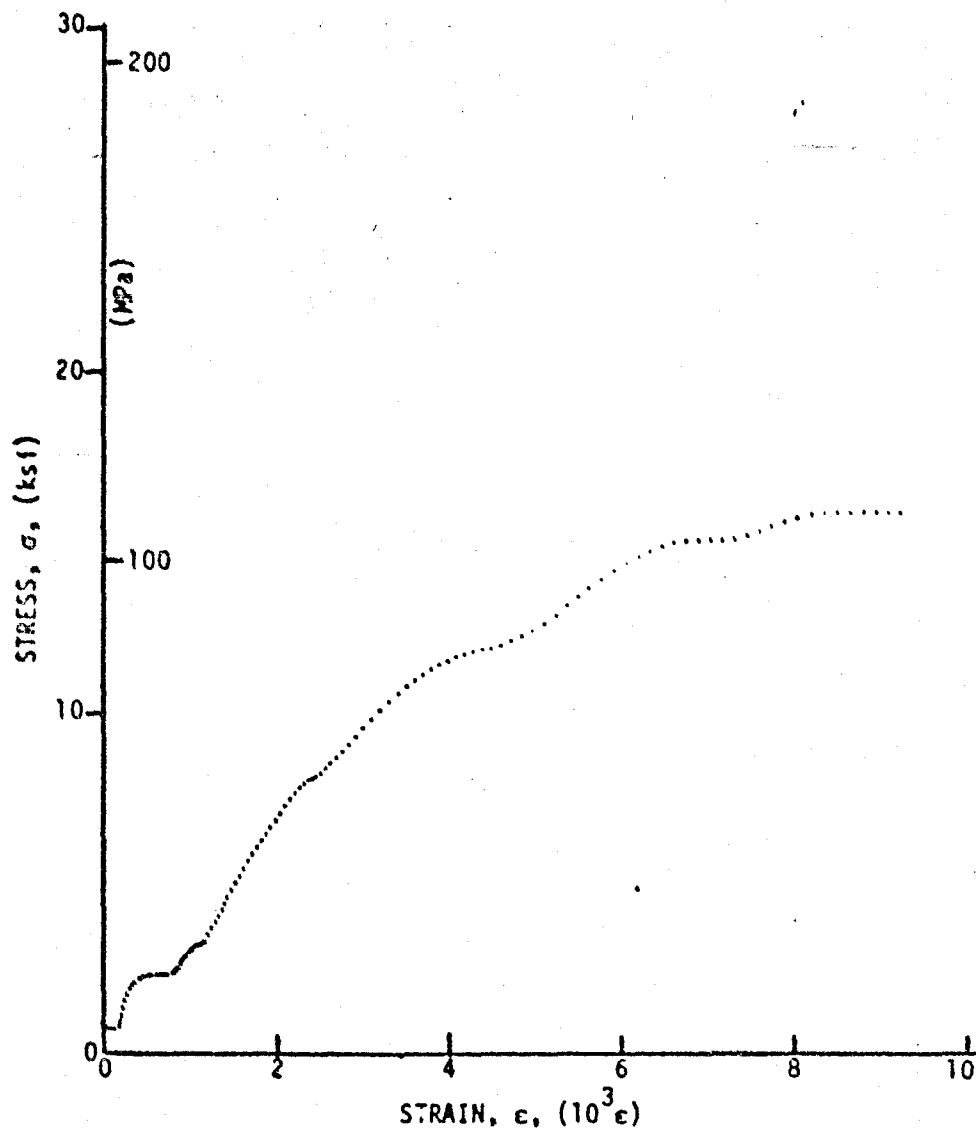


Figure 3-70. Stress-strain curve for dynamically loaded [±67.5]<sub>2s</sub> SP288/AS graphite/epoxy ring, Specimen No. 26-13.

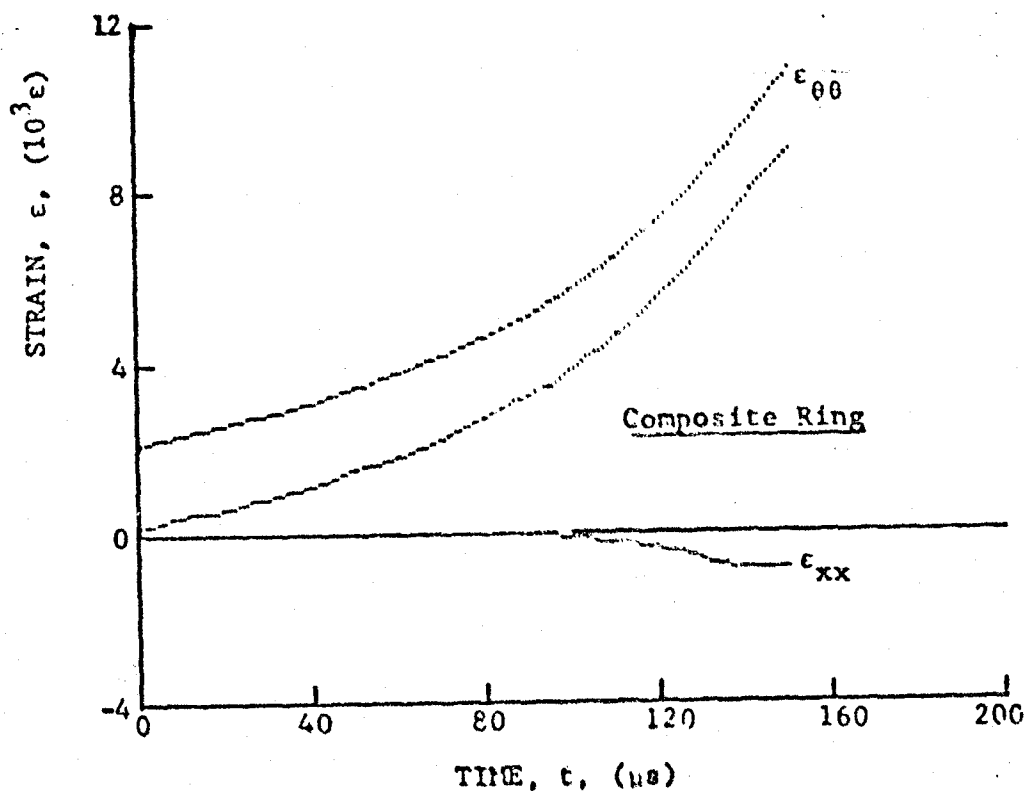
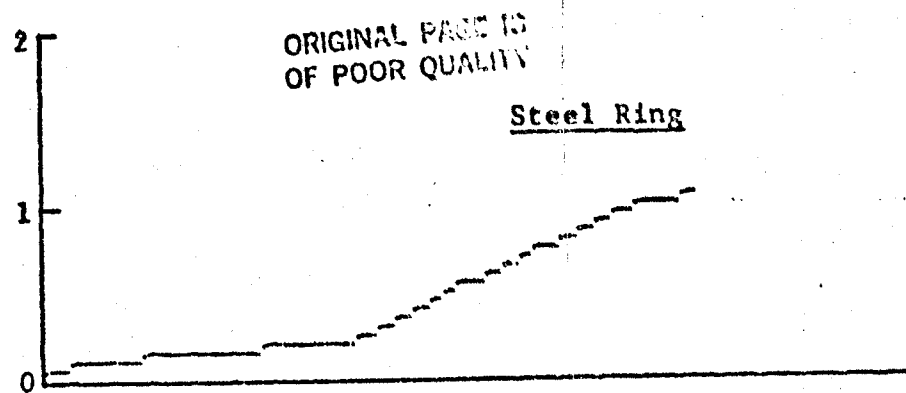


Figure 3-71. Strain records in steel ring and 80AS/20S/PR288  $[\pm 67.5]_{2s}$  graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 27-10 (0.65 g shotgun powder).

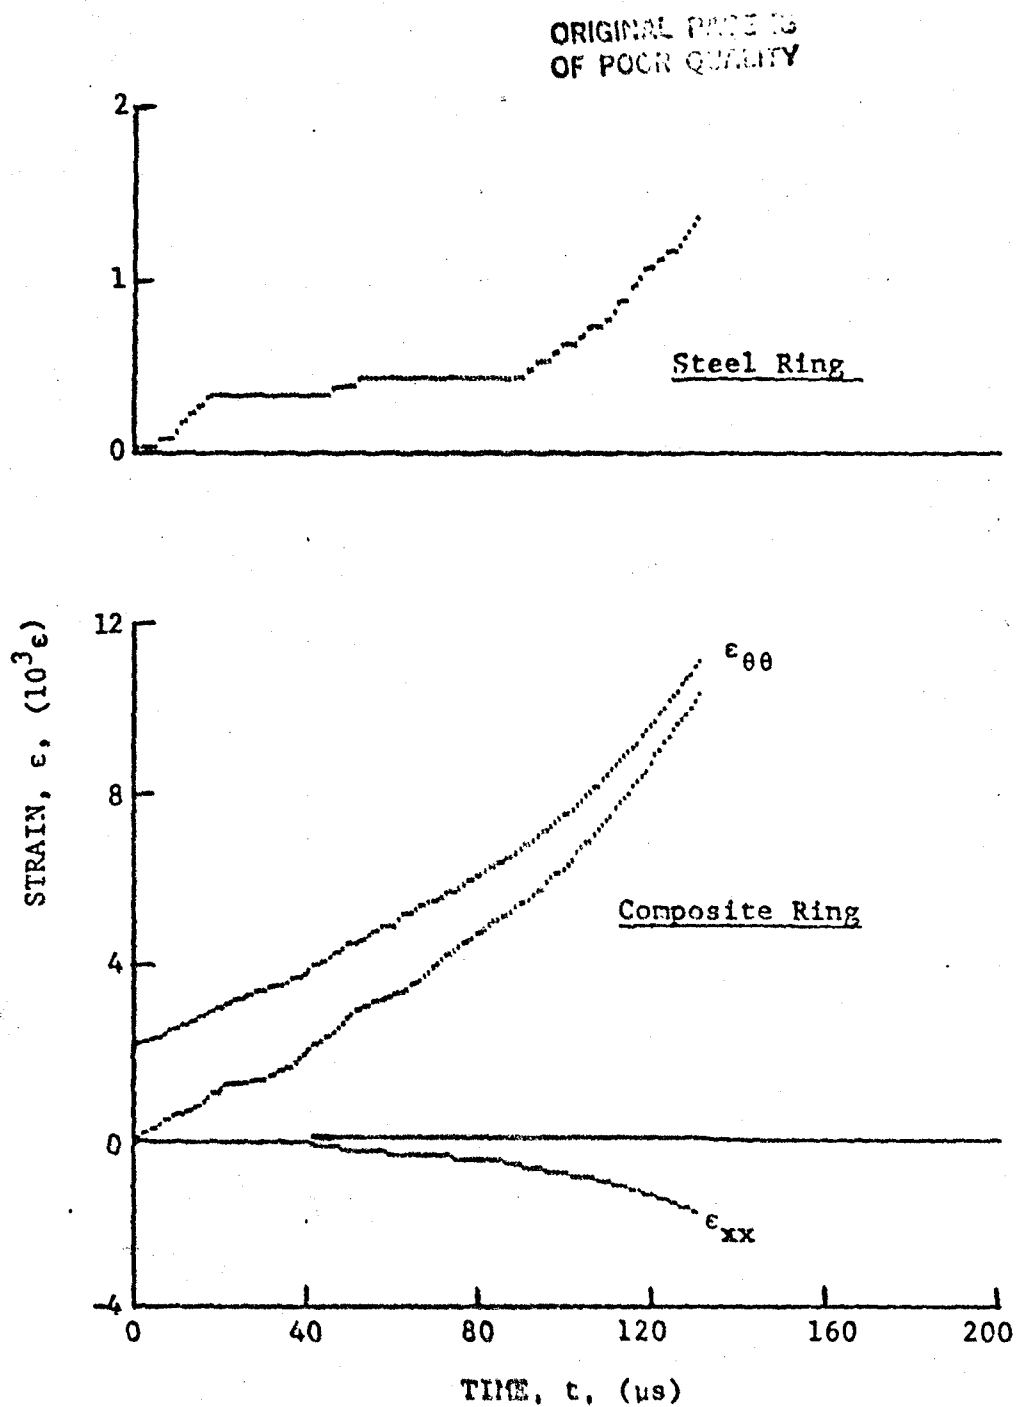


Figure 3-72. Strain records in steel ring and 80AS/20S/PR288  
[ $\pm 67.5$ ]<sub>25</sub> graphite/S-glass/epoxy ring under dynamic loading for  
Specimen No. 27-11 (0.65 g shotgun powder).

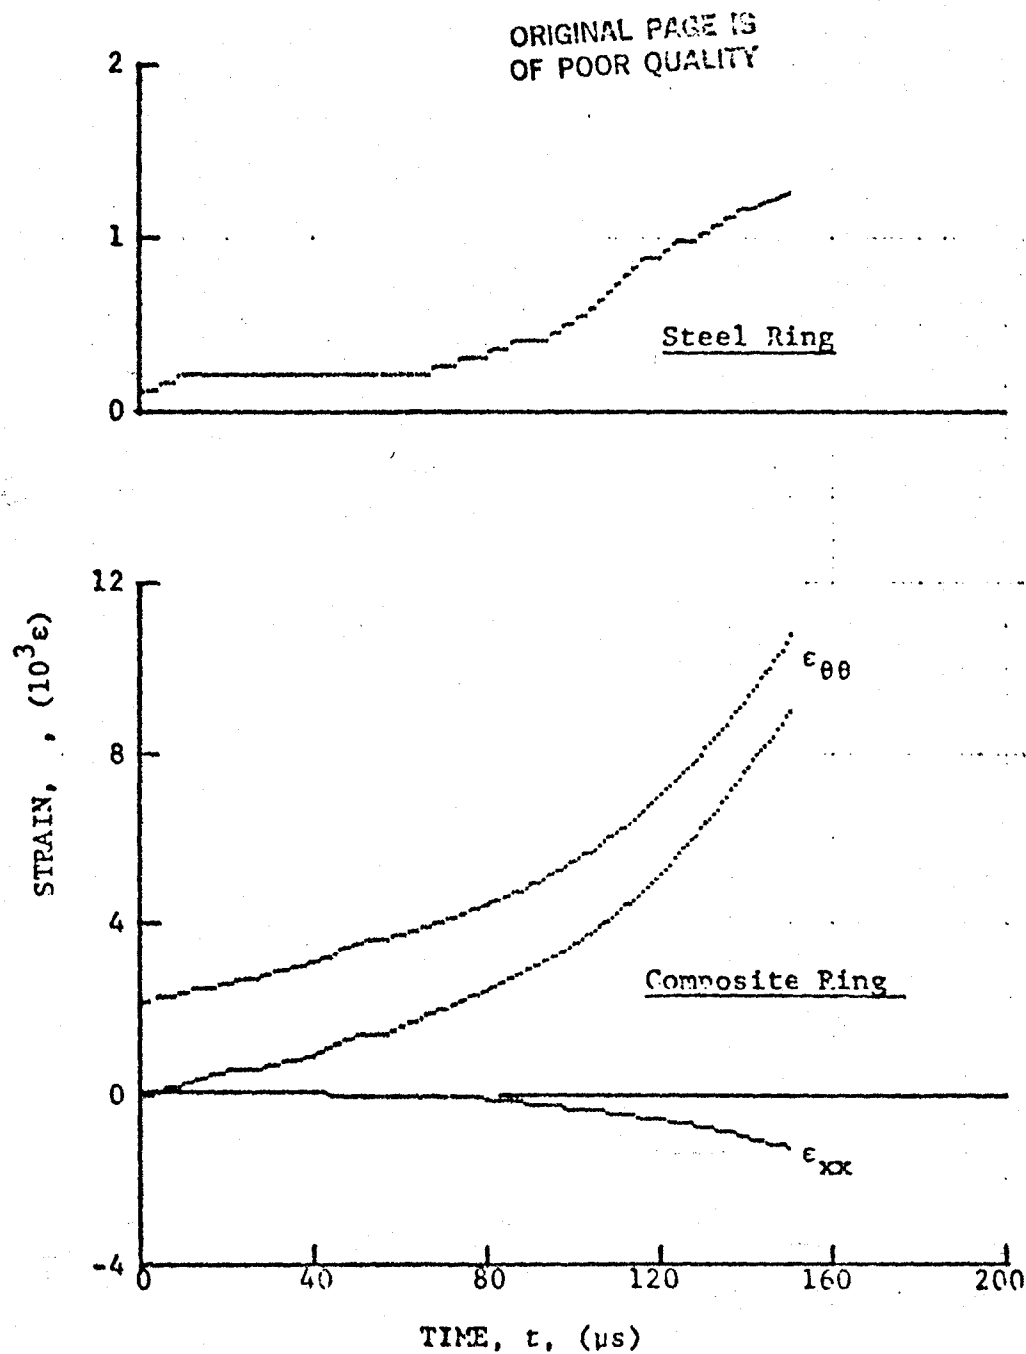


Figure 3-73. Strain records in steel ring and 80AS/20S/PR288  
[ $\pm 7.5$ ]<sub>25</sub> graphite/S-glass/epoxy ring under dynamic loading for  
Specimen No. 27-13 (0.65 g shotgun powder).



ORIGINAL PAGE IS  
OF POOR QUALITY

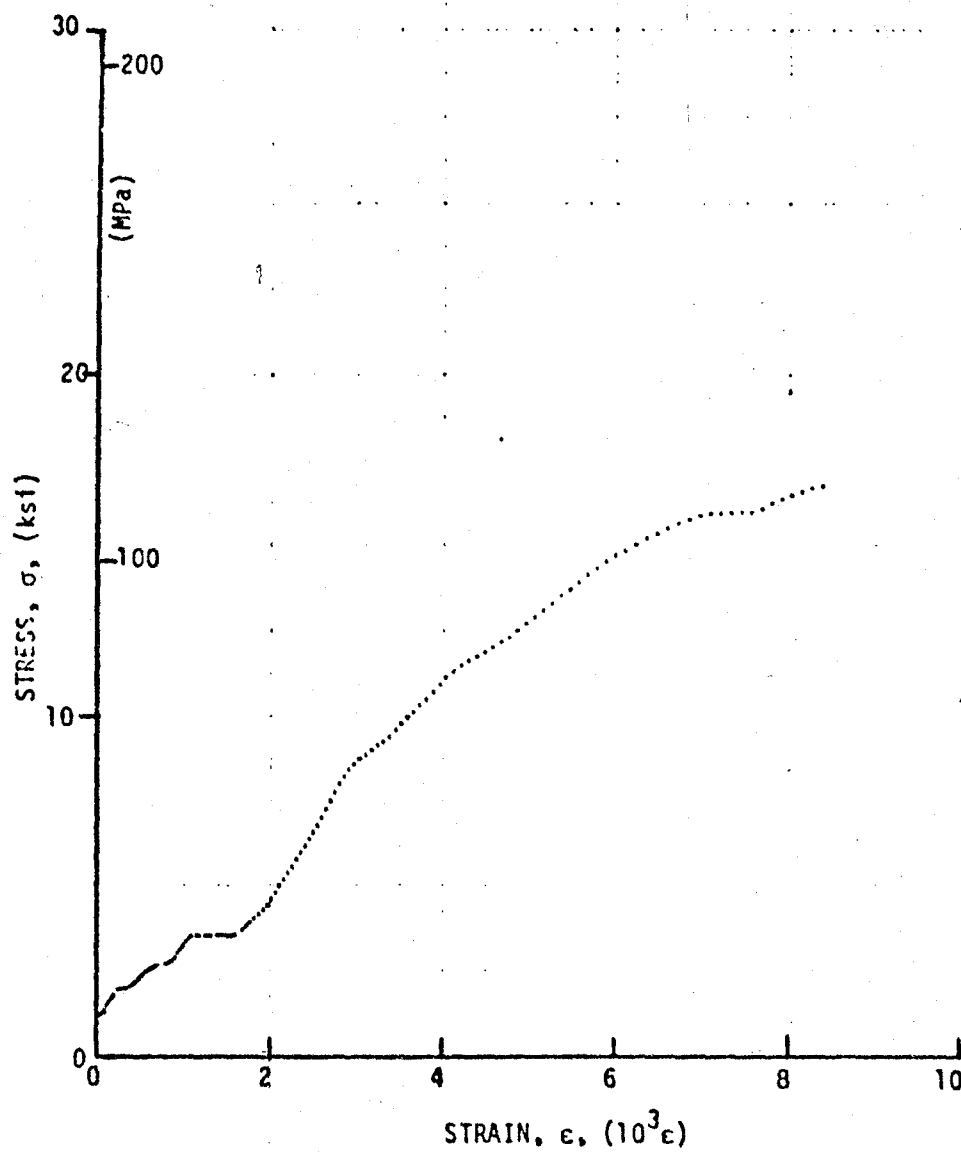


Figure 3-74. Stress-strain curve for dynamically loaded  $[\pm 67.5]_{2s}$  80AS/20S/PR288 graphite/S-glass/epoxy ring, Specimen No. 27-10.

ORIGINAL PAGE IS  
OF POOR QUALITY

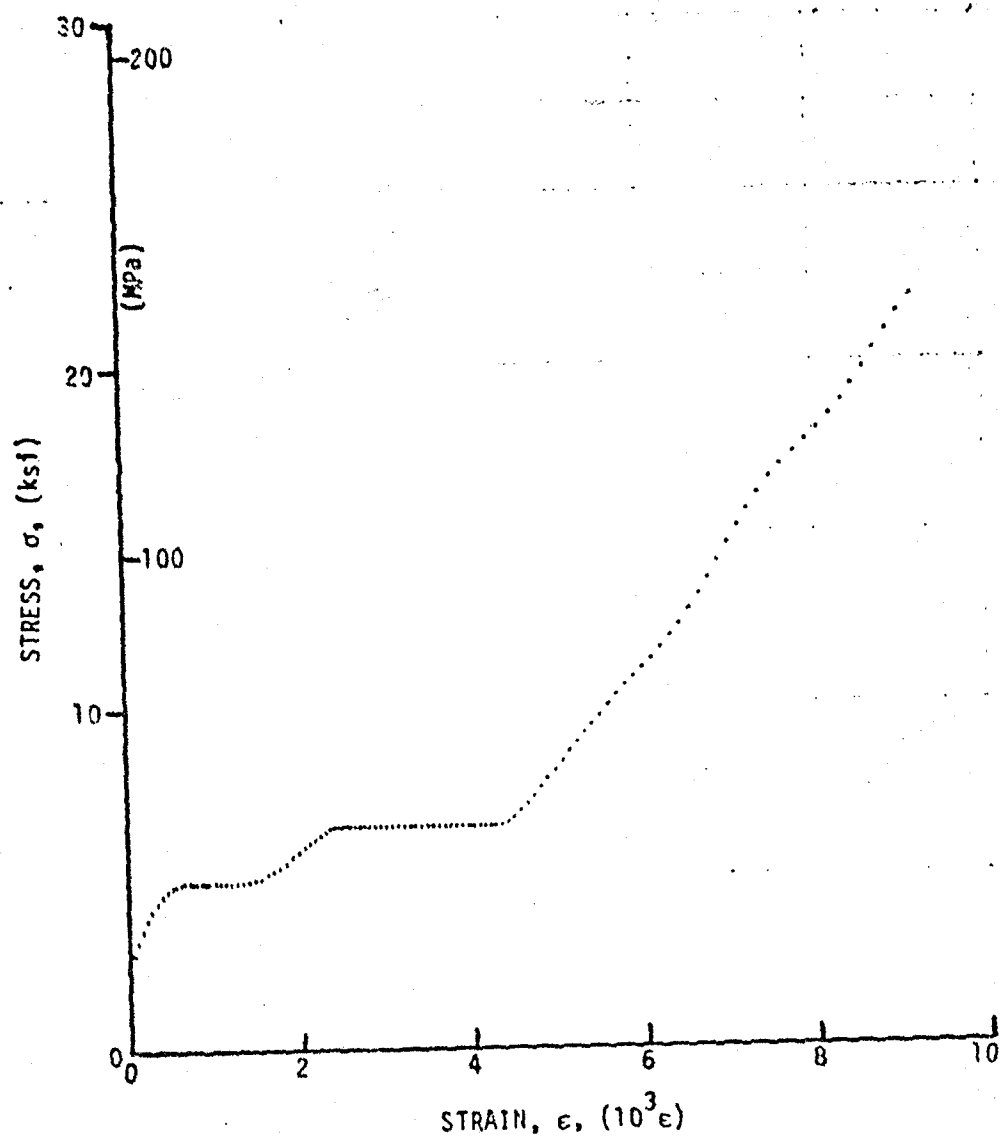


Figure 3-75. Stress-strain curve for dynamically loaded  $[\pm 67.5]_{2s}$   
80AS/20S/PR288 graphite/S-glass/epoxy ring, Specimen No. 27-11.2s

ORIGINAL PAGE 13  
OF POOR QUALITY

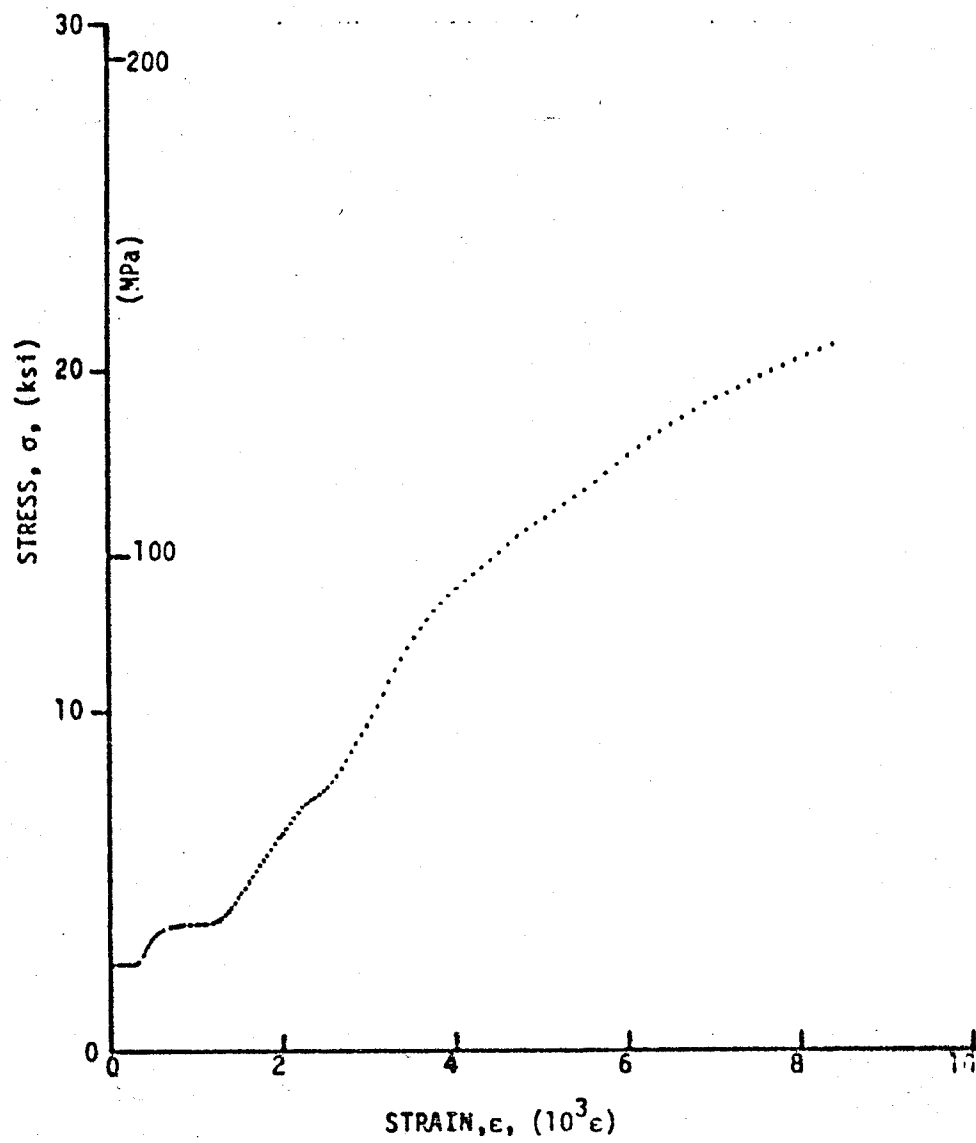


Figure 3-76. Stress-strain curve for dynamically loaded  $[\pm 67.5]_{2s}$  80AS/20S/PR288 graphite/S-glass/epoxy ring, Specimen No. 27-13.

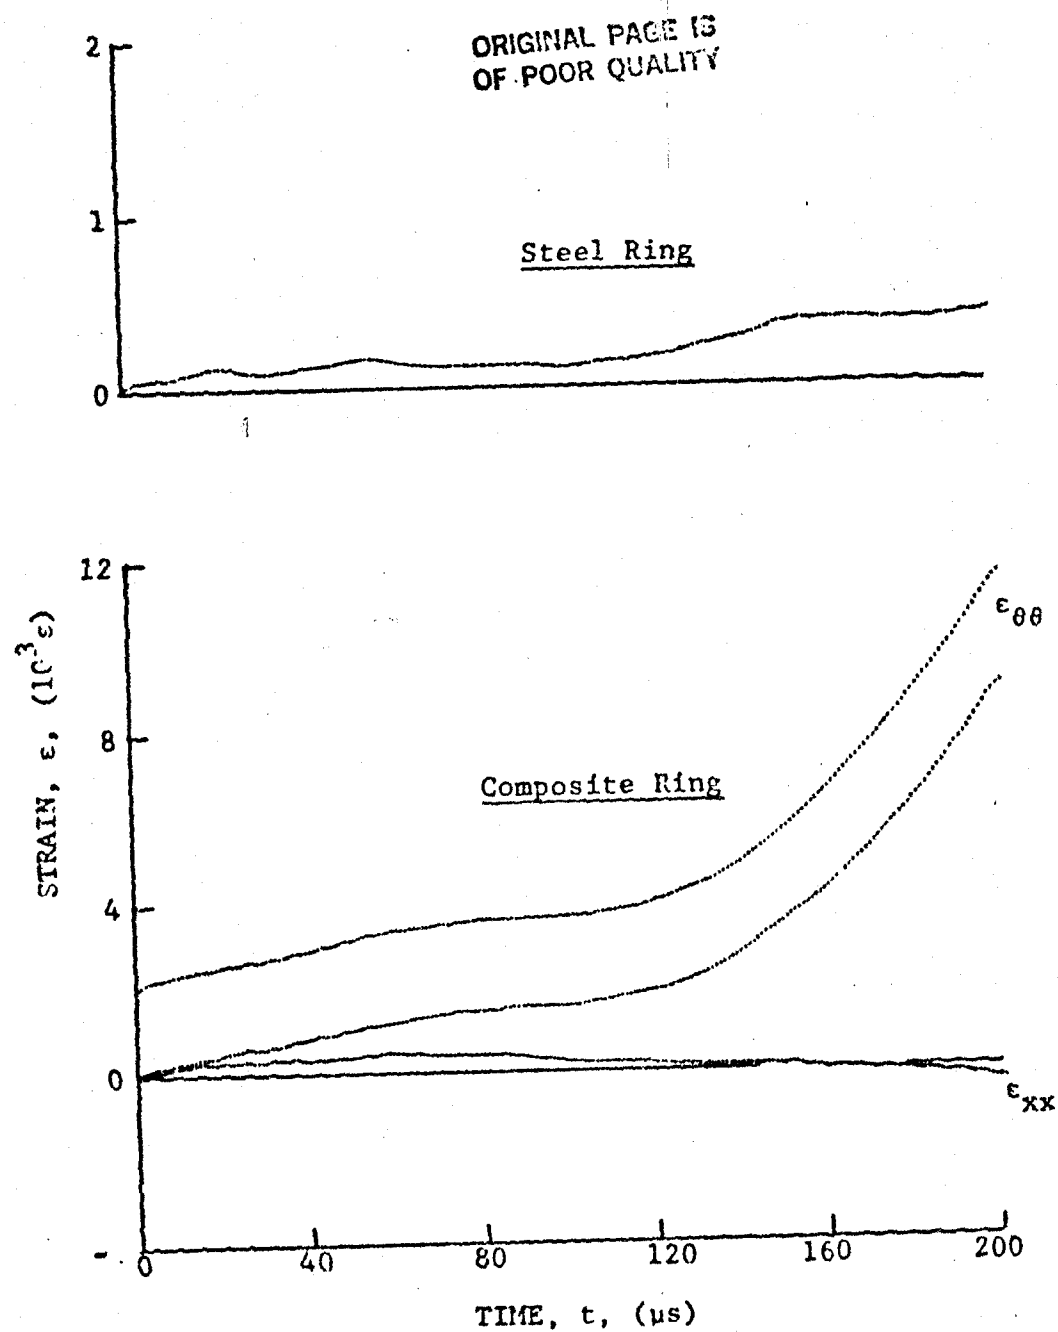


Figure 3-77. Strain records in steel ring and  $[\pm 75]_{2s}$  SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 29-12 (0.65 g shotgun powder).

ORIGINAL PAGE IS  
OF POOR QUALITY

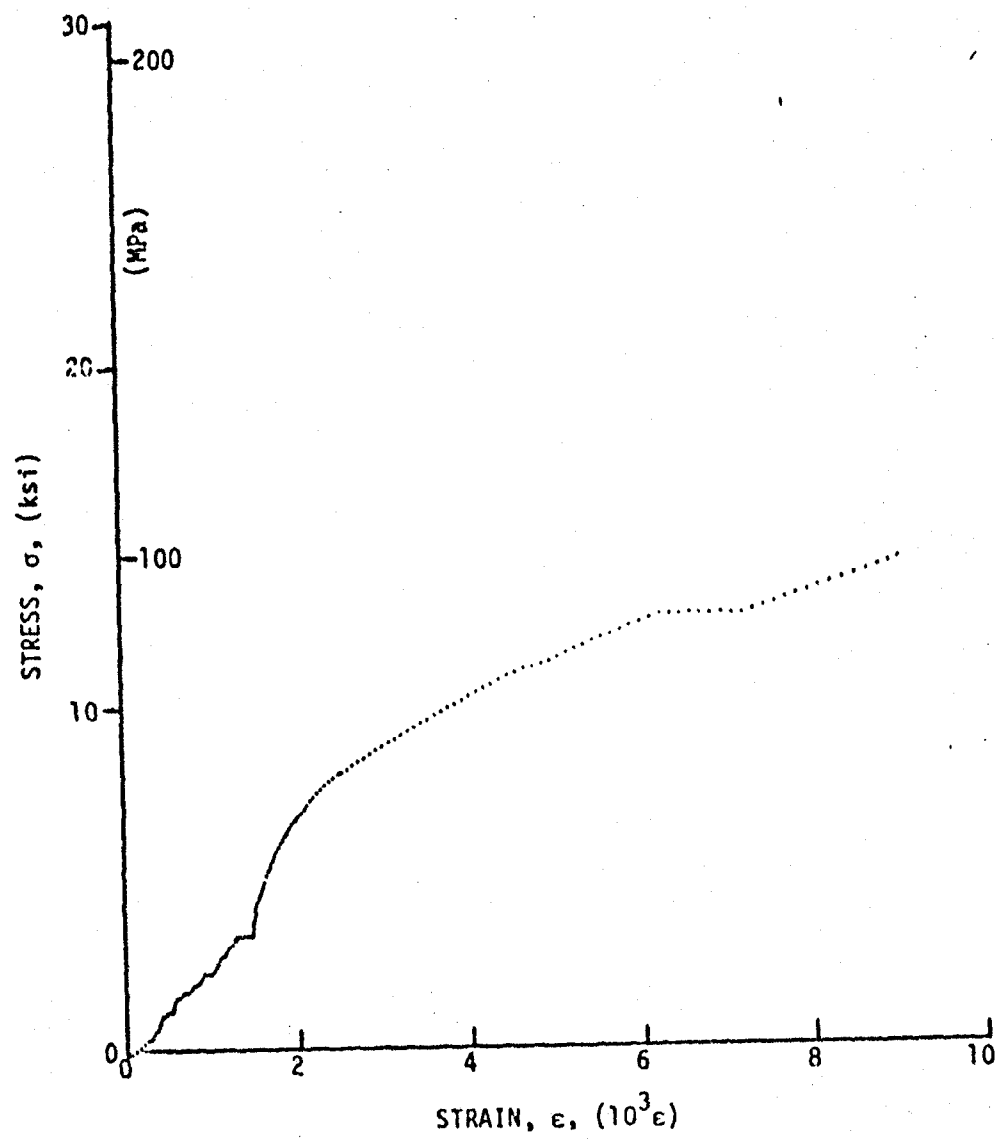


Figure 3-78. Stress-strain curve for dynamically loaded  $[\pm 75]_2$  graphite/epoxy ring, Specimen No. 20-12.

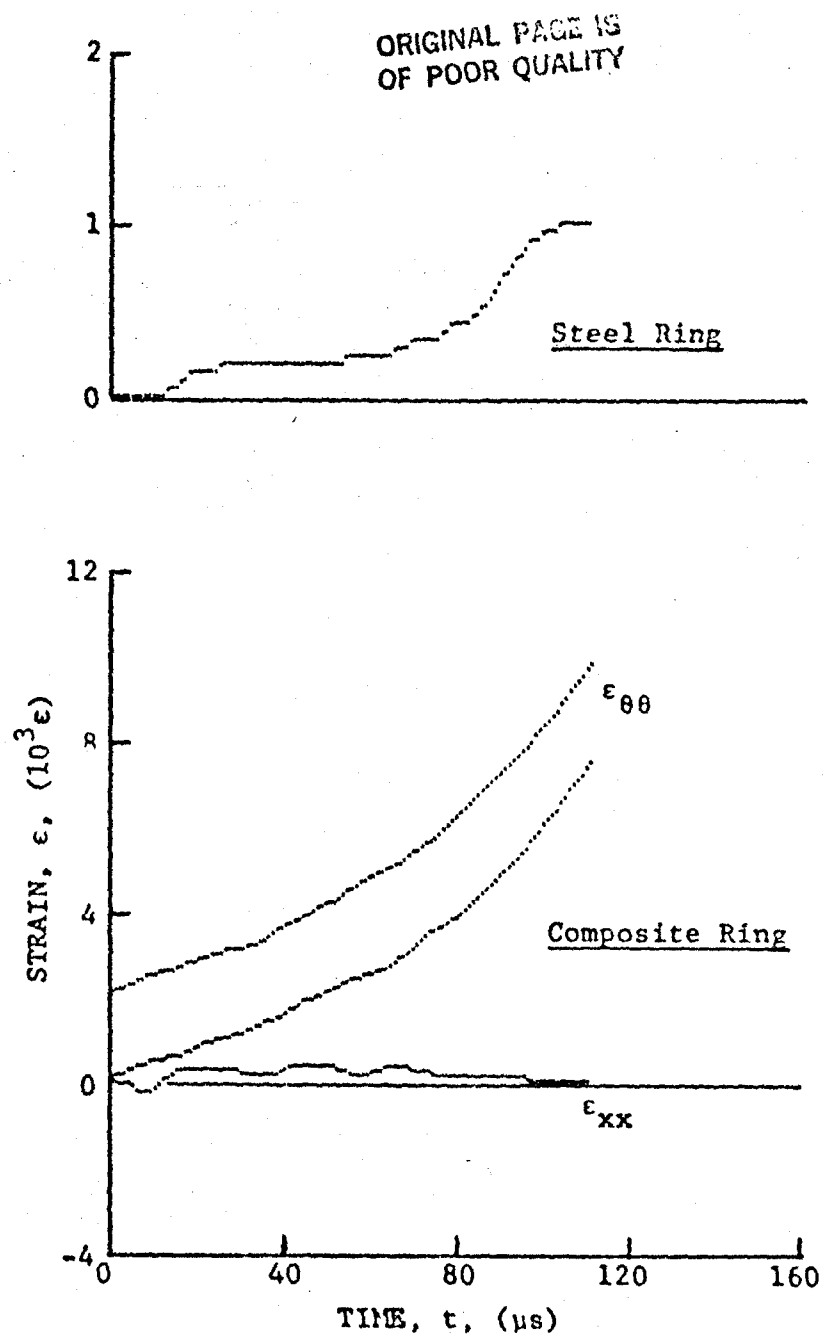


Figure 3-79. Strain records in steel ring and 80AS/20S/PR288 [ $\pm 75$ ]<sub>2s</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 21-10 (0.65 g shotgun powder).

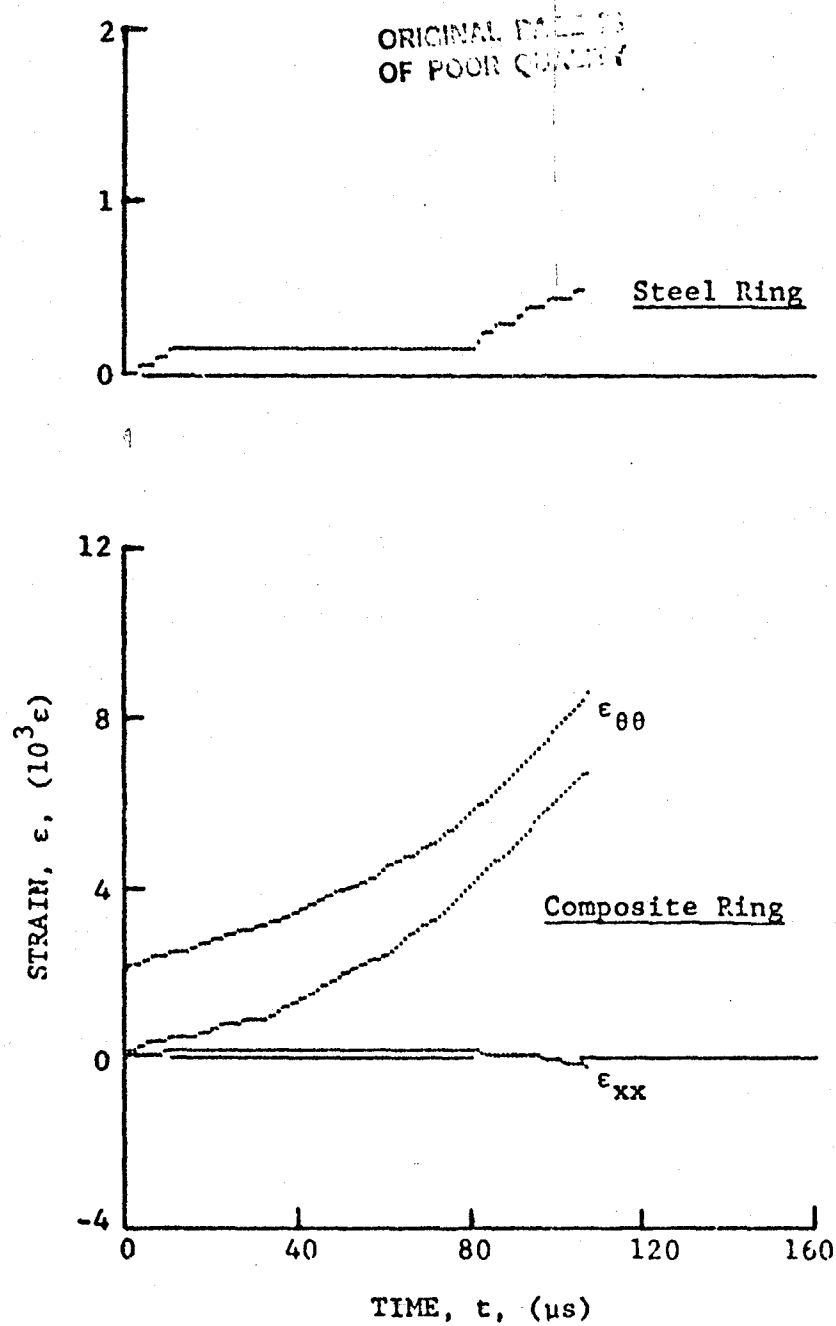


Figure 3-80. Strain records in steel ring and 80AS/20S/PR288  $[\pm 75]_2$ s graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 21-11 (0.65 g shotgun powder).

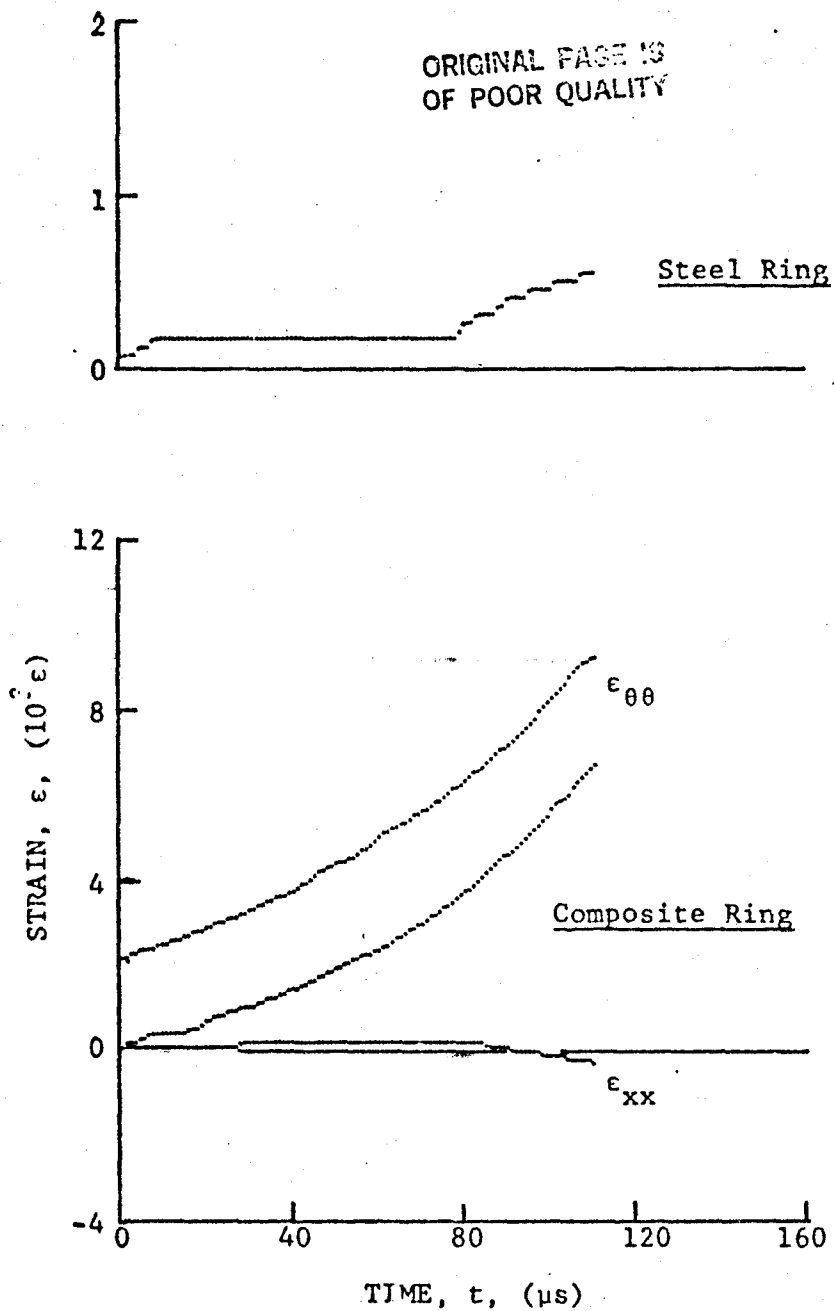


Figure 3-81. Strain records in steel ring and 80AS/20S/PR288  $[\pm 75]_{2s}$  graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 21-12 (0.65 g shotgun powder).



ORIGINAL PAGE IS  
OF POOR QUALITY

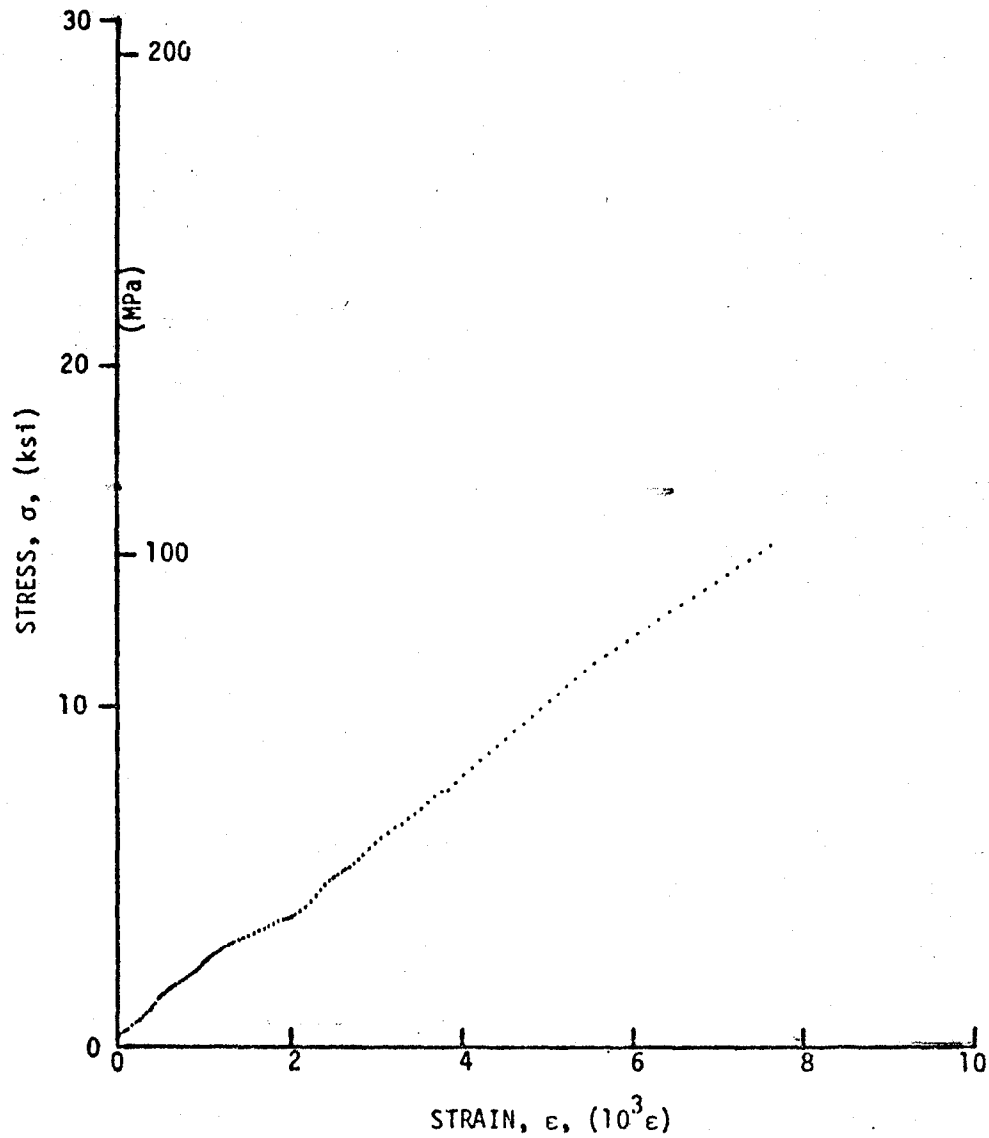


Figure 3-82. Stress-strain curve for dynamically loaded  $[\pm 75]_2s$  80AS/20S/PR288 graphite/S-glass/epoxy ring, Specimen No. 21-10.

ORIGINAL PROBLEM  
OF POOR QUALITY

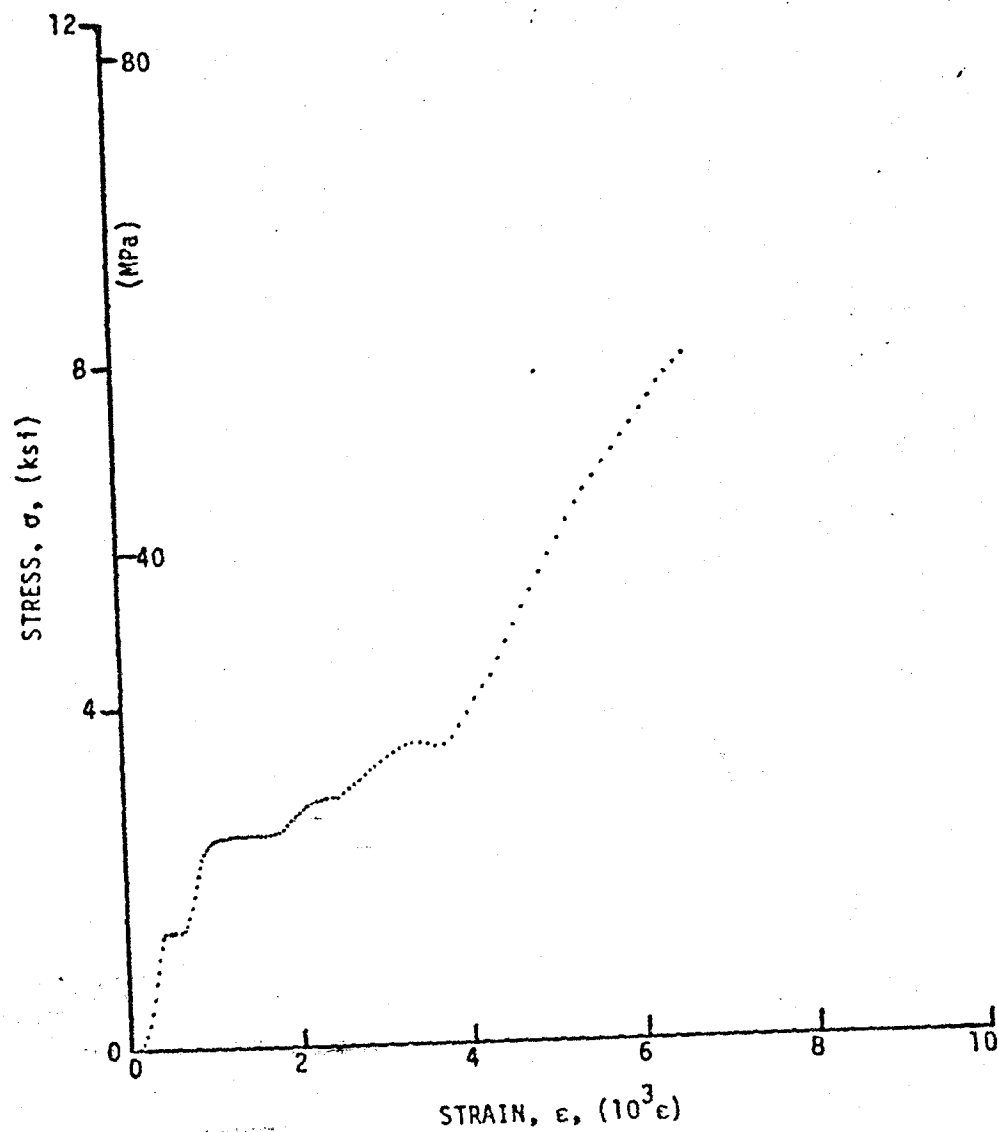


Figure 3-83. Stress-strain curve for dynamically loaded  $[\pm 75]_{2s}$  80AS/20S/PR288 graphite/S-glass/epoxy ring, Specimen No. 21-11.

ORIGINAL  
OF POOR QUALITY

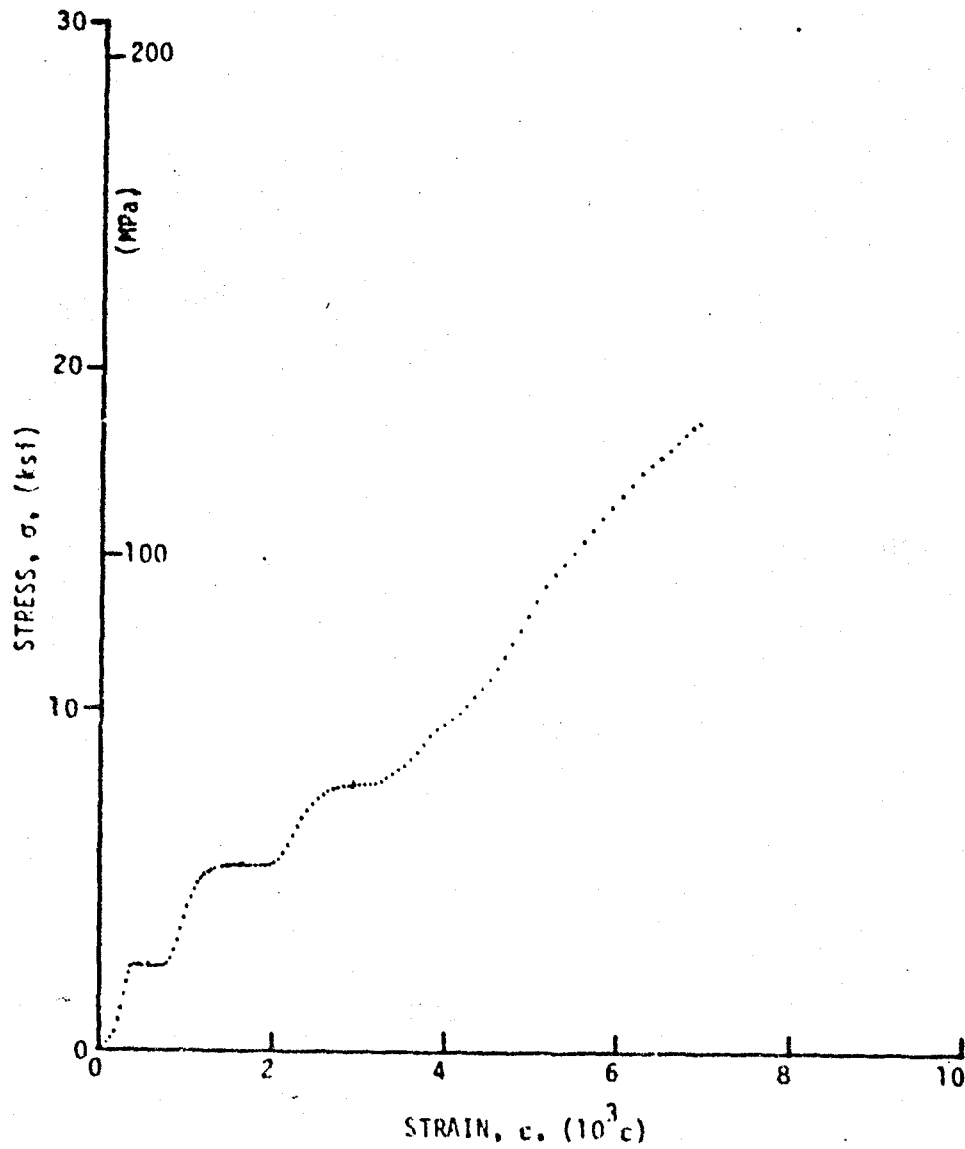


Figure 3-84. Stress-strain curve for dynamically loaded  $[\pm 75]_{2s}$  80AS/20S/PR288 graphite/S-glass/epoxy ring, Specimen No. 21-12.

#### 4. HIGH STRAIN RATE TENSILE PROPERTIES OF ANGLE-PLY LAMINATES

##### 4.1 $[\pm 15]_{2S}$ LAMINATES

High strain rate tensile properties of  $[\pm 15]_{2S}$  SP288/AS graphite/epoxy and 80AS/20S/PR288 graphite/S-glass/epoxy were obtained by testing rings under dynamic internal pressure. Three rings of each material were loaded dynamically using 100 mg PETN detonators in the pressure chamber of the fixture. The circumferential and axial strains in the composite ring and the circumferential strain in the calibration steel ring were recorded in every case.

Strain and strain derivative records for the three graphite/epoxy rings tested are shown in Figures 4-1 through 4-9 (Specimen Nos. 35-2, 35-4, and 35-6). These data were analyzed following procedures described in Part I of this report. Dynamic stress-strain curves obtained by the digital processing oscilloscope are shown in Figures 4-10, 4-11, and 4-12. Results for the three rings tested are tabulated in Table 4-1. The initial strain rates range between  $130s^{-1}$  and  $250s^{-1}$  and the average (secant) rates between  $175s^{-1}$  and  $254s^{-1}$ . The times to failure range between 35  $\mu s$  and 44  $\mu s$ . The initial and secant moduli of 113.2 GPa ( $16.4 \times 10^6$  psi) and 117.8 GPa ( $17.1 \times 10^6$  psi), respectively, are higher than the static modulus of 104.5 GPa ( $15.2 \times 10^6$  psi) by 8% and 12%, respectively. The overall average Poisson's ratio of 0.80 is lower than the static value of 0.86. The average dynamic strength of 1029 MPa (149 ksi) is higher than the static strength of 823 MPa (119.3 ksi) by 25%. The increase in dynamic strength is higher than the increase in dynamic modulus. The average dynamic ultimate strain of 0.0088 is higher than the static value of 0.0078. This trend in properties is related to some change in failure modes from those under quasi-static to those under dynamic loading conditions. Quasi-static failure modes include pronounced interlaminar shear failures. Under dynamic conditions, with the higher rate-dependent, matrix-dominated interlaminar shear properties, there is more brittle-like behavior with failures dominated primarily by fiber fractures.

TABLE 4-1. HIGH STRAIN RATE TENSILE PROPERTIES OF  $[\pm 15]_{2s}$   
SP288/AS GRAPHITE/EPOXY

Specimen Number	Strain Rate ( $\dot{\epsilon}_{\theta\theta}$ ), $s^{-1}$	Modulus ( $E_{\theta\theta}$ ), GPa ( $10^6$ psi)	Poisson's Ratio ( $\nu_{\theta x}$ )
<u>Initial Properties</u>			
35-2	250	104.9 (15.2)	0.63
35-4	190	116.6 (16.9)	0.92
35-6	130	118.0 (17.1)	0.73
<u>Secant Properties</u>			
35-2	243	110.4 (16.0)	0.61
35-4	254	109.0 (15.8)	0.89
35-6	175	133.9 (19.4)	1.02
<u>Terminal Properties</u>			
35-2	270	117.3 (17.0)	0.71
35-4	300	104.2 (15.1)	-
35-6	250	113.9 (16.5)	-
<u>Ultimate Properties</u>			
	Time to Failure ( $t_f$ ), $\mu s$	Strength ( $S_{\theta\theta T}$ ), MPa (ksi)	Strain ( $\epsilon_{\theta\theta T}^u$ )
35-2	40	1080 (156)	0.0097
35-4	35	973 (141)	0.0089
35-6	44	1035 (150)	0.0077

Strain and strain derivative records for the three hybrid rings are shown in Figures 4-13 through 4-21 (Specimen Nos. 36-2, 36-4, and 36-7). Dynamic stress-strain curves are shown in Figures 4-22, 4-23, and 4-24. Results for the three rings tested are tabulated in Table 4-2. The initial strain rates range between  $125\text{s}^{-1}$  and  $150\text{s}^{-1}$  and the average (secant) rates between  $173\text{s}^{-1}$  and  $210\text{s}^{-1}$ . The times to failure range between  $40\text{ }\mu\text{s}$  and  $45\text{ }\mu\text{s}$ . The initial and secant moduli of  $133.2\text{ GPa}$  ( $19.3 \times 10^6\text{ psi}$ ) and  $101.2\text{ GPa}$  ( $14.7 \times 10^6\text{ psi}$ ), respectively, are higher than the static modulus of  $94.5\text{ GPa}$  ( $13.7 \times 10^6\text{ psi}$ ) by 41% and 7%, respectively. The average Poisson's ratio of 0.90 is higher than the static value of 0.68. The dynamic strength of  $837\text{ MPa}$  (121 ksi) is only slightly higher than the static one of  $806\text{ MPa}$  (117 ksi). This trend is contrary to the one observed in the graphite/epoxy specimens. The dynamic ultimate strain of 0.0083 is approximately equal to the static value of 0.0084.

#### 4.2 $[\pm 22.5]_{2s}$ LAMINATES

High strain rate tensile properties of  $[\pm 22.5]_{2s}$  SP288/AS graphite/epoxy and 80AS/20S/PR288 graphite/S-glass/epoxy were obtained by testing rings under dynamic internal pressure. Three rings of each material were loaded dynamically using 100 mg PETN detonators in the pressure chamber of the fixture. In one case, the pressure on the steel ring was also measured with a Manganin alloy gage.

Strain and strain derivative records for the three graphite/epoxy rings tested are shown in Figures 4-25 through 4-33 (Specimen Nos. 33-4, 33-6, and 33-7). Dynamic stress-strain curves are shown in Figures 4-34, 4-35, and 4-36. Results are tabulated in Table 4-3. The initial strain rates range between  $130\text{s}^{-1}$  and  $150\text{s}^{-1}$  and the average (secant) rates between  $184\text{s}^{-1}$  and  $211\text{s}^{-1}$ . The times to failure range between  $38\text{ }\mu\text{s}$  and  $46\text{ }\mu\text{s}$ . The initial and secant moduli of  $131.7\text{ GPa}$  ( $19.1 \times 10^6\text{ psi}$ ) and  $93.4\text{ GPa}$  ( $13.5 \times 10^6\text{ psi}$ ), respectively, are higher than the static modulus of  $81.4\text{ GPa}$  ( $11.8 \times 10^6\text{ psi}$ ) by 62% and 15%, respectively. The average dynamic secant Poisson's ratio of 1.22 is slightly higher than the static one of 1.18. The average dynamic strength of  $790\text{ MPa}$  (115 ksi) is only slightly higher than the static one of  $773\text{ MPa}$  (112 ksi). However, the dynamic ultimate strain of 0.0084 is appreciably lower than the static value of 0.0103.

TABLE 4-2. HIGH STRAIN RATE TENSILE PROPERTIES OF  $[\pm 15]_{2s}$   
80AS/20S/PR288 GRAPHITE/S-GLASS/EPOXY

Specimen Number	Strain Rate ( $\dot{\epsilon}_{\theta\theta}$ ), $s^{-1}$	Modulus ( $E_{\theta\theta}$ ), GPa ( $10^6$ psi)	Poisson's Ratio ( $\nu_{\theta x}$ )
<u>Initial Properties</u>			
36-2	150	131.1 (19.0)	0.97
36-4	145	122.1 (17.7)	0.62
36-7	125	146.3 (21.2)	1.06
<u>Secant Properties</u>			
36-2	198	98.0 (14.2)	1.06
36-4	210	111.8 (16.2)	0.85
36-7	173	93.8 (13.6)	0.85
<u>Terminal Properties</u>			
36-2	225	63.5 (9.2)	1.24
36-4	290	58.0 (8.4)	-
36-7	220	28.2 (4.1)	0.93
<u>Ultimate Properties</u>			
	Time to Failure ( $t_f$ ), $\mu s$	Strength ( $S_{\theta\theta T}$ ), MPa (ksi)	Strain ( $\epsilon_{\theta\theta T}^U$ )
36-2	44	849 (123)	0.0087
36-4	40	932 (135)	0.0084
36-7	45	731 (106)	0.0078

TABLE 4-3. HIGH STRAIN RATE TENSILE PROPERTIES OF  $[\pm 22.5]_{2s}$   
SP288/AS GRAPHITE/EPOXY

Specimen Number	Strain Rate ( $\dot{\epsilon}_{\theta\theta}$ ), $s^{-1}$	Modulus ( $E_{\theta\theta}$ ), GPa ( $10^6$ psi)	Poisson's Ratio ( $\nu_{\theta x}$ )
<u>Initial Properties</u>			
33-4	135	131.1 (19.0)	1.66
33-6	150	140.2 (20.3)	1.50
33-7	130	123.9 (18.0)	1.54
<u>Secant Properties</u>			
33-4	196	89.5 (13.0)	1.33
33-6	184	95.9 (13.9)	1.19
33-7	211	94.9 (13.7)	1.13
<u>Terminal Properties</u>			
33-4	280	45.7 (6.6)	1.26
33-6	190	55.5 (8.1)	1.70
33-7	390	85.9 (12.4)	1.10
<u>Ultimate Properties</u>			
	Time to Failure ( $t_f$ ), $\mu s$	Strength ( $S_{\theta\theta T}$ ), MPa (ksi)	Strain ( $\epsilon_{\theta\theta T}^u$ )
33-4	46	806 (117)	0.0090
33-6	38	673 (98)	0.0070
33-7	44	890 (129)	0.0093



Strain and strain derivative records for the three hybrid rings are shown in Figures 4-37 through 4-45 (Specimen Nos. 34-4, 34-6, and 34-7). Dynamic stress-strain curves are shown in Figures 4-46, 4-47, and 4-48. Results are tabulated in Table 4-4. The initial strain rates range between  $130\text{s}^{-1}$  and  $140\text{s}^{-1}$  and the average (secant) rates between  $198\text{s}^{-1}$  and  $246\text{s}^{-1}$ . The times to failure range between  $45\text{ }\mu\text{s}$  and  $46\text{ }\mu\text{s}$ . The initial and secant moduli of  $126.1\text{ GPa}$  ( $18.3 \times 10^6\text{ psi}$ ) and  $76.5\text{ GPa}$  ( $11.1 \times 10^6\text{ psi}$ ), respectively, are higher than the static modulus of  $68.5\text{ GPa}$  ( $9.9 \times 10^6\text{ psi}$ ) by 84% and 12%, respectively. The average dynamic Poisson's ratio of 0.97 is higher than the static one of 0.83. The average dynamic strength of  $731\text{ MPa}$  (106 ksi) is higher than the static strength of  $653\text{ MPa}$  (95 ksi) by 12%. The dynamic ultimate strain of 0.0095 is somewhat lower than the static value of 0.0104.

#### 4.3 $[\pm 30]_{2S}$ LAMINATES

High strain rate tensile properties of  $[\pm 30]_{2S}$  SP288/AS graphite/epoxy and 80AS/20S/PR288 graphite/S-glass/epoxy were obtained by testing rings under dynamic internal pressure. Initially, 100 mg PETN detonals were used in the pressure chamber of the fixture. The pressure pulse produced by this loading, as seen from the strain response of the steel ring, reaches its peak in approximately  $40\text{ }\mu\text{s}$ . The time to failure, however, is somewhat longer than that, which makes the analysis of the data very difficult. It was decided to modify the explosive detonation to produce a longer, but sufficiently intense, pressure pulse. The originally used black powder, or bullseye powder, was sufficiently slow-burning to produce a long pulse, but the intensity of this pulse was too low and resulted in relatively low strain rates. To boost the explosive energy of the normally fuel-rich bullseye powder potassium perchlorate ( $\text{KClO}_4$ ) and aluminum powder were mixed in. All subsequent tests were conducted using 520 mg of each component above in the pressure chamber. The resulting pressure pulse was longer than the time to failure of the  $[\pm 30]_{2S}$  specimens and only slightly shorter than that for the  $[\pm 45]_{2S}$  specimens.

One difficulty encountered in the past was in pinpointing the exact time of failure of the composite specimens. If initial failure does not happen to occur exactly at a gage location, the strain readings at the unfailed locations

TABLE 4-4. HIGH STRAIN RATE TENSILE PROPERTIES OF [ 22.5 ]<sub>2s</sub>  
80AS/20S/PR288 GRAPHITE/S-GLASS/EPOXY

Specimen Number	Strain Rate ( $\dot{\epsilon}_{\theta\theta}$ ), s <sup>-1</sup>	Modulus ( $E_{\theta\theta}$ ), GPa (10 <sup>6</sup> psi)	Poisson's Ratio ( $\nu_{\theta\theta}$ )
<u>Initial Properties</u>			
34-4	130	134.6 (19.5)	1.15
34-6	140	100.1 (14.5)	0.93
34-7	130	143.7 (20.8)	0.85
<u>Secant Properties</u>			
34-4	198	73.6 (10.7)	1.06
34-6	246	79.2 (11.5)	0.87
34-7	208	76.6 (11.1)	0.99
<u>Terminal Properties</u>			
34-4	300	26.9 (3.9)	1.16
34-6	308	50.0 (7.2)	0.84
34-7	280	29.3 (4.3)	1.07
<u>Ultimate Properties</u>			
	Time to Failure ( $t_f$ ), $\mu$ s	Strength ( $S_{\theta\theta T}$ ), MPa (ksi)	Strain ( $\epsilon_{\theta\theta T}^u$ )
34-4	45	656 (95)	0.0089
34-6	46	819 (119)	0.0103
34-7	45	716 (104)	0.0094

continue to increase for some time after initial failure. To overcome this uncertainty a conductive ribbon was bonded around the entire circumference of the ring and connected to one of the tabs of one strain gage. The ribbon is a Micromeritics Ni-clad copper ribbon of 0.025 mm x 0.397 mm (0.001 in. x 1/64 in.) cross section. This ribbon is first bonded on a strip of 104 type glass scrimcloth with Epon 815/V40 adhesive. After curing, the ribbon with the scrimcloth strip is bonded on the composite ring with Micromeritics AE10 adhesive and connected in series with one of the leads of a circumferential strain gage. When the specimen fails at any point around the circumference the ribbon breaks and strain readings from the gage connected to the ribbon are interrupted.

Tests on the  $[\pm 30]_{2s}$  laminates were repeated using a 1560 mg mixture of equal amounts of bullseye pistol powder, potassium perchlorate ( $KClO_4$ ), and aluminum dust. Strain and strain derivative records for the three graphite/epoxy rings tested are shown in Figures 4-49 through 4-55 (Specimen Nos. 28-9, 28-10, and 28-11). Stress-strain curves are shown in Figures 4-56, 4-57, and 4-58. Results are tabulated in Table 4-5. The initial strain rates range between  $200s^{-1}$  and  $230s^{-1}$  and the average (secant) rates between  $285s^{-1}$  and  $320s^{-1}$ . The times to failure range between 44  $\mu s$  and 45  $\mu s$ . The initial and secant moduli of 85.7 GPa ( $12.4 \times 10^6$  psi) and 49.8 GPa ( $7.2 \times 10^6$  psi), respectively, are higher and lower than the static modulus of 58.6 GPa ( $8.5 \times 10^6$  psi) by 46% and 15%, respectively. The average dynamic Poisson's ratio of 1.21 is only slightly lower than the static one of 1.25. The average dynamic strength of 660 MPa (96 ksi) is higher than the static one of 566 MPa (82 ksi) by 17%. The dynamic ultimate strain of 0.0133 is almost equal to the static value of 0.0132.

Strain and strain derivative records for the three hybrid rings are shown in Figures 4-59 through 4-64 (Specimen Nos. 29-10, 29-11, and 29-12). Stress-strain curves are shown in Figures 4-65, 4-66, and 4-67. Results are tabulated in Table 4-6. The initial strain rates range between  $190s^{-1}$  and  $230s^{-1}$  and the average (secant) rates between  $300s^{-1}$  and  $340s^{-1}$ . The times to failure range between 40  $\mu s$  and 43  $\mu s$ . The initial and secant moduli of 93.5 GPa ( $13.6 \times 10^6$  psi) and 51.5 GPa ( $7.5 \times 10^6$  psi), respectively, are higher than the static modulus of 44.9 GPa ( $6.51 \times 10^6$  psi) by 108% and 15%, respectively.

TABLE 4-5. HIGH STRAIN RATE TENSILE PROPERTIES OF  $[\pm 30]_{2s}$   
SP288/AS GRAPHITE/EPOXY

Specimen Number	Strain Rate ( $\dot{\epsilon}_{\theta\theta}$ ), $s^{-1}$	Modulus ( $E_{\theta\theta}$ ), GPa ( $10^6$ psi)	Poisson's Ratio ( $\nu_{\theta x}$ )
<u>Initial Properties</u>			
28-9	230	84.0 (12.2)	-
28-10	230	82.8 (12.0)	1.09
28-11	200	90.2 (13.1)	1.35
<u>Secant Properties</u>			
28-9	320	46.8 (6.8)	-
28-10	285	49.1 (7.1)	1.19
28-11	286	53.5 (7.8)	1.21
<u>Terminal Properties</u>			
28-9	465	41.0 (5.9)	-
28-10	400	27.3 (4.0)	1.25
28-11	420	37.3 (5.4)	1.07
<u>Ultimate Properties</u>			
	Time to Failure ( $t_f$ ), $\mu s$	Strength ( $S_{\theta\theta T}$ ), MPa (ksi)	Strain ( $\epsilon_{\theta\theta T}^u$ )
28-9	44	664 (96)	0.0142
28-10	45	626 (91)	0.0128
28-11	45	690 (100)	0.0129

TABLE 4-6. HIGH STRAIN RATE TENSILE PROPERTIES OF  $[\pm 30]_{2s}$   
80AS/20S/PR288 GRAPHITE/S-GLASS/EPOXY

Specimen Number	Strain Rate ( $\dot{\epsilon}_{\theta\theta}$ ), $s^{-1}$	Modulus ( $E_{\theta\theta}$ ), GPa ( $10^6$ psi)	Poisson's Ratio ( $\nu_{\theta x}$ )
<u>Initial Properties</u>			
29-10	200	100.6 (14.6)	1.08
29-11	190	95.9 (13.9)	1.18
29-12	230	84.0 (12.2)	1.09
<u>Secant Properties</u>			
29-10	300	59.8 (8.7)	1.13
29-11	340	48.1 (7.0)	1.00
29-12	333	46.6 (6.8)	1.05
<u>Terminal Properties</u>			
29-10	400	48.8 (7.1)	1.79
29-11	440	41.1 (6.0)	1.48
29-12	480	39.2 (5.7)	1.25
<u>Ultimate Properties</u>			
	Time to Failure ( $t_f$ ), $\mu s$	Strength ( $S_{\theta\theta T}$ ), MPa (ksi)	Strain ( $\epsilon_{\theta\theta T}^u$ )
29-10	40	699 (101)	0.0116
29-11	43	707 (102)	0.0147
29-12	43	666 (97)	0.0143

The average dynamic Poisson's ratio of 1.09 is lower than the static one of 1.26. The average dynamic strength of 690 MPa (100 ksi) is much higher than the static one of 503 MPa (73 ksi) by 37%. The dynamic ultimate strain of 0.0135 is only slightly lower than the static value of 0.0139.

Comparison of the results for the graphite/epoxy and hybrid  $[\pm 30]_{2s}$  specimens (Tables 4-5 and 4-6) shows that the hybrid specimens have higher dynamic moduli and strength than the graphite/epoxy ones. This is contrary to the trend in static values. This phenomenon, for which no ready explanation is available, was not noticed in the  $[\pm 22.5]_{2s}$  specimens.

#### 4.4 $[\pm 45]_{2s}$ LAMINATES

High strain rate tensile properties of  $[\pm 45]_{2s}$  SP288/AS graphite/epoxy and 80AS/20S/PR288 graphite/S-glass/epoxy were obtained by testing rings under dynamic internal pressure using a 1.56 g mixture of pistol powder,  $KClO_4$ , and aluminum dust in the pressure chamber of the fixture.

Strain and strain derivative records for the three graphite/epoxy rings tested are shown in Figures 4-68 through 4-76 (Specimen Nos. 24-11, 24-12, and 24-13). The corresponding stress-strain curves are shown in Figures 4-77, 4-78, and 4-79. These curves were extrapolated up to the maximum strain measured in the composite ring (ultimate strain). Results are tabulated in Table 4-7. The initial strain rates range between  $140s^{-1}$  and  $200s^{-1}$  and the average (secant) rates between  $220s^{-1}$  and  $440s^{-1}$ . The times to failure range between 68  $\mu s$  and 91  $\mu s$ . The initial and secant moduli of 111.4 GPa ( $16.15 \times 10^6$  psi) and 40.3 GPa ( $5.83 \times 10^6$  psi), respectively, are much higher than the static modulus of 20.4 GPa ( $2.95 \times 10^6$  psi). The secant modulus above was based on the extrapolated stress-strain curve. The average initial Poisson's ratio of 0.78 is also higher than the static value of 0.69. The average dynamic strength obtained approximately by extrapolation of the stress-strain curve is 927 MPa (134 ksi) which is much higher than the static strength of 224 MPa (32.5 ksi). The average dynamic ultimate strain of 0.0245 is lower than the static value of 0.0305.

Strain and strain derivative records for the three hybrid rings tested are shown in Figures 4-80 through 4-88 (Specimen Nos. 25-11, 25-12, and 25-13). The corresponding stress-strain curves are shown in Figures 4-89, 4-90, and

TABLE 4-7. HIGH STRAIN RATE TENSILE PROPERTIES OF  $[\pm 45]_{2s}$   
SP288/A5 GRAPHITE/EPOXY

Specimen Number	Strain Rate ( $\dot{\epsilon}_{\theta\theta}$ ), $s^{-1}$	Modulus ( $E_{\theta\theta}$ ), GPa ( $10^6$ psi)	Poisson's Ratio ( $\nu_{\theta x}$ )
<u>Initial Properties</u>			
24-11	200	98.3 (14.25)	0.95
24-12	140	111.8 (16.20)	0.68
24-13	165	124.2 (18.00)	0.72
<u>Secant Properties</u>			
24-11	440	23.8 (3.45)	0.90
24-12	330	44.5 (6.45)	0.89
24-13	220	52.4 (7.60)	0.69
<u>Terminal Properties</u>			
24-11	550	8.6 (1.25)	0.91
24-12	435	26.9 (3.90)	0.99
24-13	260	25.9 (3.75)	0.75
<u>Ultimate Properties</u>			
	Time to Failure ( $t_f$ ), $\mu s$	Strength ( $S_{\theta\theta T}$ ), MPa (ksi)	Strain ( $\epsilon_{\theta\theta T}^u$ )
24-11	>70	738 (107)	0.0310
24-12	68	1000 (145)	0.0225
24-13	91	1042 (151)	0.0200

4-91. Results are tabulated in Table 4-8. The initial strain rates range between  $250\text{s}^{-1}$  and  $300\text{s}^{-1}$  and the average (secant) rates between  $550\text{s}^{-1}$  and  $560\text{s}^{-1}$ . The times to failure range between 52  $\mu\text{s}$  and 70  $\mu\text{s}$ .

The initial dynamic modulus of 50.8 GPa ( $7.37 \times 10^6$  psi) is much higher than the static modulus of 21.5 GPa ( $3.12 \times 10^6$  psi). The average Poisson's ratio (initial and secant) of 0.76 is slightly higher than the static value of 0.74. The average dynamic strength of 711 MPa (103 ksi) is much higher than the static strength of 191 MPa (28 ksi). The average dynamic ultimate strain, based on the larger recorded values in each specimen, of 0.0353 is also higher than the highest static value recorded (0.0265). It should be noted that the static value for strength and ultimate strain are lower bounds since the specimens could not be tested to ultimate failure.

#### 4.5 $[\pm 60]_{2s}$ LAMINATES

High strain rate tensile properties of  $[\pm 60]_{2s}$  SP288/AS graphite/epoxy and 80AS/20S/PR288 graphite/S-glass/epoxy were obtained in a similar manner as before.

Strain and strain derivative records for the three graphite/epoxy rings tested are shown in Figures 4-92 through 4-100 (Specimen Nos. 22-6, 22-7, and 22-8). The corresponding stress-strain curves are shown in Figures 4-101, 4-102, and 4-103. Results are tabulated in Table 4-9. The initial strain rates range between  $220\text{s}^{-1}$  and  $280\text{s}^{-1}$  and the average (secant) rates between  $307\text{s}^{-1}$  and  $398\text{s}^{-1}$ . The times to failure range between 41  $\mu\text{s}$  and 44  $\mu\text{s}$ . The initial and secant moduli of 45.5 GPa ( $6.59 \times 10^6$  psi) and 34.6 GPa ( $5.02 \times 10^6$  psi), respectively, are much higher than the static modulus of 13.4 GPa ( $1.95 \times 10^6$  psi). The average secant Poisson's ratio of 0.34 is only slightly higher than the static value of 0.32. The average dynamic strength of 511 MPa (74 ksi) is much higher than the static strength of 105 MPa (15.2 ksi). The average dynamic ultimate strain of 0.0145 is higher than the static value of 0.0120.

Strain and strain derivative records for the three hybrid rings are shown in Figures 4-104 through 4-112 (Specimen Nos. 23-2, 23-4, and 23-6). The corresponding stress-strain curves are shown in Figures 4-113, 4-114, and 4-115. Results are tabulated in Table 4-10. The initial strain rates range



TABLE 4-8. HIGH STRAIN RATE TENSILE PROPERTIES OF  $[\pm 45]_{2s}$   
80AS/20S/PR288 GRAPHITE/S-GLASS/EPOXY

Specimen Number	Strain Rate ( $\dot{\epsilon}_{\theta\theta}$ ), $s^{-1}$	Modulus ( $E_{\theta\theta}$ ), GPa ( $10^6$ psi)	Poisson's Ratio ( $\nu_{\theta x}$ )
<u>Initial Properties</u>			
25-11	280	43.1 (6.25)	0.85
25-12	300	59.3 (8.60)	0.73
25-13	250	50.0 (7.25)	0.69
<u>Secant Properties</u>			
25-11	555	19.1 (2.77)	0.96
25-12	560	22.9 (3.32)	0.56
25-13	550	19.0 (2.75)	0.80
<u>Terminal Properties</u>			
25-11	1000	4.1 (0.60)	0.59
25-12	800	6.6 (0.95)	0.63
25-13	760	3.7 (0.53)	0.59
<u>Ultimate Properties</u>			
	Time to Failure ( $t_f$ ), $\mu s$	Strength ( $S_{\theta\theta T}$ ), MPa (ksi)	Strain ( $\epsilon_{\theta\theta T}^u$ )
25-11	70	745 (108)	0.0390
25-12	52	662 (96)	0.0290
25-13	69	725 (105)	0.0380

TABLE 4-9. HIGH STRAIN RATE TENSILE PROPERTIES OF  $[\pm 60]_{2s}$   
SP288/AS GRAPHITE/EPOXY

Specimen Number	Strain Rate ( $\dot{\epsilon}_{00}$ ), $s^{-1}$	Modulus ( $E_{00}$ ), GPa ( $10^6$ psi)	Poisson's Ratio ( $\nu_{0x}$ )
<u>Initial Properties</u>			
22-6	280	46.1 (6.68)	0.50
22-7	220	43.1 (6.25)	0.45
22-8	250	47.3 (6.85)	0.50
<u>Secant Properties</u>			
22-6	398	37.8 (5.47)	0.32
22-7	307	27.3 (3.96)	0.33
22-8	320	38.8 (5.62)	0.36
<u>Terminal Properties</u>			
22-6	640	28.6 (4.15)	0.34
22-7	520	17.3 (2.58)	0.35
22-8	480	31.2 (4.52)	0.34
<u>Ultimate Properties</u>			
	Time to Failure ( $t_f$ ), $\mu s$	Strength ( $S_{00T}$ ), MPa (ksi)	Strain ( $\epsilon_{00T}^u$ )
22-6	41	621 (90)	0.0163
22-7	44	367 (53)	0.0135
22-8	43	543 (79)	0.0138

TABLE 4-10. HIGH STRAIN RATE TENSILE PROPERTIES OF  $[\pm 60]_{2s}$   
80AS/20S/PR288 GRAPHITE/S-GLASS/EPOXY

Specimen Number	Strain Rate ( $\dot{\epsilon}_{\theta\theta}$ ), $s^{-1}$	Modulus ( $E_{\theta\theta}$ ), GPa ( $10^6$ psi)	Poisson's Ratio ( $\nu_{\theta x}$ )
<u>Initial Properties</u>			
23-2	140	45.2 (6.55)	0.32
23-4	270	56.4 (8.17)	0.39
23-6	250	42.4 (6.15)	0.30
<u>Secant Properties</u>			
23-2	200	52.9 (7.67)	0.31
23-4	288	47.4 (6.87)	0.32
23-6	352	41.7 (6.05)	0.24
<u>Terminal Properties</u>			
23-2	330	55.5 (8.05)	0.27
23-4	390	34.0 (4.93)	0.28
23-6	600	38.0 (5.50)	0.16
<u>Ultimate Properties</u>			
	Time to Failure ( $t_f$ ), $\mu s$	Strength ( $S_{\theta\theta T}$ ), MPa (ksi)	Strain ( $\epsilon_{\theta\theta T}^u$ )
23-2	51	535 (78)	0.0102
23-4	40	545 (79)	0.0115
23-6	42	618 (89)	0.0148

between  $140\text{s}^{-1}$  and  $270\text{s}^{-1}$  and the average (secant) rates between  $200\text{s}^{-1}$  and  $352\text{s}^{-1}$ . The times to failure range between  $40\text{ }\mu\text{s}$  and  $51\text{ }\mu\text{s}$ . The initial and secant moduli of  $48.0\text{ GPa}$  ( $6.96 \times 10^6\text{ psi}$ ) and  $47.4\text{ GPa}$  ( $6.86 \times 10^6\text{ psi}$ ), respectively, are much higher than the static modulus of  $15.2\text{ GPa}$  ( $2.20 \times 10^6\text{ psi}$ ). The average secant Poisson's ratio of  $0.29$  is exactly equal to the static value. The average dynamic strength of  $566\text{ MPa}$  ( $82\text{ ksi}$ ) is much higher than the static strength of  $94.8\text{ MPa}$  ( $13.7\text{ ksi}$ ). The average dynamic ultimate strain of  $0.0122$  is appreciably higher than the static value of  $0.0087$ .

Comparison of the results above with those for the similarly oriented graphite/epoxy specimens shows that the hybrid specimens have higher dynamic moduli and strength than the graphite/epoxy specimens. This is contrary to the trend in static strength values.

#### 4.6 $[\pm 67.5]_{2S}$ LAMINATES

High strain rate tensile properties of  $[\pm 67.5]_{2S}$  SP288/AS graphite/epoxy and 80AS/20S/PR288 graphite/S-glass/epoxy were obtained as for the other laminates before.

Strain and strain derivative records for the three graphite/epoxy rings tested are shown in Figures 4-116 through 4-124 (Specimen Nos. 26-2, 26-4, and 26-6). The corresponding stress-strain curves are shown in Figures 4-125, 4-126, and 4-127. Results are tabulated in Table 4-11. The initial strain rates range between  $200\text{s}^{-1}$  and  $290\text{s}^{-1}$  and the average (secant) rates between  $230\text{s}^{-1}$  and  $310\text{s}^{-1}$ . The times to failure range between  $30\text{ }\mu\text{s}$  and  $44\text{ }\mu\text{s}$ . The initial and secant moduli of  $48.8\text{ GPa}$  ( $7.07 \times 10^6\text{ psi}$ ) and  $36.2\text{ GPa}$  ( $5.24 \times 10^6\text{ psi}$ ), respectively, are much higher than the static modulus of  $12.0\text{ GPa}$  ( $1.74 \times 10^6\text{ psi}$ ). The average Poisson's ratio of  $0.19$  is only slightly higher than the static value of  $0.17$ . The average dynamic strength of  $339\text{ MPa}$  ( $49\text{ ksi}$ ) is much higher than the static strength of  $85.1\text{ MPa}$  ( $12.3\text{ ksi}$ ). The average dynamic ultimate strain of  $0.0096$  is somewhat higher than the static value of  $0.0081$ .

Strain and strain derivative records for the three hybrid rings tested are shown in Figures 4-128 through 4-136 (Specimen Nos. 27-2, 27-4, and 27-6). The corresponding stress-strain curves are shown in Figures 4-137, 4-138, and 4-139. Results are tabulated in Table 4-12. The initial strain rates range

TABLE 4-11. HIGH STRAIN RATE TENSILE PROPERTIES OF  $[\pm 67.5]_{2s}$   
SP288/AS GRAPHITE/EPOXY

Specimen Number	Strain Rate ( $\dot{\epsilon}_{\theta\theta}$ ), $s^{-1}$	Modulus ( $E_{\theta\theta}$ ), GPa ( $10^6$ psi)	Poisson's Ratio ( $\nu_{\theta x}$ )
<u>Initial Properties</u>			
26-2	290	52.2 (7.56)	0.18
26-4	240	50.9 (7.37)	0.20
26-6	200	43.3 (6.28)	0.13
<u>Secant Properties</u>			
26-2	310	36.4 (5.27)	0.19
26-4	270	43.6 (6.32)	0.18
26-6	230	28.5 (4.12)	0.19
<u>Terminal Properties</u>			
26-2	350	22.4 (3.25)	0.13
26-4	320	22.9 (3.31)	0.11
26-6	370	23.4 (3.39)	0.37
<u>Ultimate Properties</u>			
	Time to Failure ( $t_f$ ), $\mu s$	Strength ( $S_{\theta\theta T}$ ), MPa (ksi)	Strain ( $\epsilon_{\theta\theta T}^u$ )
26-2	30	334 (48)	0.0095
26-4	34	395 (57)	0.0092
26-6	44	289 (42)	0.0102

TABLE 4-12. HIGH STRAIN RATE TENSILE PROPERTIES OF  $[\pm 67.5]_{2s}$   
80AS/20S/PR288 GRAPHITE/S-GLASS/EPOXY

<u>Specimen Number</u>	<u>Strain Rate (<math>\dot{\epsilon}_{\theta\theta}</math>), <math>s^{-1}</math></u>	<u>Modulus (<math>E_{\theta\theta}</math>), GPa (<math>10^6</math> psi)</u>	<u>Poisson's Ratio (<math>\nu_{\theta x}</math>)</u>
<u>Initial Properties</u>			
27-2	280	45.3 (6.56)	0.26
27-4	204	44.7 (6.48)	0.19
27-6	300	80.2 (11.62)	0.23
<u>Secant Properties</u>			
27-2	224	54.3 (7.86)	0.21
27-4	204	36.5 (5.29)	0.24
27-6	280	37.3 (5.40)	0.16
<u>Terminal Properties</u>			
27-2	180	75.9 (11.00)	0.21
27-4	205	26.9 (3.90)	0.21
27-6	375	22.4 (3.25)	0.08
<u>Ultimate Properties</u>			
	<u>Time to Failure (<math>t_f</math>), <math>\mu s</math></u>	<u>Strength (<math>S_{\theta\theta T}</math>), MPa (ksi)</u>	<u>Strain (<math>\epsilon_{\theta\theta T}^u</math>)</u>
27-2	39	474 (69)	0.0087
27-4	38	280 (41)	0.0078
27-6	30	311 (45)	0.0085

between  $204\text{s}^{-1}$  and  $300\text{s}^{-1}$  and the average (secant) rates between  $204\text{s}^{-1}$  and  $280\text{s}^{-1}$ . The times to failure range between  $30\text{ }\mu\text{s}$  and  $39\text{ }\mu\text{s}$ . The initial modulus for Specimen No. 27-6 is excessively high as seen also in the stress-strain curve of Figure 4-139. In comparing dynamic and static values for the moduli, the value for Specimen No. 27-6 was not considered. The initial and secant dynamic moduli of  $45.0\text{ GPa}$  ( $6.52 \times 10^6\text{ psi}$ ) and  $42.7\text{ GPa}$  ( $6.18 \times 10^6\text{ psi}$ ), respectively, are much higher than the static modulus of  $14.4\text{ GPa}$  ( $2.08 \times 10^6\text{ psi}$ ). The average Poisson's ratio of  $0.20$  is also higher than the static value of  $0.16$ . The average dynamic strength of  $356\text{ MPa}$  ( $52\text{ ksi}$ ) is much higher than the static strength of  $76.1\text{ MPa}$  ( $11.0\text{ ksi}$ ). The average dynamic ultimate strain of  $0.0083$  is higher than the static value of  $0.0062$ .

Comparison of these results with those of the graphite/epoxy specimens show that the hybrid specimens have higher dynamic moduli and strength than the graphite/epoxy specimens. This is contrary to the trend in static strength values.

#### 4.7 $[\pm 75]_{2s}$ LAMINATES

High strain rate properties of  $[\pm 75]_{2s}$  SP288/AS graphite/epoxy and 80AS/20S/PR288 graphite/S-glass/epoxy were obtained as for the other laminates before.

Strain and strain derivative records for the three graphite/epoxy rings tested are shown in Figures 4-140 through 4-148 (Specimen Nos. 20-2, 20-4, and 20-7). The corresponding stress-strain curves are shown in Figures 4-149, 4-150, and 4-151. Results are tabulated in Table 4-13. The initial strain rates range between  $220\text{s}^{-1}$  and  $245\text{s}^{-1}$  and the average (secant) rates between  $253\text{s}^{-1}$  and  $286\text{s}^{-1}$ . The times to failure range between  $29\text{ }\mu\text{s}$  and  $30\text{ }\mu\text{s}$ . The initial and secant dynamic moduli of  $45.2\text{ GPa}$  ( $6.55 \times 10^6\text{ psi}$ ) and  $36.1\text{ GPa}$  ( $5.24 \times 10^6\text{ psi}$ ), respectively, are much higher than the static modulus of  $11.2\text{ GPa}$  ( $1.63 \times 10^6\text{ psi}$ ). It was difficult to obtain reliable values for dynamic Poisson's ratio because of the large scatter in the transverse strain data. The average dynamic strength of  $290\text{ MPa}$  ( $42\text{ ksi}$ ) is much higher than the static strength of  $75\text{ MPa}$  ( $10.8\text{ ksi}$ ). The average dynamic ultimate strain of  $0.0081$  is slightly higher than the static value of  $0.0076$ .

TABLE 4-13. HIGH STRAIN RATE TENSILE PROPERTIES OF  $[\pm 75]_{2s}$   
SP288/AS GRAPHITE/EPOXY

Specimen Number	Strain Rate ( $\dot{\epsilon}_{\theta\theta}$ ), $s^{-1}$	Modulus ( $E_{\theta\theta}$ ), GPa ( $10^6$ psi)	Poisson's Ratio ( $\nu_{\theta x}$ )
<u>Initial Properties</u>			
20-2	220	43.3 (6.28)	-
20-4	245	54.7 (7.93)	-
20-7	225	37.6 (5.45)	-
<u>Secant Properties</u>			
20-2	277	36.6 (5.30)	0.18
20-4	253	38.1 (5.53)	-
20-7	286	33.6 (4.87)	0.12
<u>Terminal Properties</u>			
20-2	320	30.5 (4.42)	-
20-4	295	26.6 (3.85)	-
20-7	330	32.1 (4.65)	-
<u>Ultimate Properties</u>			
	Time to Failure ( $t_f$ ), $\mu s$	Strength ( $S_{\theta\theta T}$ ), MPa (ksi)	Strain ( $\epsilon_{\theta\theta T}^u$ )
20-2	30	304 (44)	0.0083
20-4	30	290 (42)	0.0076
20-7	29	278 (40)	0.0083



Strain and strain derivative records for the three hybrid rings tested are shown in Figures 4-152 through 4-160 (Specimen Nos. 21-2, 21-4, and 21-6). The corresponding stress-strain curves are shown in Figures 4-161, 4-162, and 4-163. Results are tabulated in Table 4-14. The initial strain rates range between  $140\text{s}^{-1}$  and  $260\text{s}^{-1}$  and the average (secant) rates between  $215\text{s}^{-1}$  and  $290\text{s}^{-1}$ . The times to failure range between 24  $\mu\text{s}$  and 27  $\mu\text{s}$ . The initial and secant moduli of 45.1 GPa ( $6.53 \times 10^6$  psi) and 35.1 GPa ( $5.09 \times 10^6$  psi), respectively, are much higher than the static modulus of 15.5 GPa ( $2.25 \times 10^6$  psi). It was difficult to obtain reliable values for dynamic Poisson's ratio, because of the large scatter in the transverse strain data. The average dynamic strength of 223 MPa (32 ksi) is much higher than the static strength of 61.4 GPa ( $8.9 \times 10^6$  psi). The average dynamic ultimate strain of 0.0066 is also higher than the static value of 0.0047.

TABLE 4-14. HIGH STRAIN RATE TENSILE PROPERTIES OF  $[\pm 75]_{2s}$   
80AS/20S/PR288 GRAPHITE/S-GLASS/EPOXY

Specimen Number	Strain Rate ( $\dot{\epsilon}_{\theta\theta}$ ), $s^{-1}$	Modulus ( $E_{\theta\theta}$ ), GPa ( $10^6$ psi)	Poisson's Ratio ( $\nu_{\theta x}$ )
<u>Initial Properties</u>			
21-2	250	46.6 (6.75)	-
21-4	140	56.2 (8.14)	0.03
21-6	260	32.4 (4.70)	-
<u>Secant Properties</u>			
21-2	263	31.8 (4.61)	-
21-4	215	46.5 (6.74)	0.017
21-6	290	27.0 (3.91)	0.02
<u>Terminal Properties</u>			
21-2	280	16.8 (2.43)	-
21-4	230	42.0 (6.08)	-
21-6	375	18.4 (2.66)	-
<u>Ultimate Properties</u>			
	Time to Failure ( $t_f$ ), $\mu s$	Strength ( $S_{\theta\theta T}$ ), MPa (ksi)	Strain ( $\epsilon_{\theta\theta T}^u$ )
21-2	27	214 (31)	0.0071
21-4	27	270 (39)	0.0058
21-6	24	186 (27)	0.0069

ORIGINAL PAGE IS  
OF POOR QUALITY

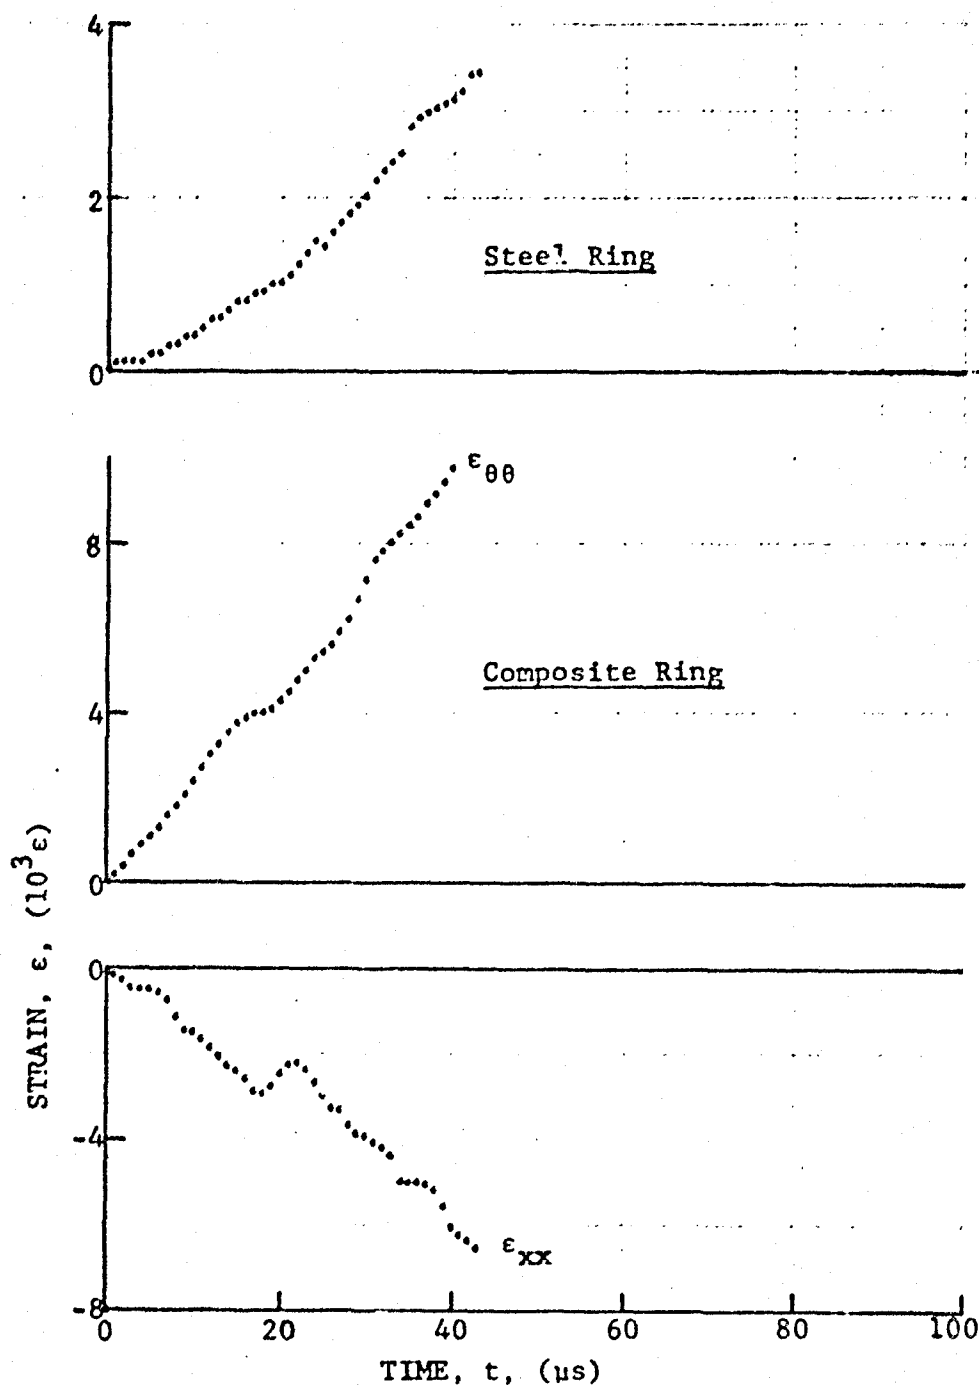


Figure 4-1. Strain records in steel ring and  $[\pm 15]_2$  SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 35-2 (100 mg PETN detonator).

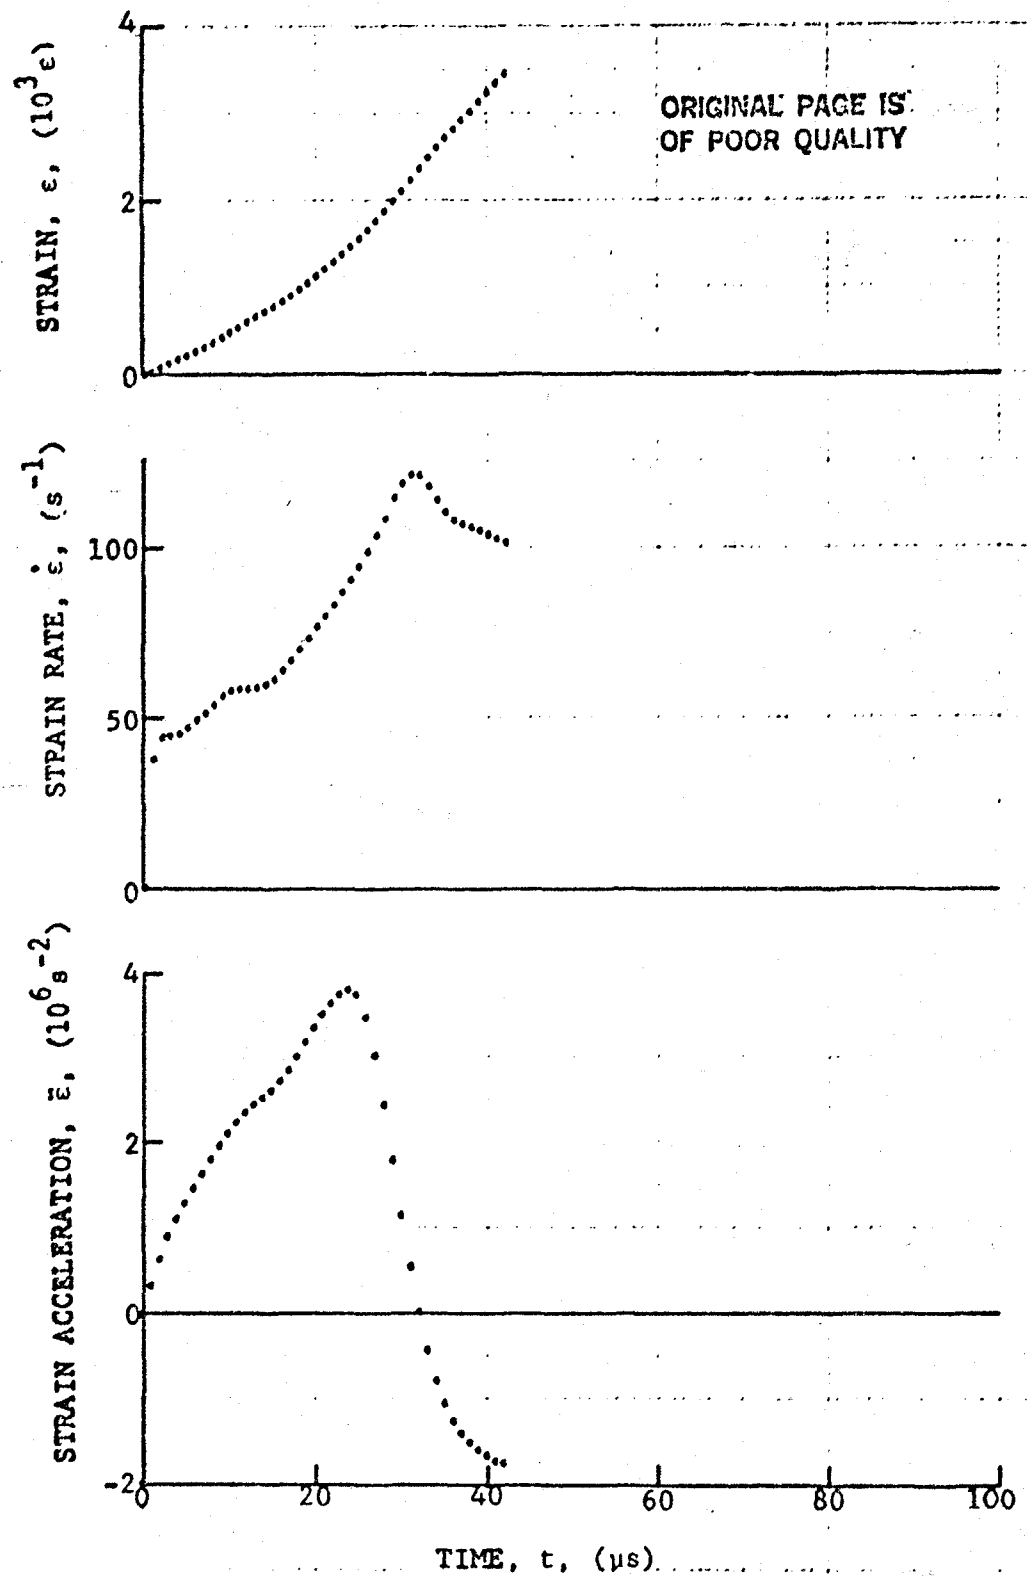


Figure 4-2. Strain and its derivatives in steel ring for Specimen No. 35-2.

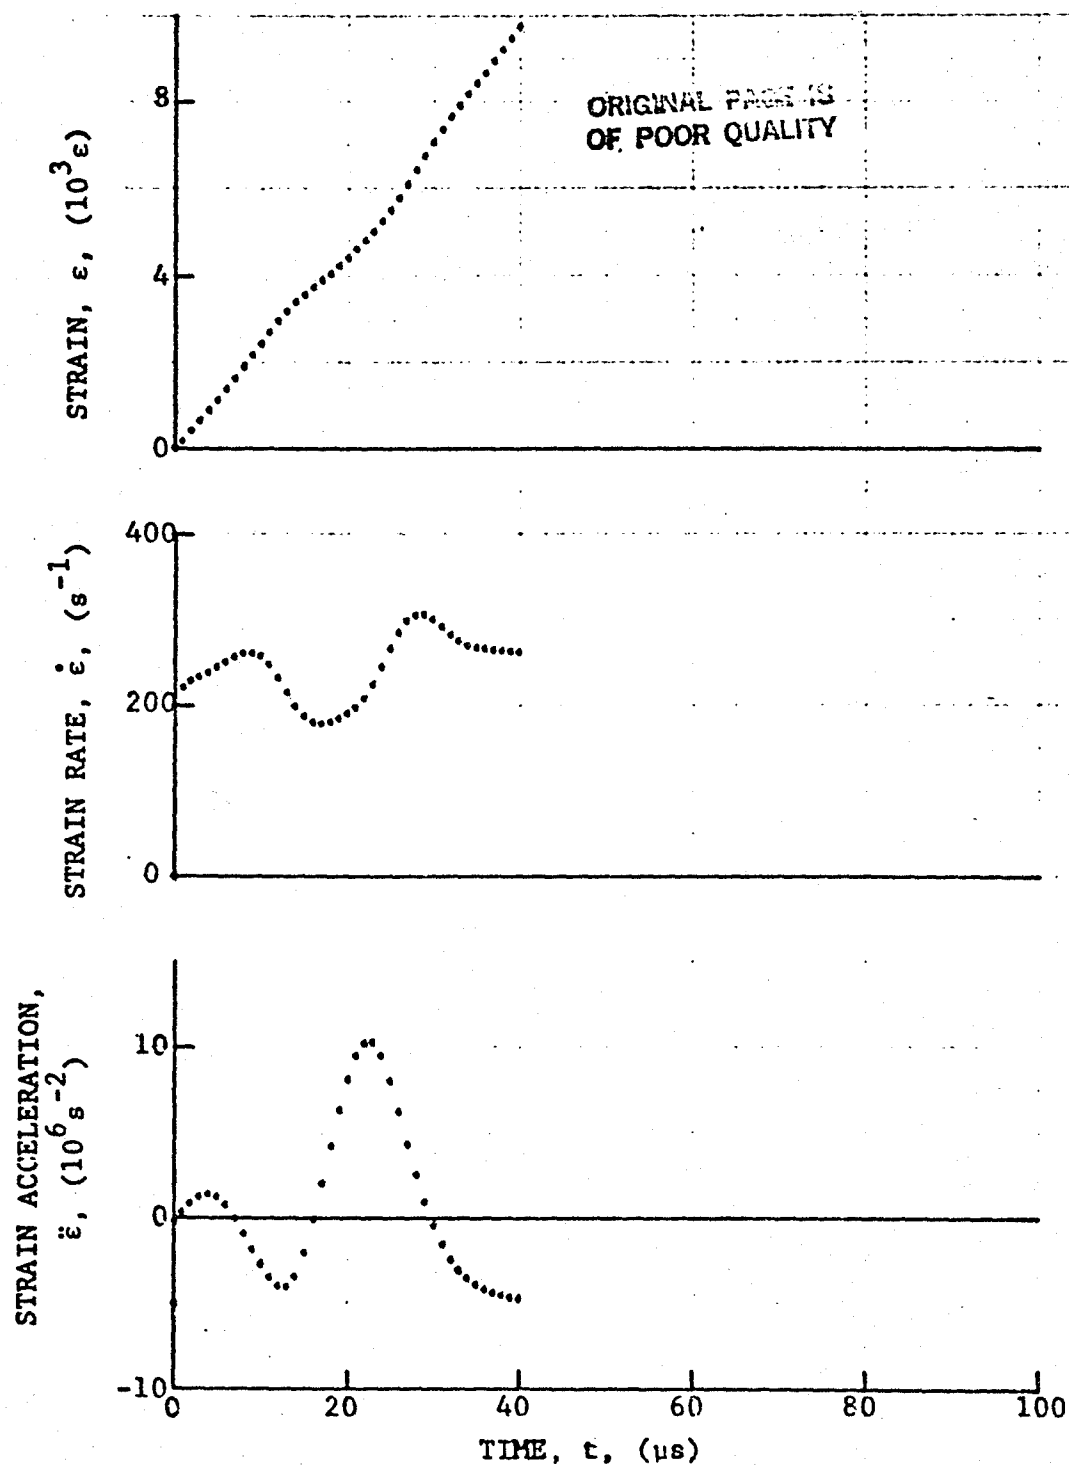


Figure 4-3. Circumferential strain and its derivatives in  $[\pm 15]_{2s}$  SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 35-2.

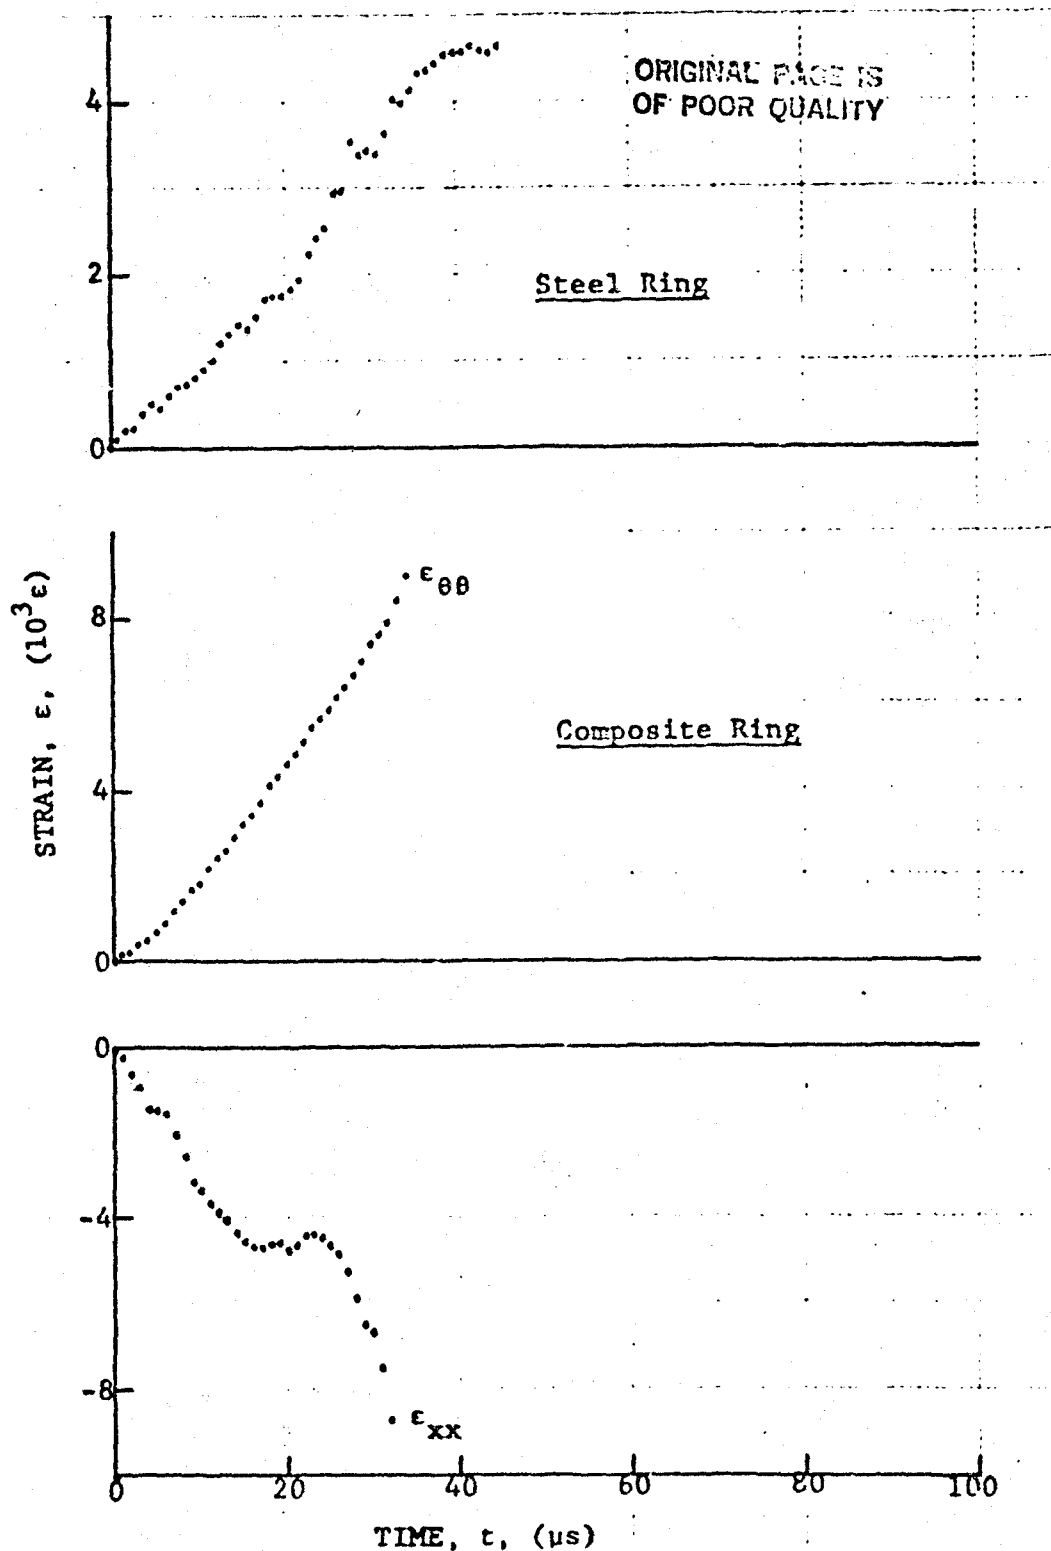


Figure 4-4. Strain records in steel ring and  $[\pm 15]_{25}$  SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 35-4 (100 mg PETN detonator).

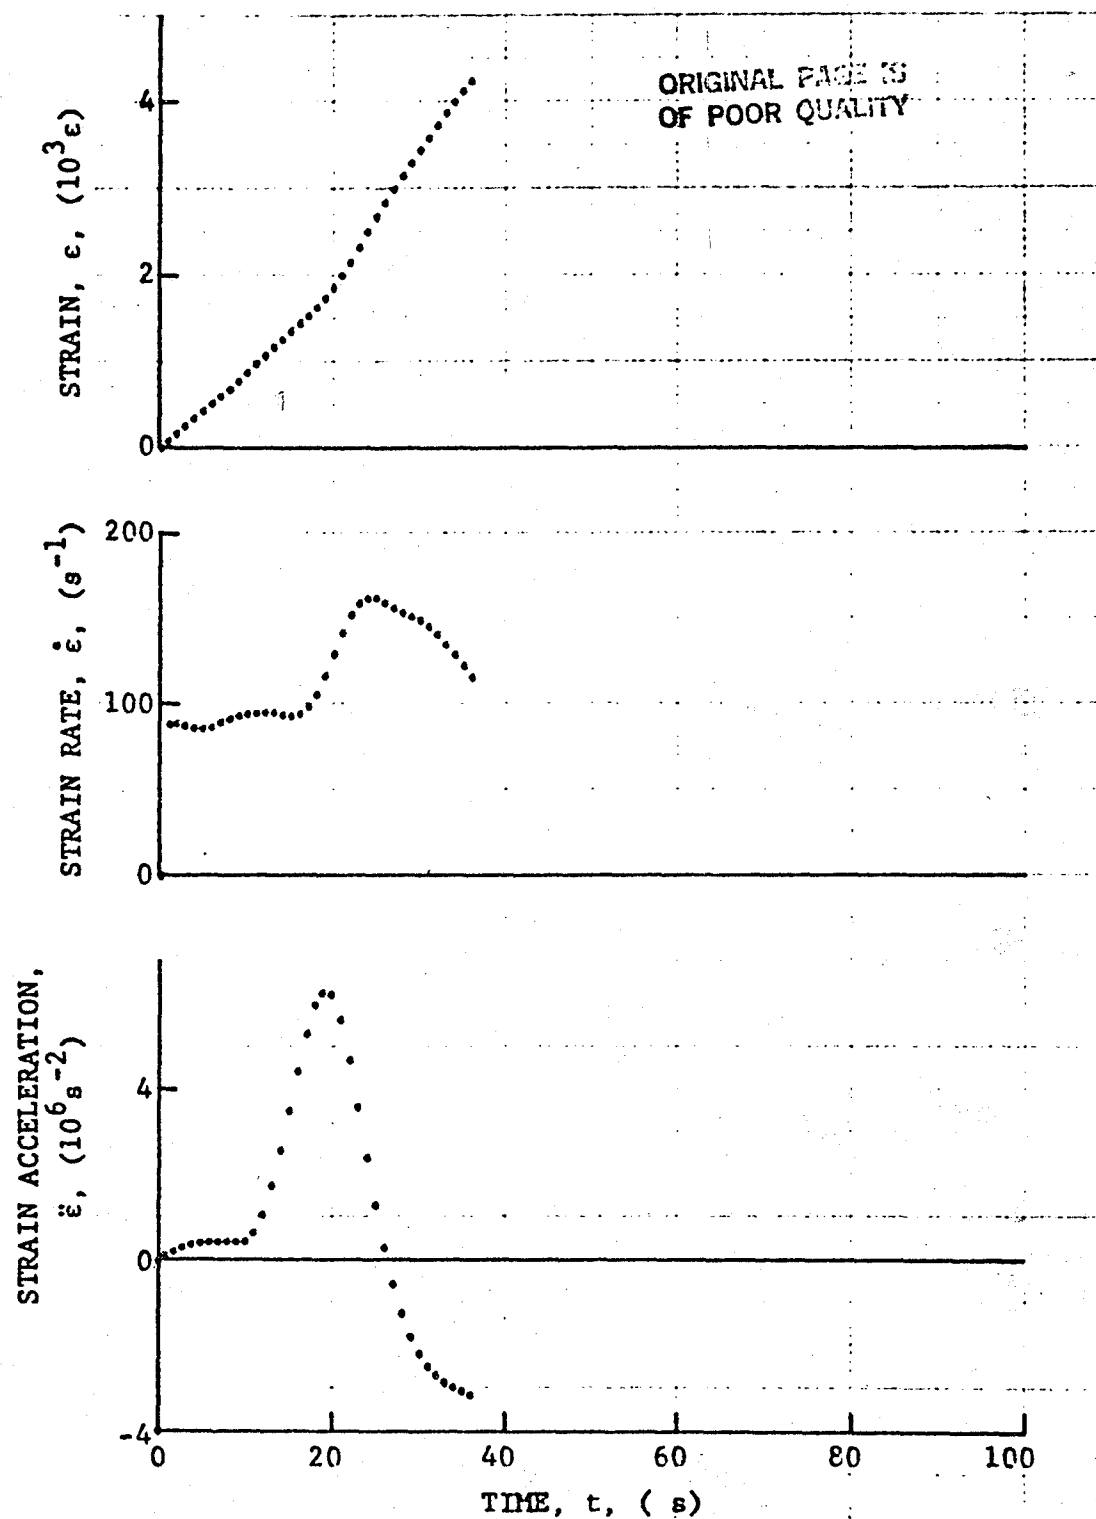


Figure 4-5. Strain and its derivatives in steel ring for Specimen No. 35-4.

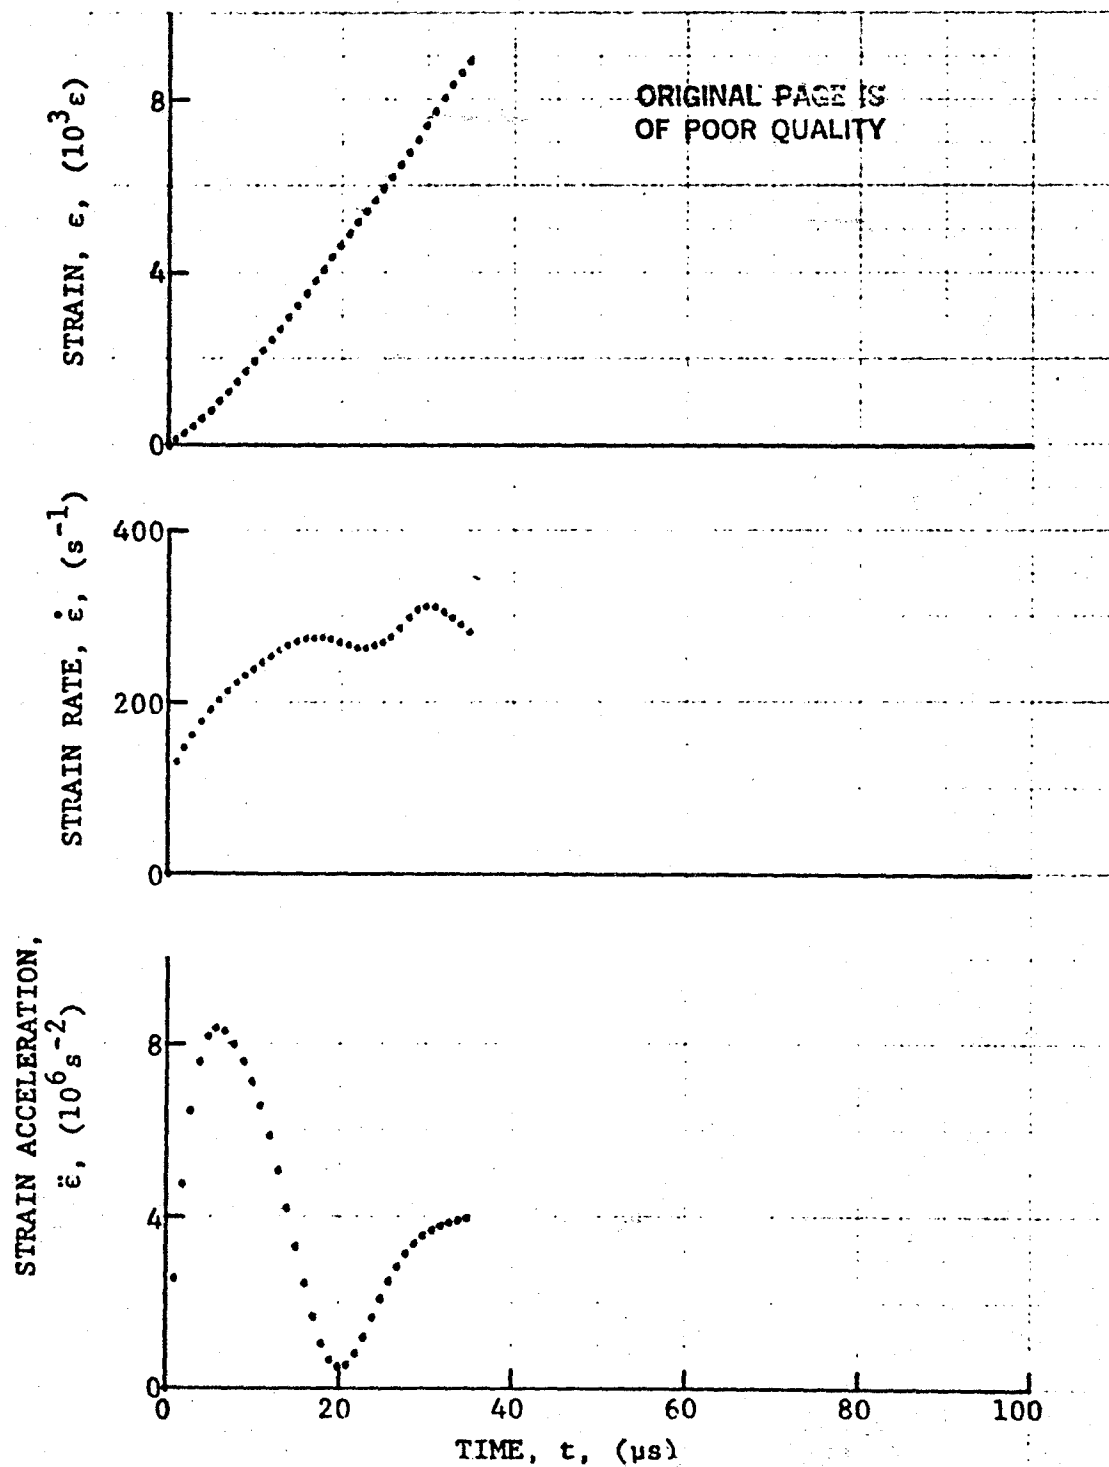


Figure 4-6. Circumferential strain and its derivatives in  $[\pm 15]_{2s}$  SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 35-4.



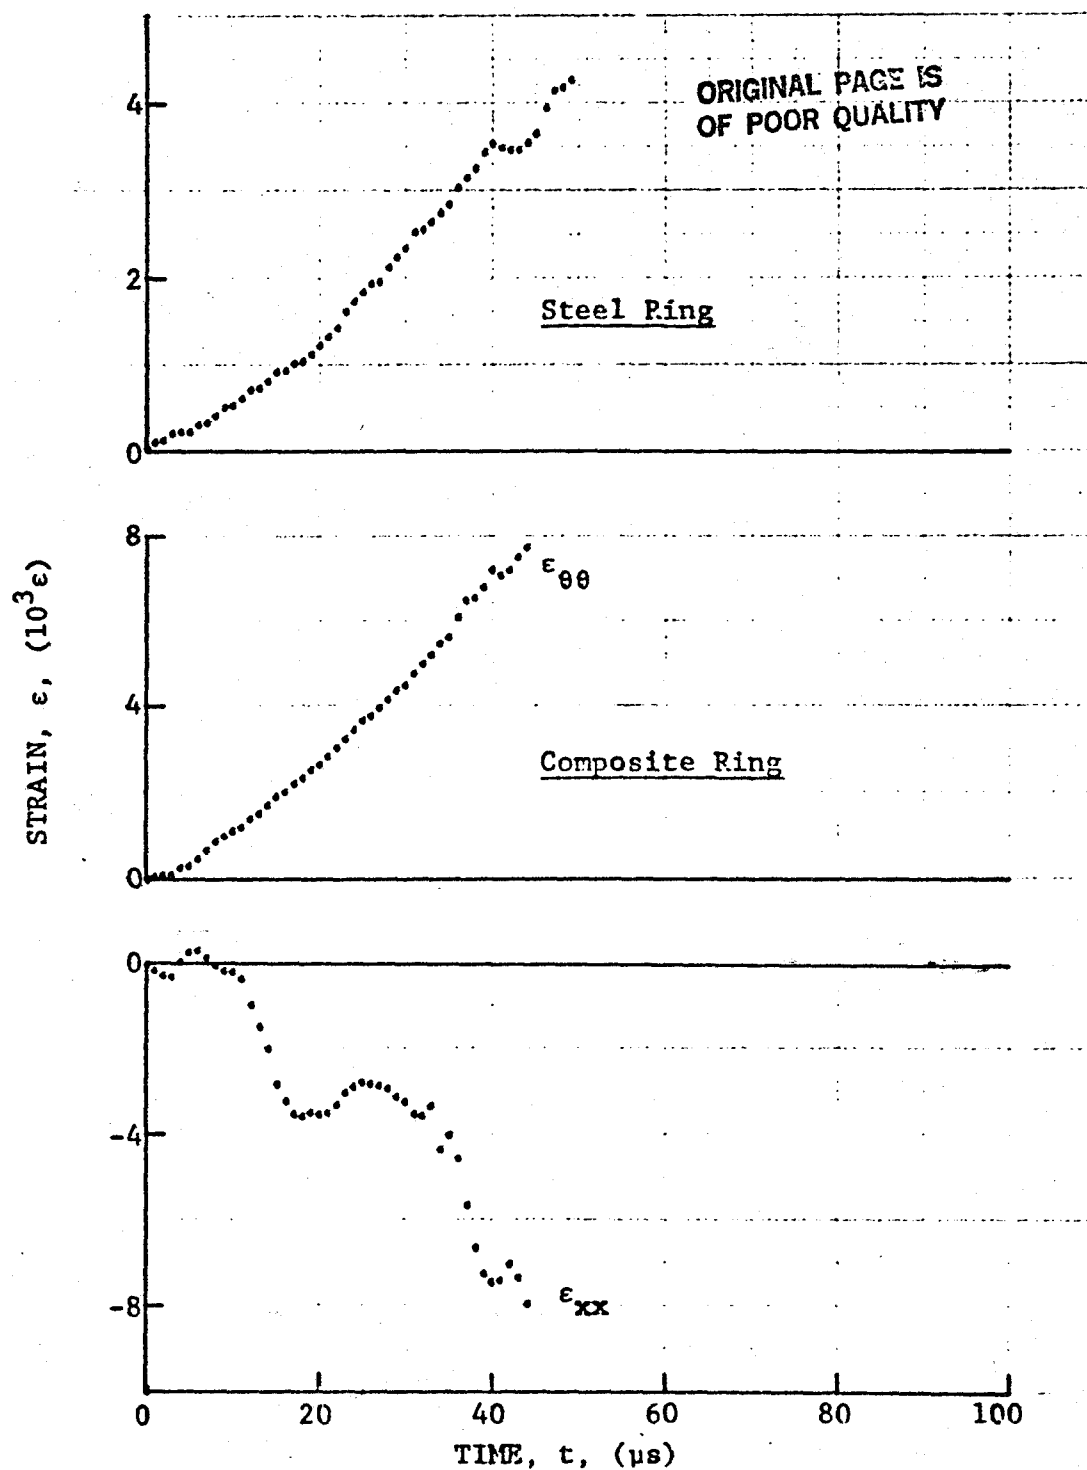


Figure 4-7. Strain records in steel ring and  $[\pm 15]_2$  SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 35-6 (100 mg PETN detonator).

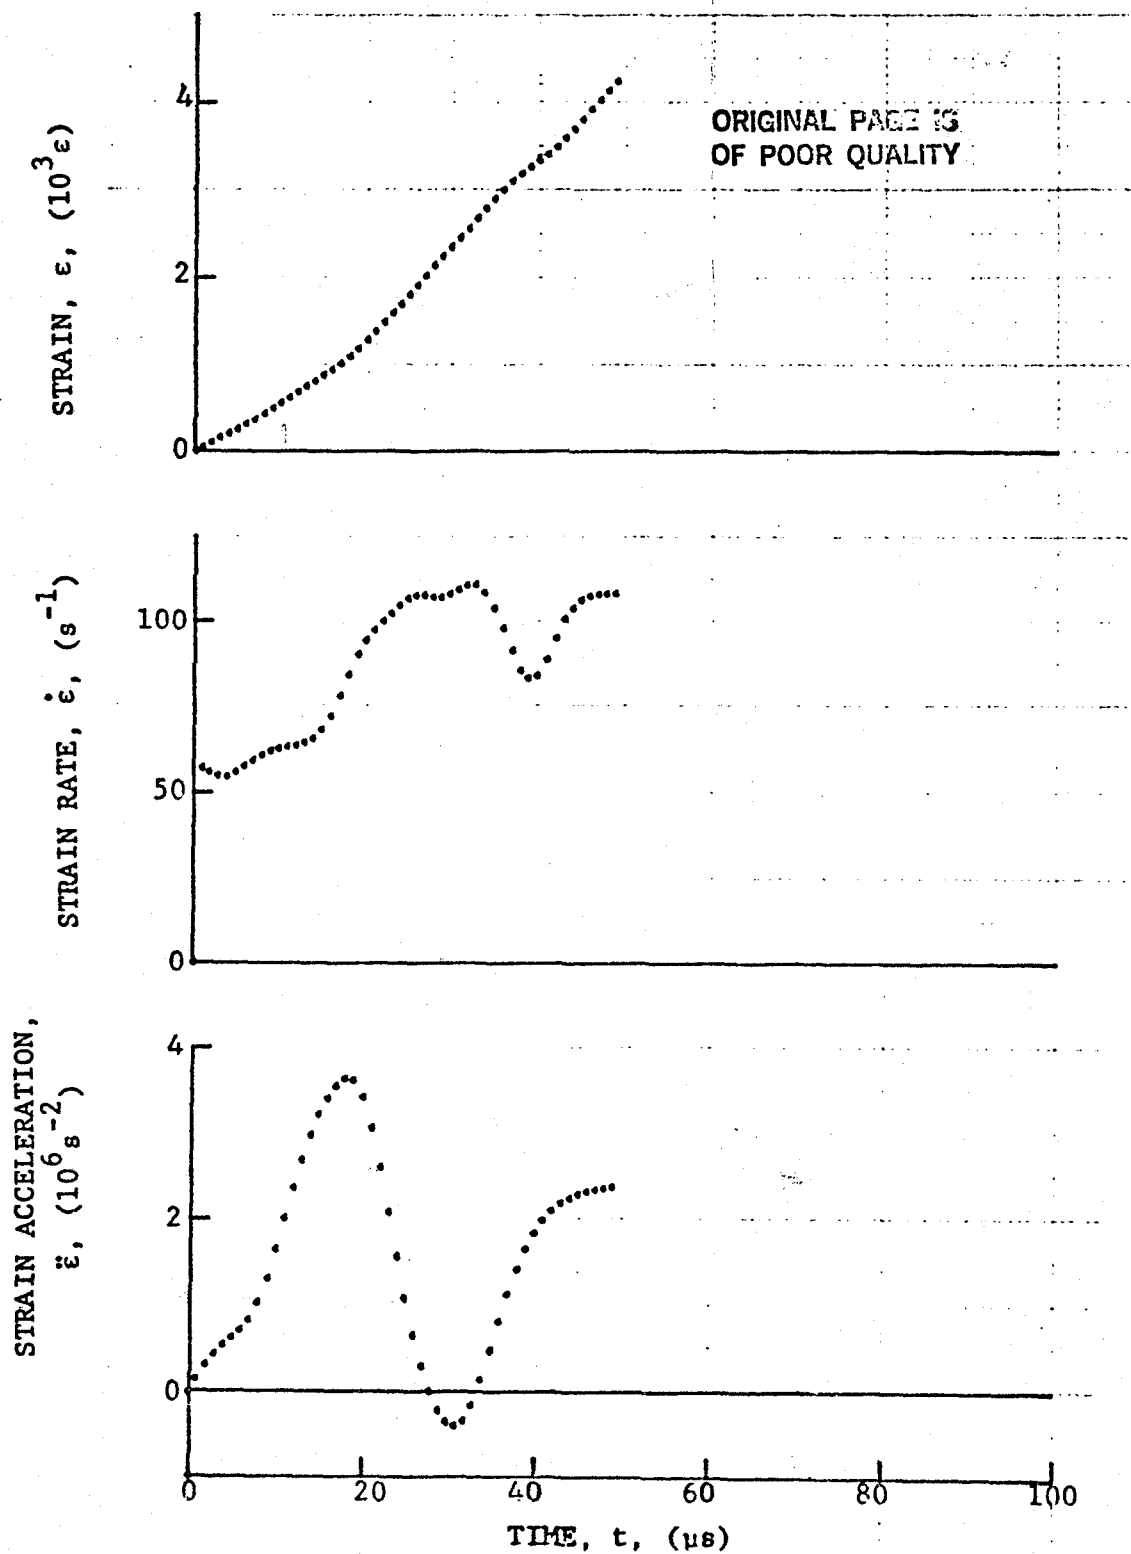


Figure 4-8. Strain and its derivatives in steel ring in Specimen No. 35-6.

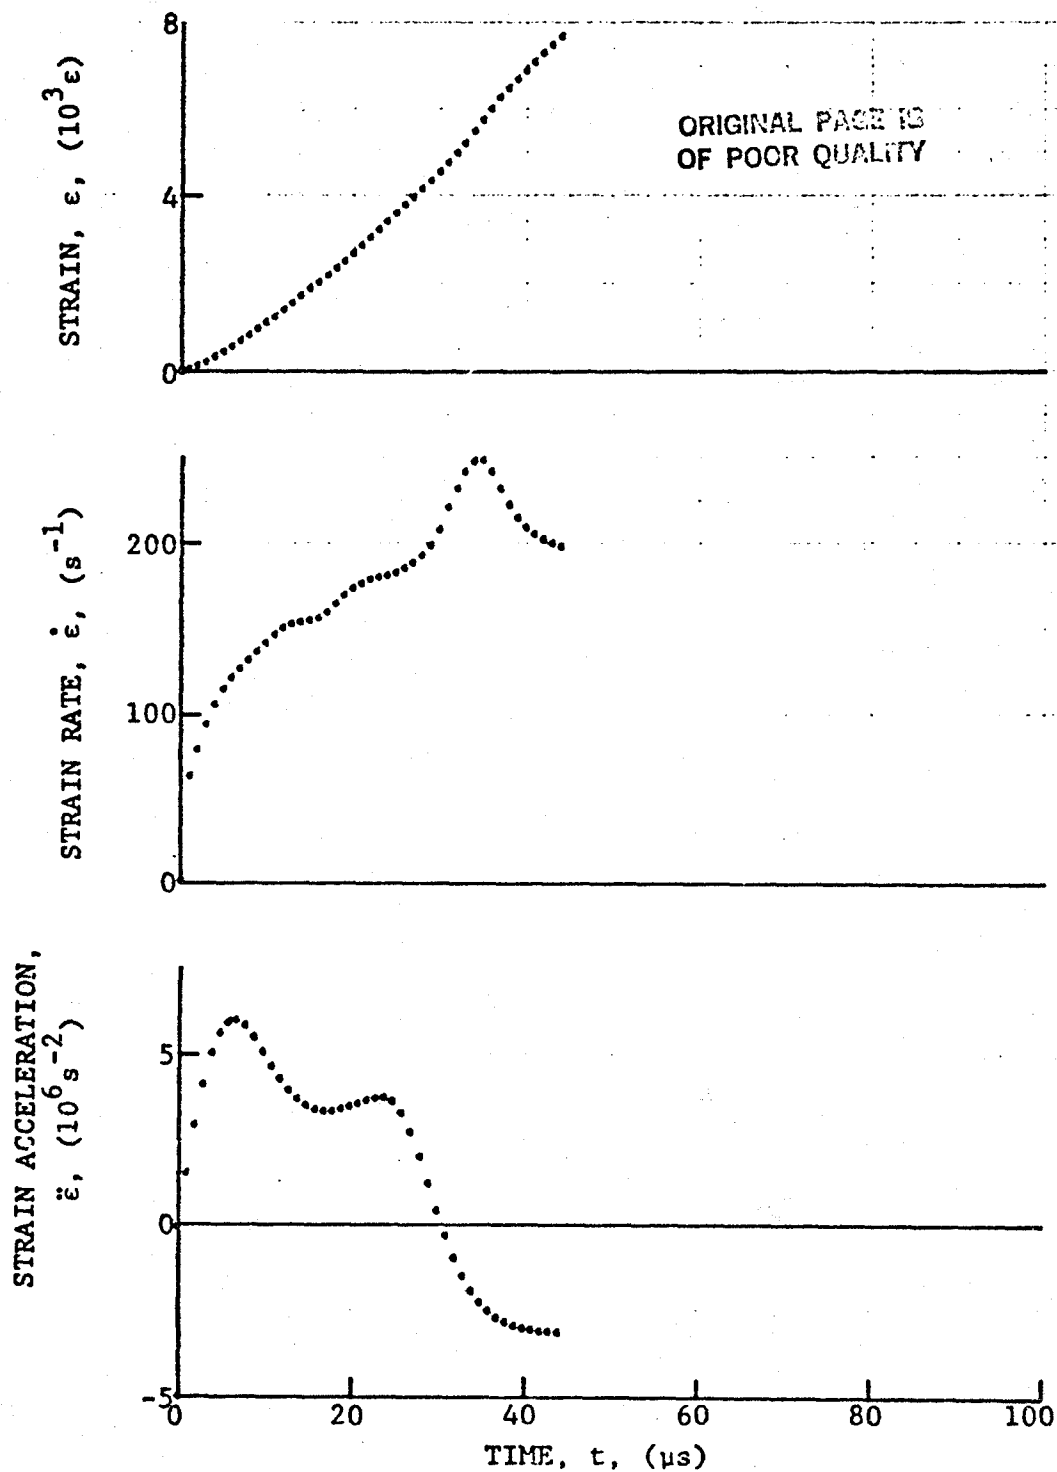


Figure 4-9. Circumferential strain and its derivatives in  $[\pm 15]_{2s}$  SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 35-6.

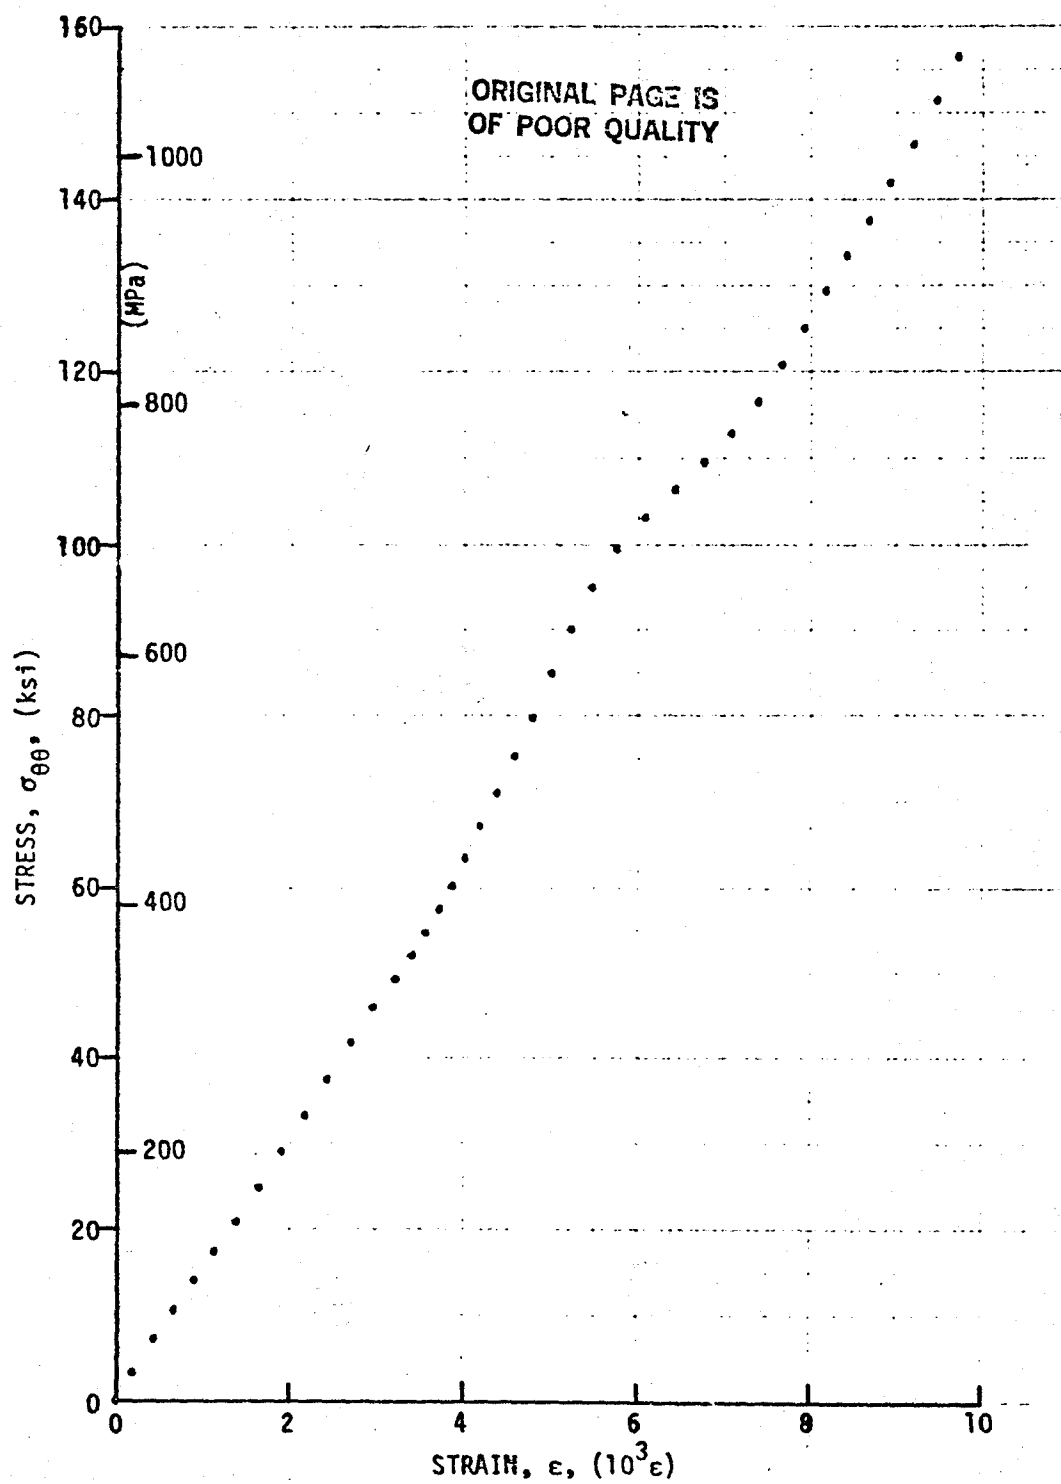


Figure 4-10. Stress-strain curve for dynamically loaded  $[\pm 15]_{2s}$  SP288/AS graphite/epoxy ring, Specimen No. 35-2.

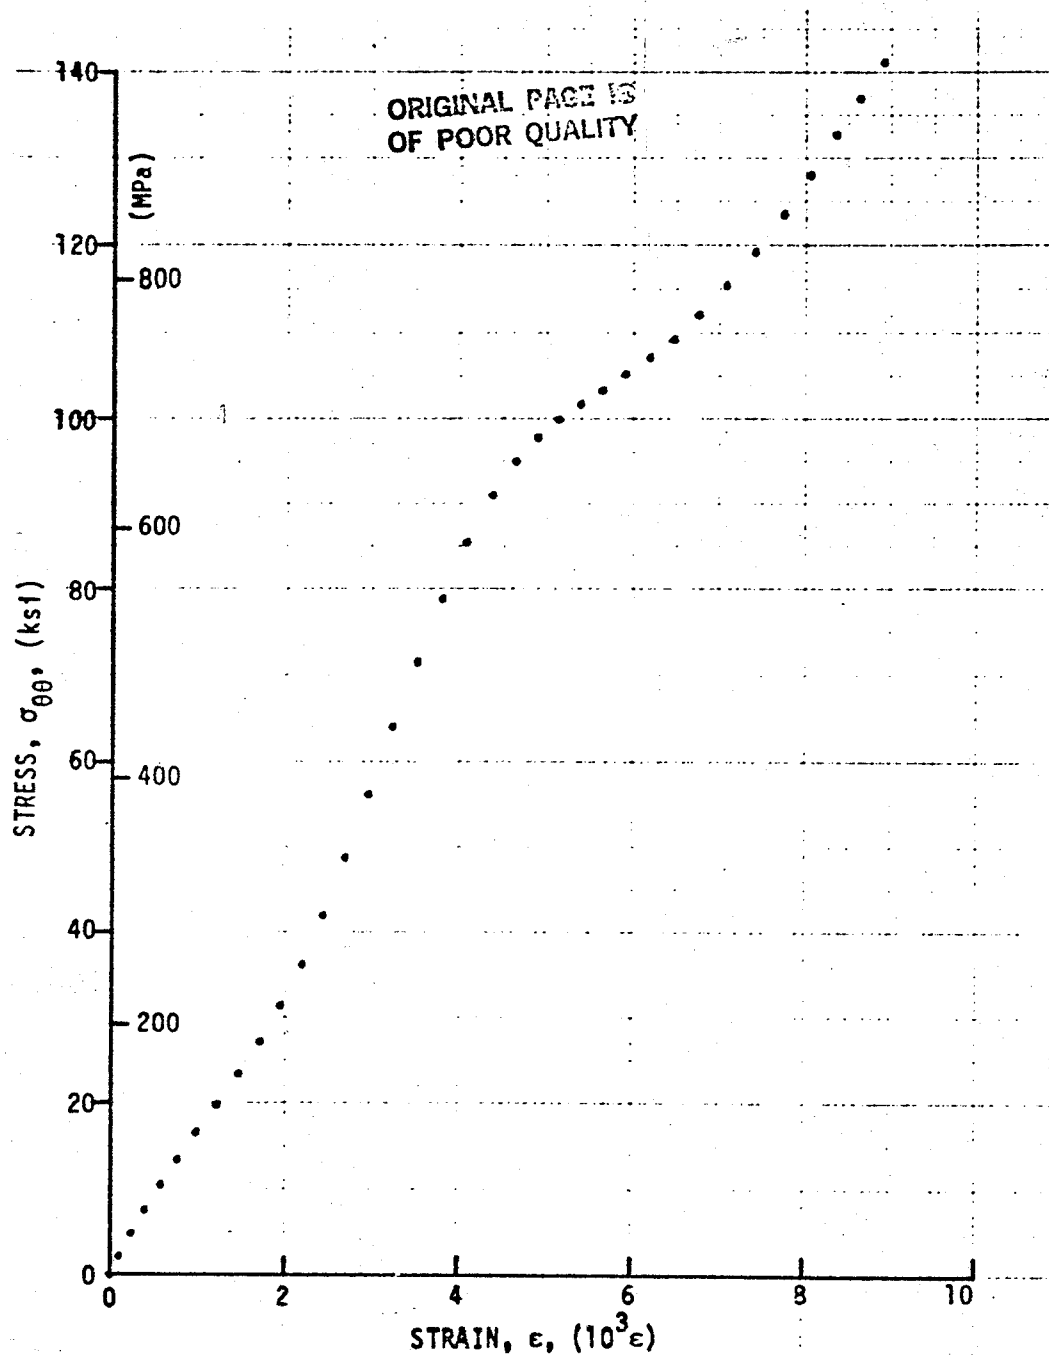


Figure 4-11. Stress-strain curve for dynamically loaded  $[\pm 15]_{2s}$  SP288/AS graphite/epoxy ring, Specimen No. 35-4.

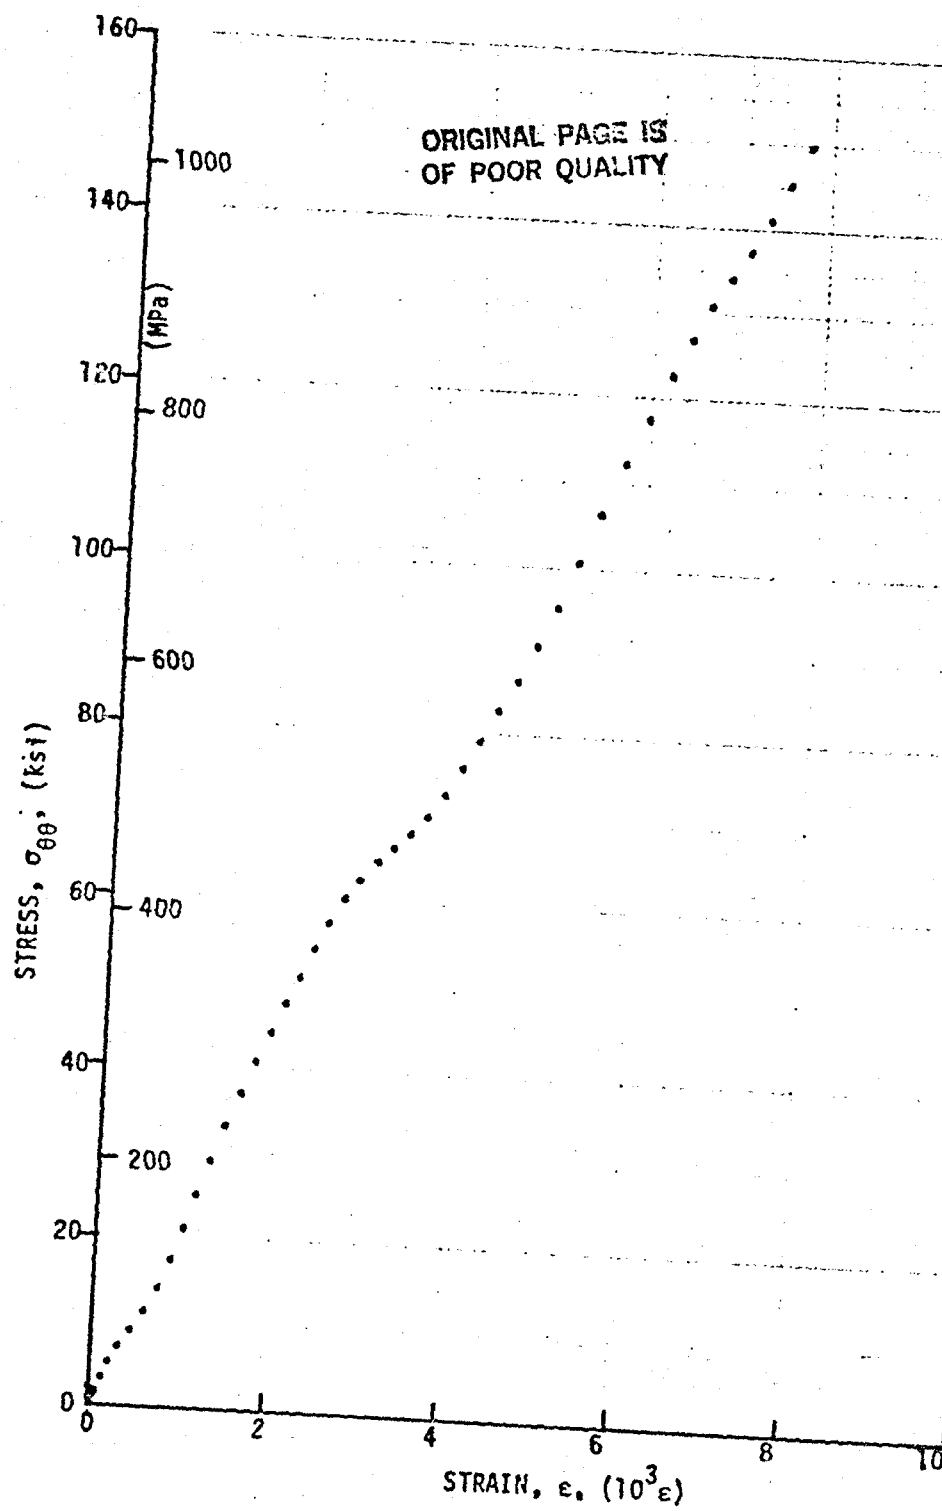


Figure 4-12. Stress-strain curve for dynamically loaded  $[\pm 15]_{2s}$  SP288/AS graphite/epoxy ring, Specimen No. 35-6.

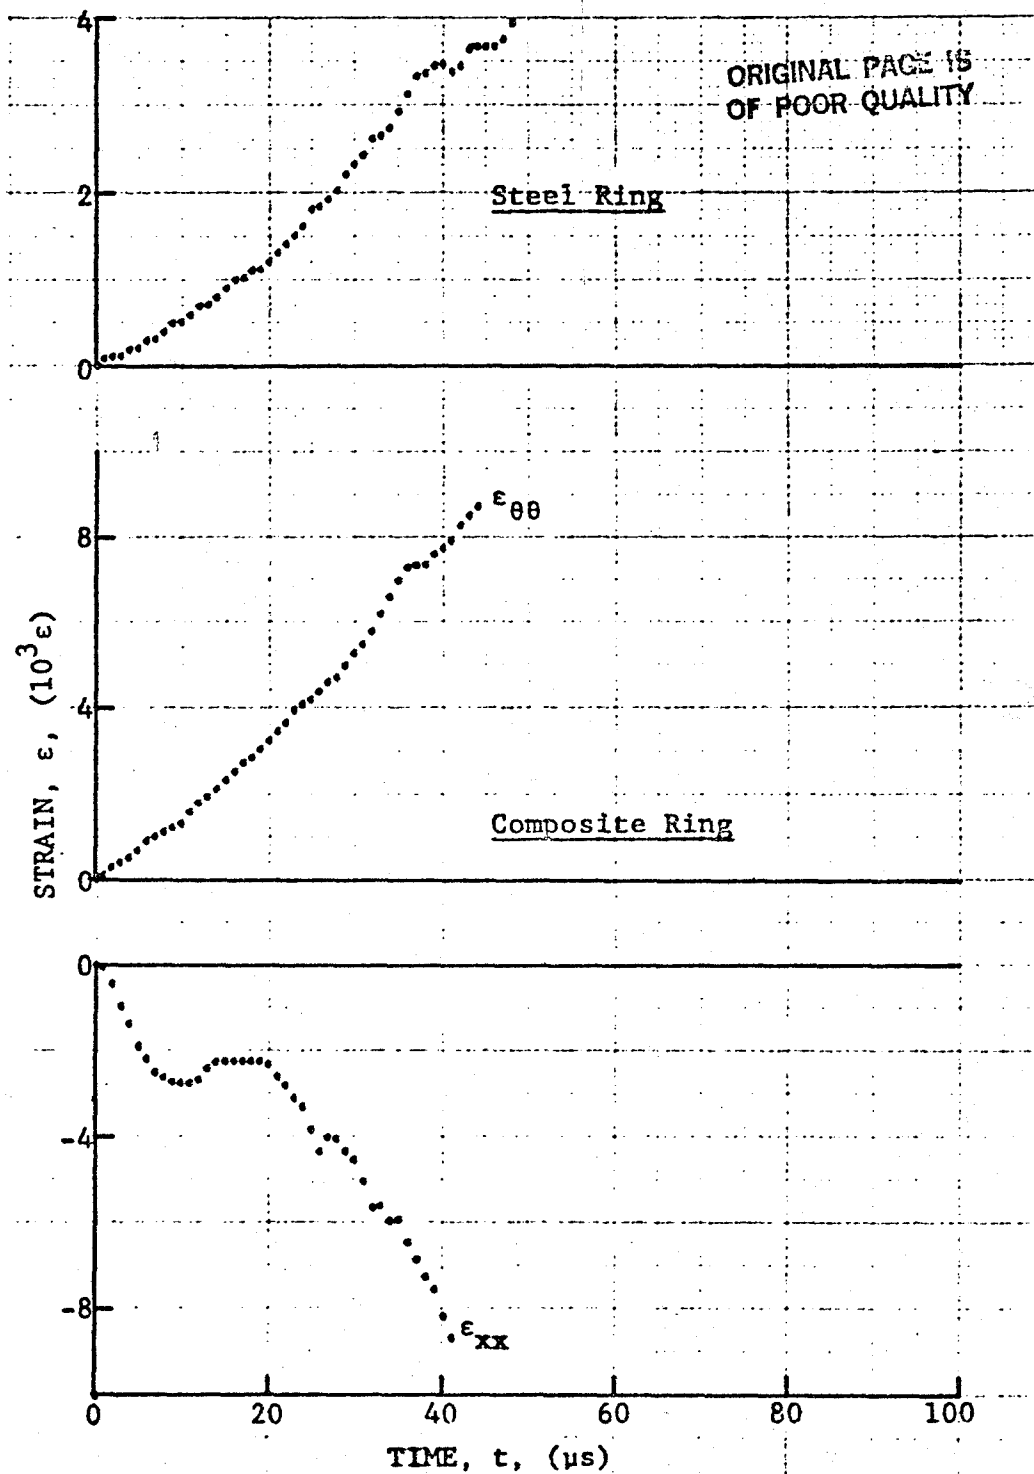


Figure 4-13. Strain records in steel ring and 80AS/20S/PR288  
[ $\pm 15$ ]<sub>2s</sub> graphite/S-glass/epoxy ring under dynamic loading  
for Specimen No. 36-2 (100 mg PETN detonator).

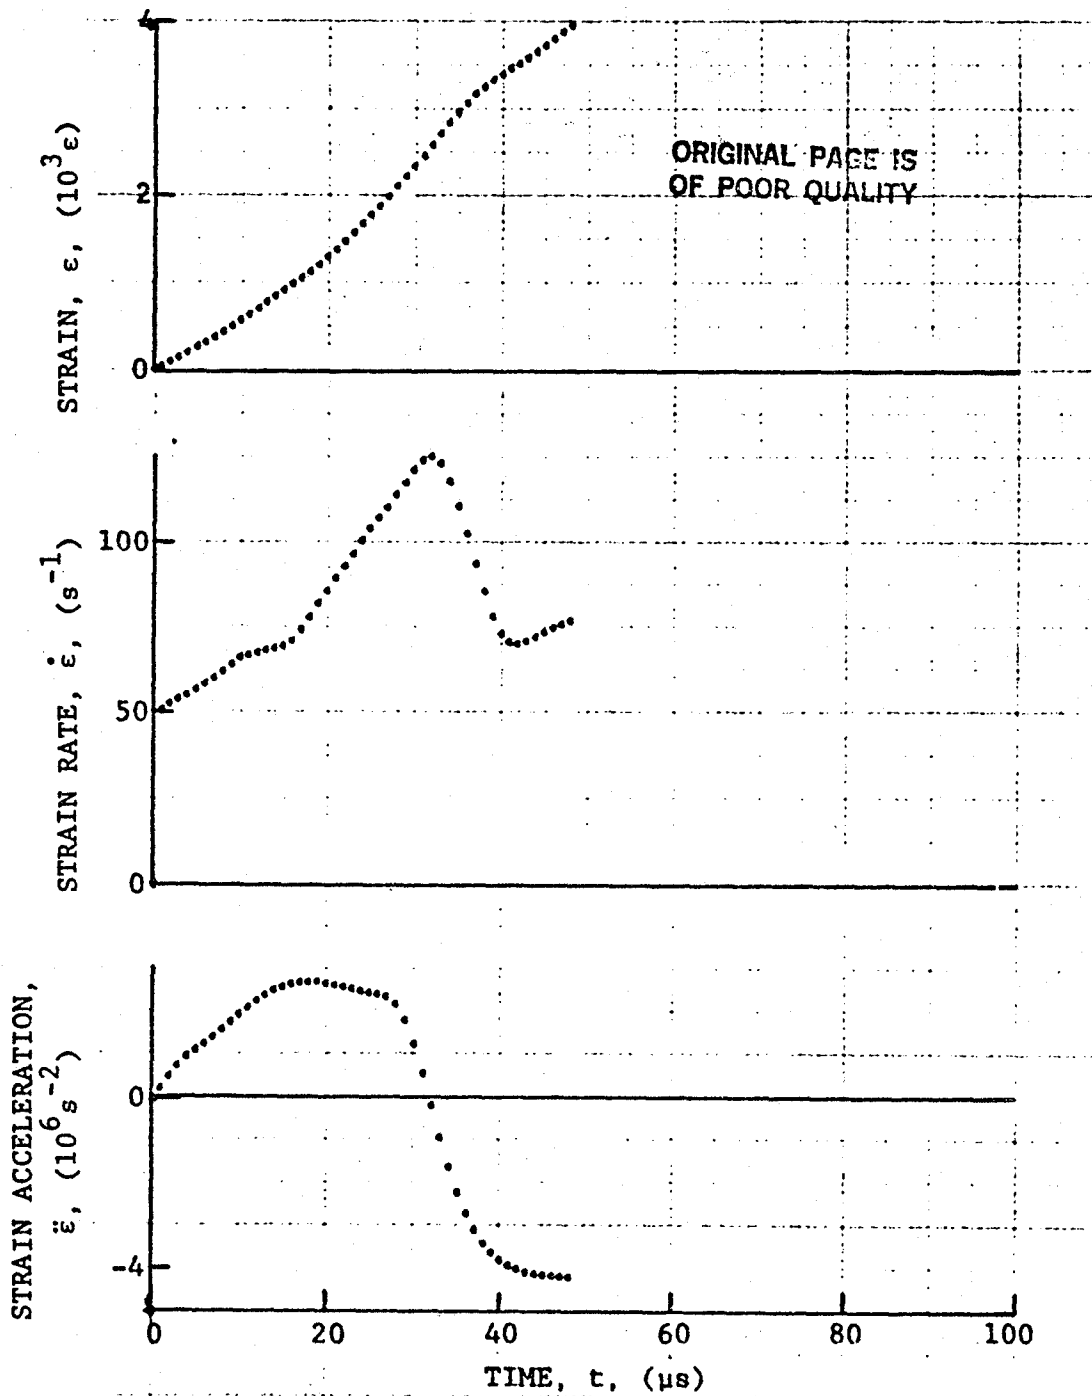


Figure 4-14. Strain and its derivatives in steel ring for Specimen No. 36-2.



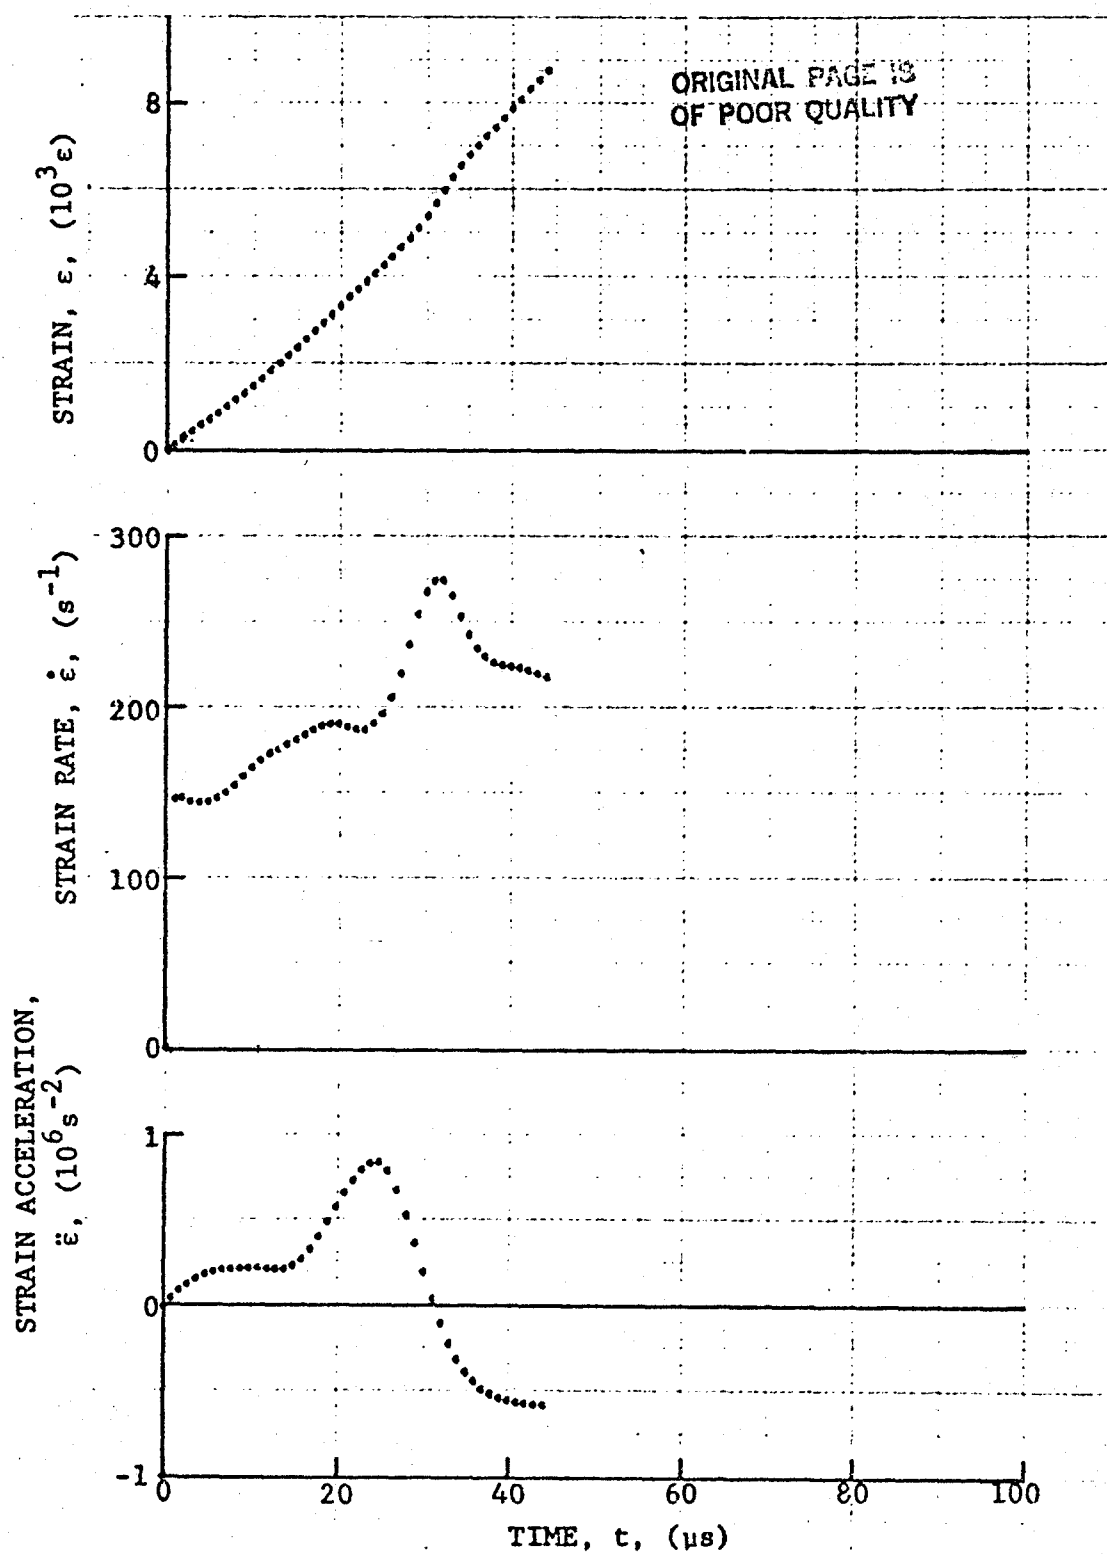


Figure 4-15. Circumferential strain and its derivatives in 80AS/20S/PR288  $[\pm 15]_2$ s graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 36-2.

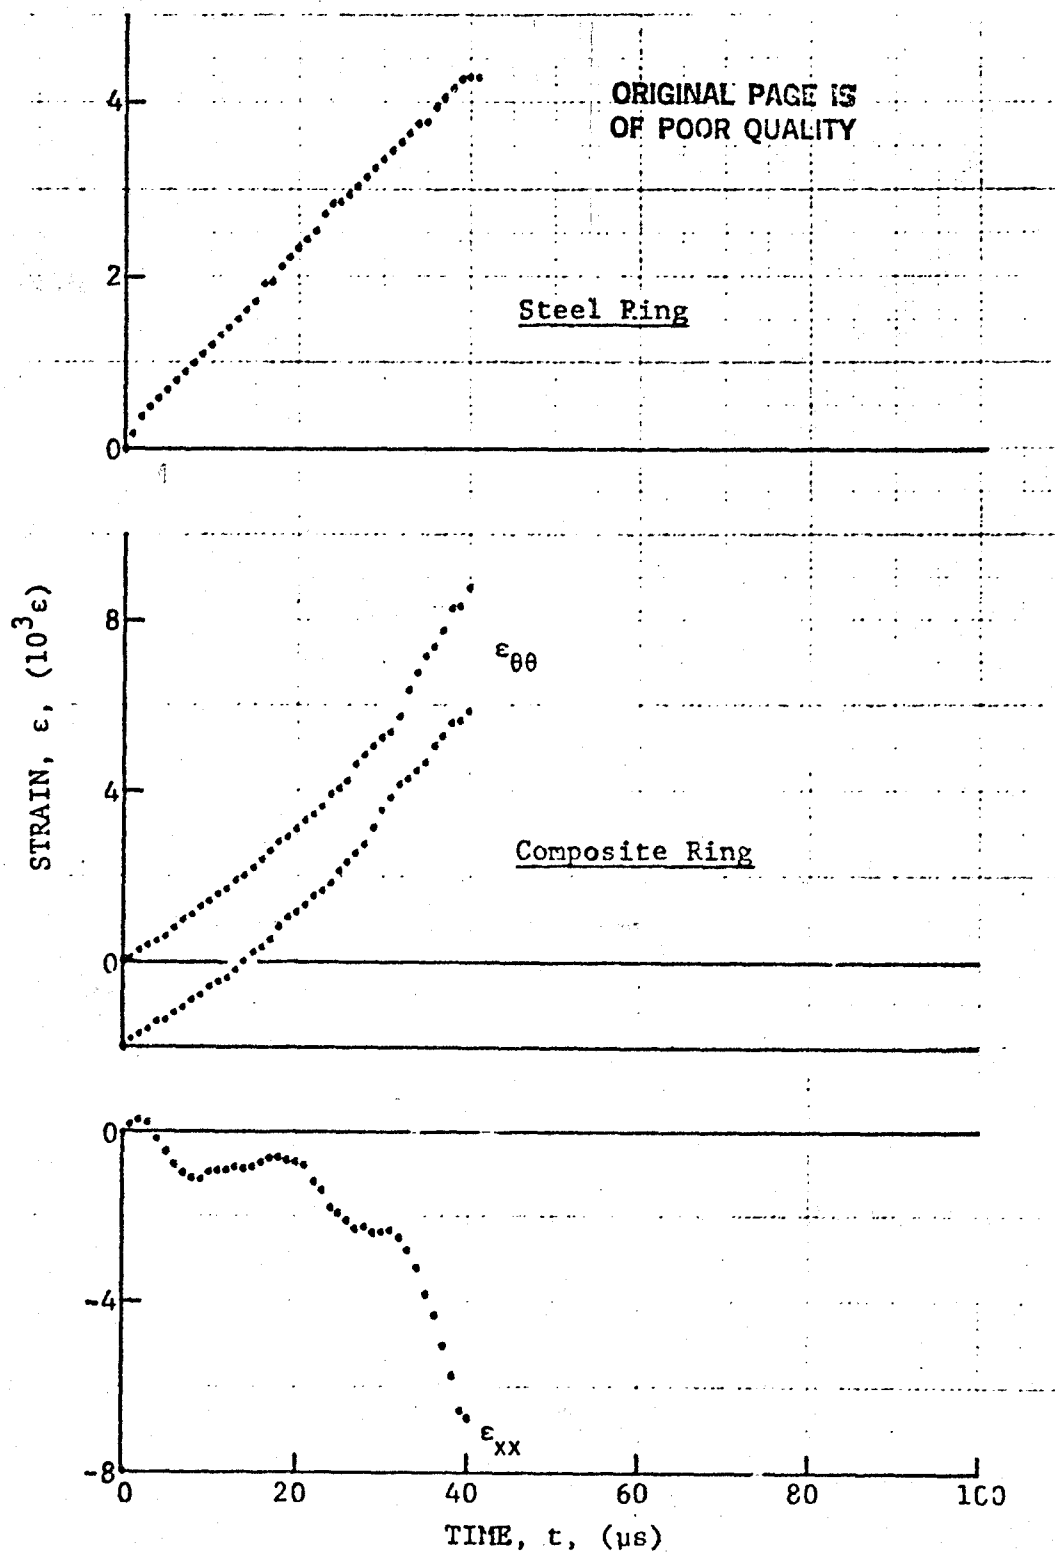


Figure 4-16. Strain records in steel ring and 80AS/20S/PR288  
[ $\pm 15$ ]<sub>2s</sub> graphite/S-glass/epoxy ring under dynamic loading  
for Specimen No. 36-4 (100 mg PETN detonator).

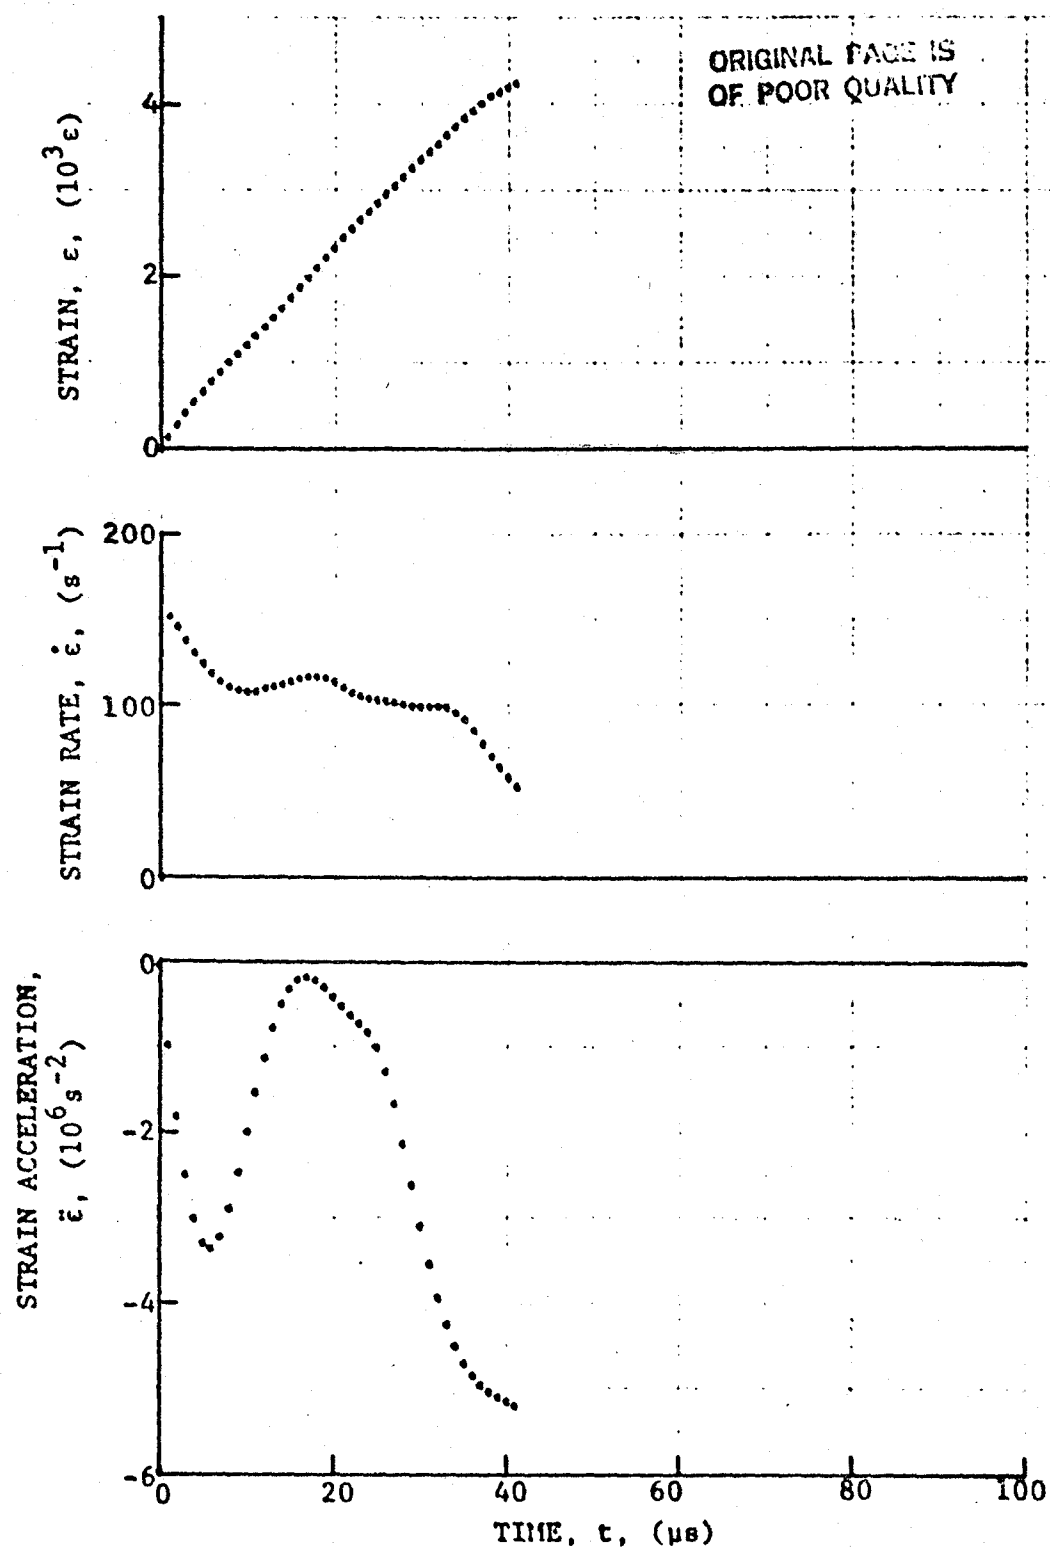


Figure 4-17. Strain and its derivatives in steel ring for Specimen No. 36-4.

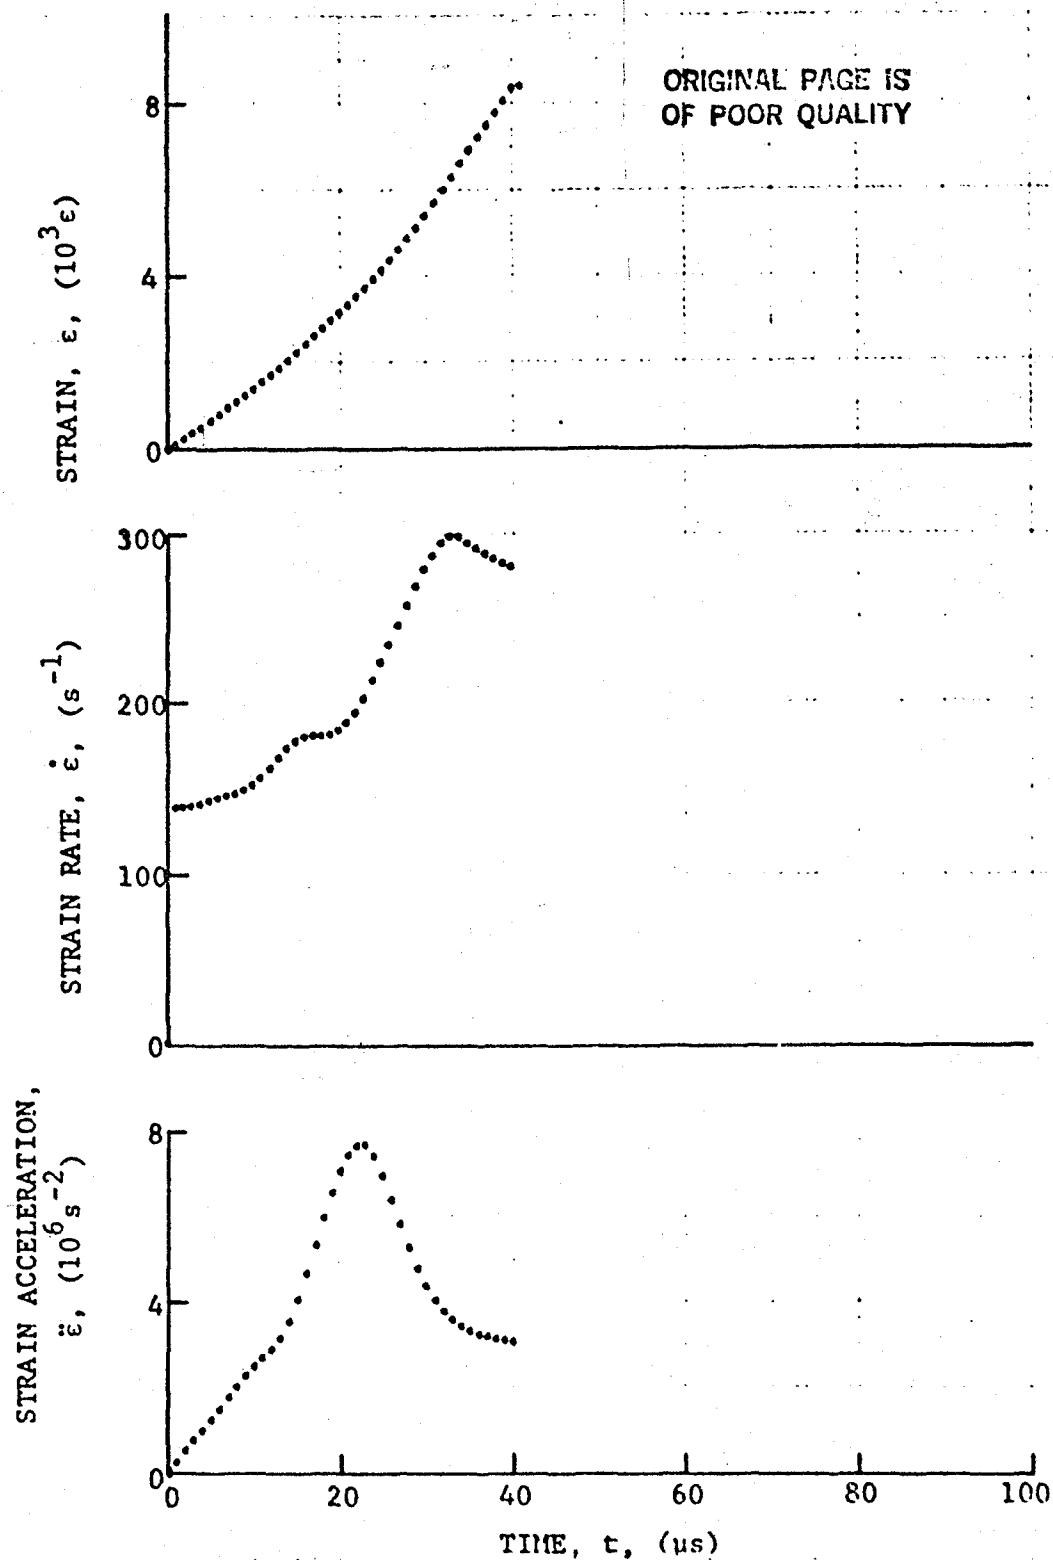


Figure 4-18. Circumferential strain and its derivatives in 80AS/20S/PR288  $[\pm 15]_{2S}$  graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 36-4.

ORIGINAL PAGE IS  
OF POOR QUALITY

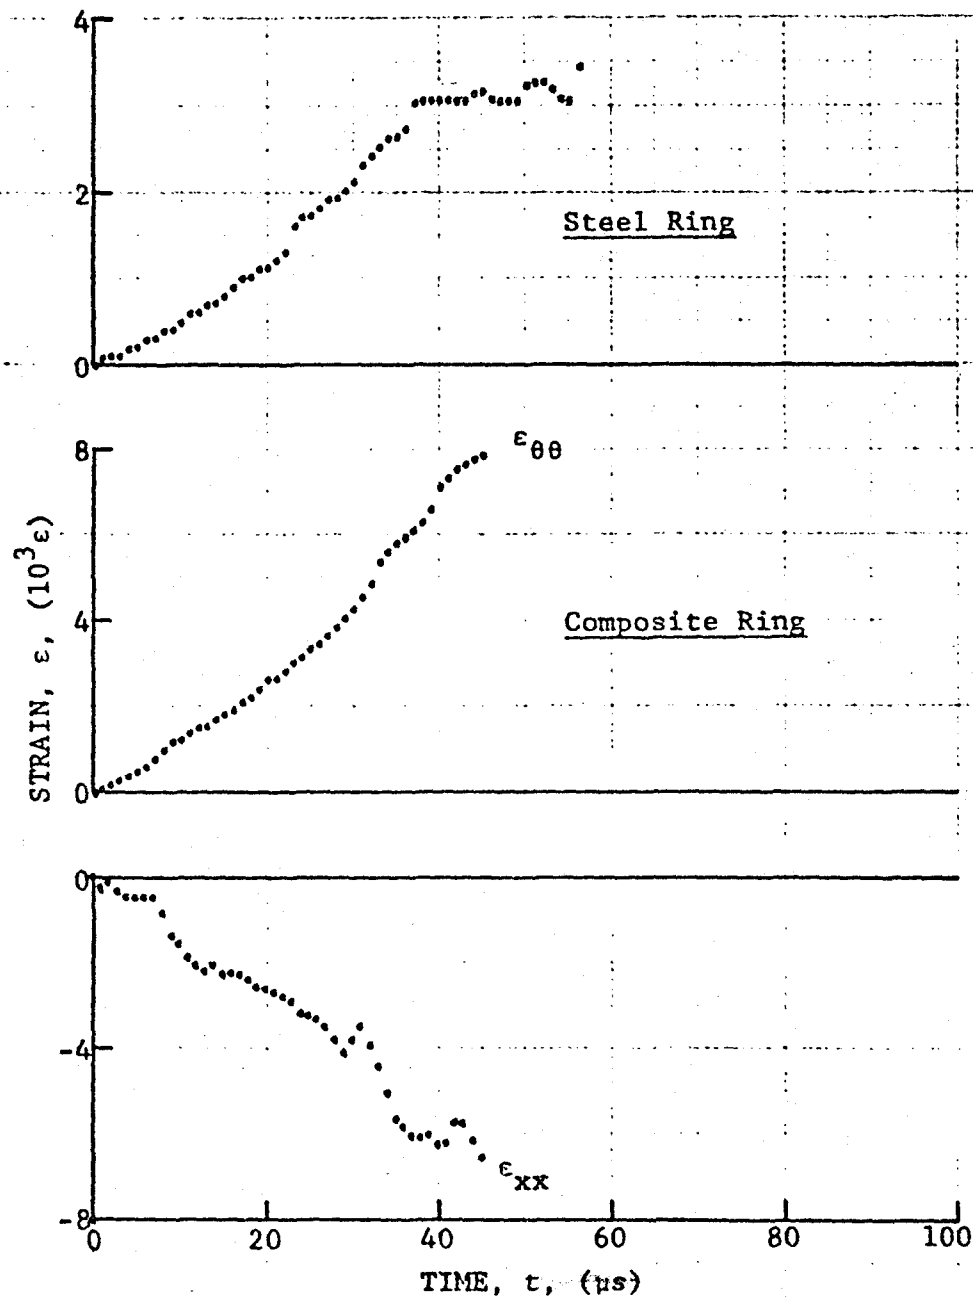


Figure 4-19. Strain records in steel ring and 80AS/20S/PR288  $[\pm 15]_2$  graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 36-7 (100 mg PETN detonator).

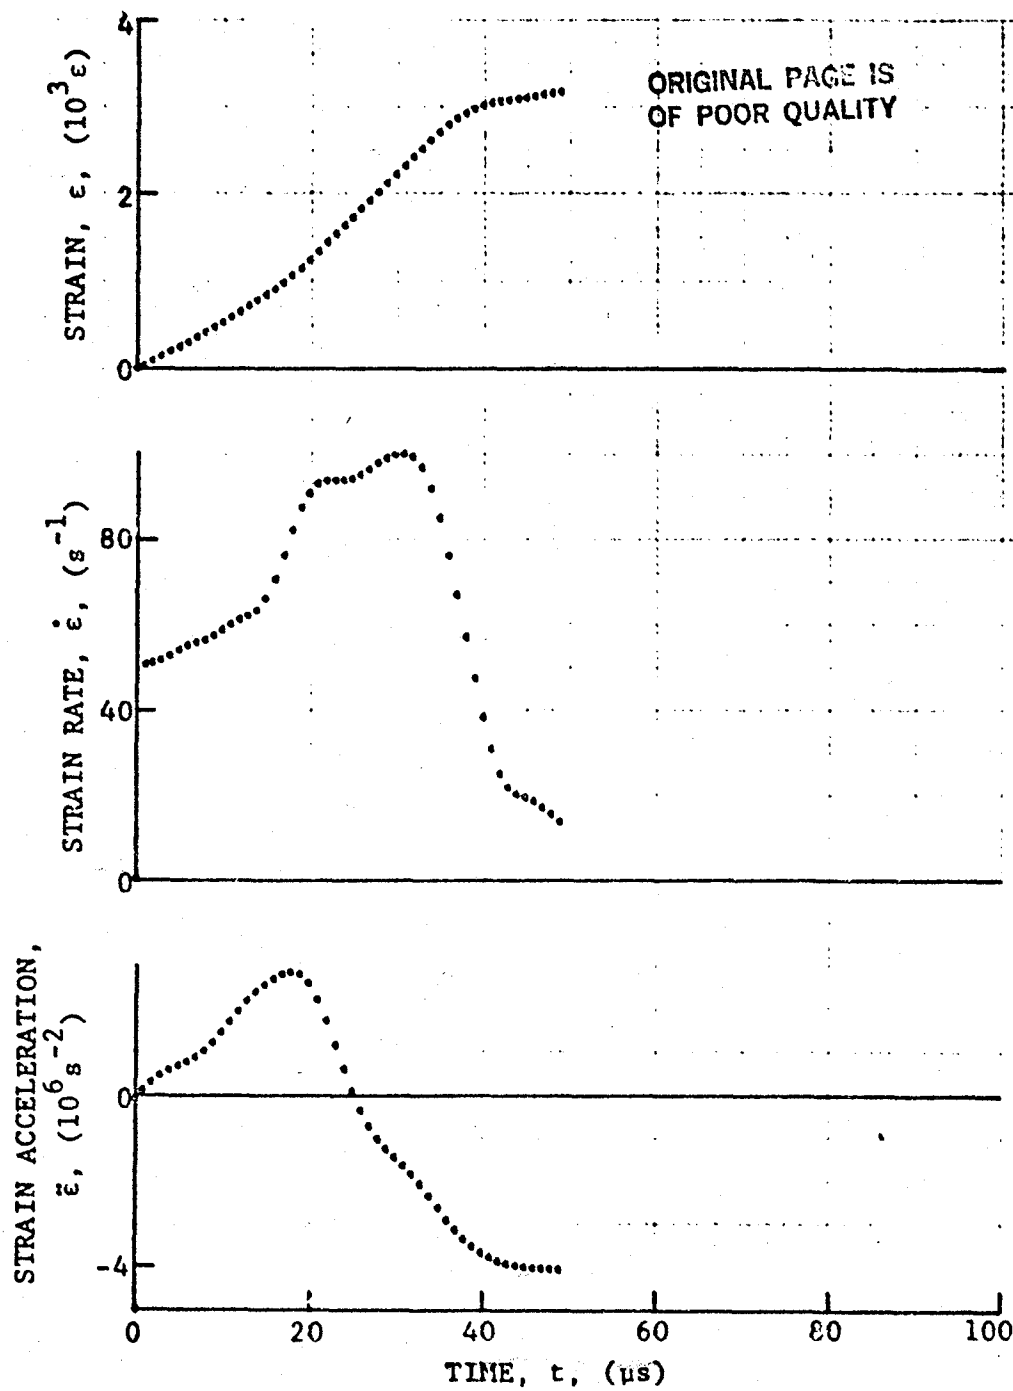


Figure 4-20. Strain and its derivatives in steel ring for Specimen No. 36-7.

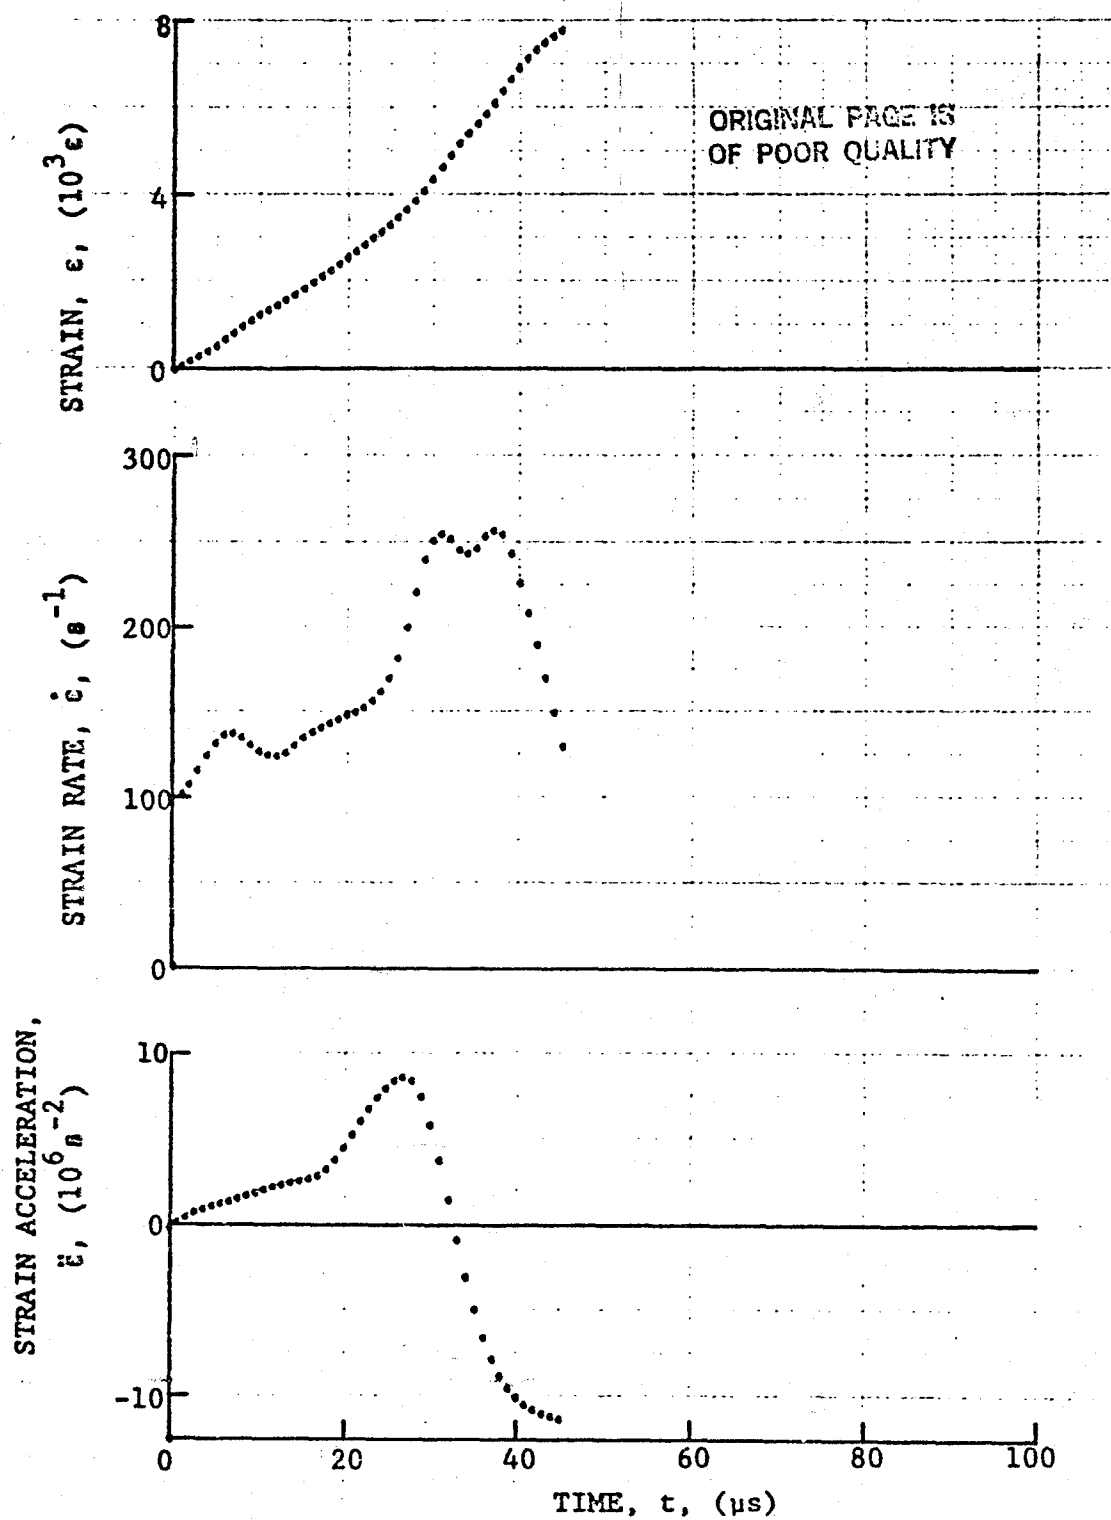


Figure 4-21. Circumferential strain and its derivatives in 80AS/20S/PR288  $[\pm 15]_{2S}$  graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 36-7.

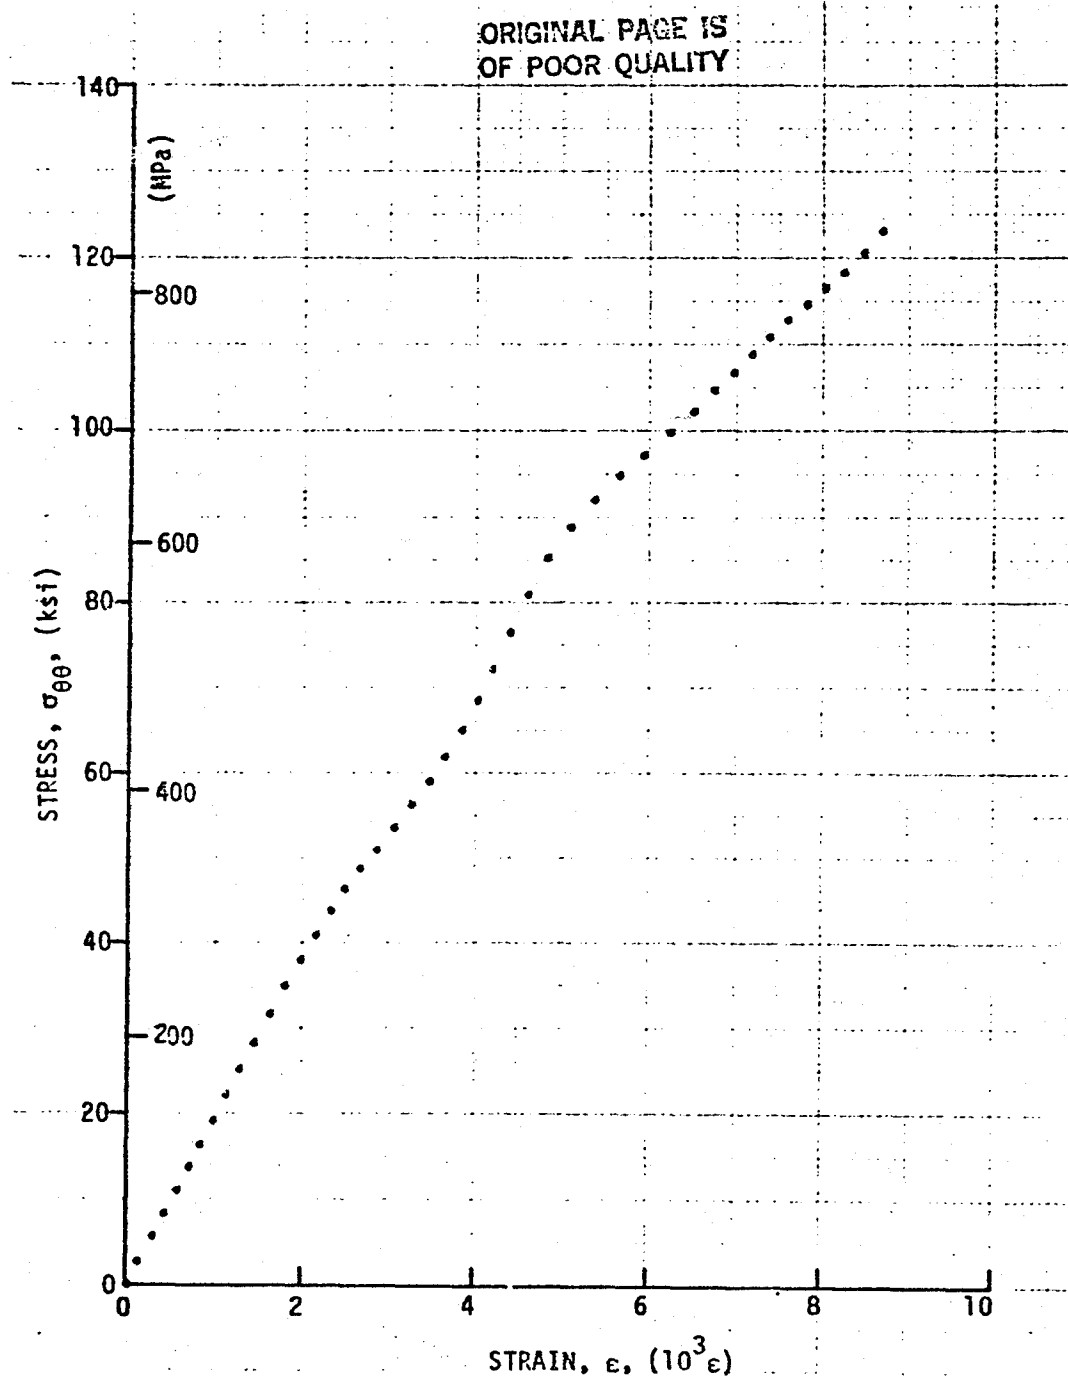


Figure 4-22. Stress-strain curve for dynamically loaded  
80AS/20S/PR288  $[\pm 15]_{2s}$  graphite/S-glass/epoxy ring,  
Specimen No. 36-2.



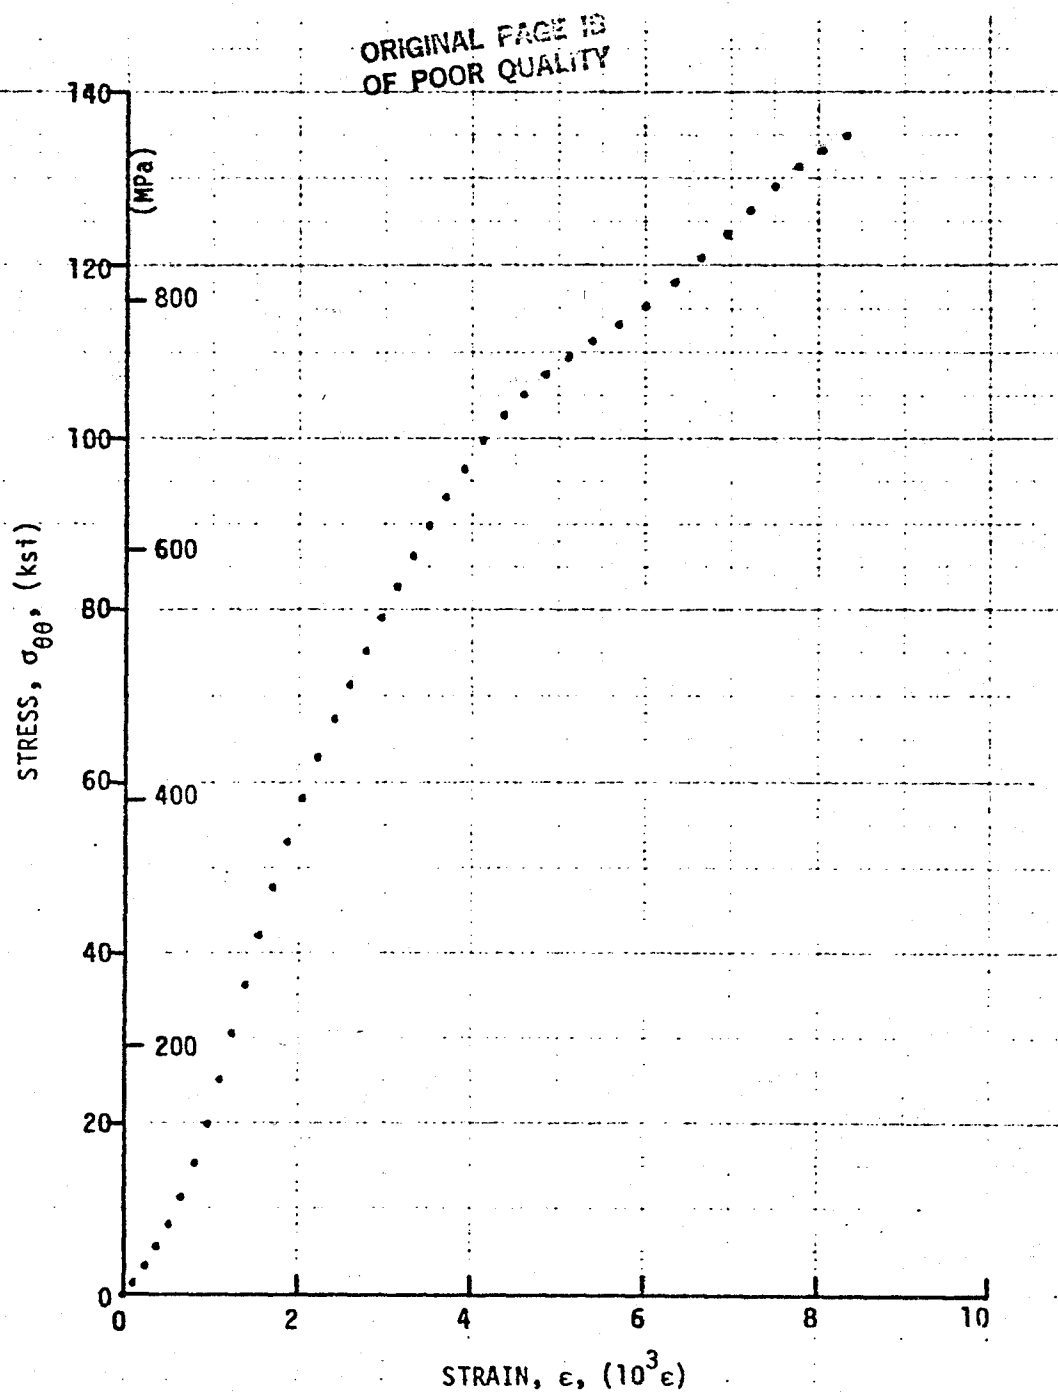


Figure 4-23. Stress-strain curve for dynamically loaded  
80AS/20S/PR288  $[\pm 15]_{2s}$  graphite/S-glass/epoxy ring,  
Specimen No. 36-4.

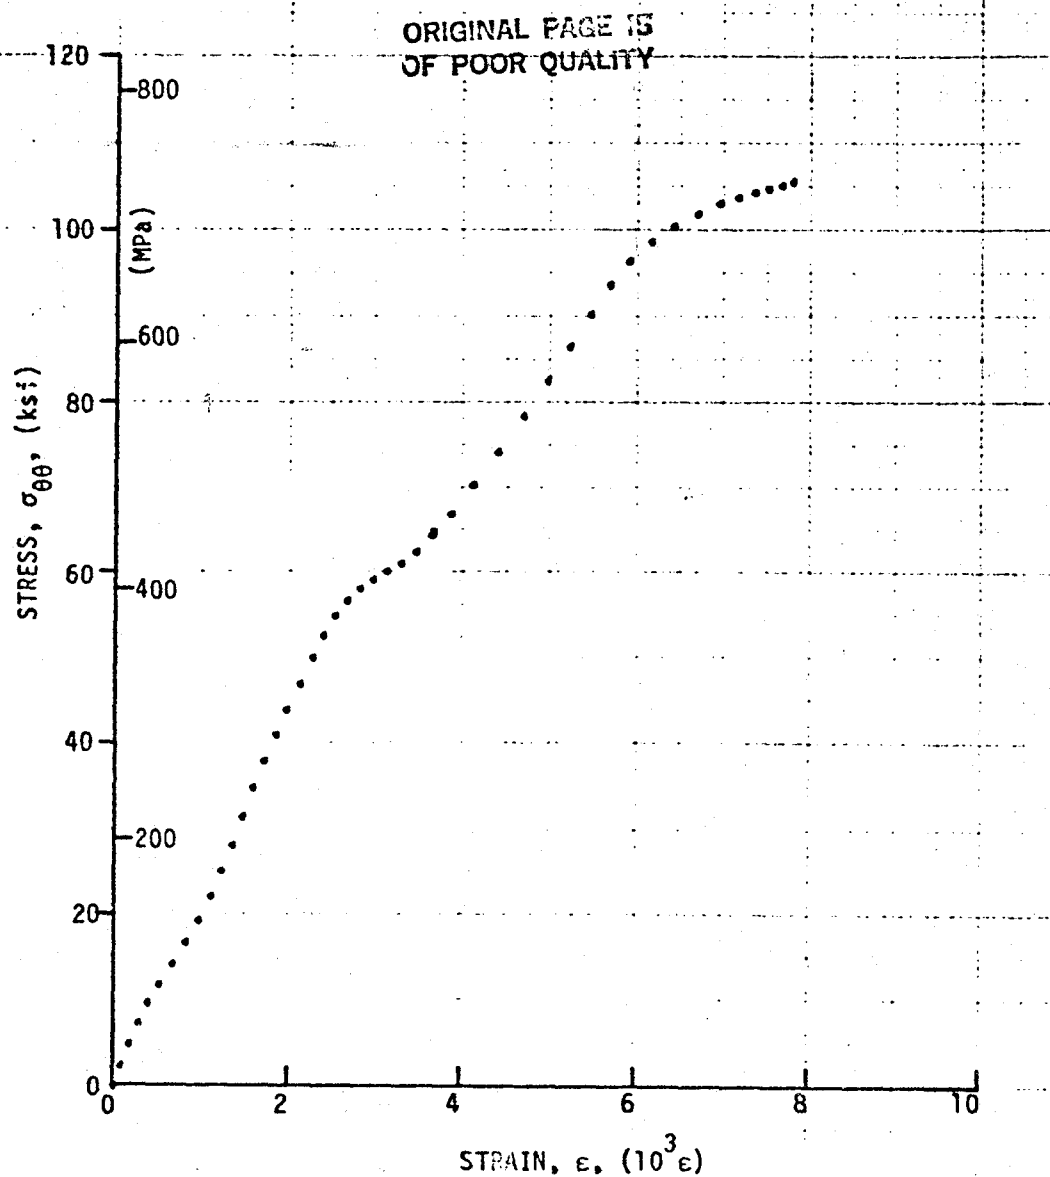


Figure 4-24. Stress-strain curve for dynamically loaded  
80AS/20S/PR208  $[\pm 15]_2$ s graphite/S-glass/epoxy ring,  
Specimen No. 36-7.

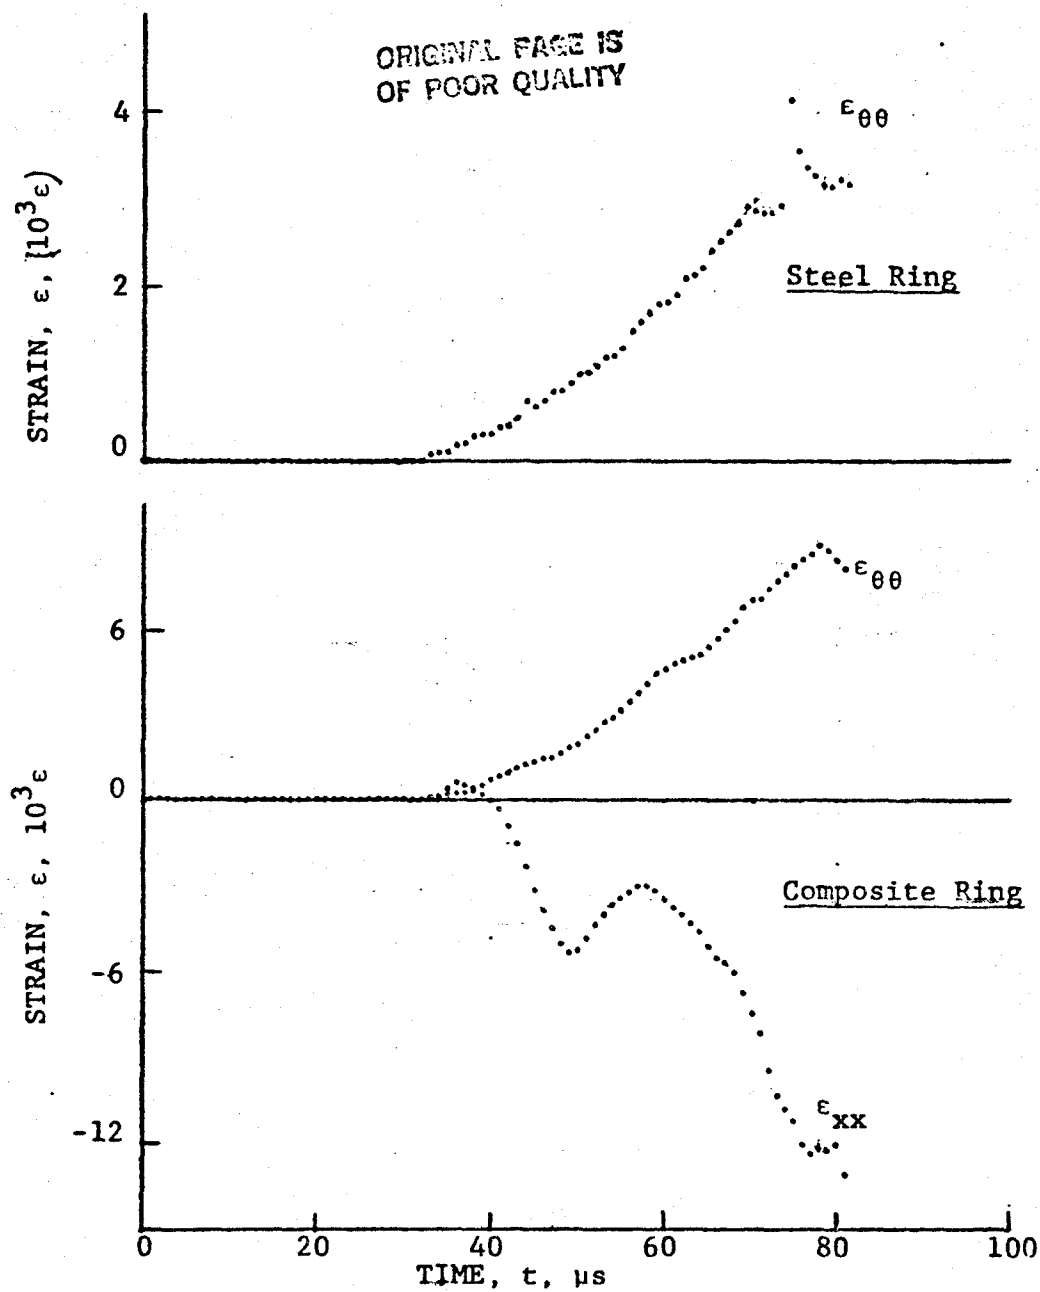


Figure 4-25. Strain records in steel ring and SP288/AS  $[\pm 22.5]_2$  graphite/epoxy ring under dynamic loading for Specimen No. 33-4 (100 mg PETN detonator).

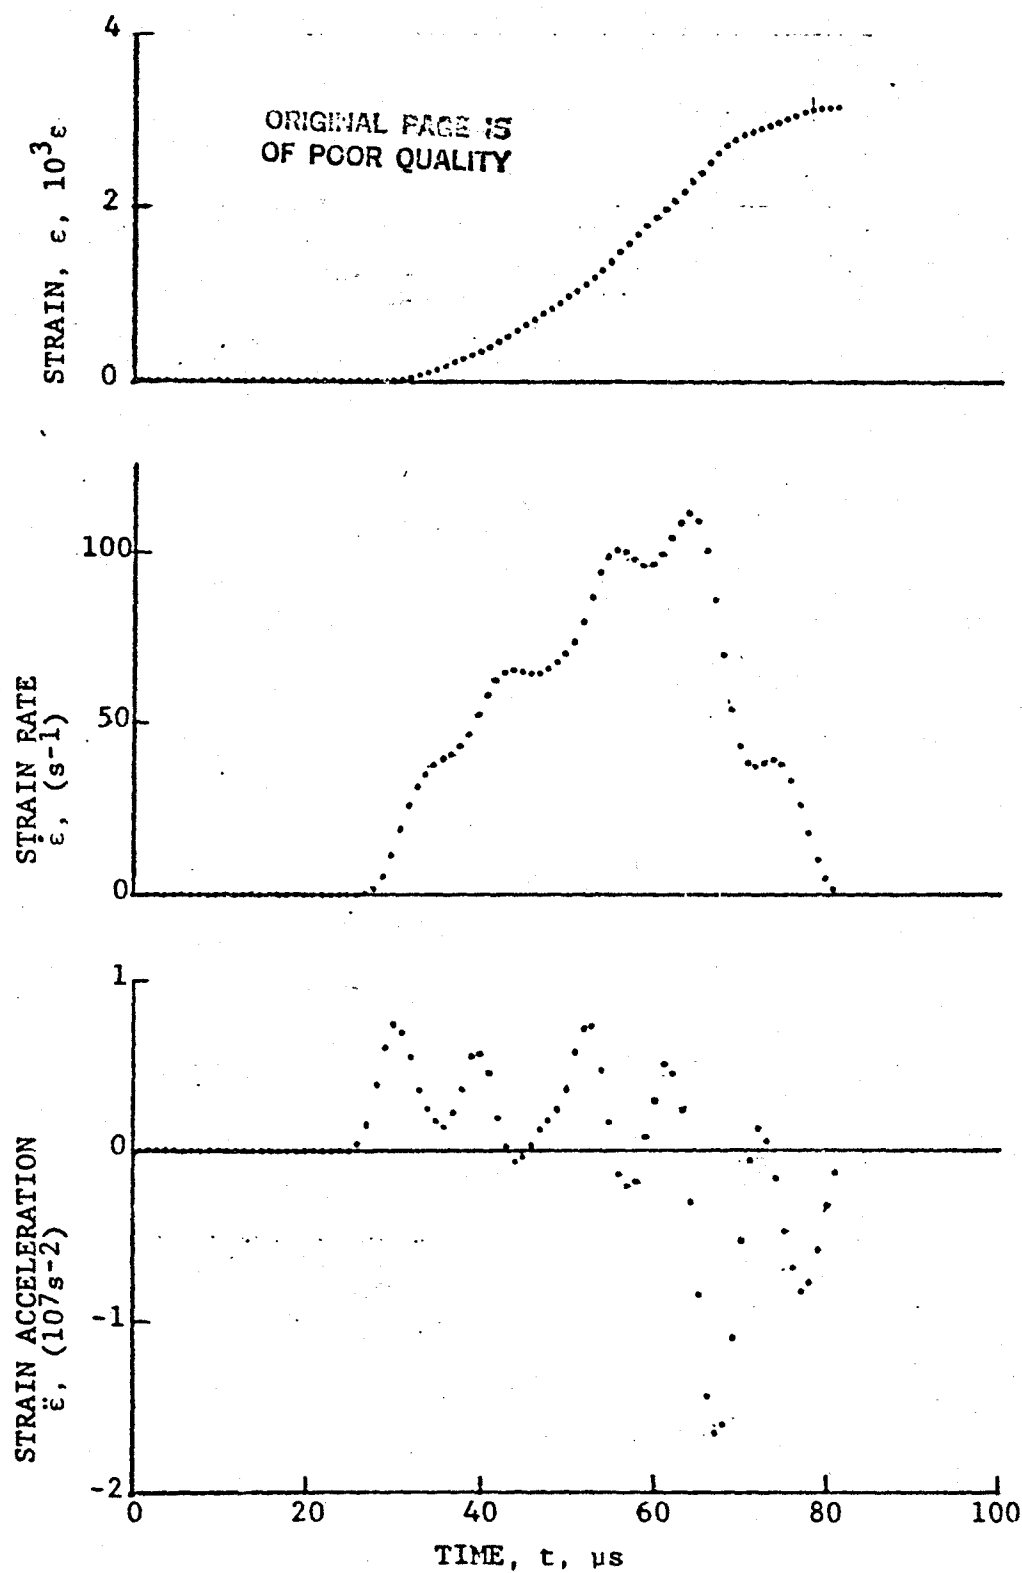


Figure 4-26. Strain in steel ring and its derivatives  
for Specimen No. 33-4.

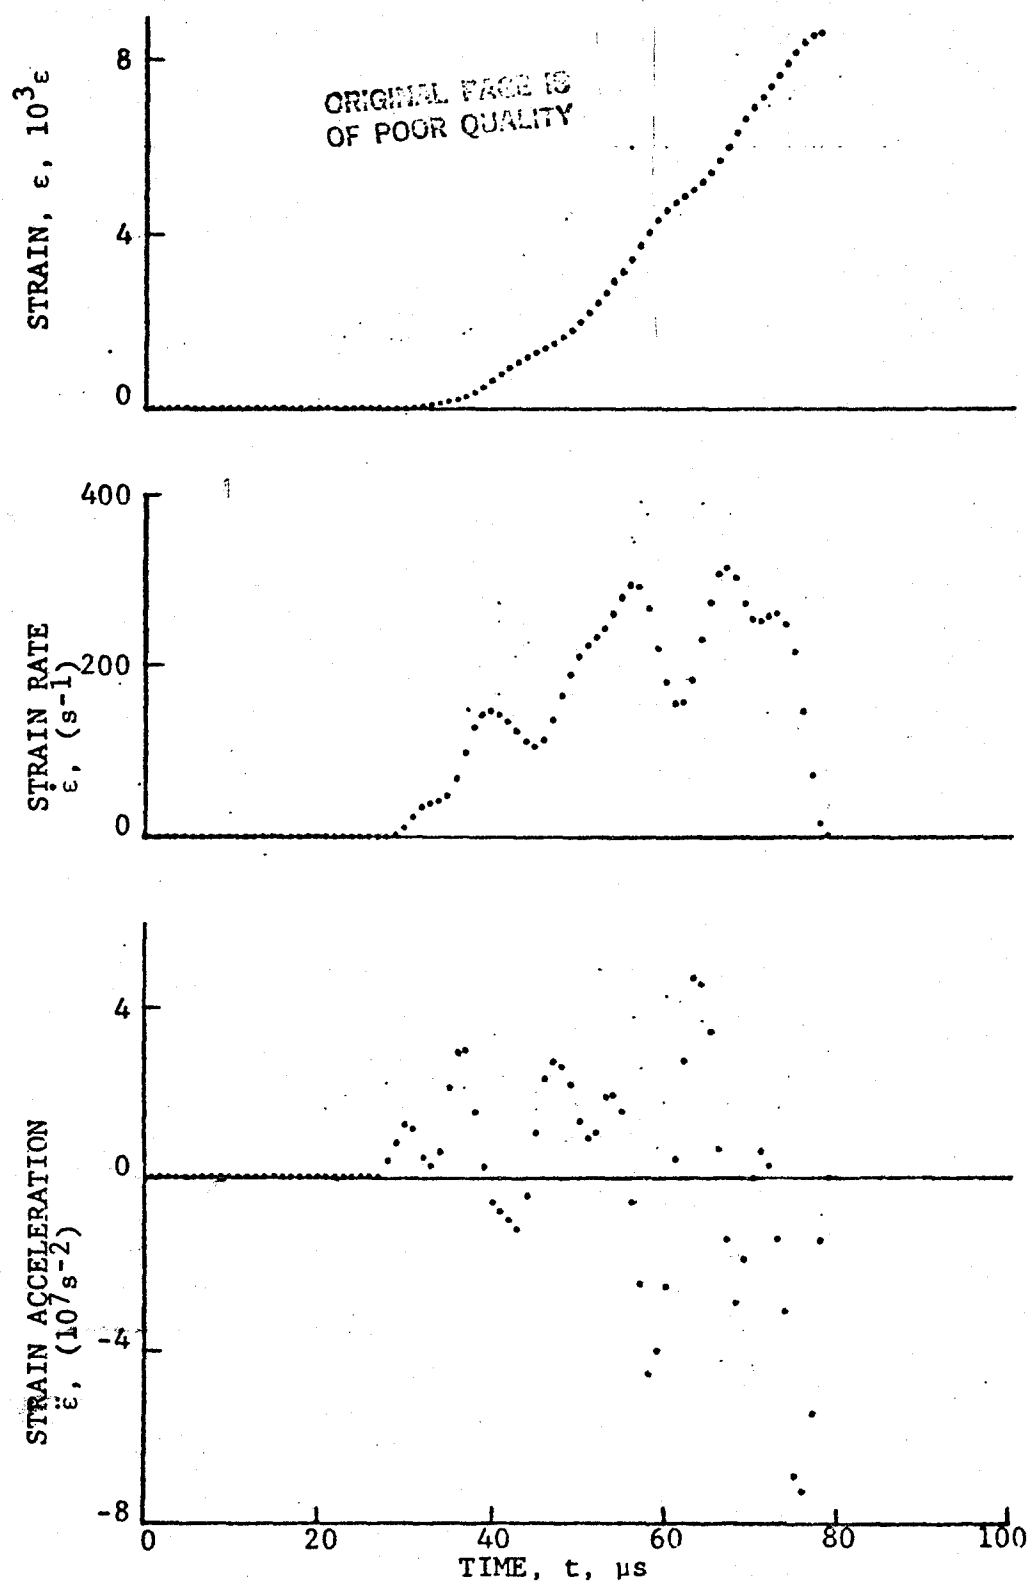


Figure 4-27. Circumferential strain and its derivatives in SP288/AS  $[\pm 22.5]_{2s}$  graphite/epoxy ring under dynamic loading, Specimen No. 33-4.

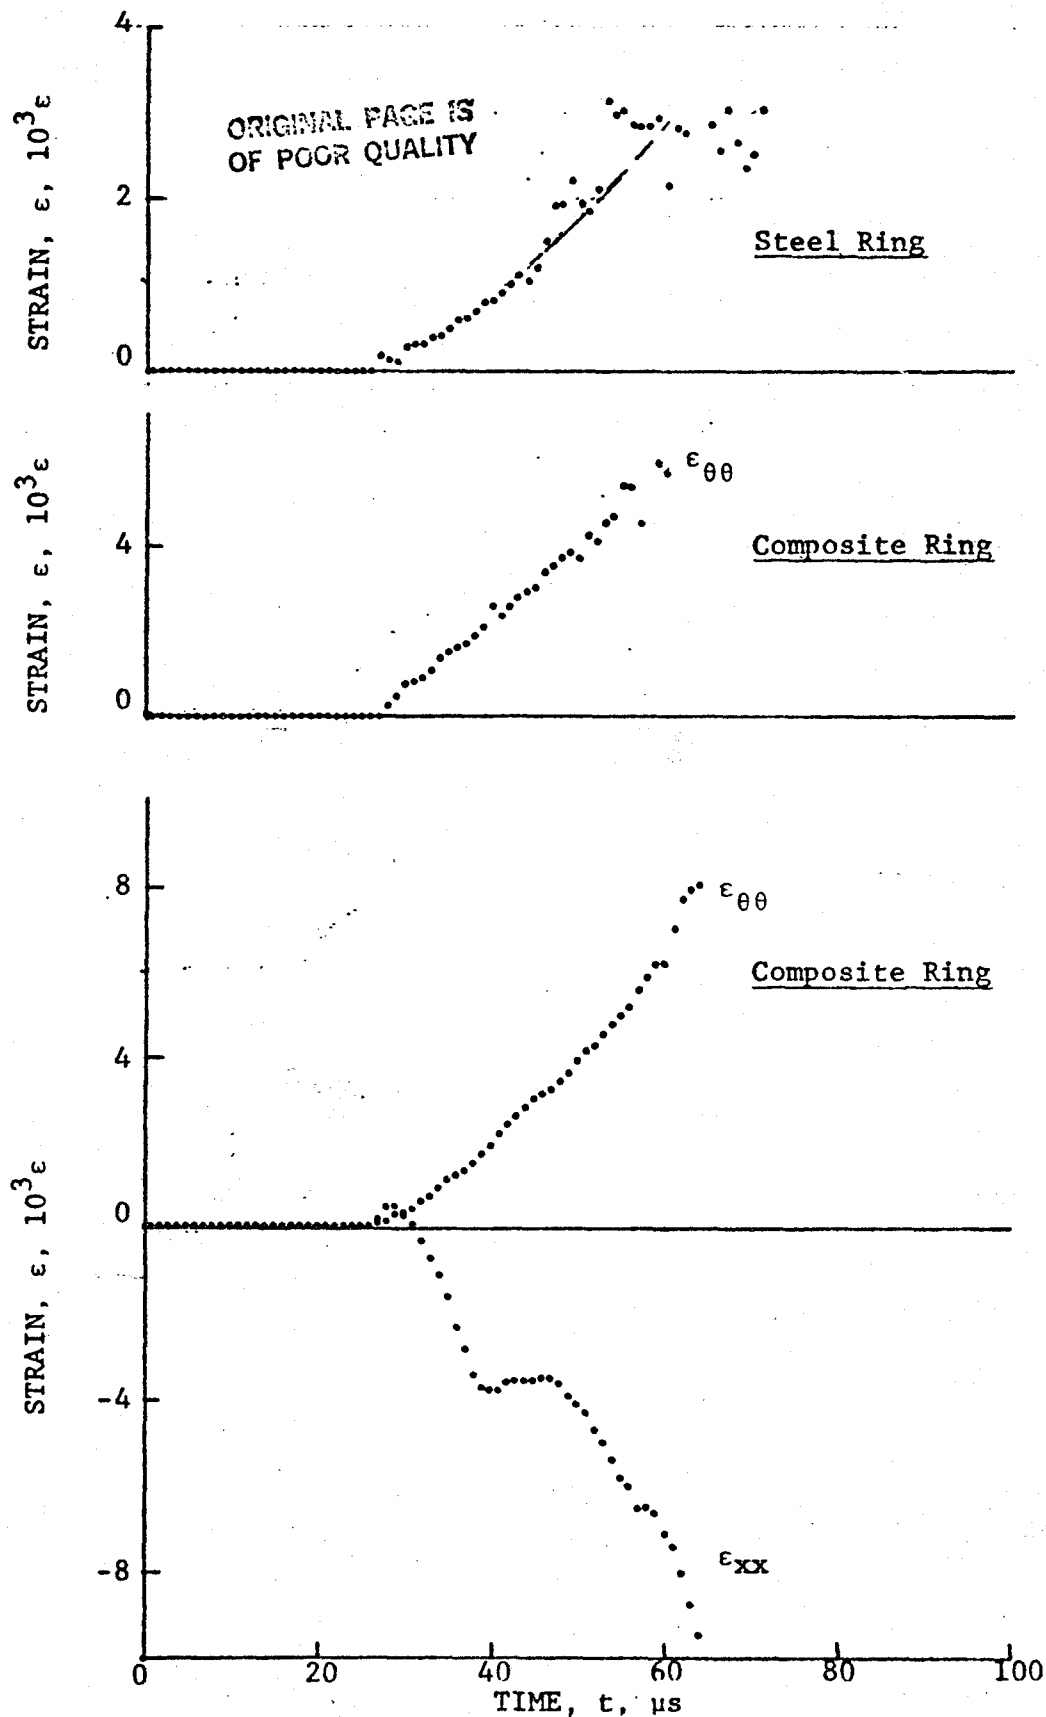


Figure 4-28. Strain records in steel ring and SP288/AS  $[\pm 22.5]_2$ s graphite/epoxy ring under dynamic loading for Specimen No. 33-6 (100 mg PETN detonator).

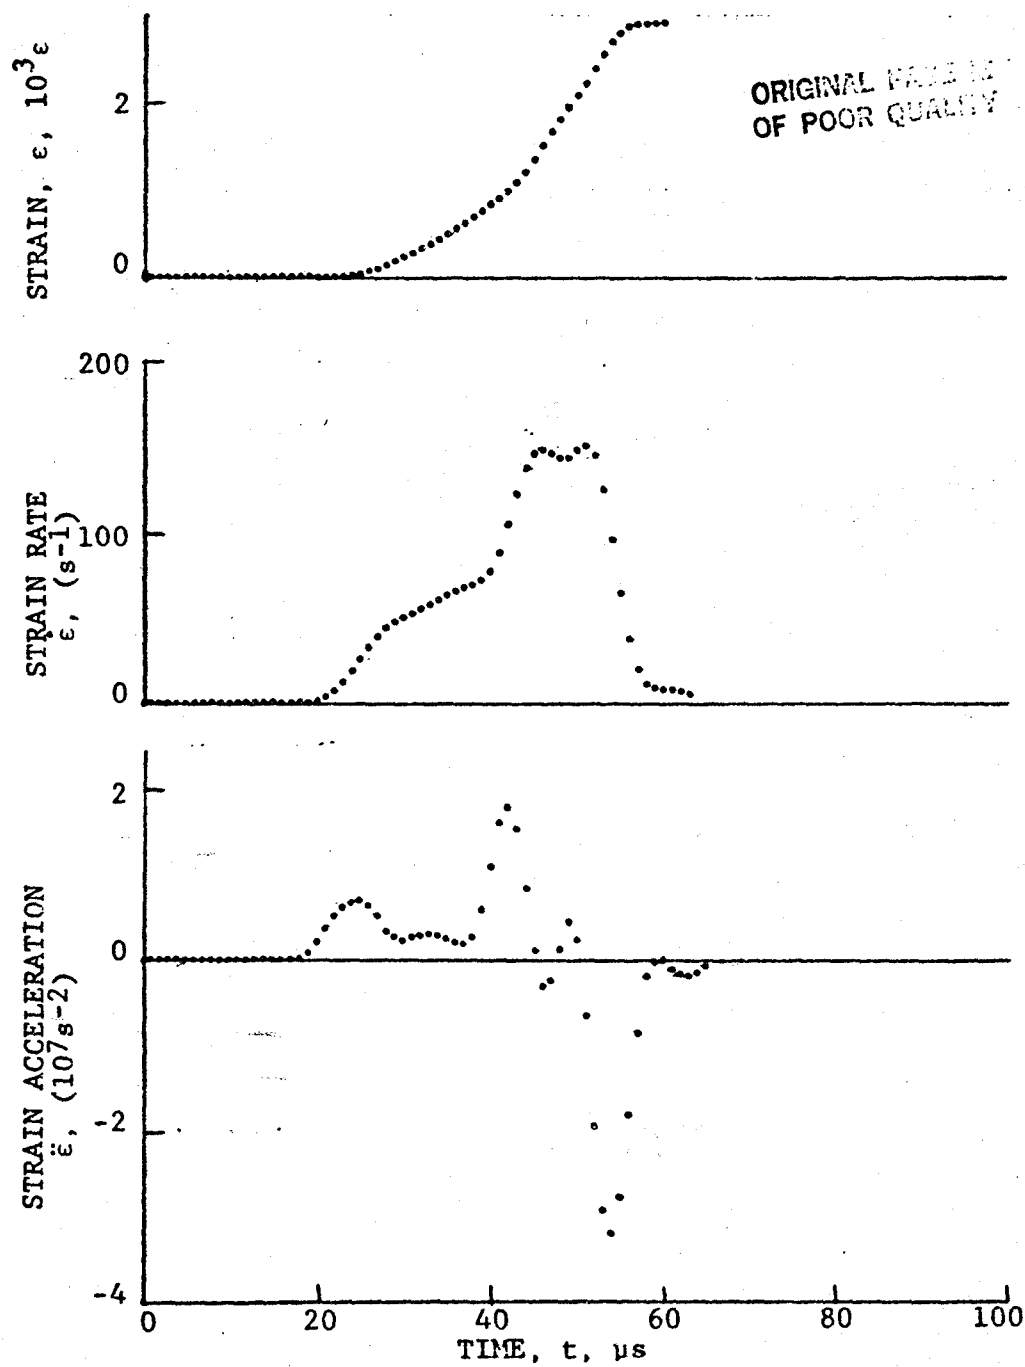


Figure 4-29. Strain in steel ring and its derivatives for Specimen No. 33-6.

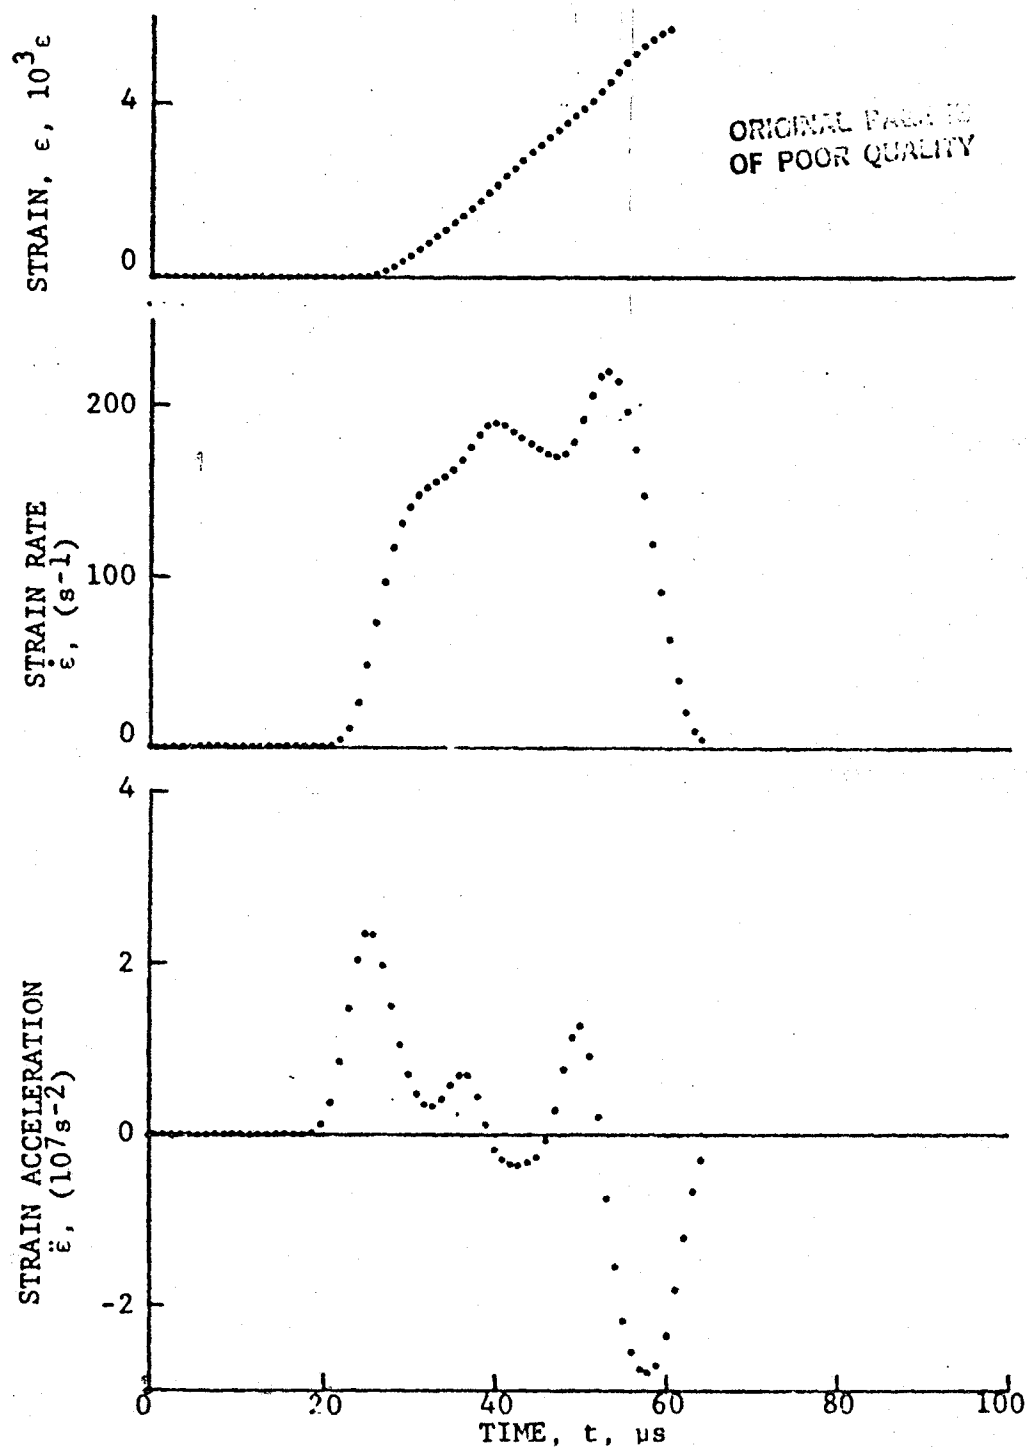


Figure 4-30. Circumferential strain and its derivatives in SP288/AS [ $\pm 22.5$ ]<sub>2s</sub> graphite/epoxy ring under dynamic loading, Specimen No. 33-6.



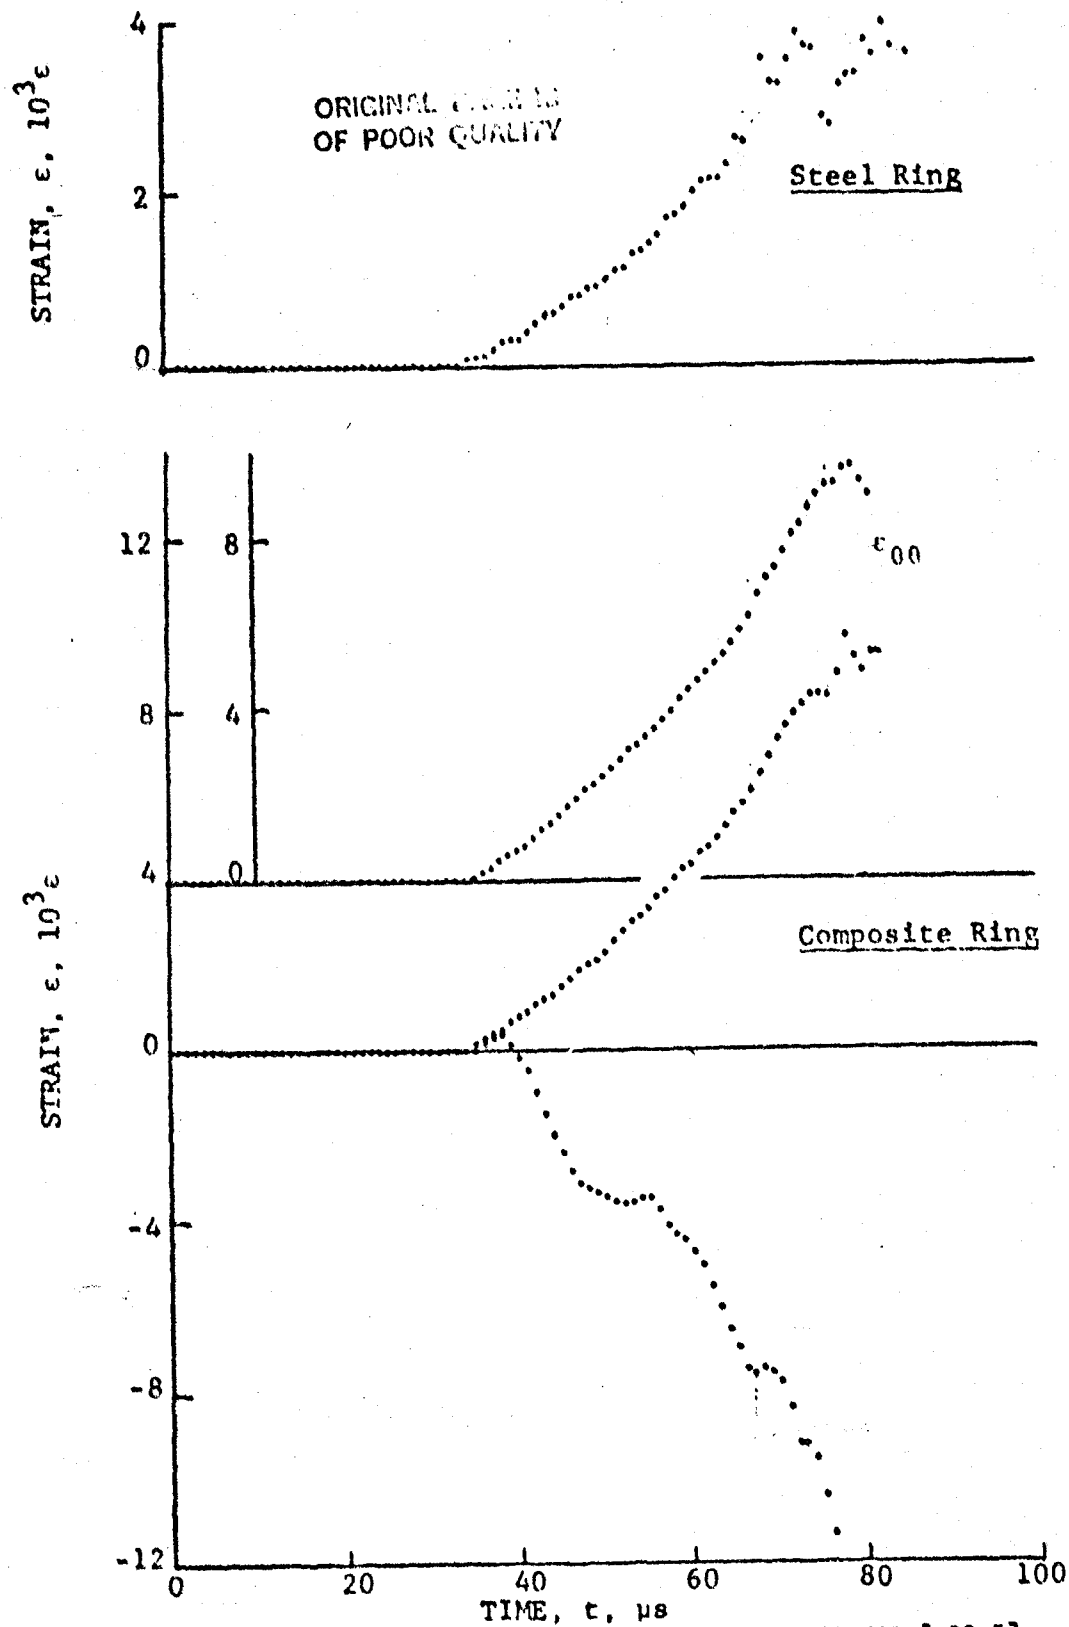


Figure 4-31. Strain records in steel ring and SP288/AS  $[\pm 22.5]_2$ s graphite/epoxy ring under dynamic loading for Specimen No. 33-7<sup>2s</sup> (100 mg PETN detonator).

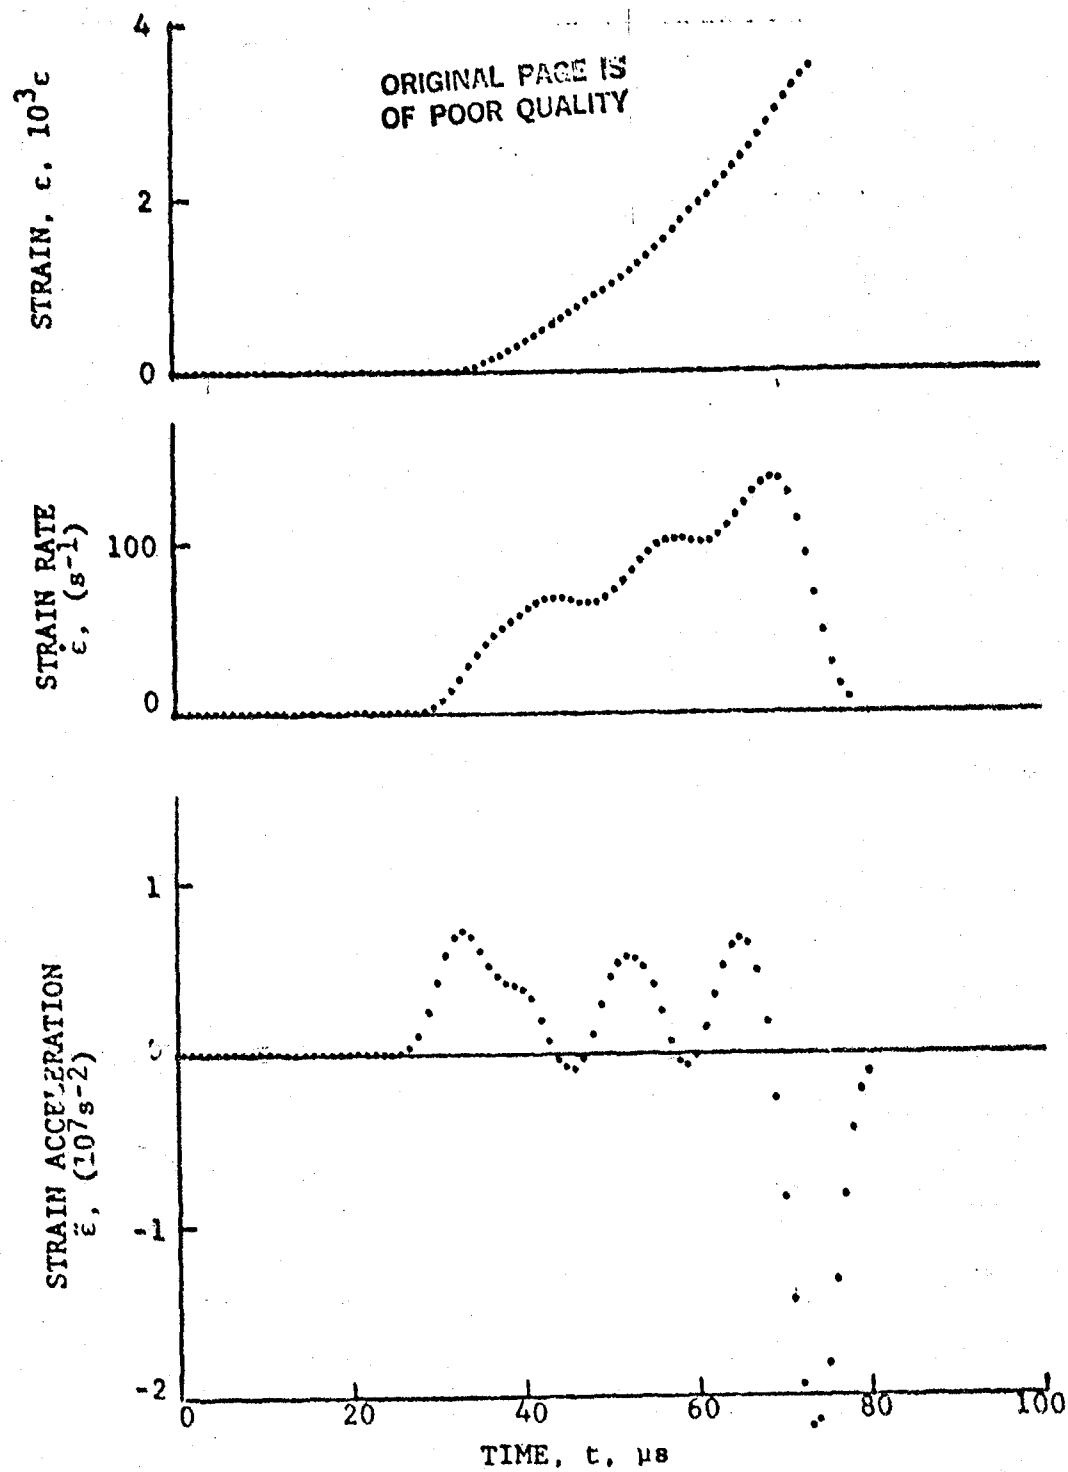


Figure 4-32. Strain in steel ring and its derivatives  
for Specimen No. 33-7.

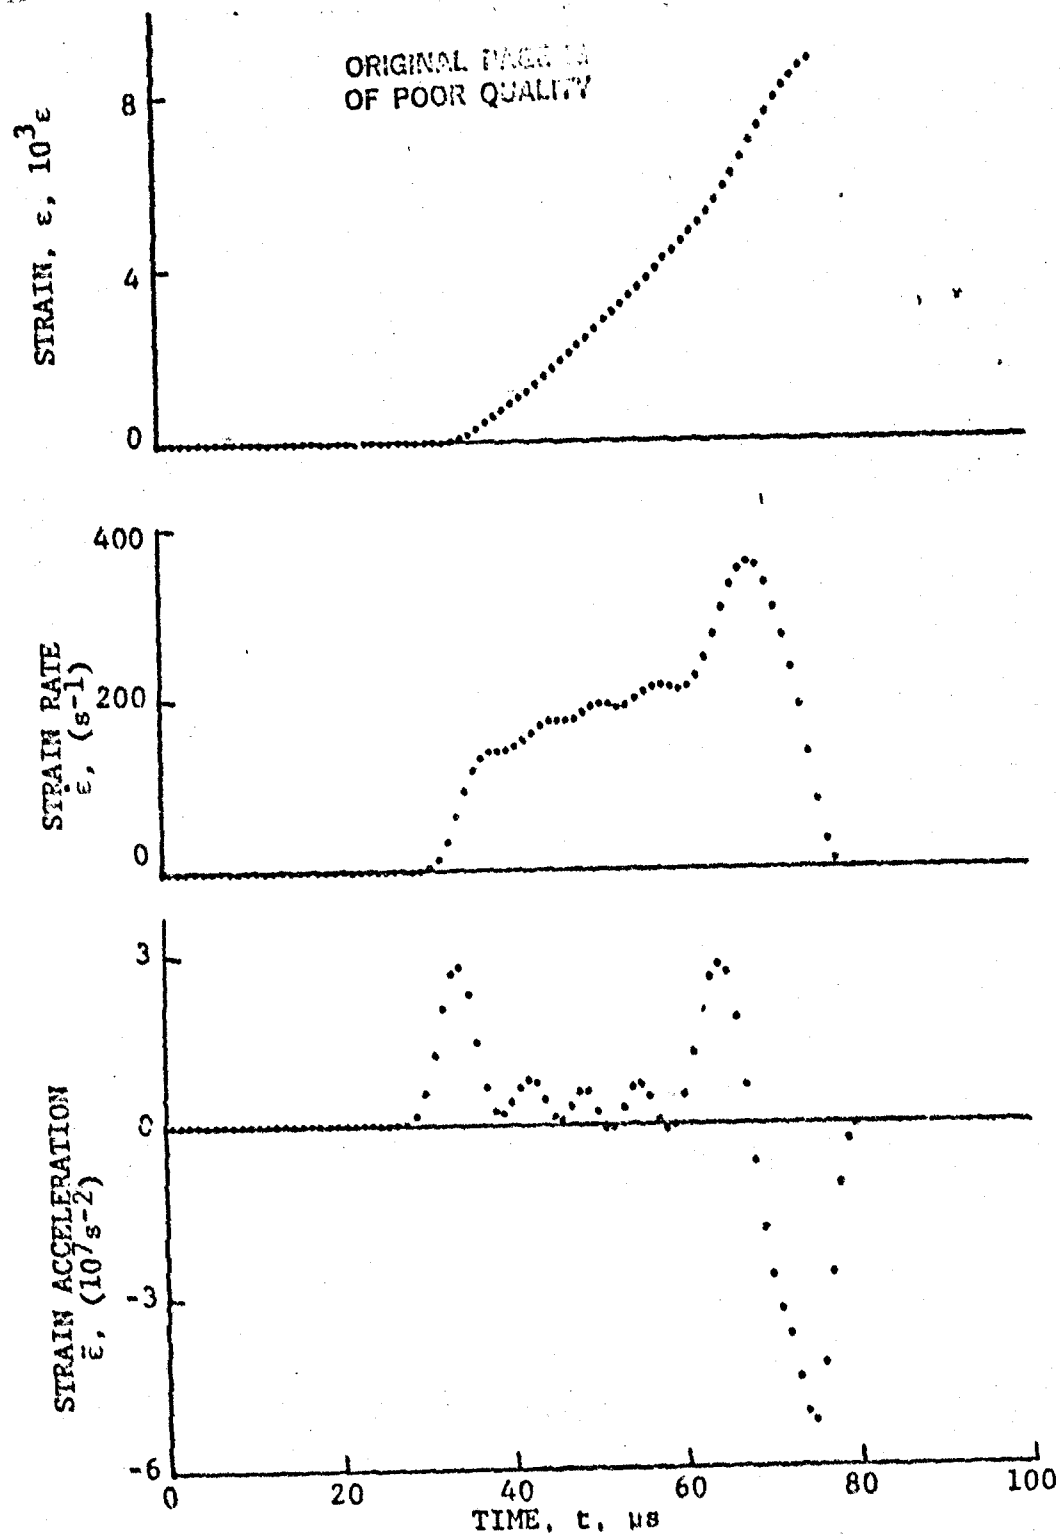


Figure 4-33. Circumferential strain and its derivatives in SP288/AS [ $\pm 22.5$ ]<sub>2s</sub> graphite/epoxy ring under dynamic loading, Specimen No. 33-7.

ORIGINAL PAGE IS  
OF POOR QUALITY

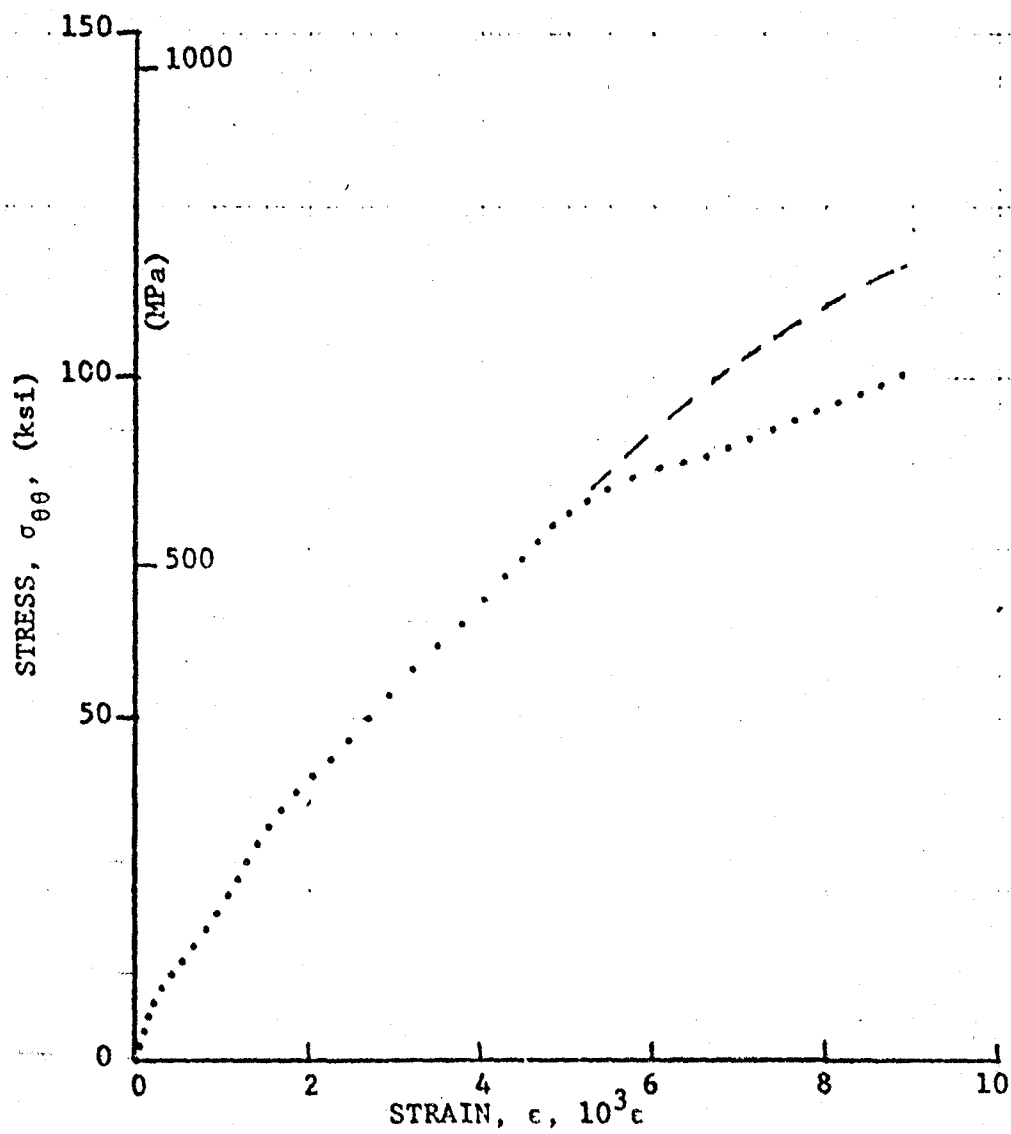


Figure 4-34. Stress-strain curve for dynamically loaded SP288/AS  $[\pm 22.5]_{2s}$  graphite/epoxy ring, Specimen No. 33-4 (100 mg PETN detonator).

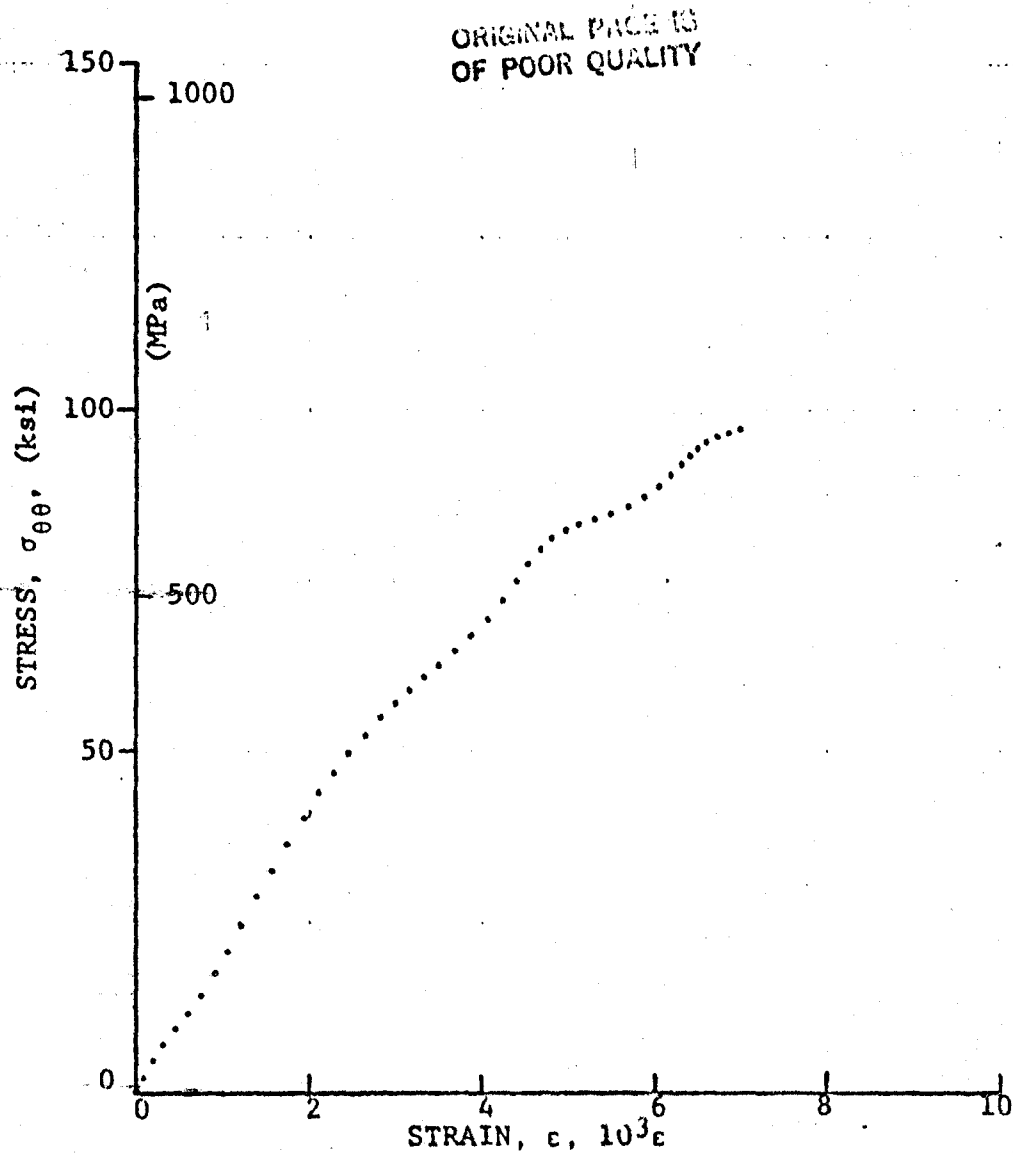


Figure 4-35. Stress-strain curve for dynamically loaded SP288/AS  $[\pm 22.5]_{2s}$  graphite/epoxy ring, Specimen No. 33-6 (100 mg PETN detonator).

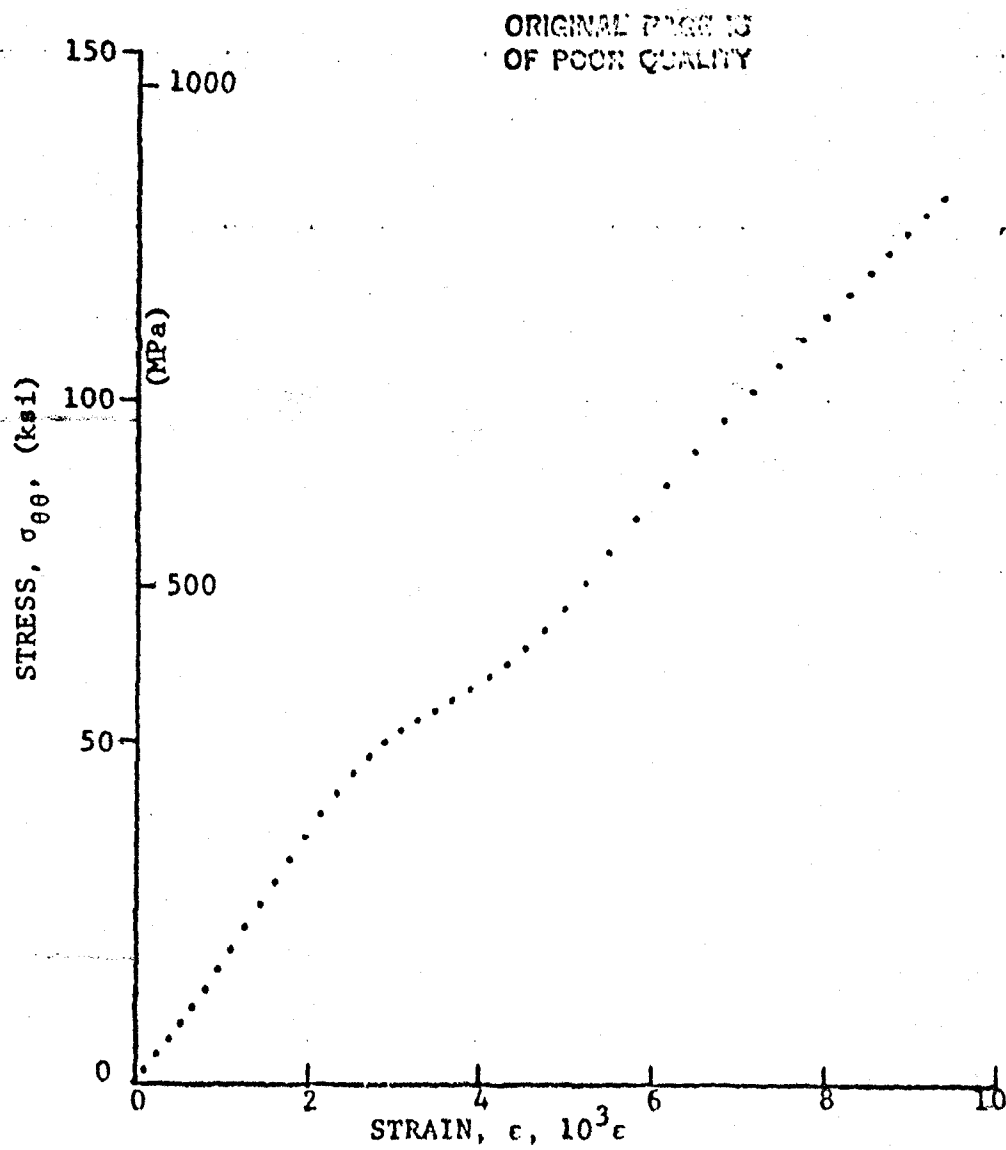


Figure 4-36. Stress-strain curve for dynamically loaded SP288/AS  $[\pm 22.5]_{2s}$  graphite/epoxy ring, Specimen No. 33-7 (100 mg PETN detonator).

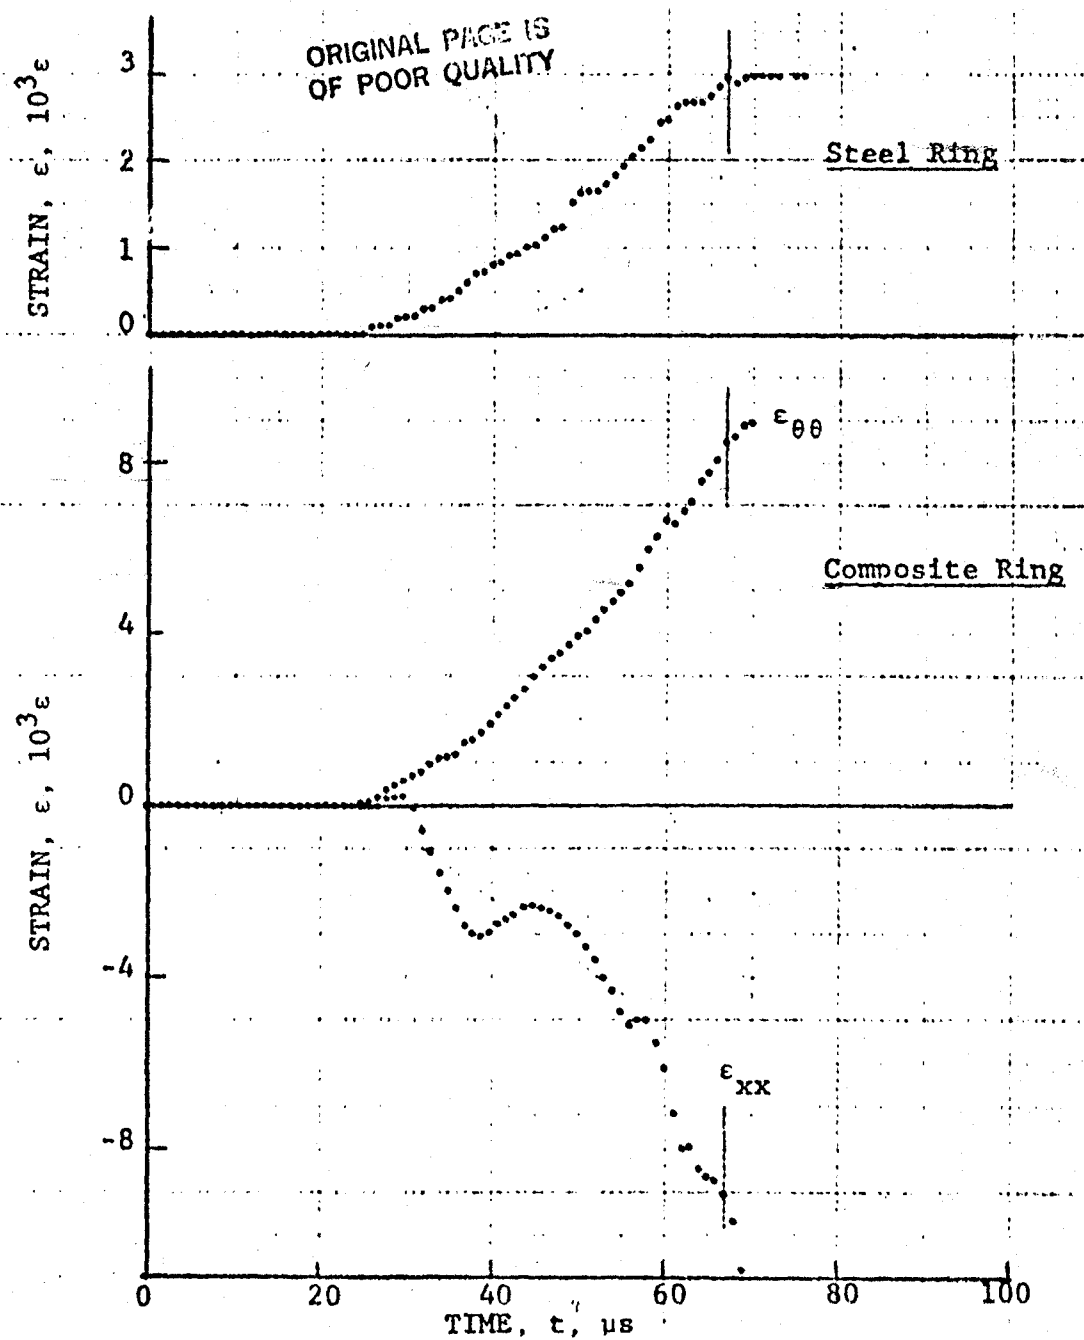


Figure 4-37. Strain records in steel ring and in 80AS/20S/PR288  $[\pm 22.5]_2$  graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 34-4 (100 mg PETN detonator).

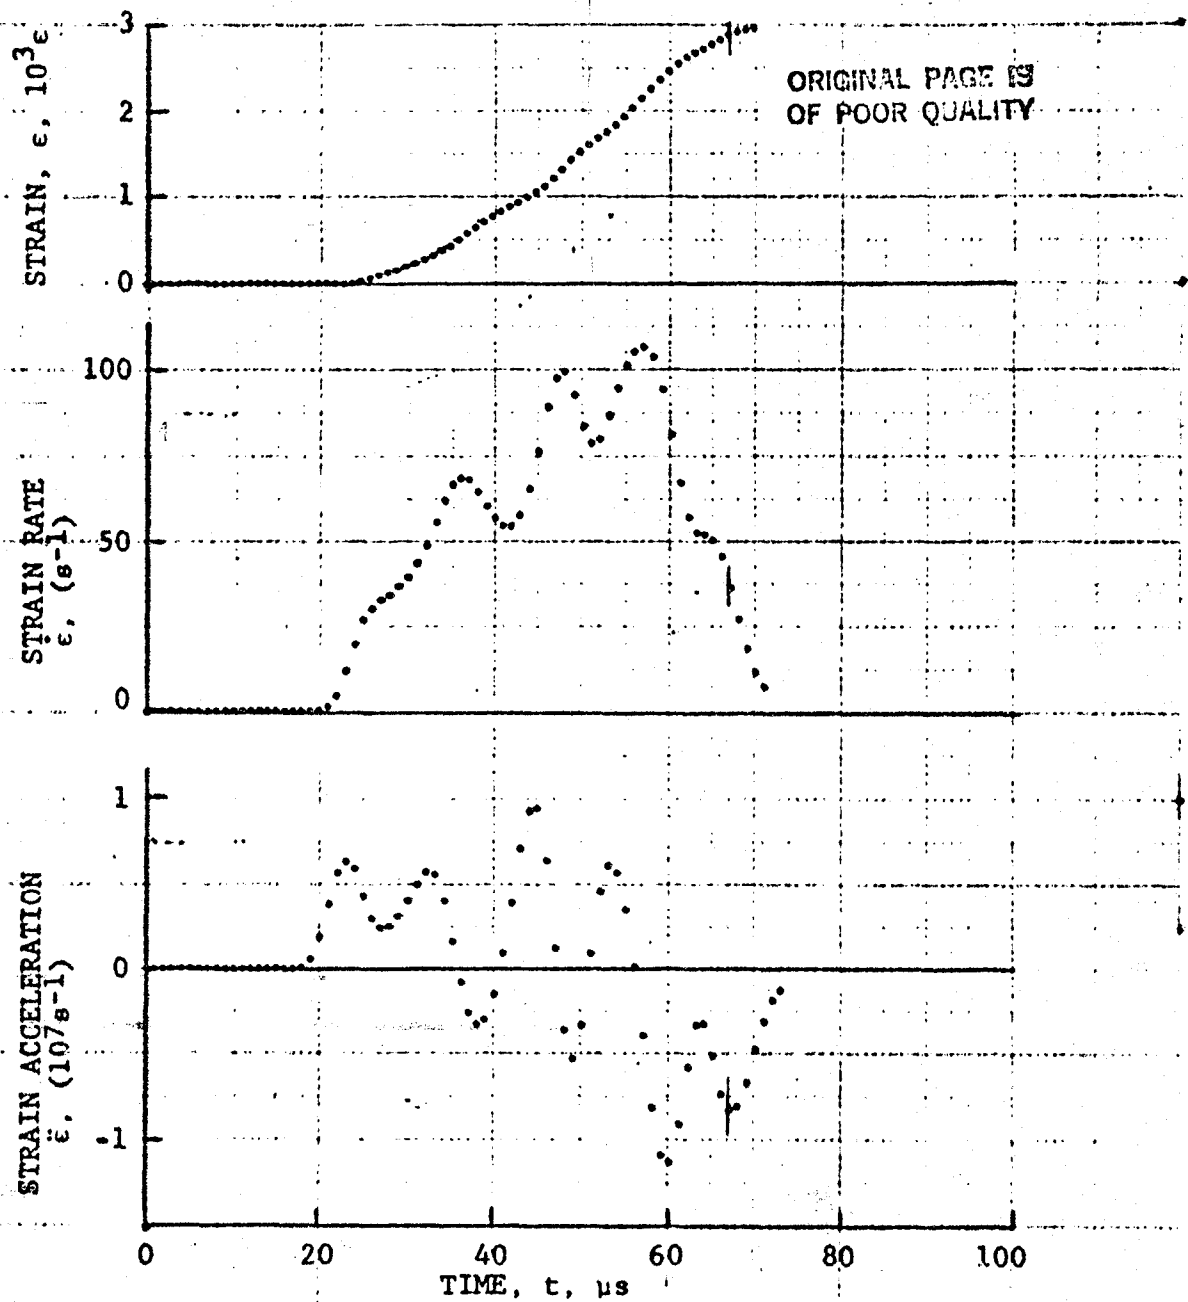


Figure 4-38. Strain and its derivatives in steel ring  
for Specimen No. 34-4.



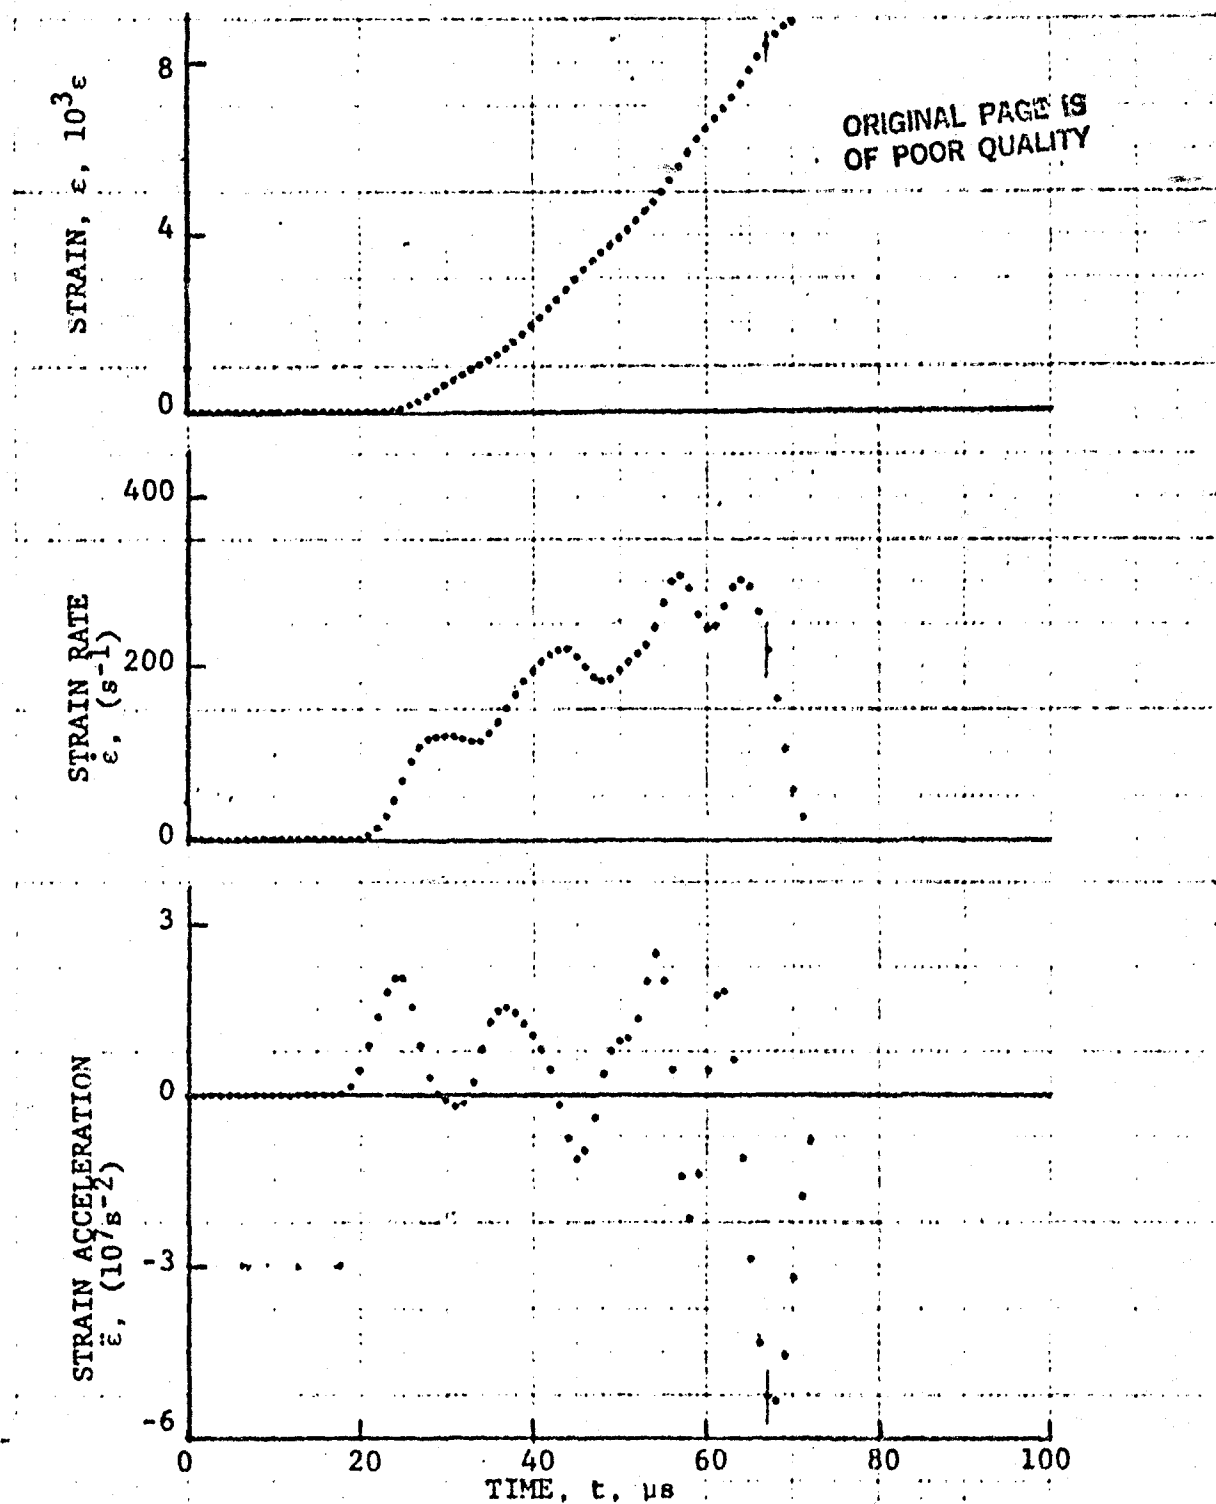


Figure 4-39. Circumferential strain and its derivatives in 80AS/20S/PR288  $[\pm 22.5]_2$  graphite/S-glass/epoxy ring under dynamic loading, Specimen No. 34-4.

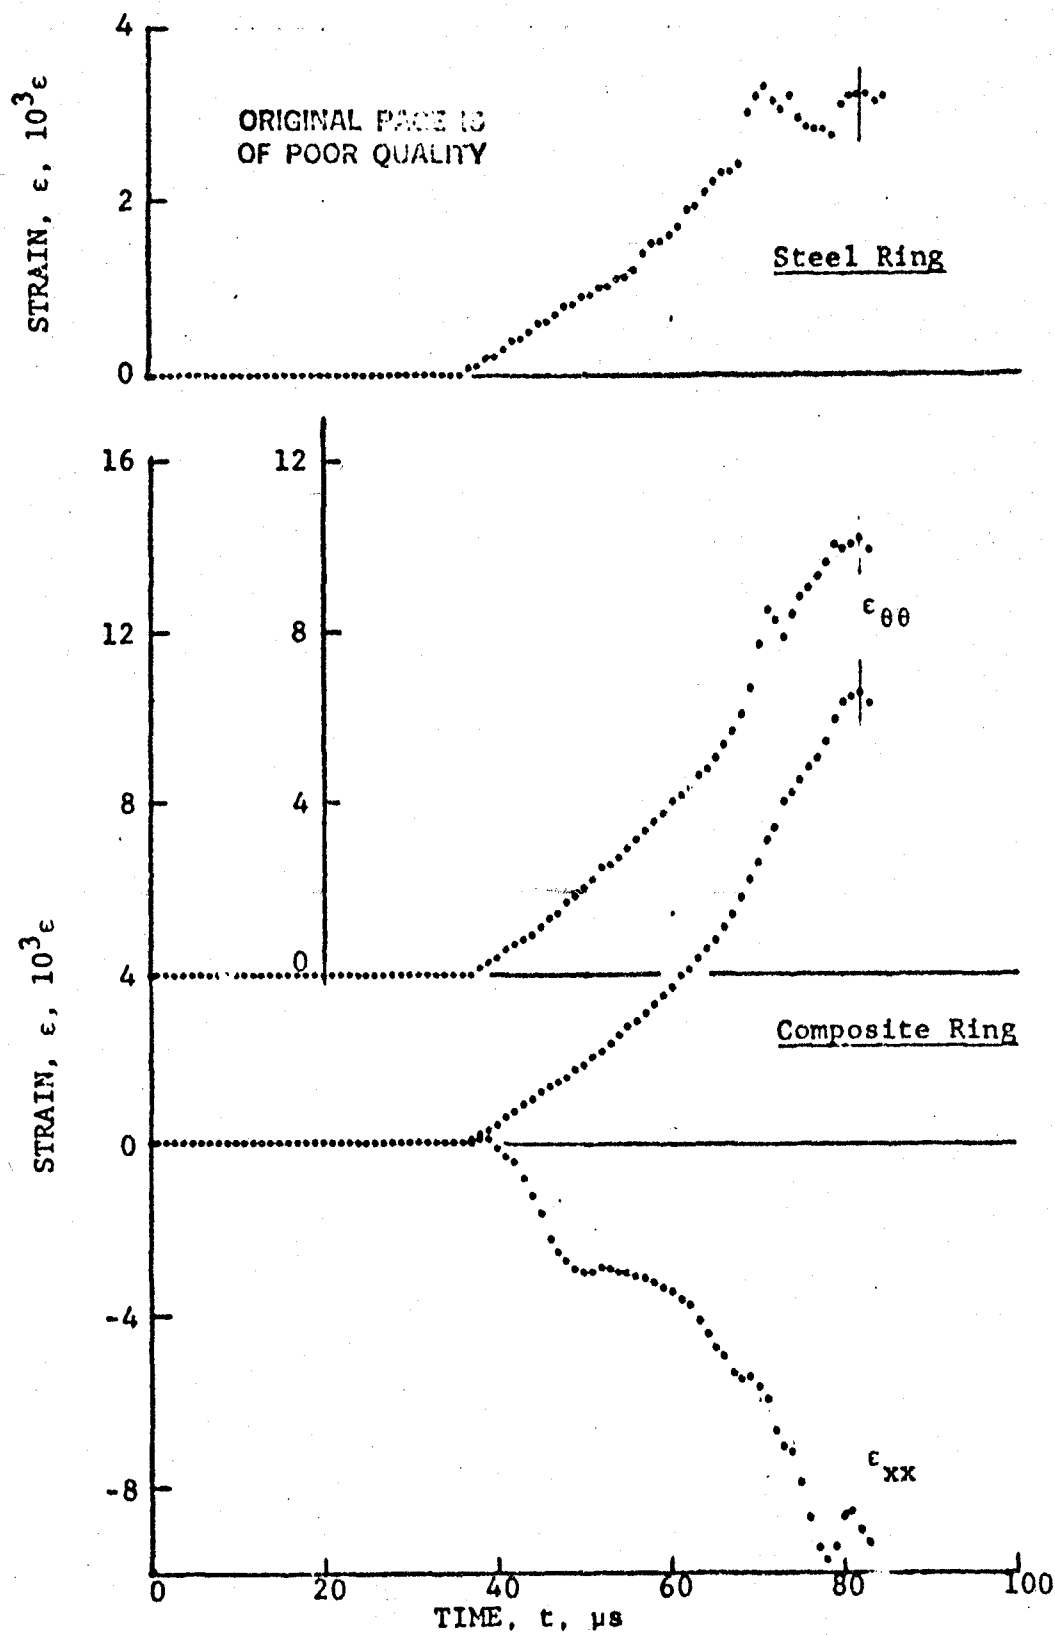


Figure 4-40. Strain records in steel ring and in 80AS/20S/PR288  $[\pm 22.5]_2$  graphite/S-glass/epoxy ring under dynamic loading, Specimen No. 34-6 (100 mg PETN detonator).

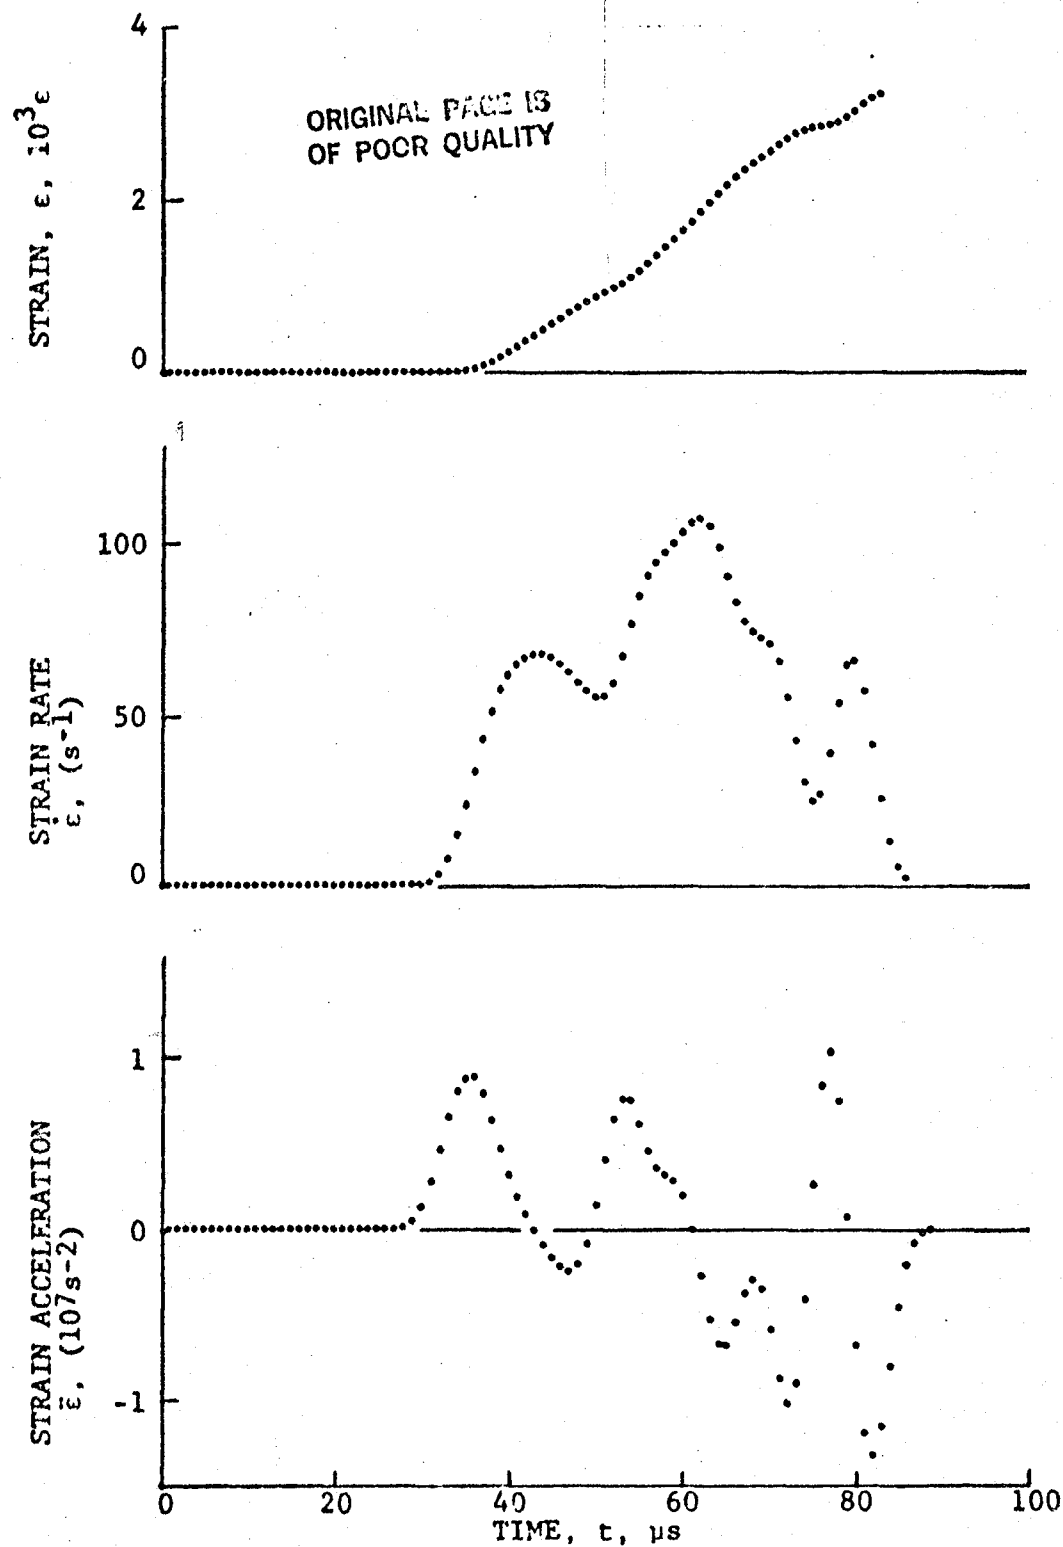


Figure 4-41. Strain and its derivatives in steel ring  
for Specimen No. 34-6.

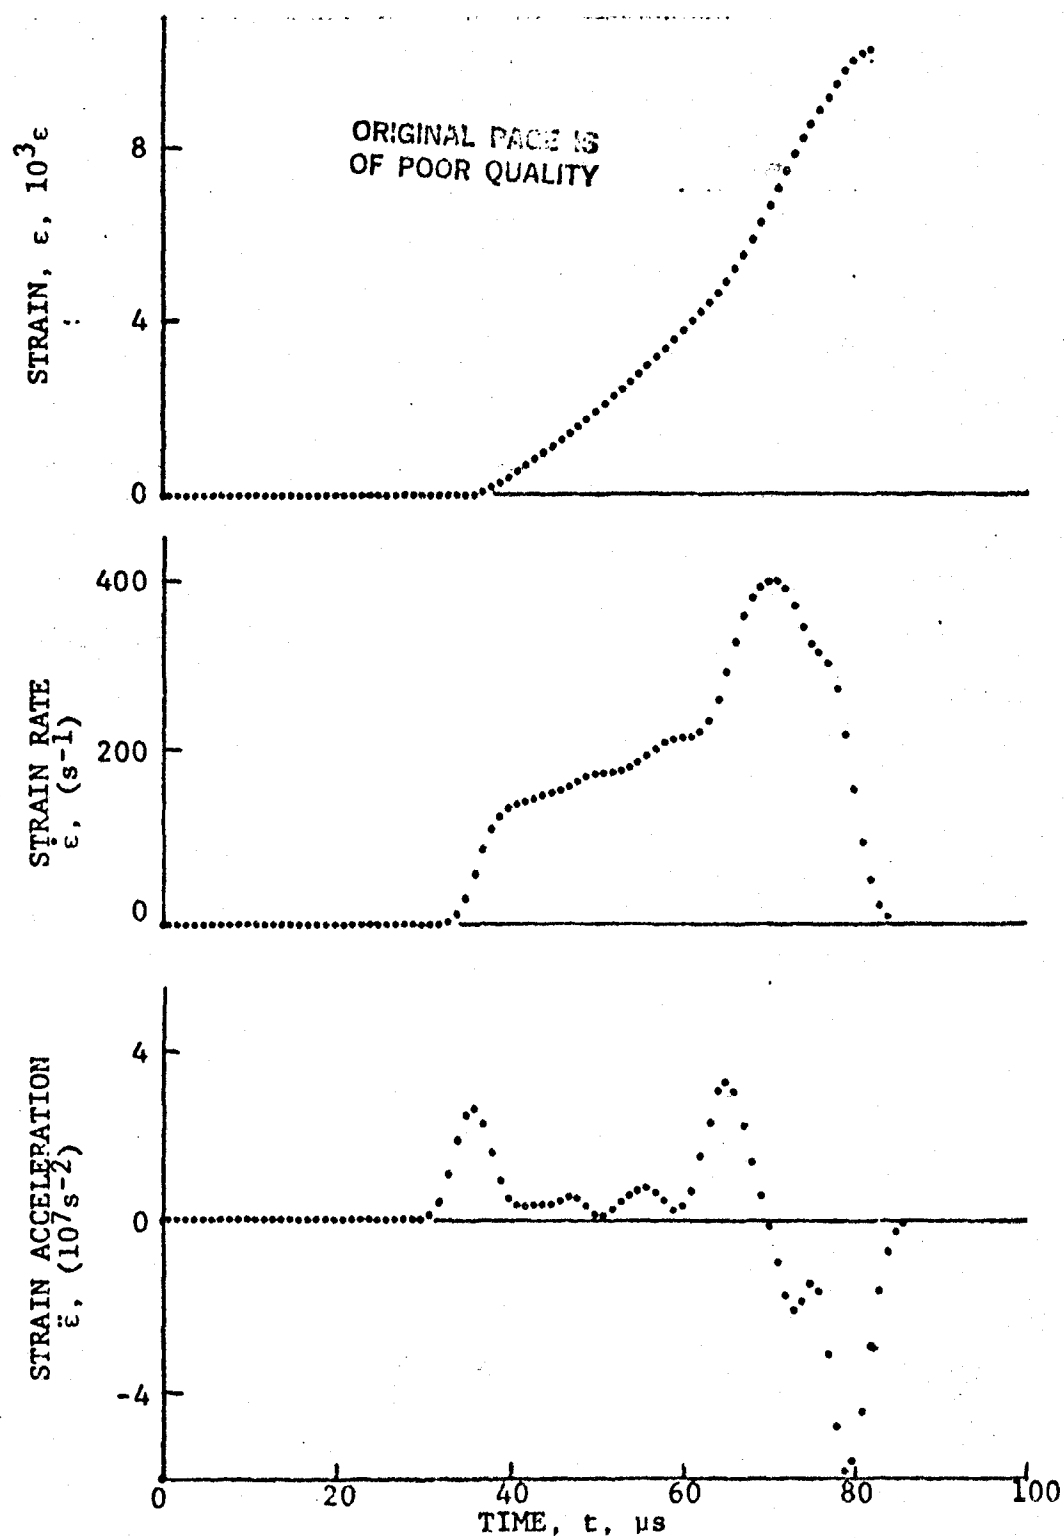


Figure 4-42. Circumferential strain and its derivatives in 80AS/20S/PR288  $[\pm 22.5]_2$ s graphite/S-glass/epoxy ring under dynamic loading, Specimen No. 34-6.

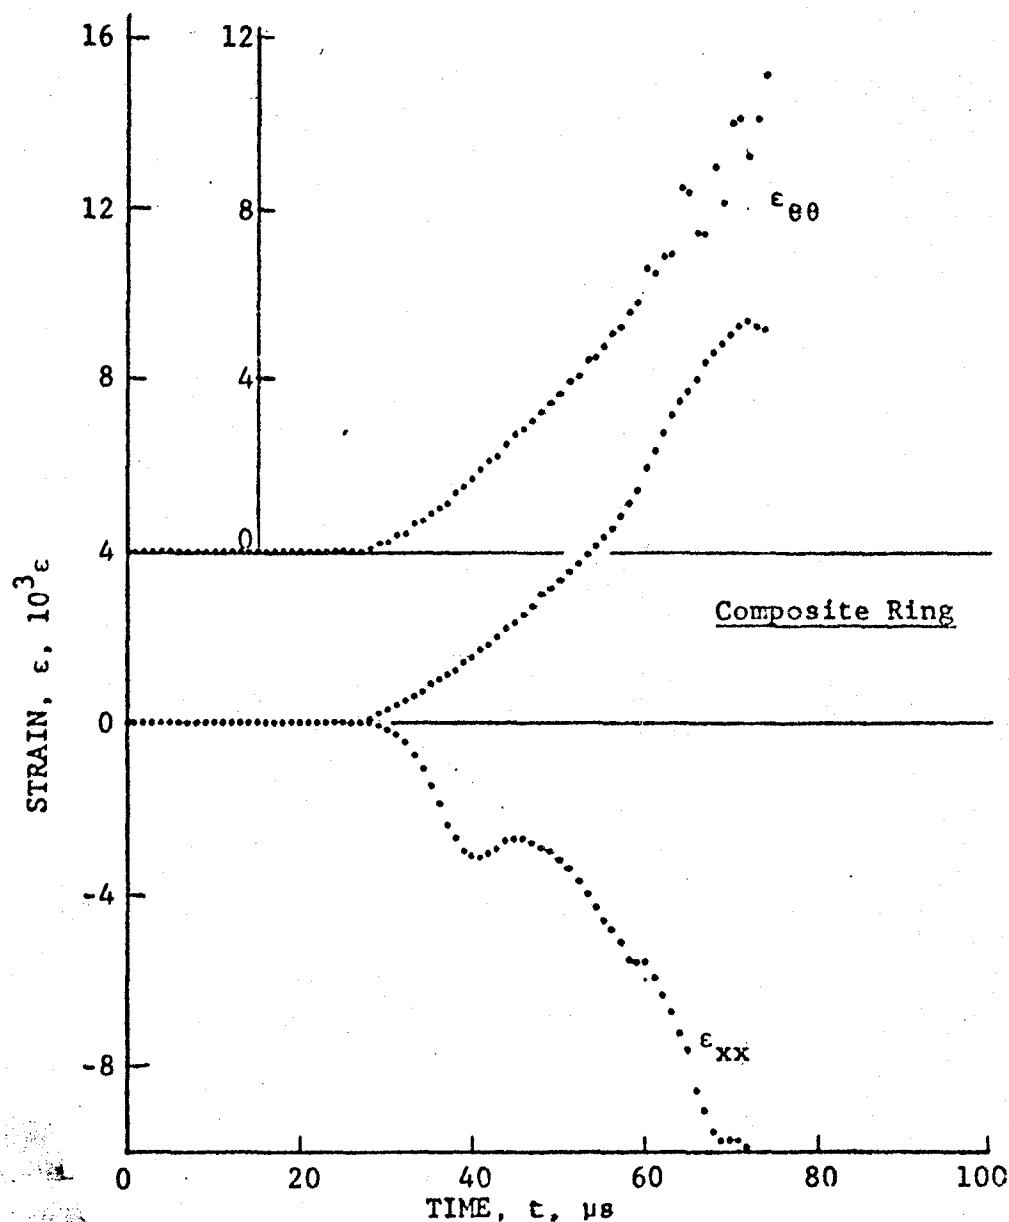
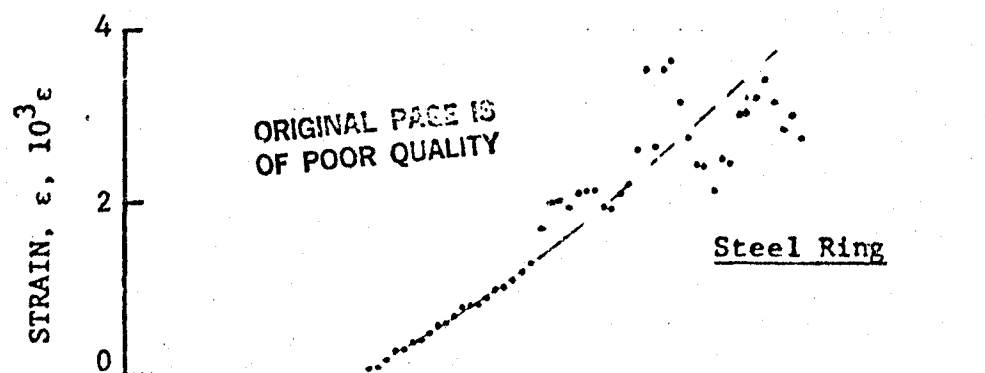


Figure 4-43. Strain records in steel ring and in 80AS/20S/PR288 [ $\pm 22.5$ ]<sub>2S</sub> graphite/S-glass/epoxy ring under dynamic loading, Specimen No. 34-7 (100 mg PETN detonator).

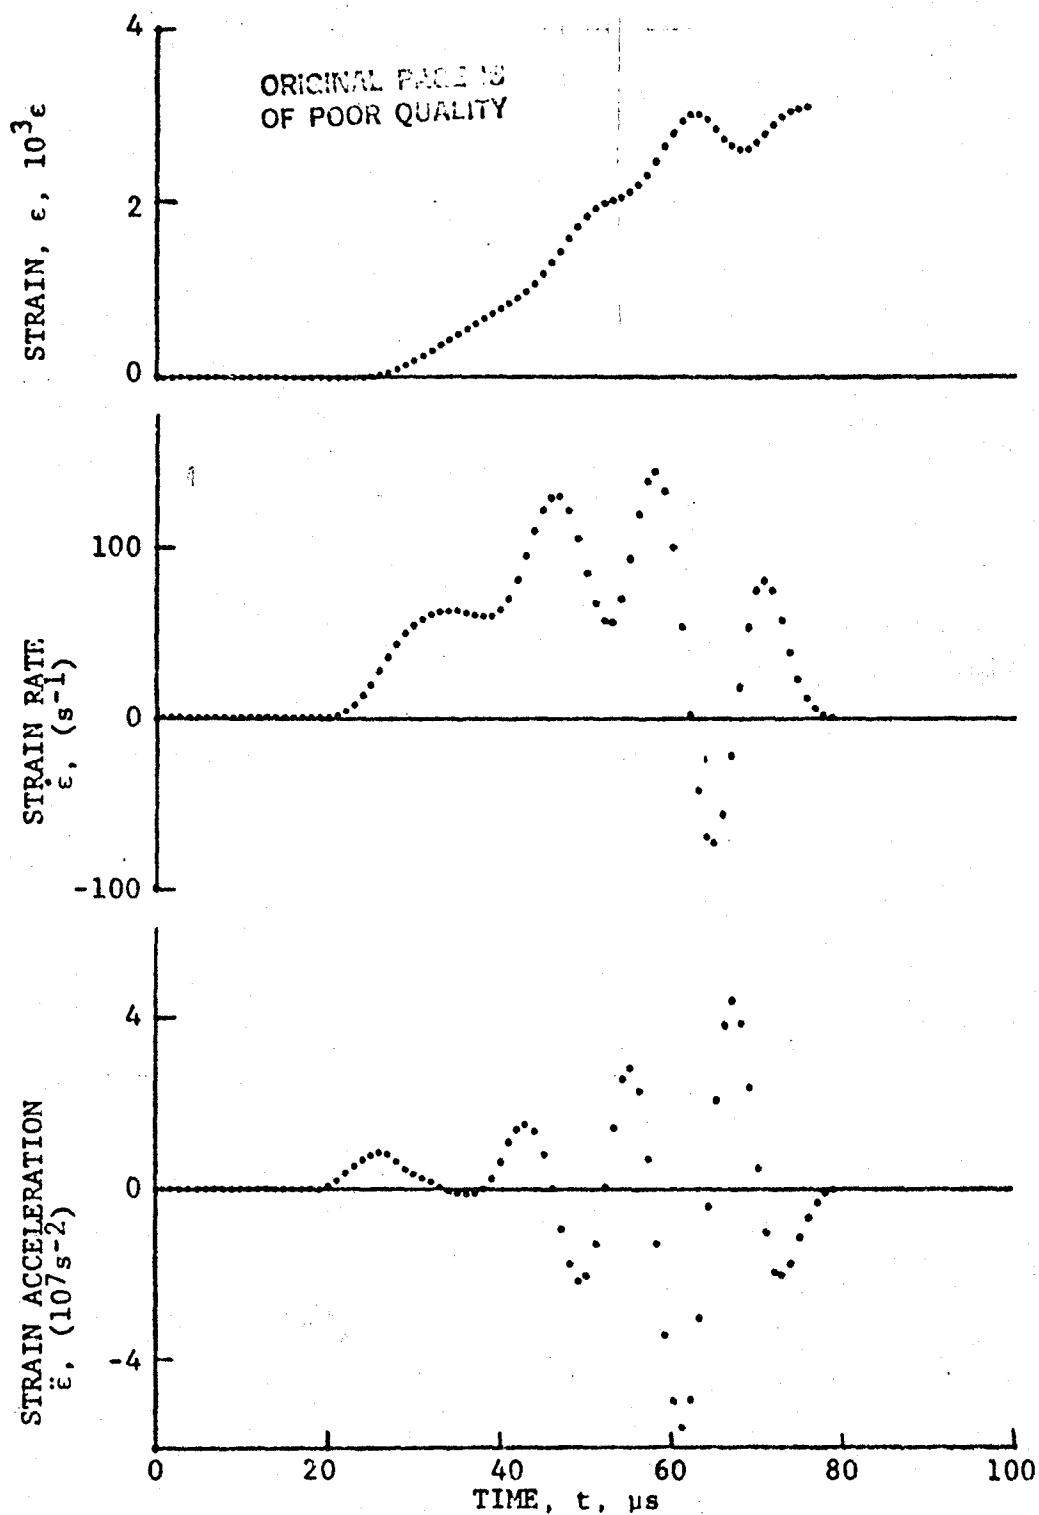


Figure 4-44. Strain and its derivatives in steel ring for Specimen No. 34-7.

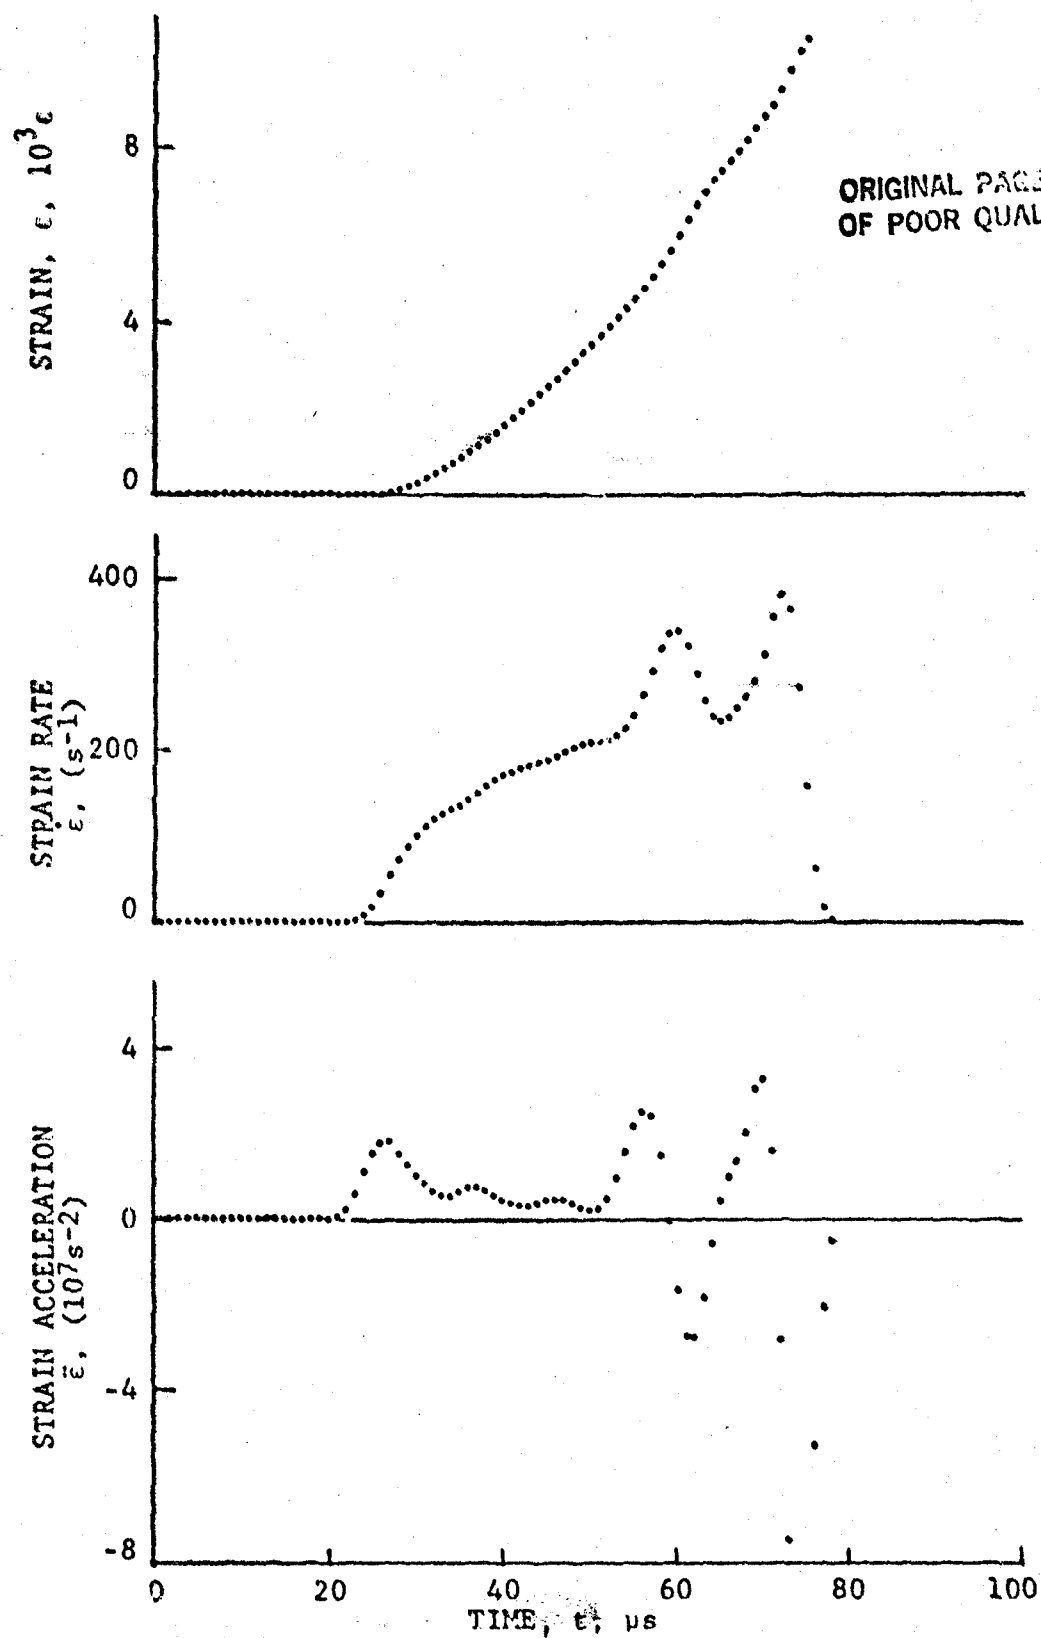


Figure 4-45. Circumferential strain and its derivatives in 80AS/20S/PR288  $[\pm 22.5]_2$ s graphite/S-glass/epoxy ring under dynamic loading, Specimen No. 34-7.

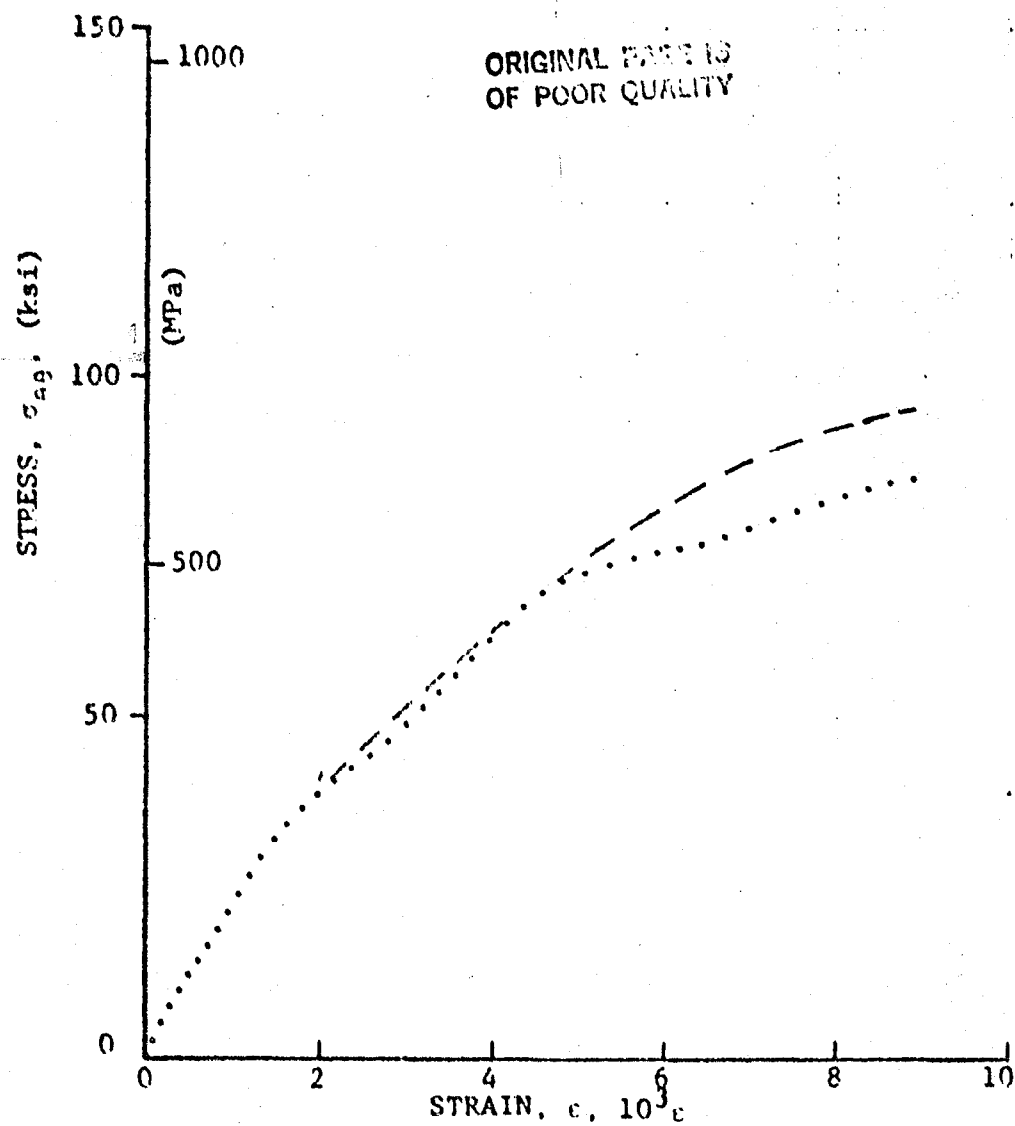


Figure 4-46. Stress-strain curve for dynamically loaded 80AS/20S/PR288  $[\pm 22.5]_2$ s graphite/S-glass/epoxy ring, Specimen No. 34-4 (100 mg PETN detonator).



ORIGINAL PAGE IS  
OF POOR QUALITY

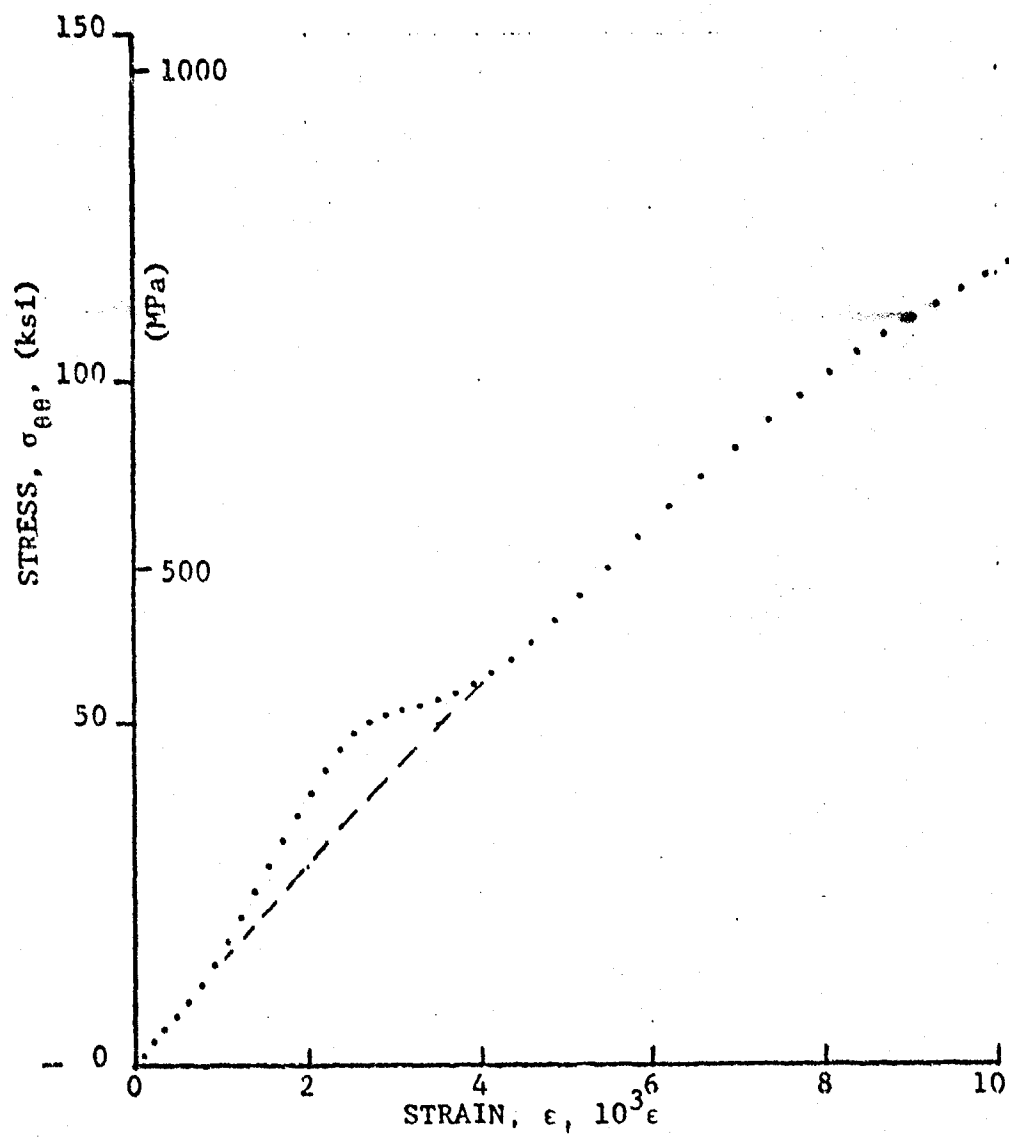


Figure 4-47. Stress-strain curve for dynamically loaded  
80AS/20S/PR288  $[\pm 22.5]_{2s}$  graphite/S-glass/epoxy ring,  
Specimen No. 34-6 (100 mg PETN detonator).

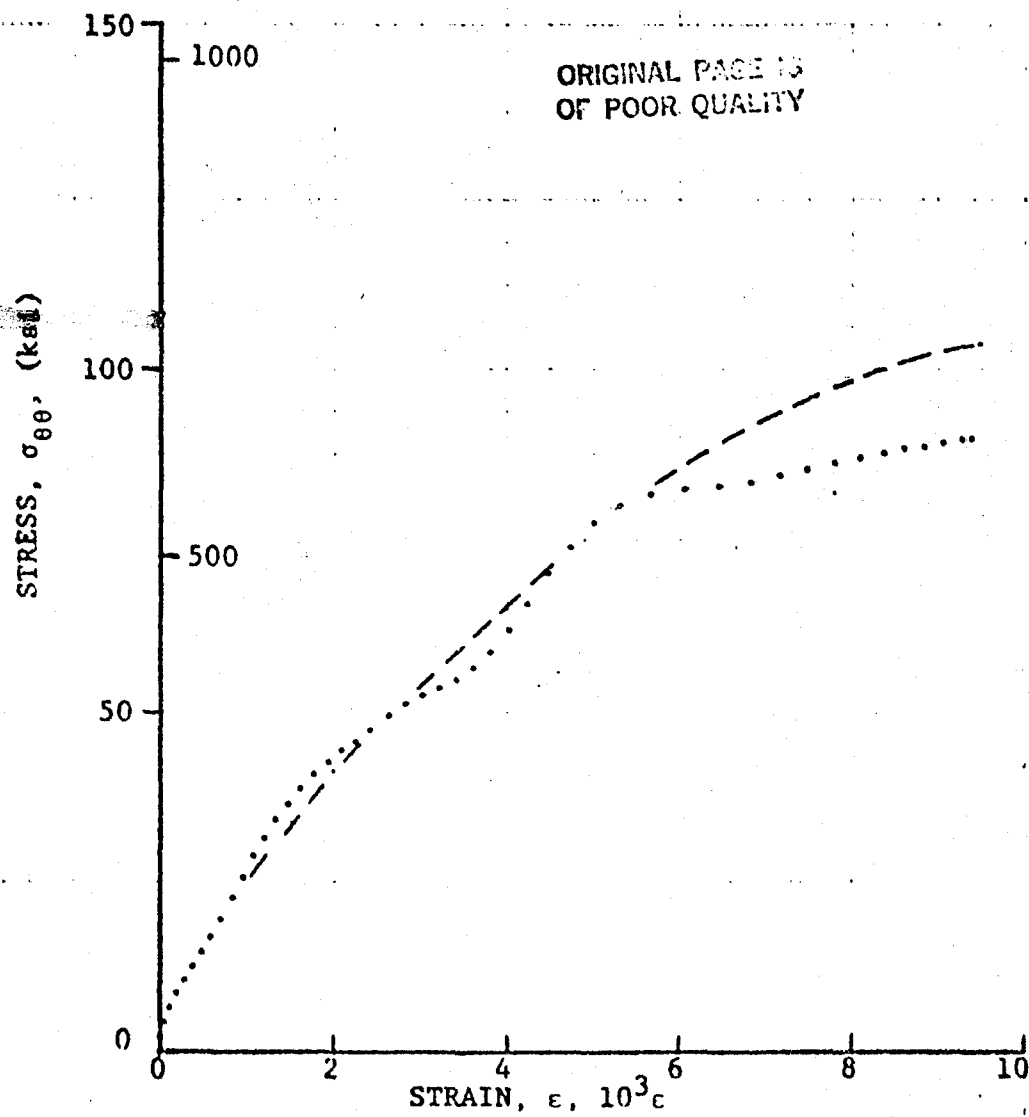


Figure 4-48. Stress-strain curve for dynamically loaded 80AS/20S/PR288  $[\pm 22.5]_{2s}$  graphite/S-glass/epoxy ring, Specimen No. 34-7 (100 mg PETN detonator).

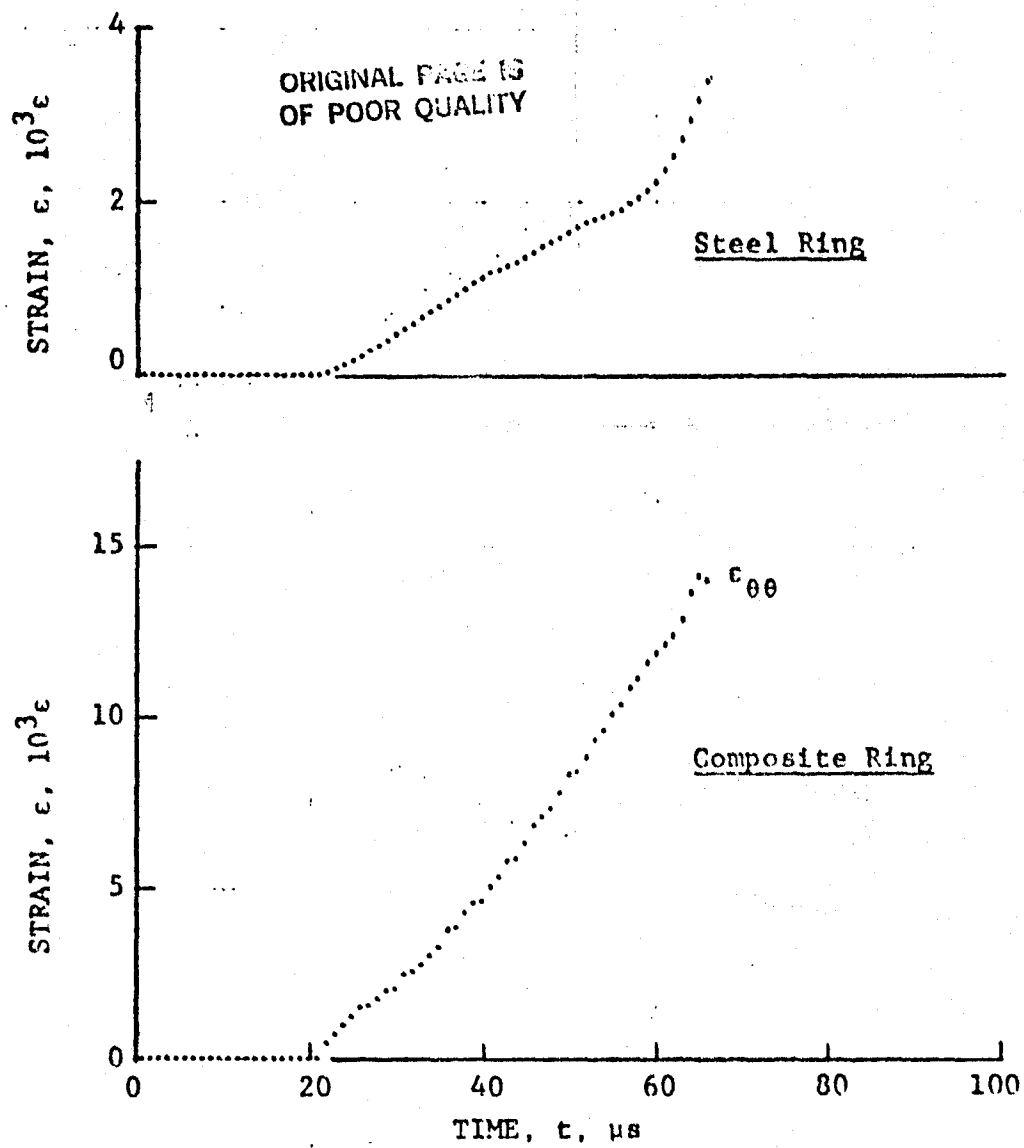


Figure 4-49. Strain records in steel ring and SP288/AS  $[\pm 30]_{2s}$  graphite/epoxy ring under dynamic loading, Specimen No. 28-9<sup>2s</sup> (1.56 g bullseye powder,  $KClO_4$ , and aluminum dust).

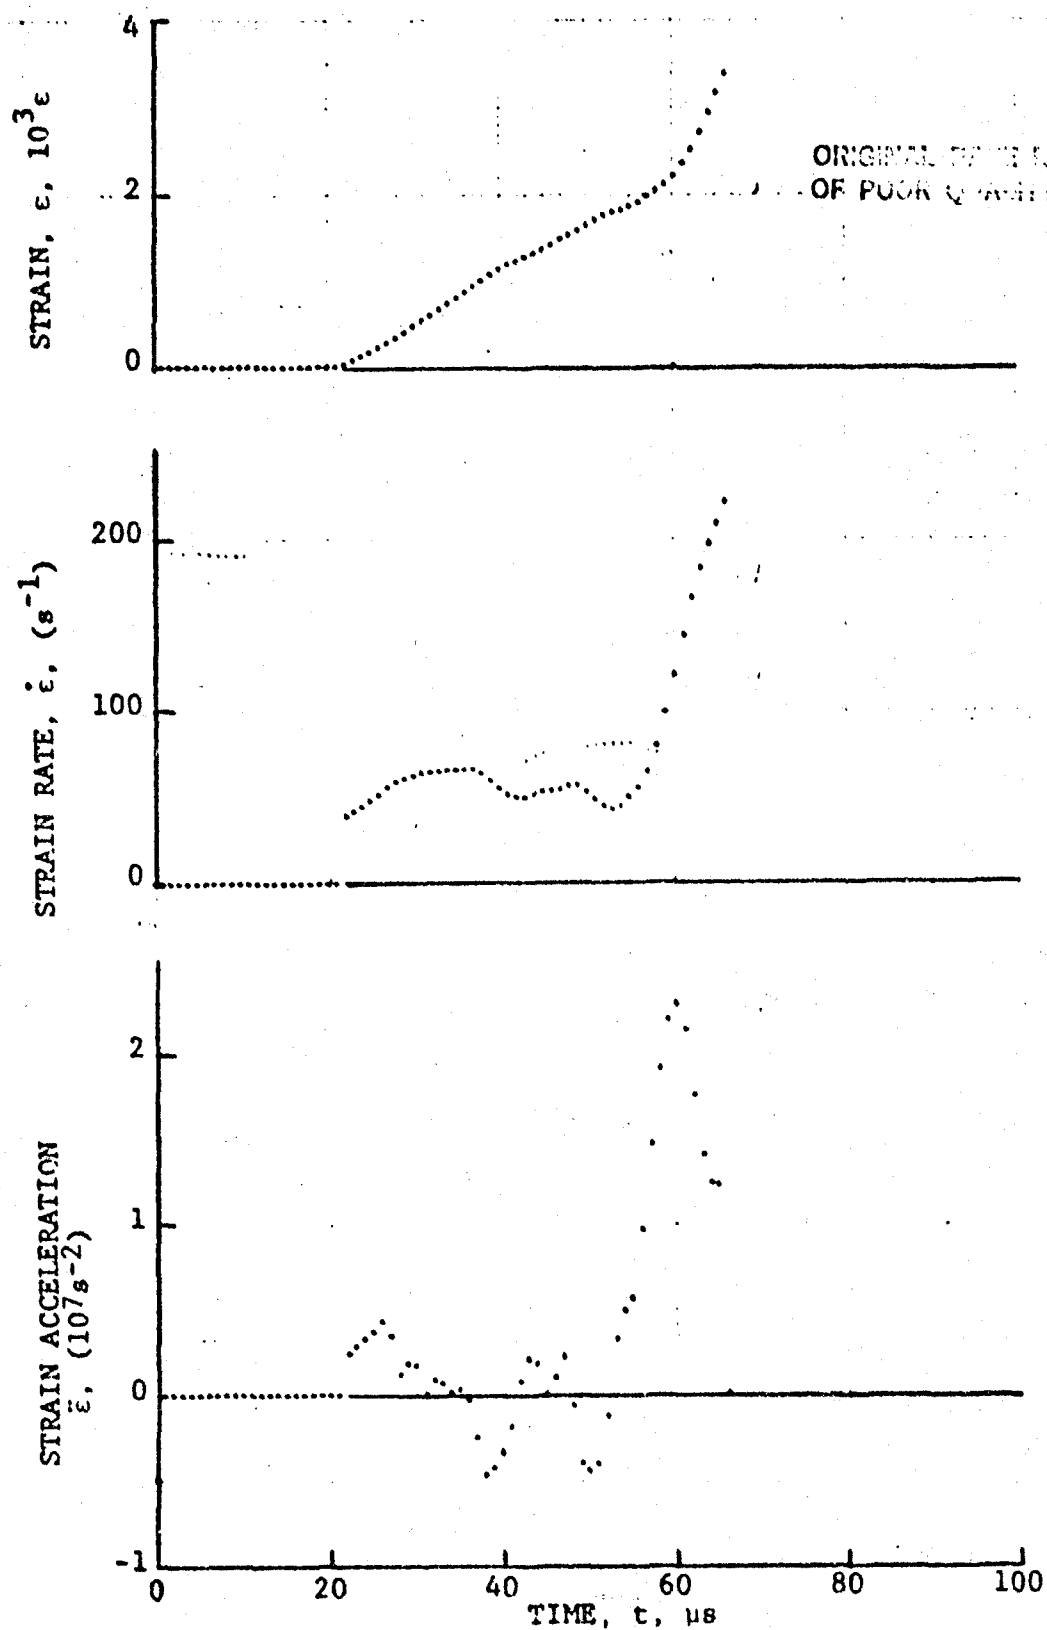


Figure 4-50. Strain and its derivatives in steel ring for Specimen No. 28-9.

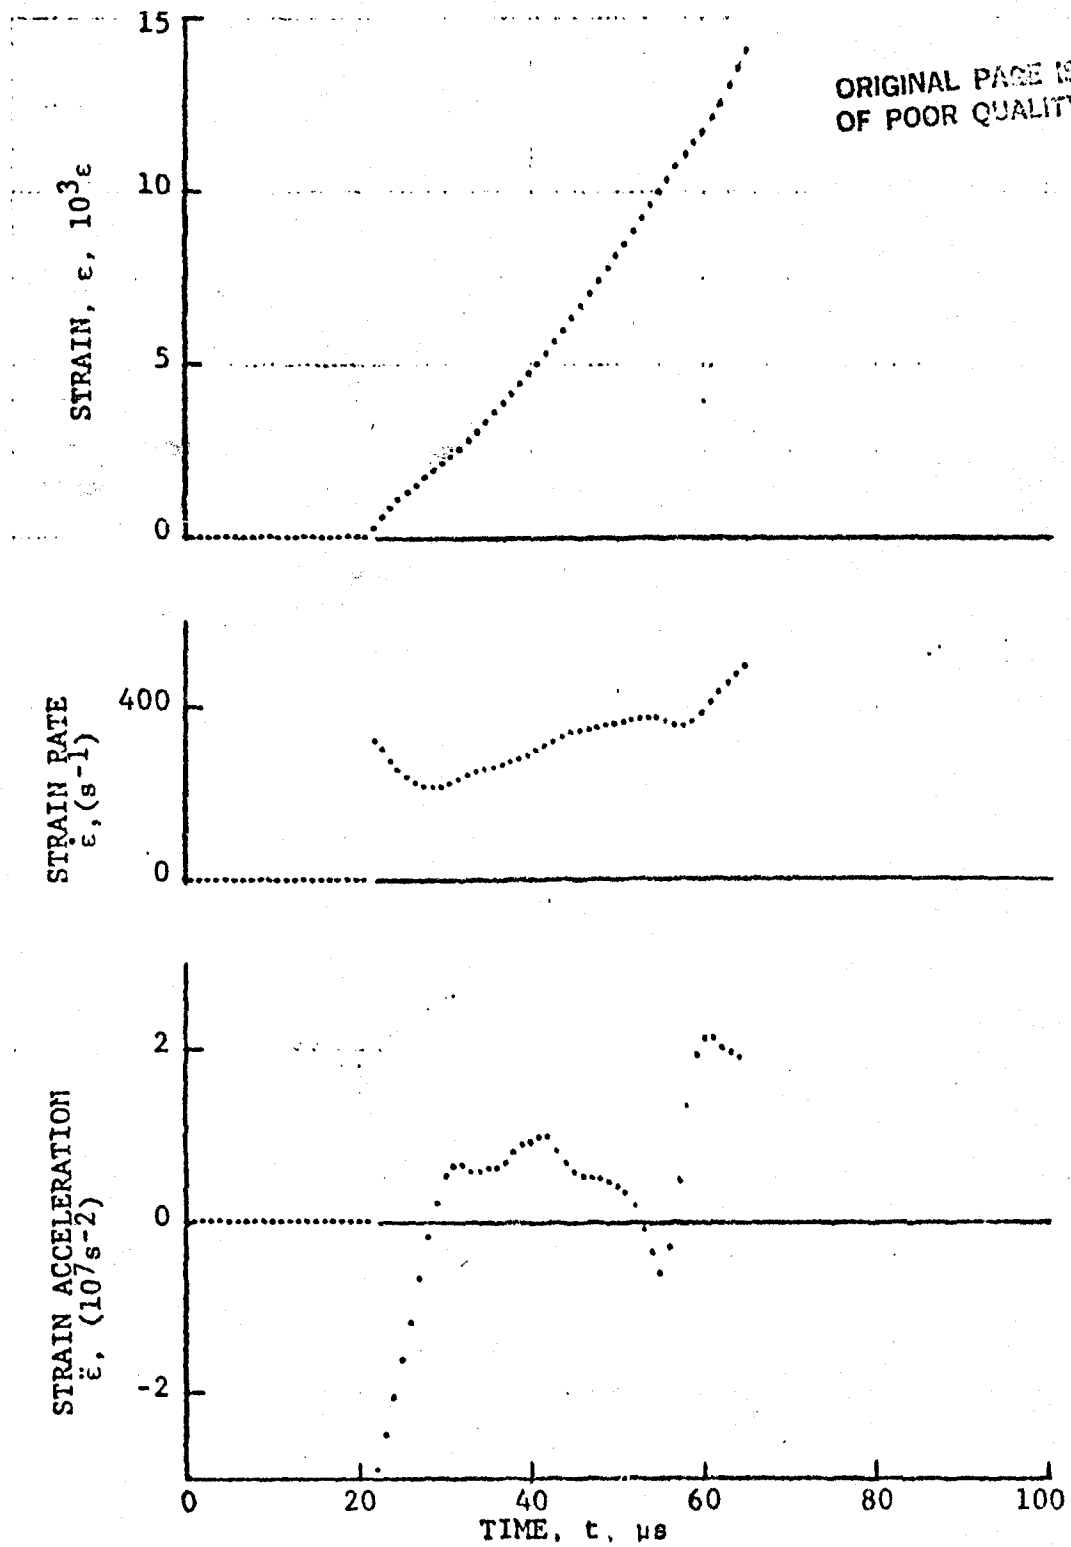


Figure 4-51. Circumferential strain and its derivatives in SP288/AS  $[\pm 30]_{2s}$  graphite/epoxy ring under dynamic loading, Specimen No. 28-9.

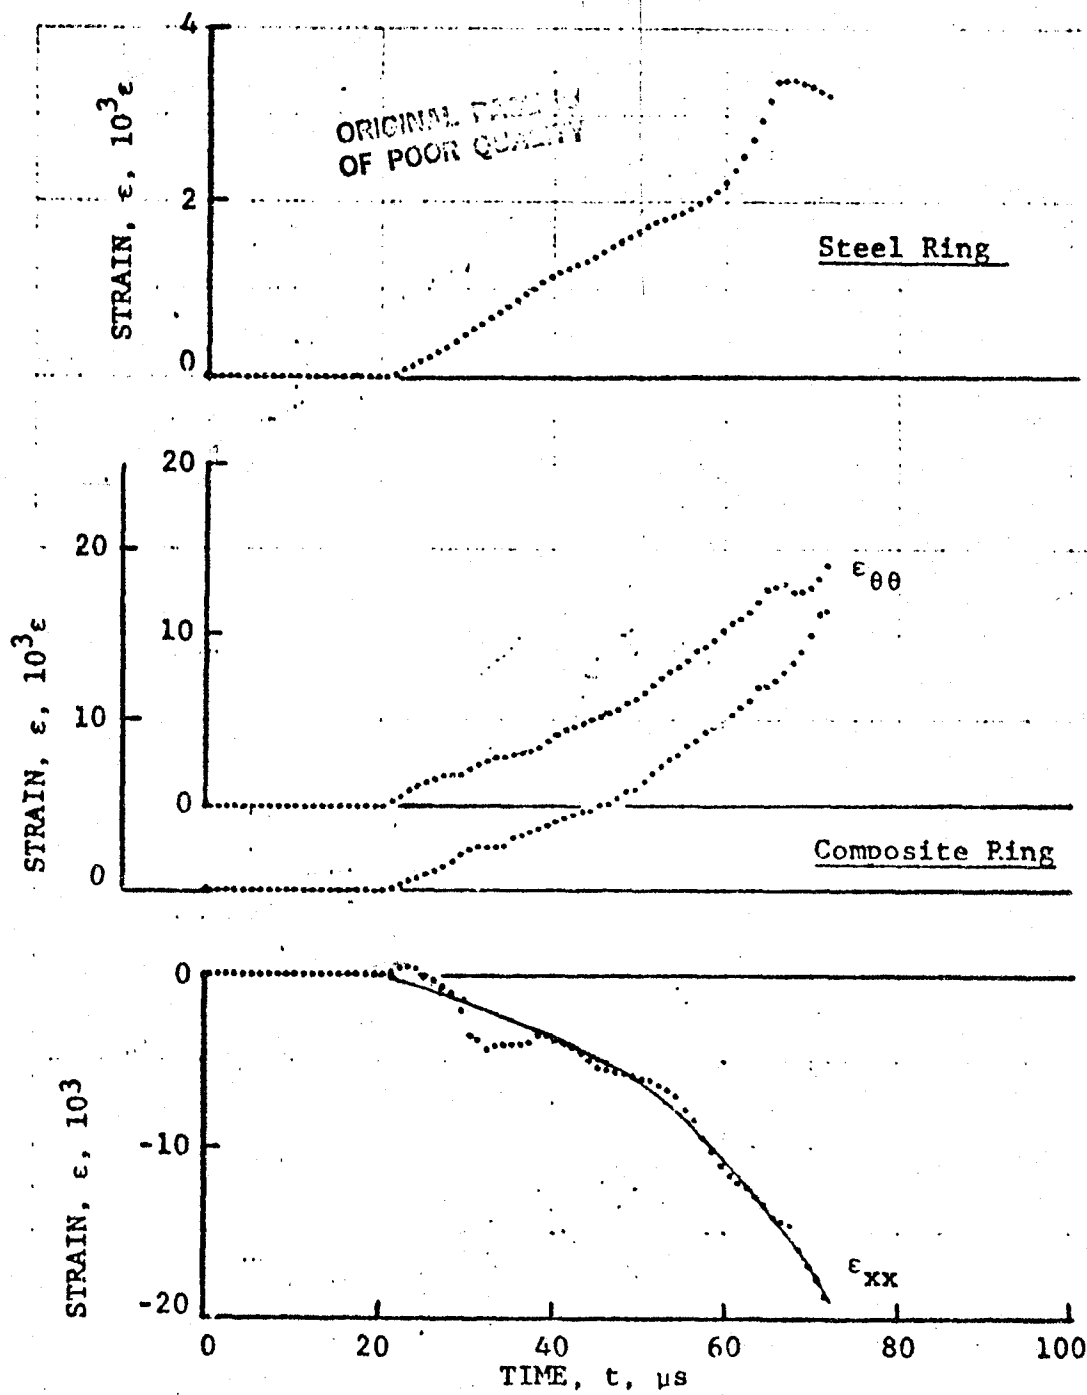


Figure 4-52. Strain records in steel ring and SP288/AS  $[\pm 30]_{2s}$  graphite/epoxy ring under dynamic loading, Specimen No. 28-10<sup>2s</sup> (1.56 g bullseye powder,  $KClO_4$ , and aluminum dust).

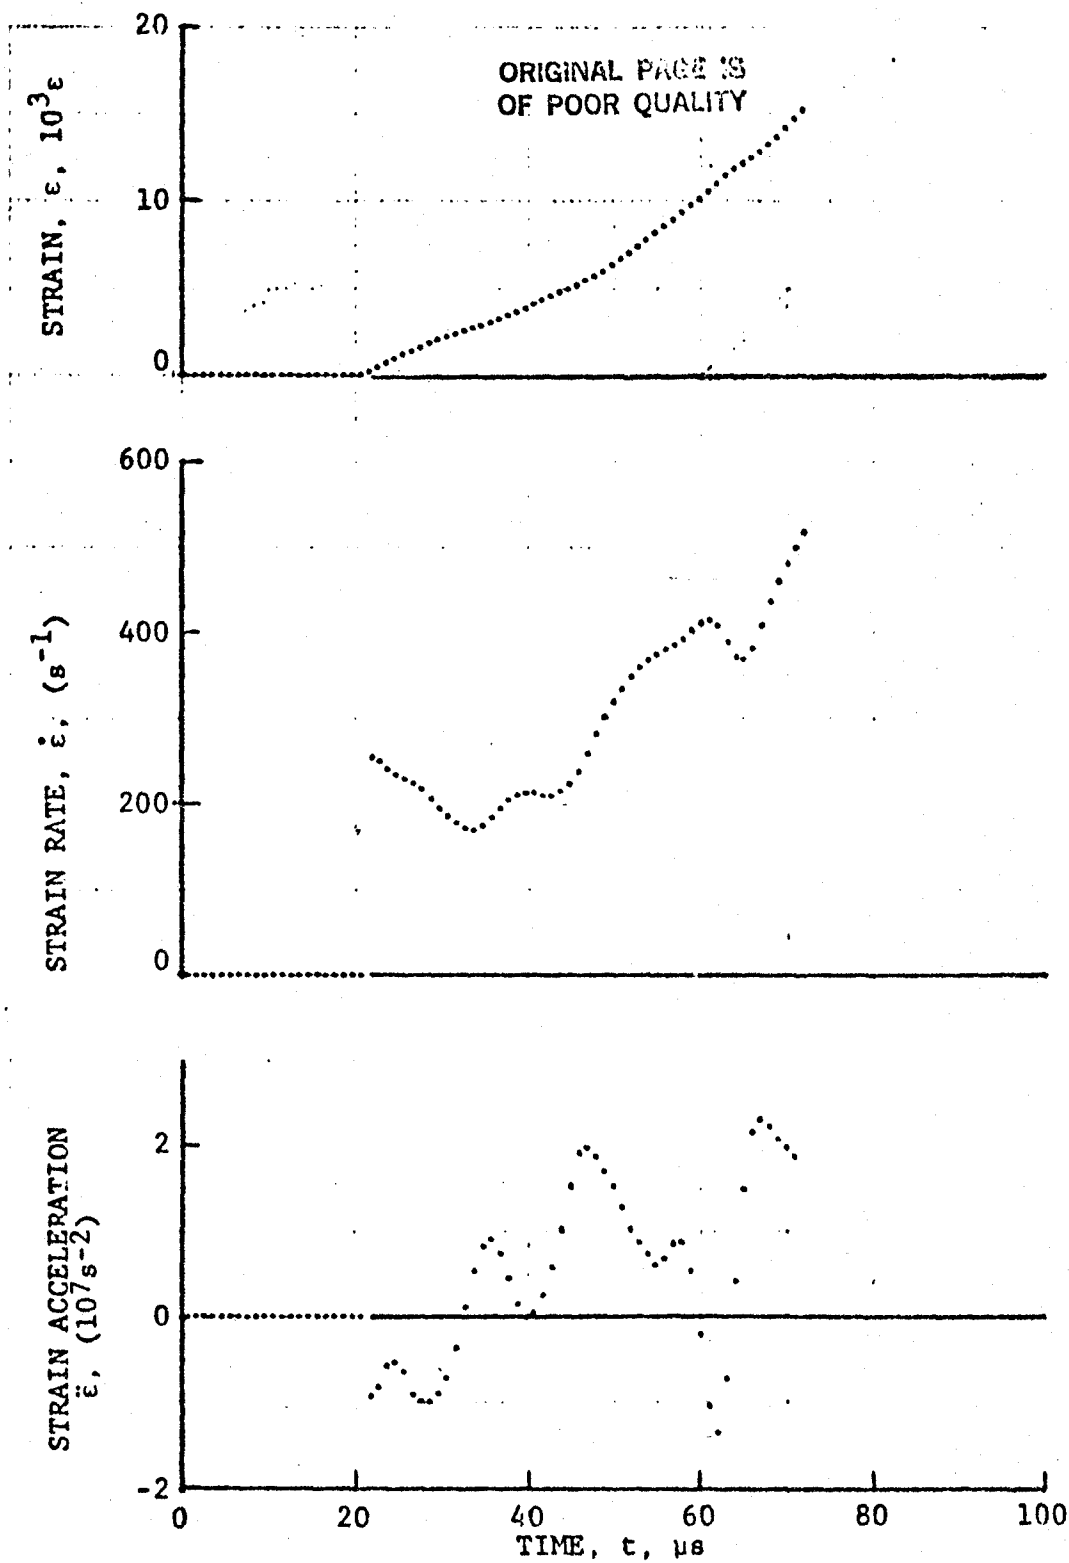


Figure 4-53. Circumferential strain and its derivatives in SP288/AS  $[\pm 30]_{2s}$  graphite/epoxy ring under dynamic loading, Specimen No. 28-10.

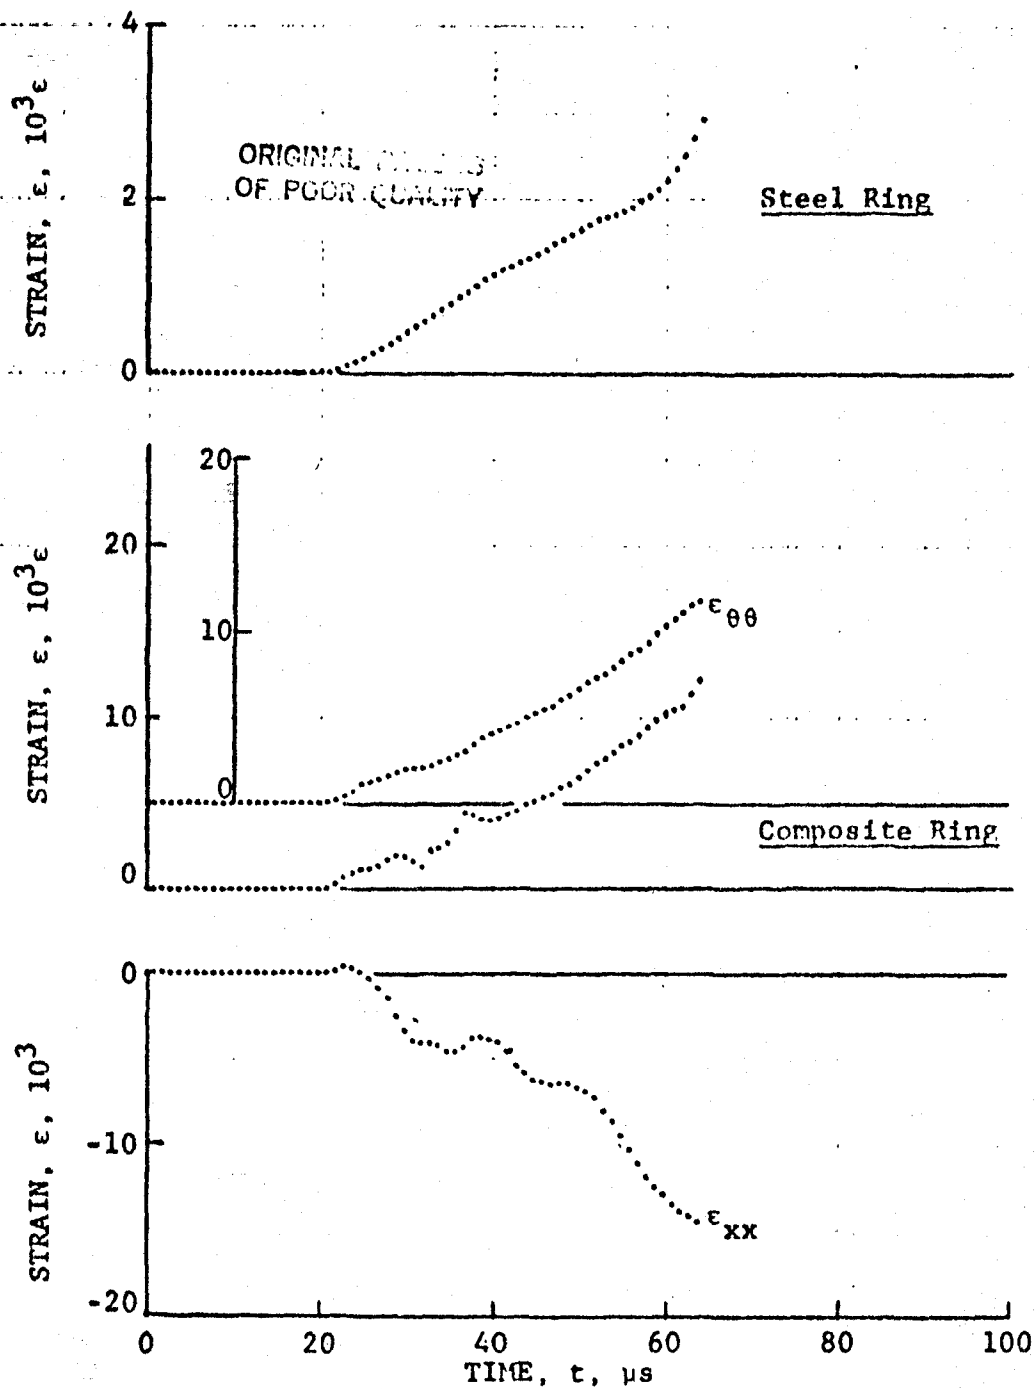


Figure 4-54. Strain records in steel ring and SP288/AS  $[\pm 30]_{2s}$  graphite/epoxy ring under dynamic loading, Specimen No. 28-11 (1.56 g bullseye powder,  $KClO_4$ , and aluminum dust).



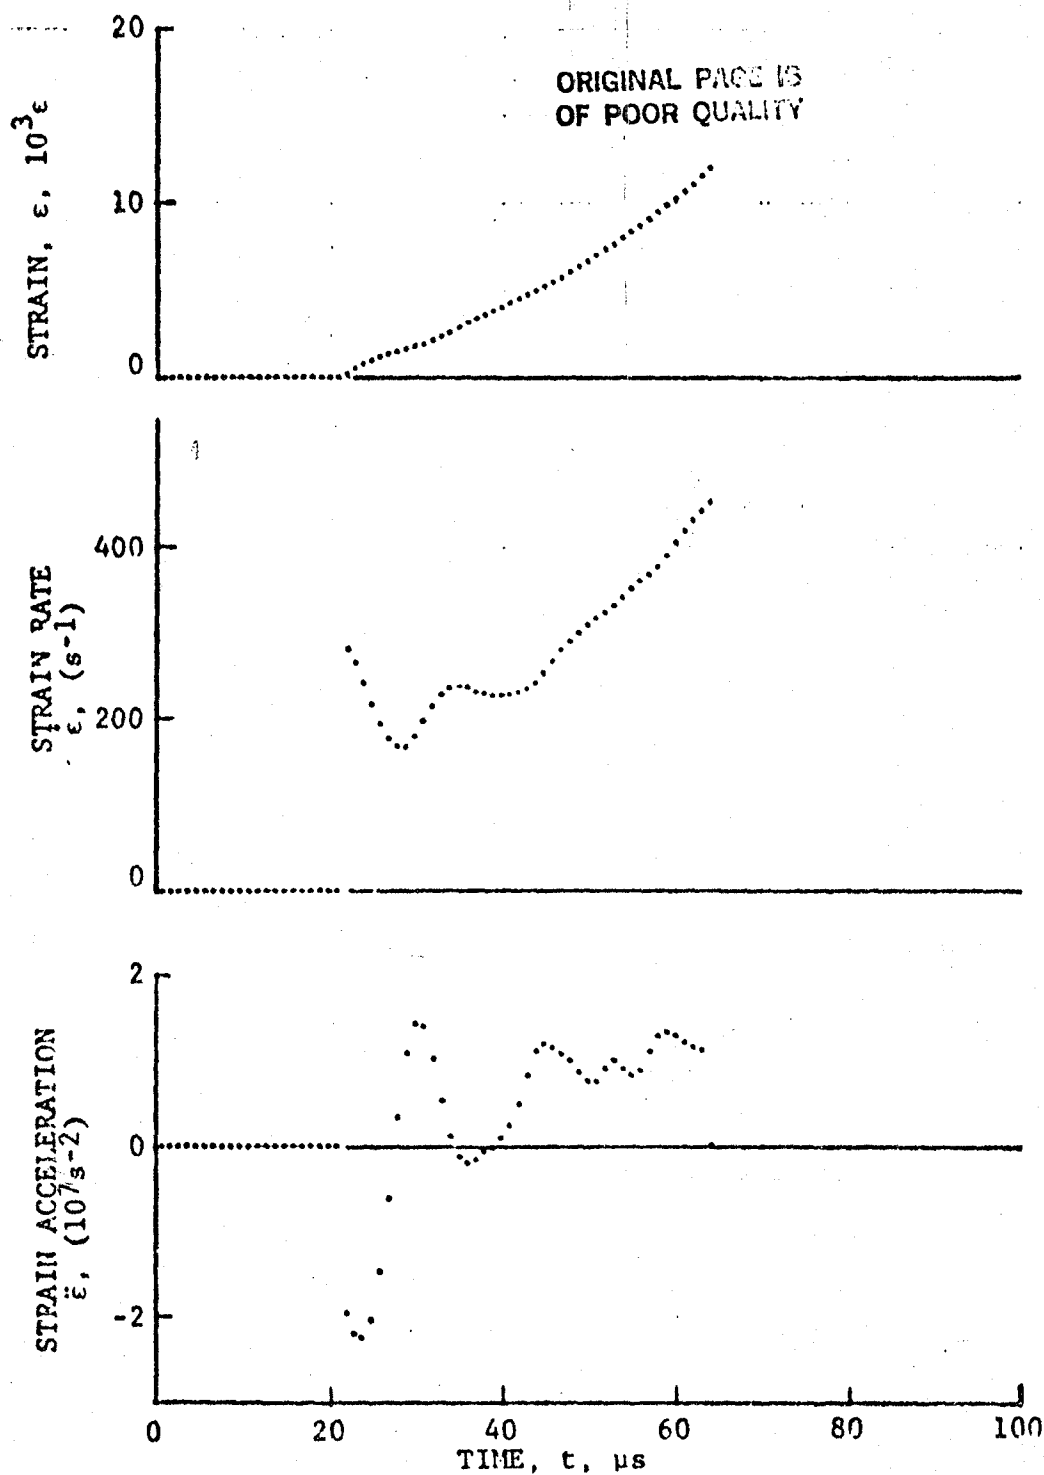


Figure 4-55. Circumferential strain and its derivatives in SP288/AS  $[\pm 30]_{2s}$  graphite/epoxy ring under dynamic loading, Specimen No. 28-11.

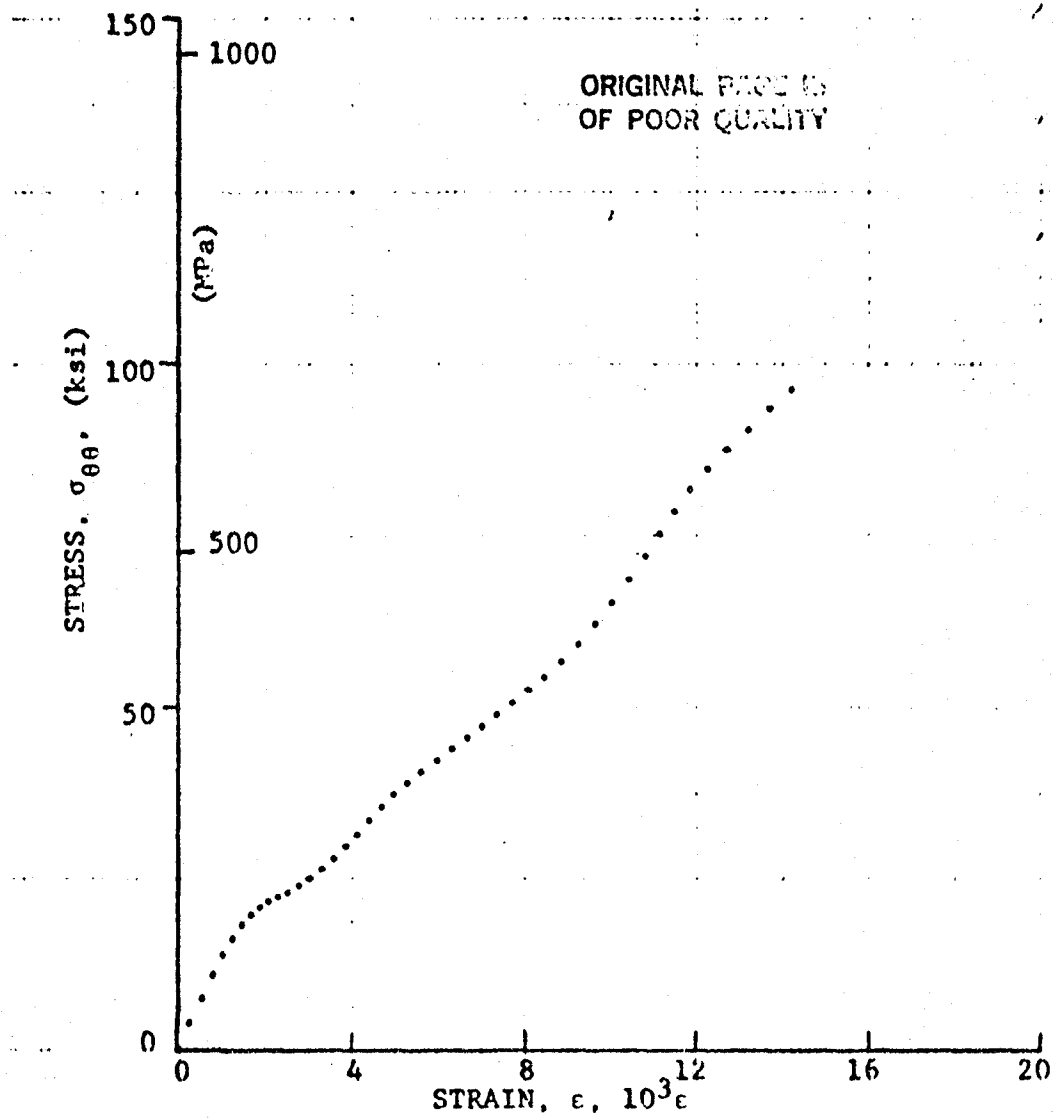


Figure 4-56. Stress-strain curve for dynamically loaded SP288/AS  $[\pm 30]_2$ s graphite/epoxy ring, Specimen No. 28-9 (1.56 g bullseye powder,  $KClO_4$ , and aluminum dust).

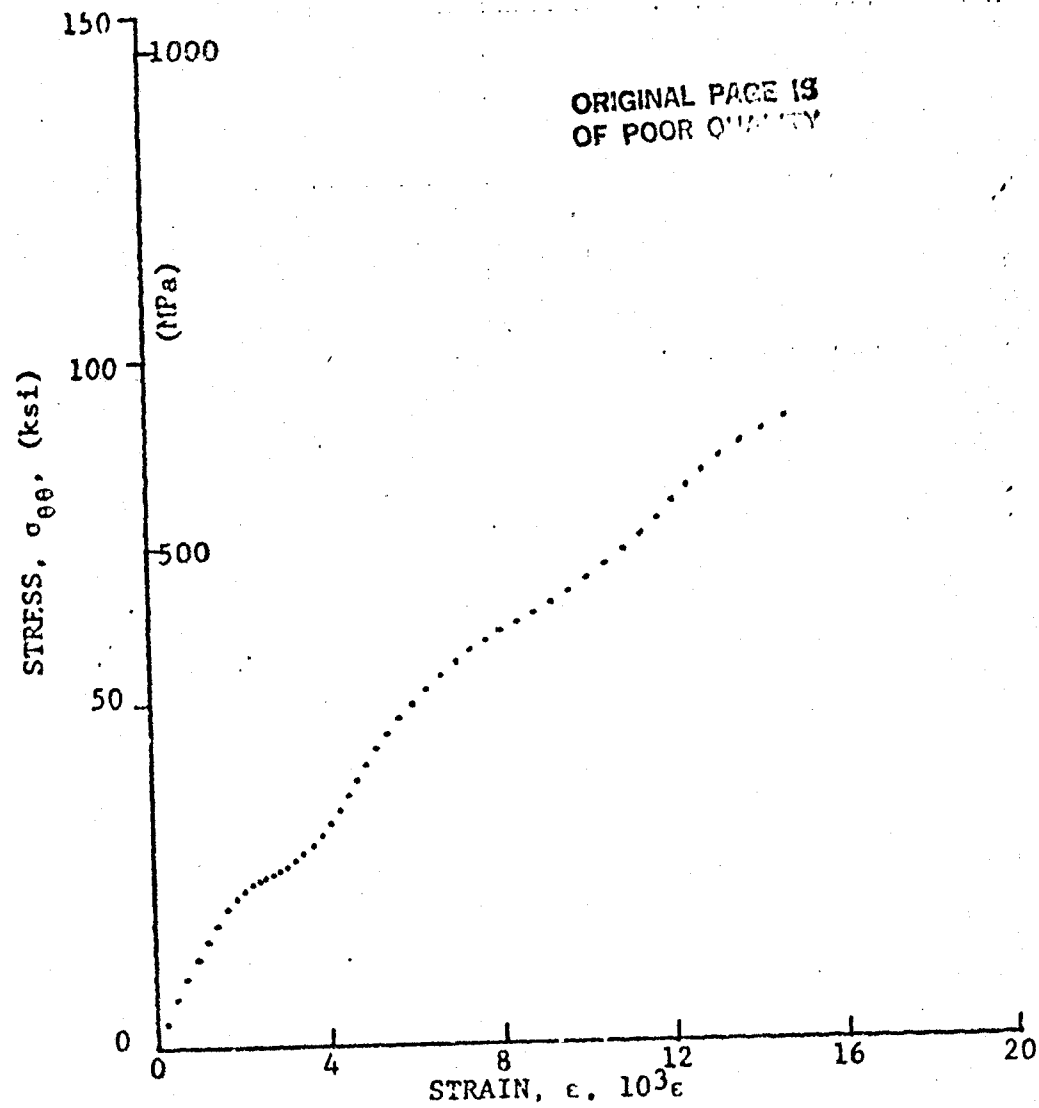


Figure 4-57. Stress-strain curve for dynamically loaded SP288/AS  $[\pm 30]_2$ s graphite/epoxy ring, Specimen No. 28-10 (1.56 g bullseye powder,  $KClO_4$ , and aluminum dust).

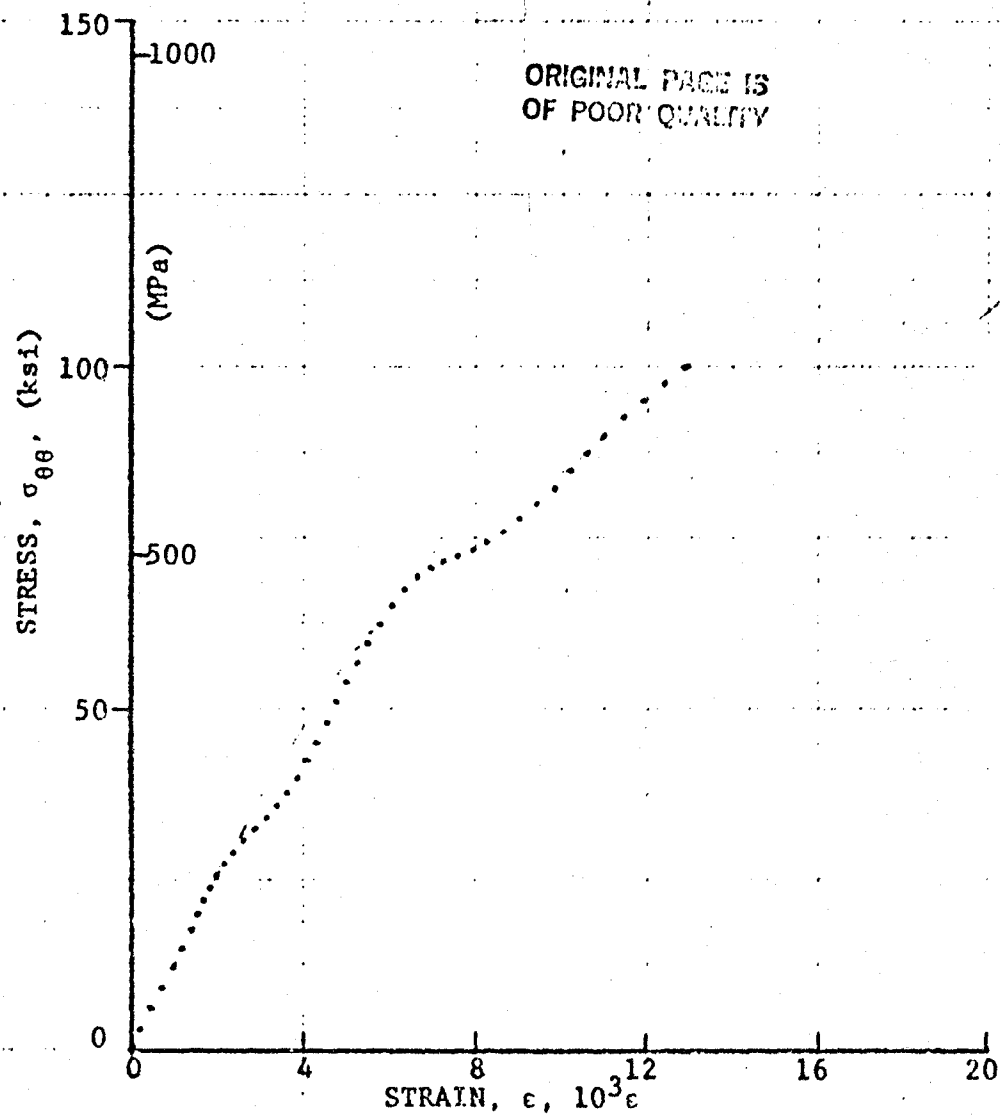


Figure 4-58. Stress-strain curve for dynamically loaded SP288/AS  $[\pm 30]_{2s}$  graphite/epoxy ring, Specimen No. 28-11 (1.56 g bullseye powder,  $KClO_4$ , and aluminum dust).

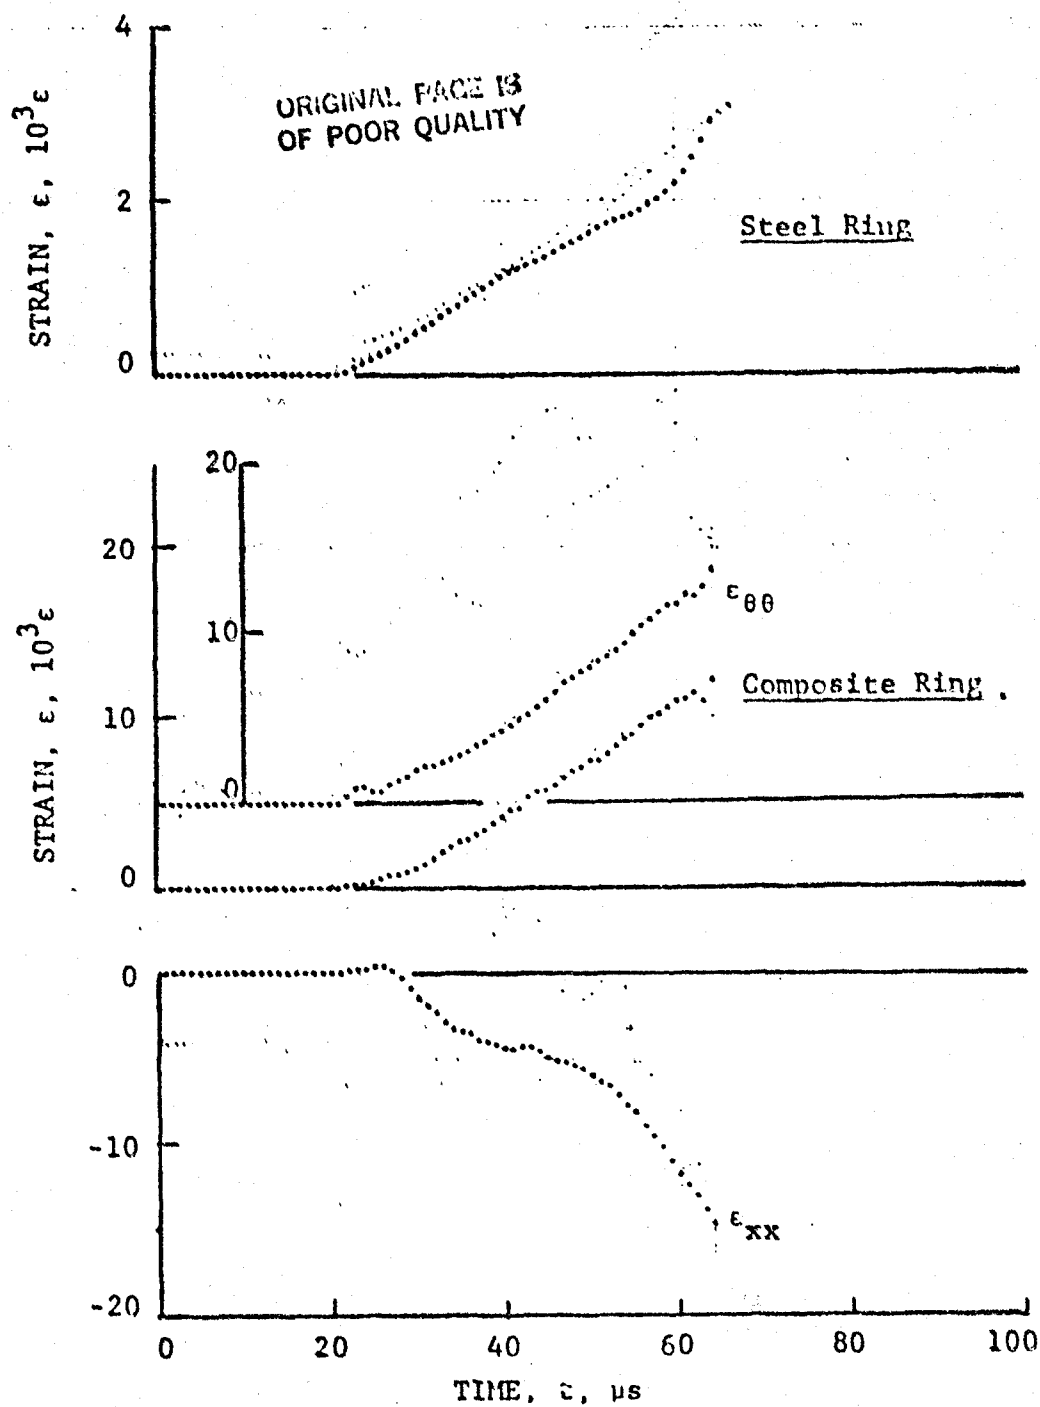


Figure 4-59. Strain records in steel ring and in 80AS/20S/PR288 [ $\pm 30$ ]<sub>2</sub> graphite/S-glass/epoxy ring under dynamic loading, Specimen No. 29-10 (1.56 g bullseye powder,  $KClO_4$ , and aluminum dust).

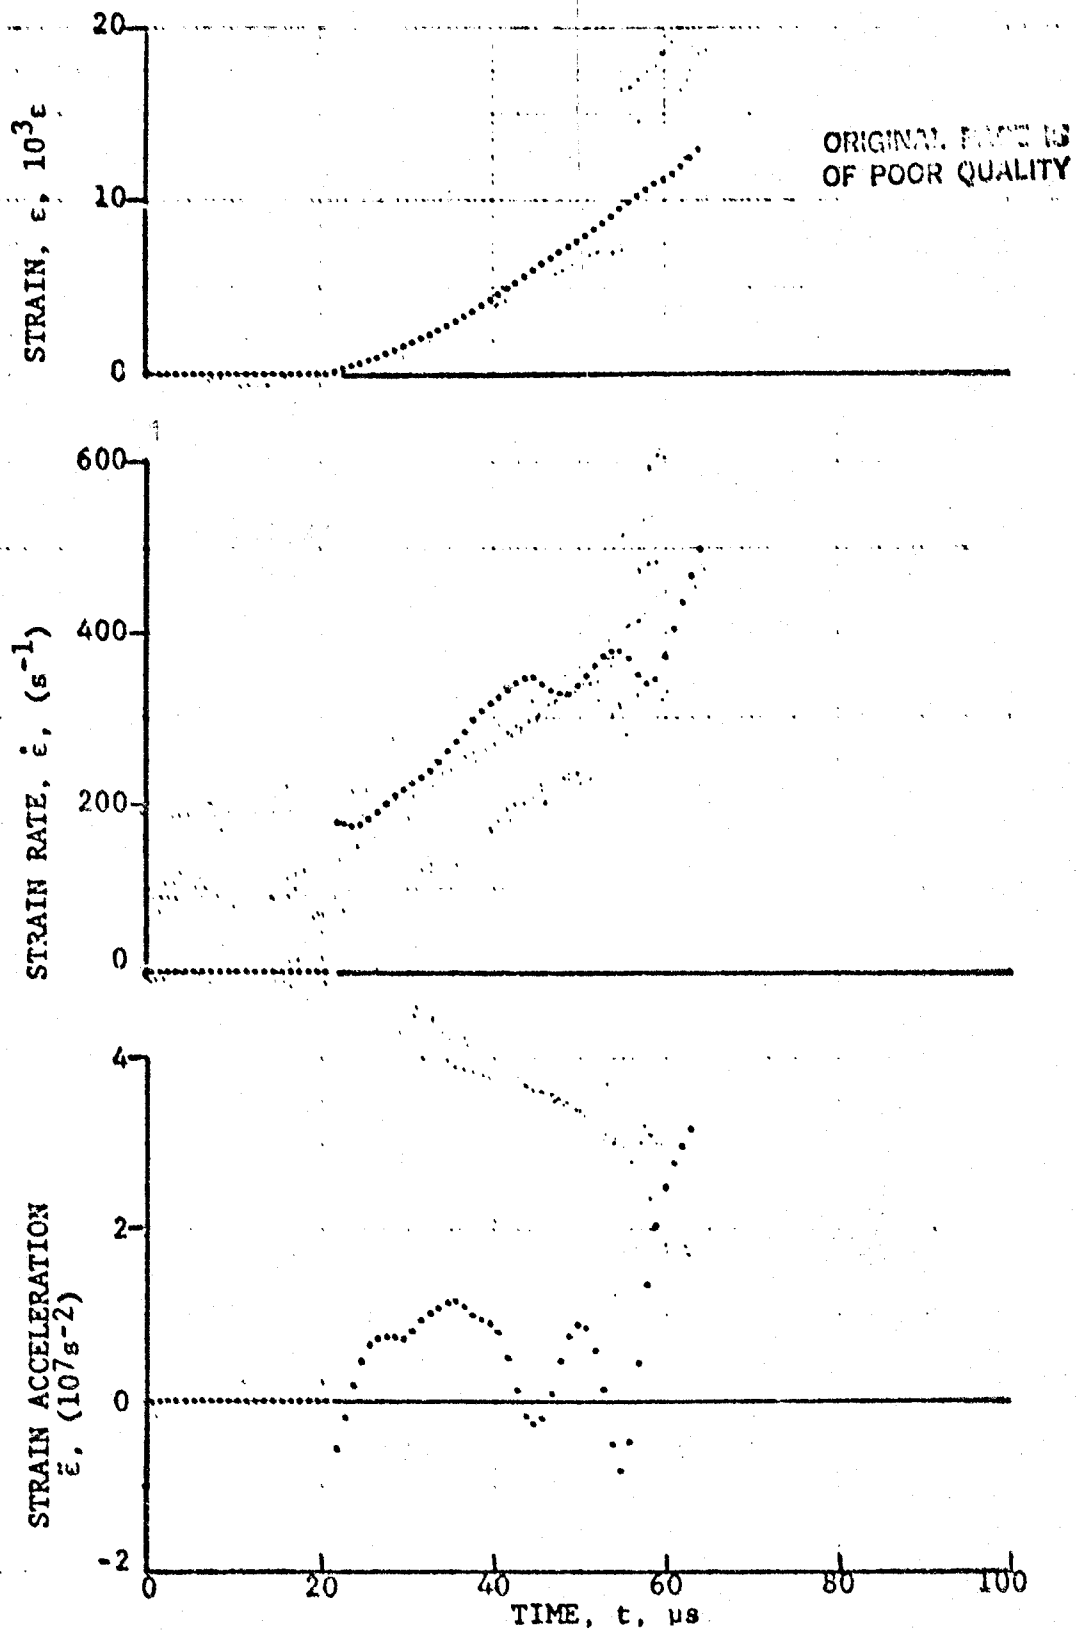


Figure 4-60. Circumferential strain and its derivatives in 80AS/20S/PR288  $[\pm 30]_{2s}$  graphite/S-glass/epoxy ring under dynamic loading, Specimen No. 29-10.

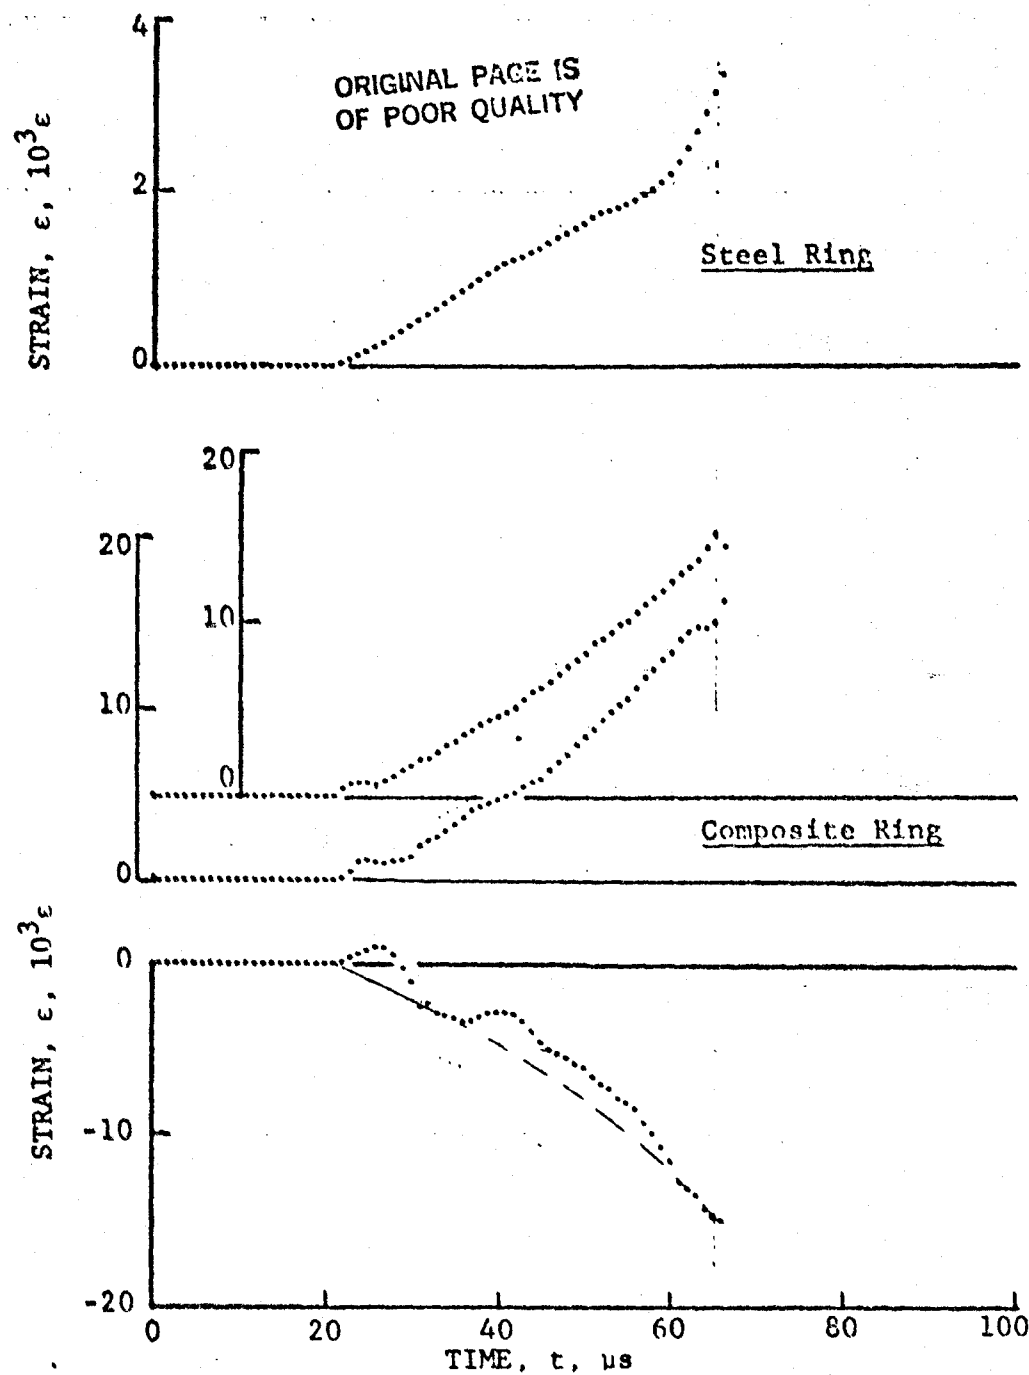


Figure 4-61. Strain records in steel ring and in 80AS/20S/PR288  $[\pm 30]_{25}$  graphite/S-glass/epoxy ring under dynamic loading, Specimen No. 29-11 (1.56 g bullseye powder,  $KClO_4$ , and aluminum dust).

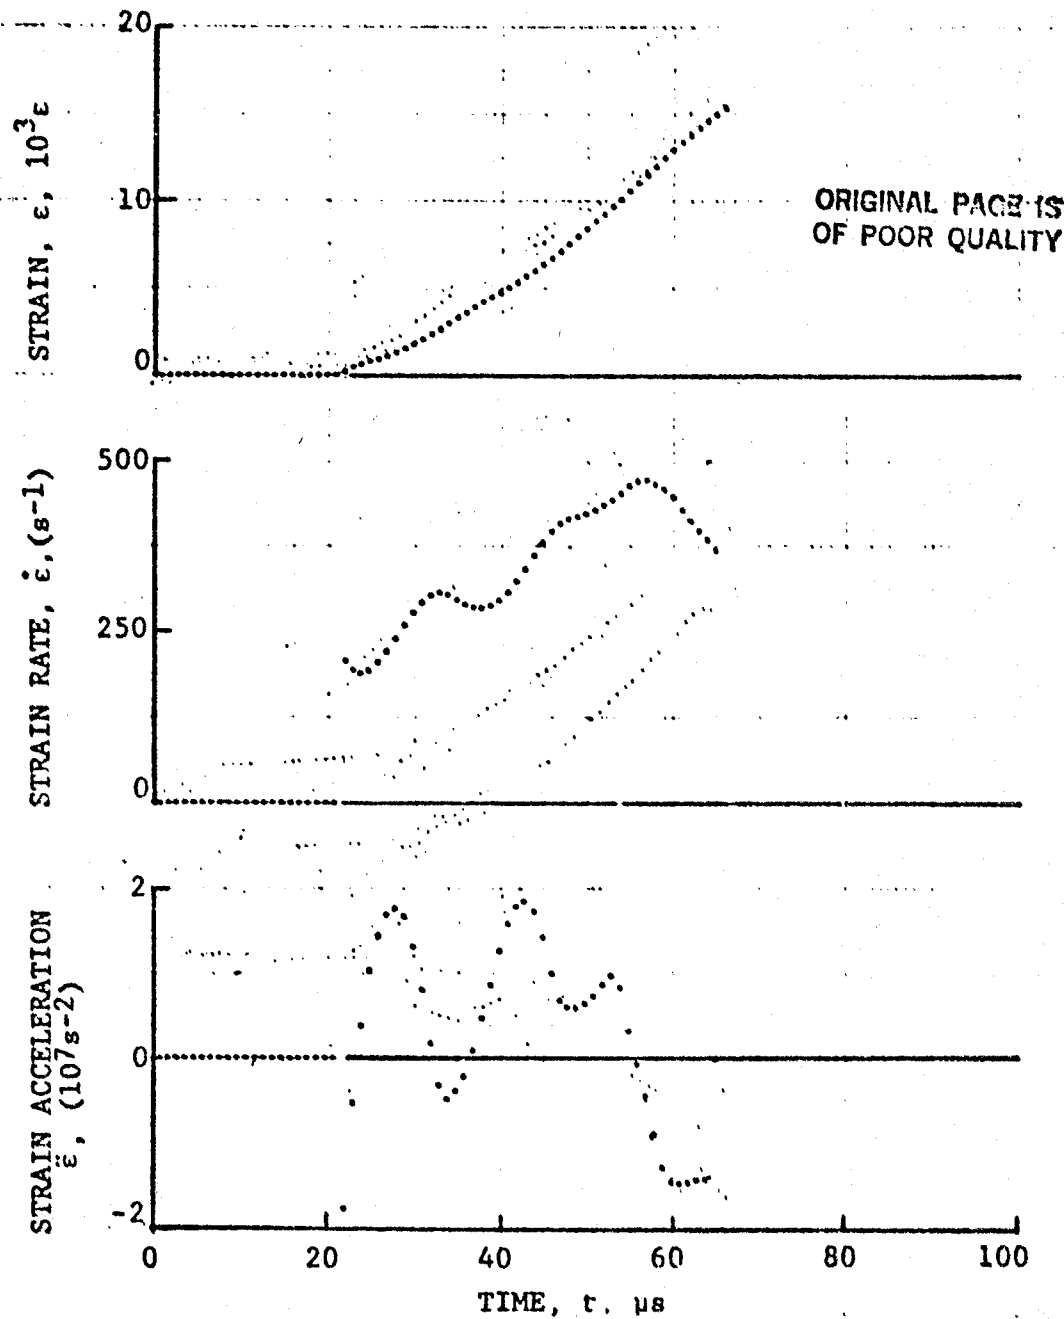


Figure 4-62. Circumferential strain and its derivatives in 80AS/20S/PR288  $[\pm 30]_{2s}$  graphite/S-glass/epoxy ring under dynamic loading, Specimen No. 29-11.



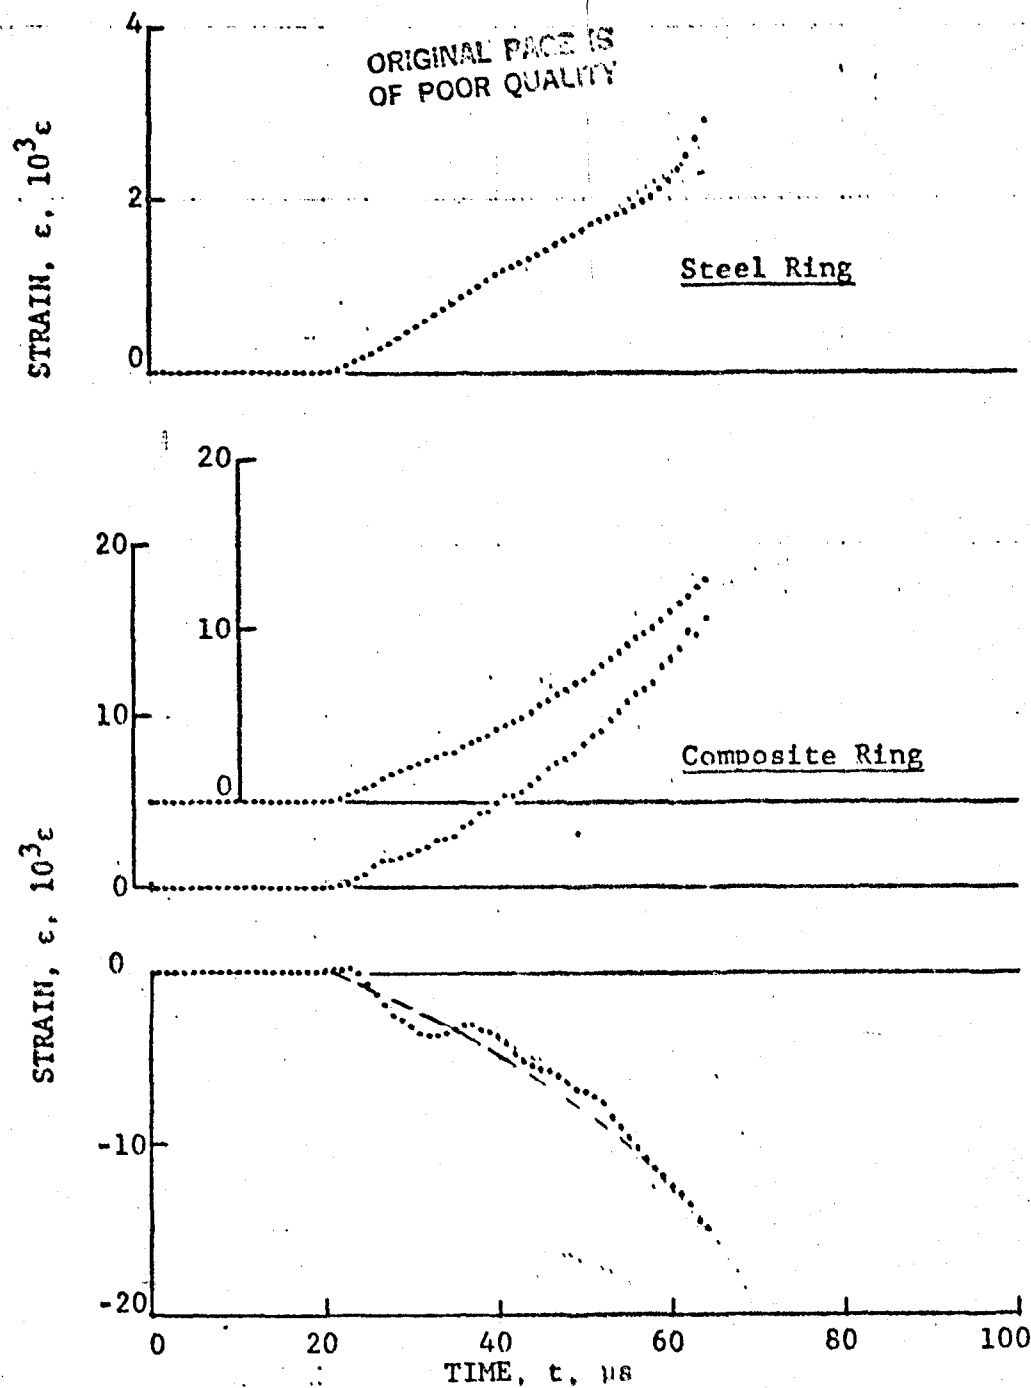


Figure 4-63. Strain records in steel ring and in 80AS/20S/PR288 [ $\pm 30$ ]<sub>2s</sub> graphite/S-glass/epoxy ring under dynamic loading, Specimen No. 29-12 (1.56 g bullseye powder,  $KClO_4$ , and aluminum dust).

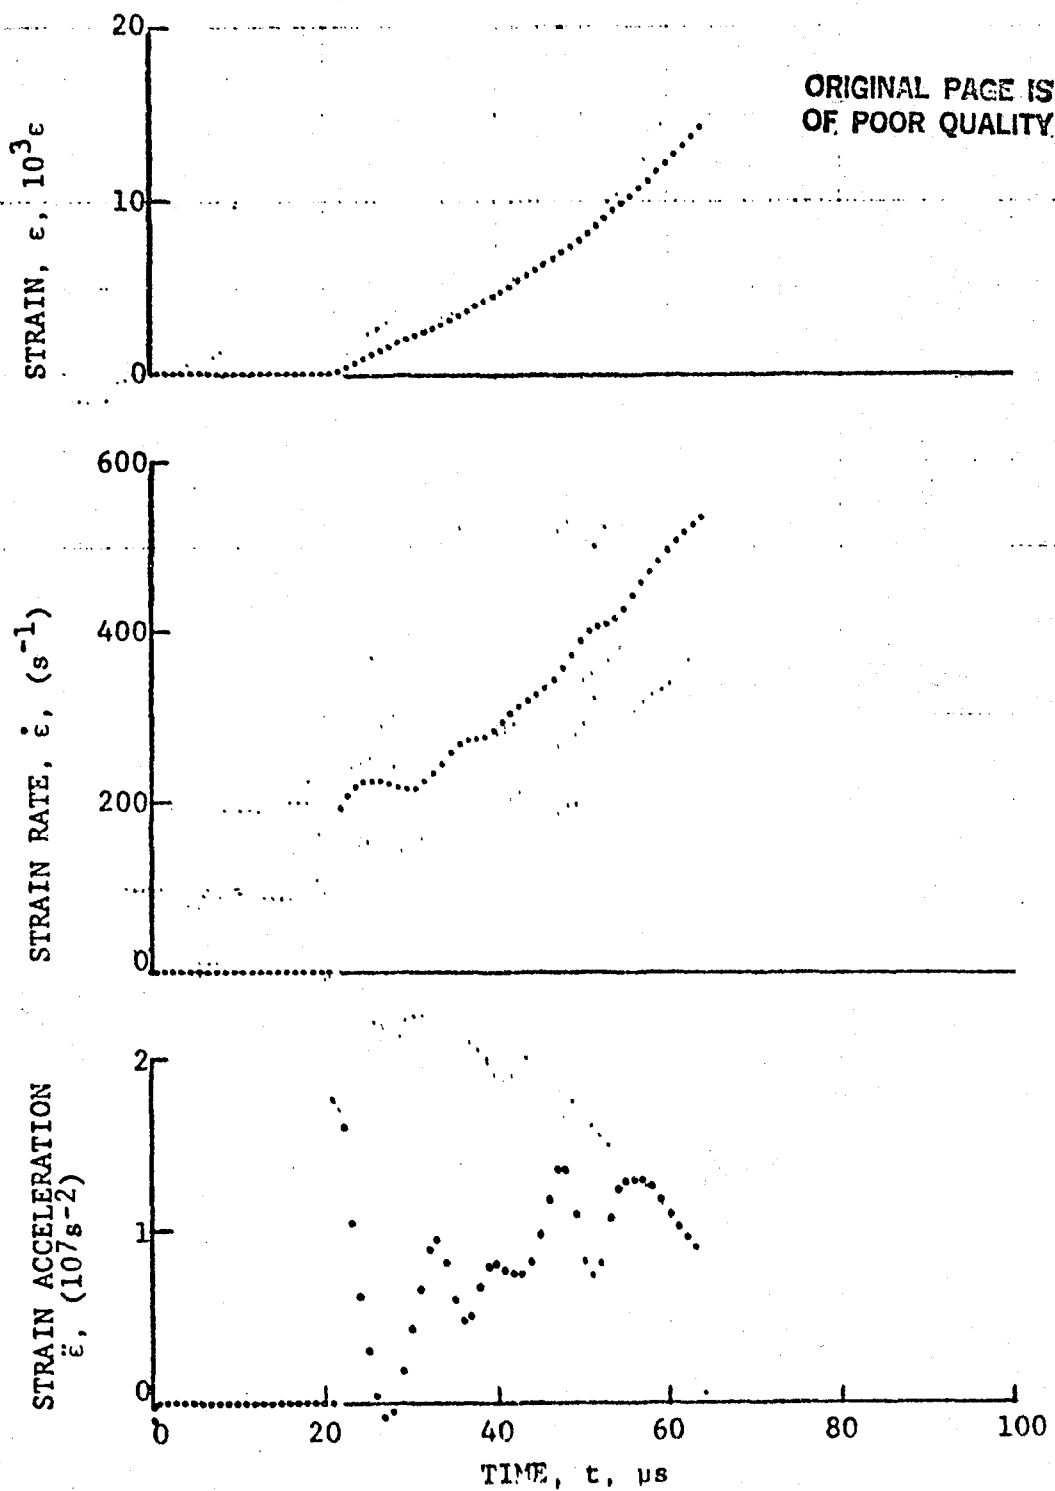


Figure 4-64. Circumferential strain and its derivatives in 80AS/20S/PR288  $[\pm 30]_{2s}$  graphite/S-glass/epoxy ring under dynamic loading, Specimen No. 29-12.

ORIGINAL PAGE IS  
OF POOR QUALITY

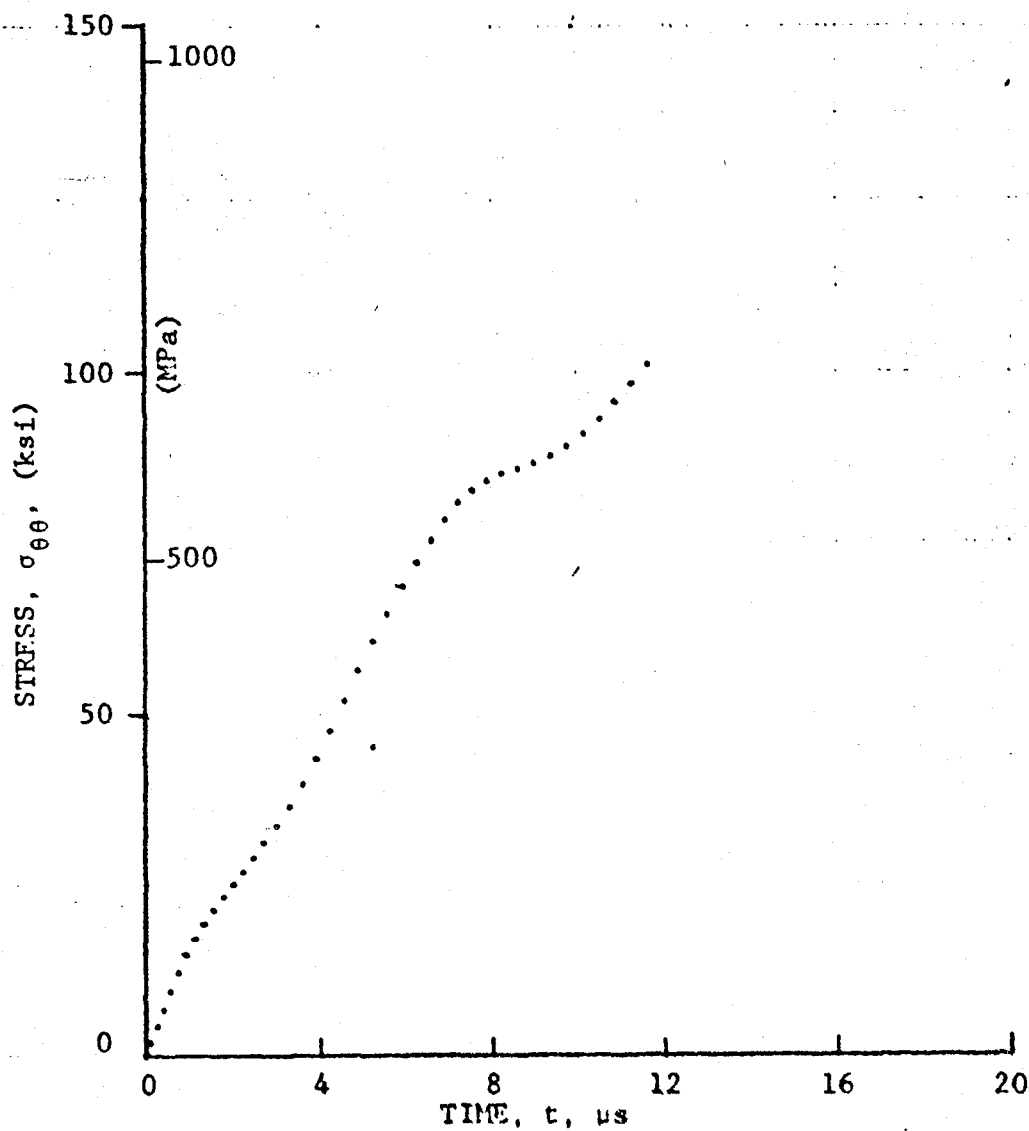


Figure 4-65. Stress-strain curve for dynamically loaded 80AS/20S/PR288  $[\pm 3C]_2^s$  graphite/S-glass/epoxy ring, Specimen No. 29-10 (1.56 g bullseye powder,  $KClO_4$ , and aluminum dust).

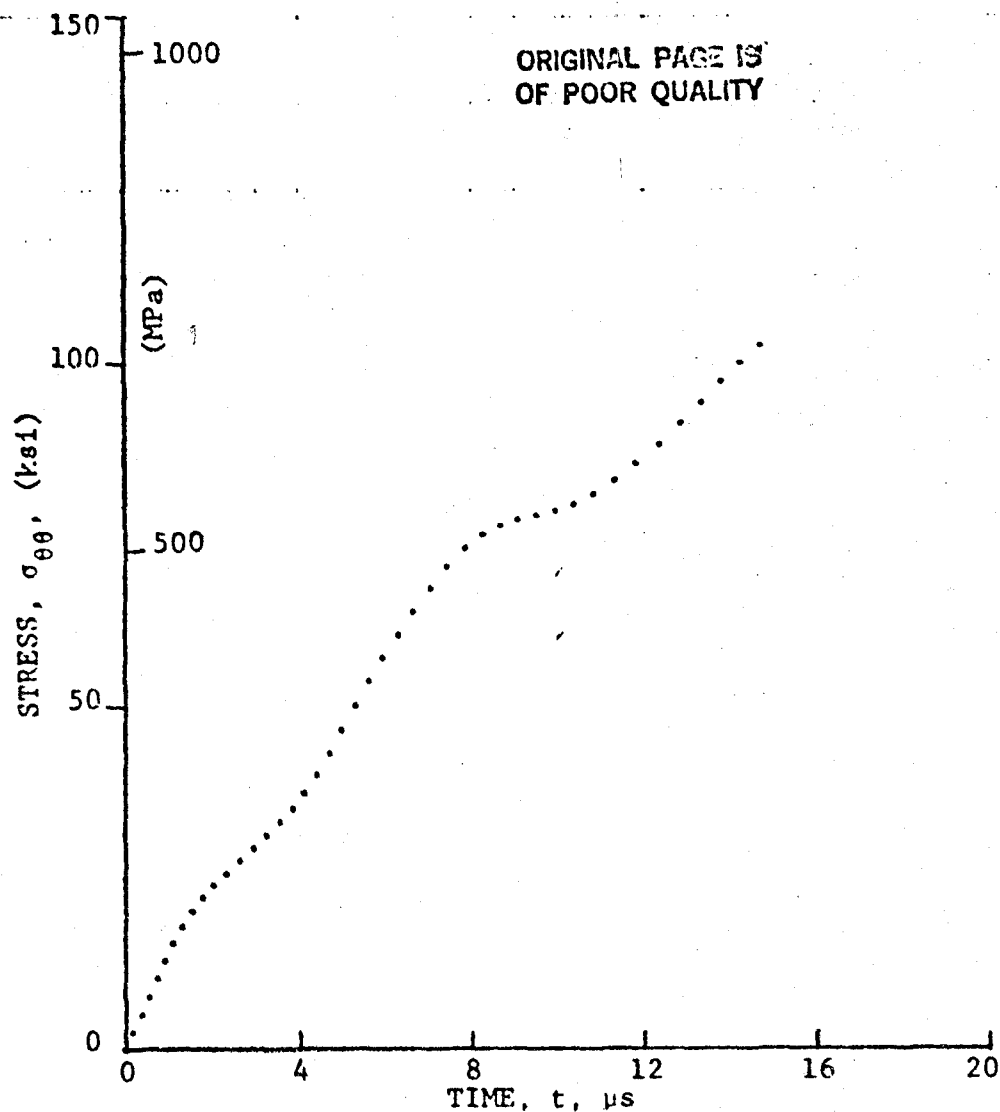


Figure 4-66. Stress-strain curve for dynamically loaded 80AS/20S/PR288  $[\pm 30]_2$  graphite/S-glass/epoxy ring, Specimen No. 29-11 (1.56 g bullseye powder,  $KClO_4$ , and aluminum dust).

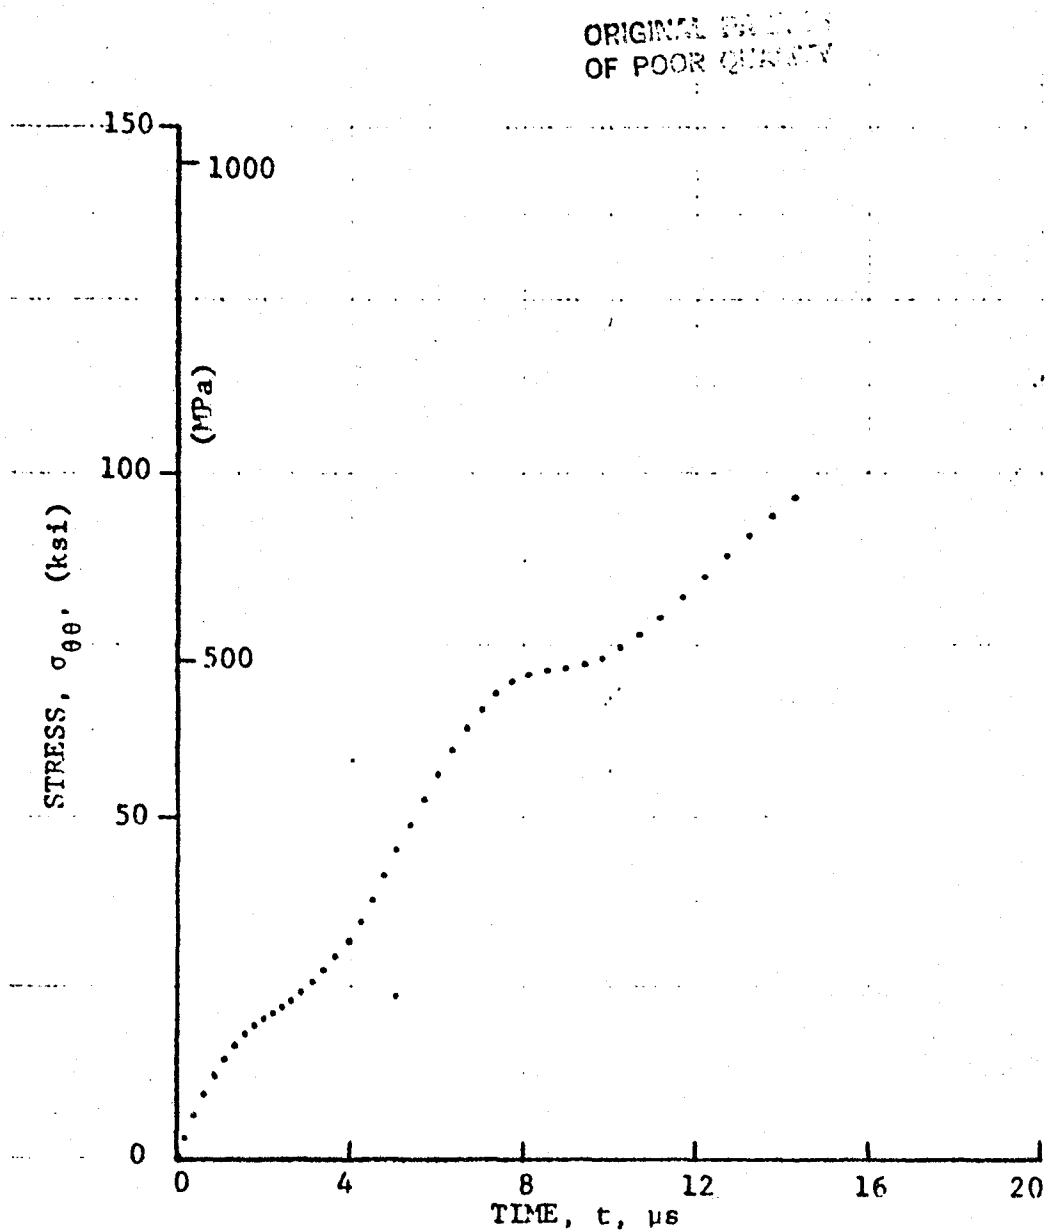


Figure 4-67. Stress-strain curve for dynamically loaded 80AS/20S/PR288  $[\pm 30]_2$  graphite/S-glass/epoxy ring, Specimen No. 29-12 (1.56 g bullseye powder,  $KClO_4$ , and aluminum dust).

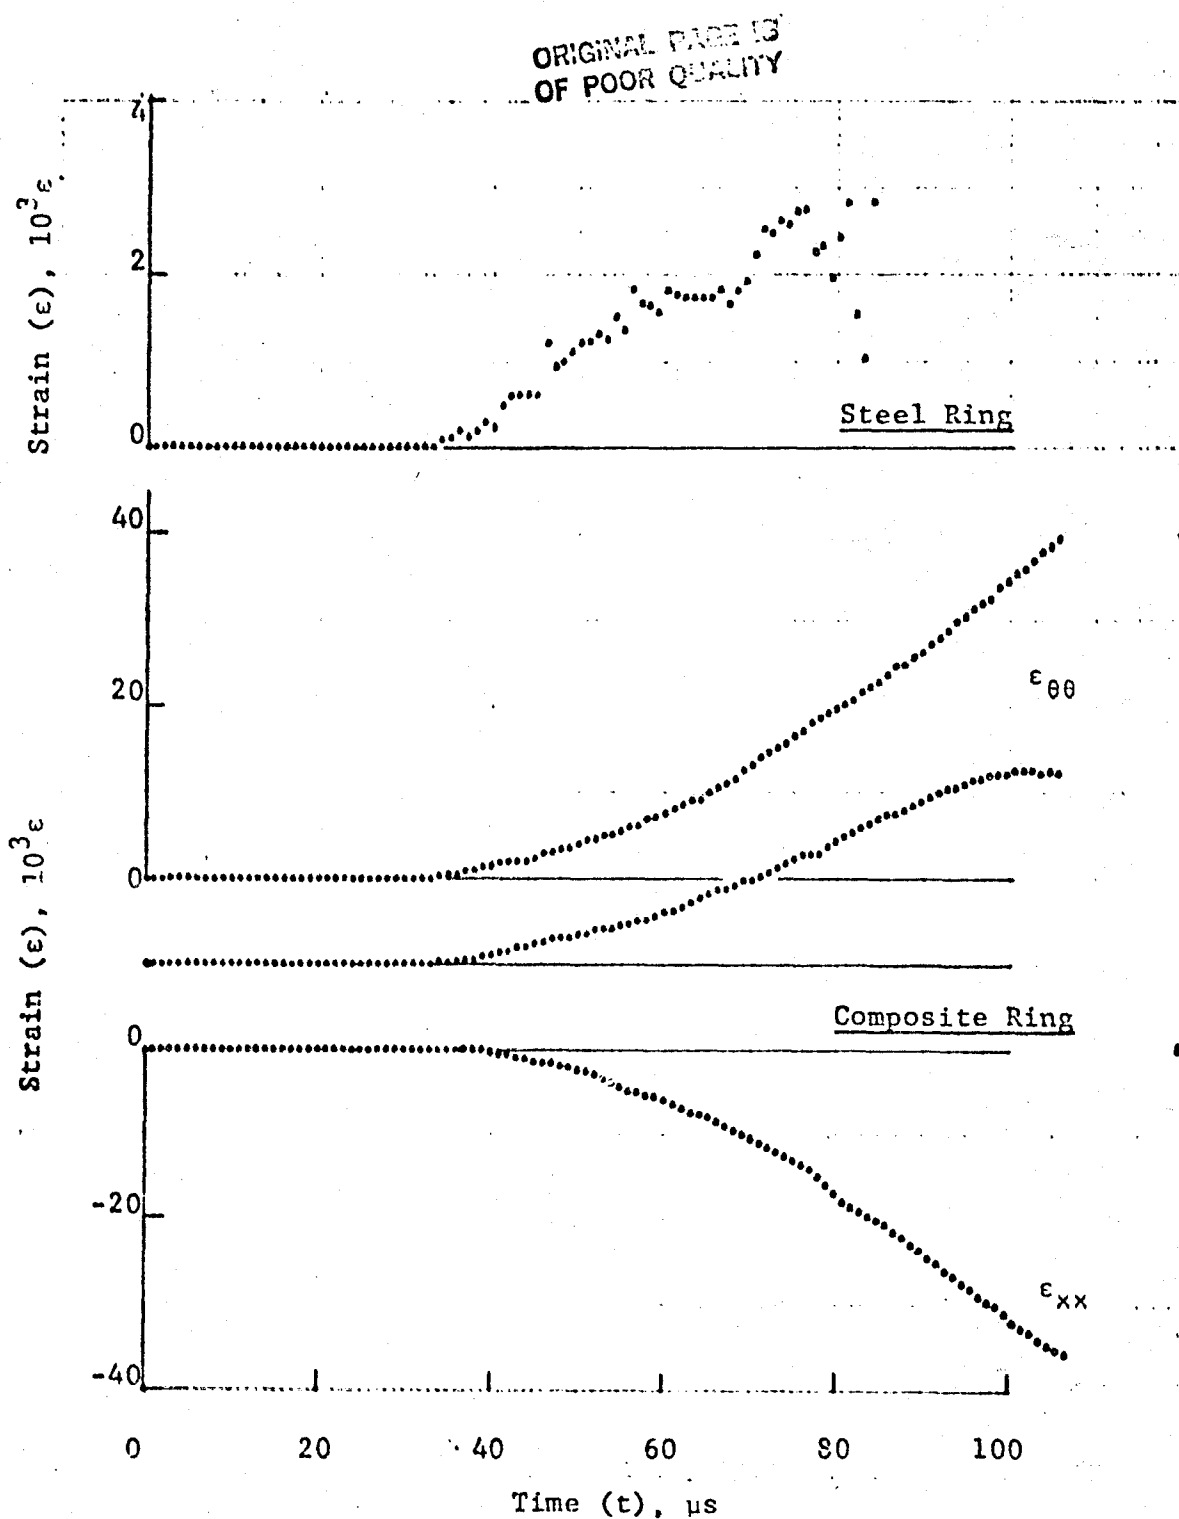


Figure 4-68. Strain records in steel ring and SP288/AS [ $\pm 45$ ]<sub>2s</sub> graphite/epoxy ring under dynamic loading for Specimen No. 24-11 (1.56 g pistol powder,  $KClO_4$ , and aluminum dust).

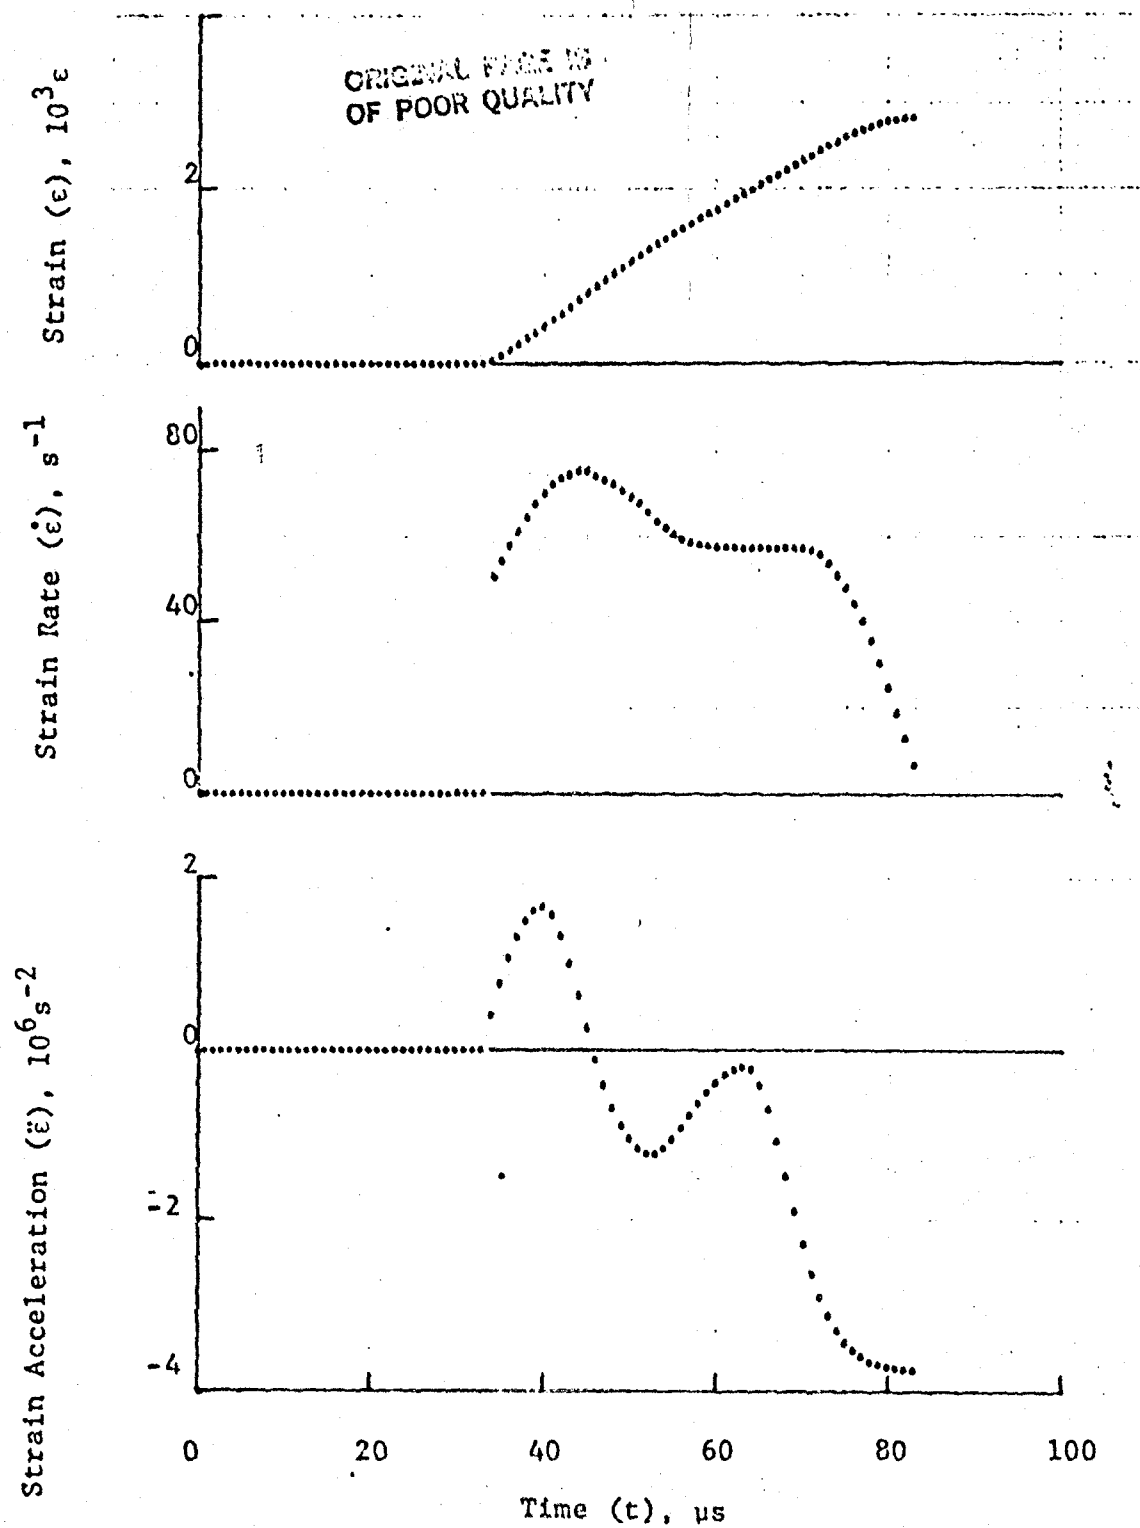


Figure 4-69. Strain and its derivatives in steel ring for Specimen No. 24-11.

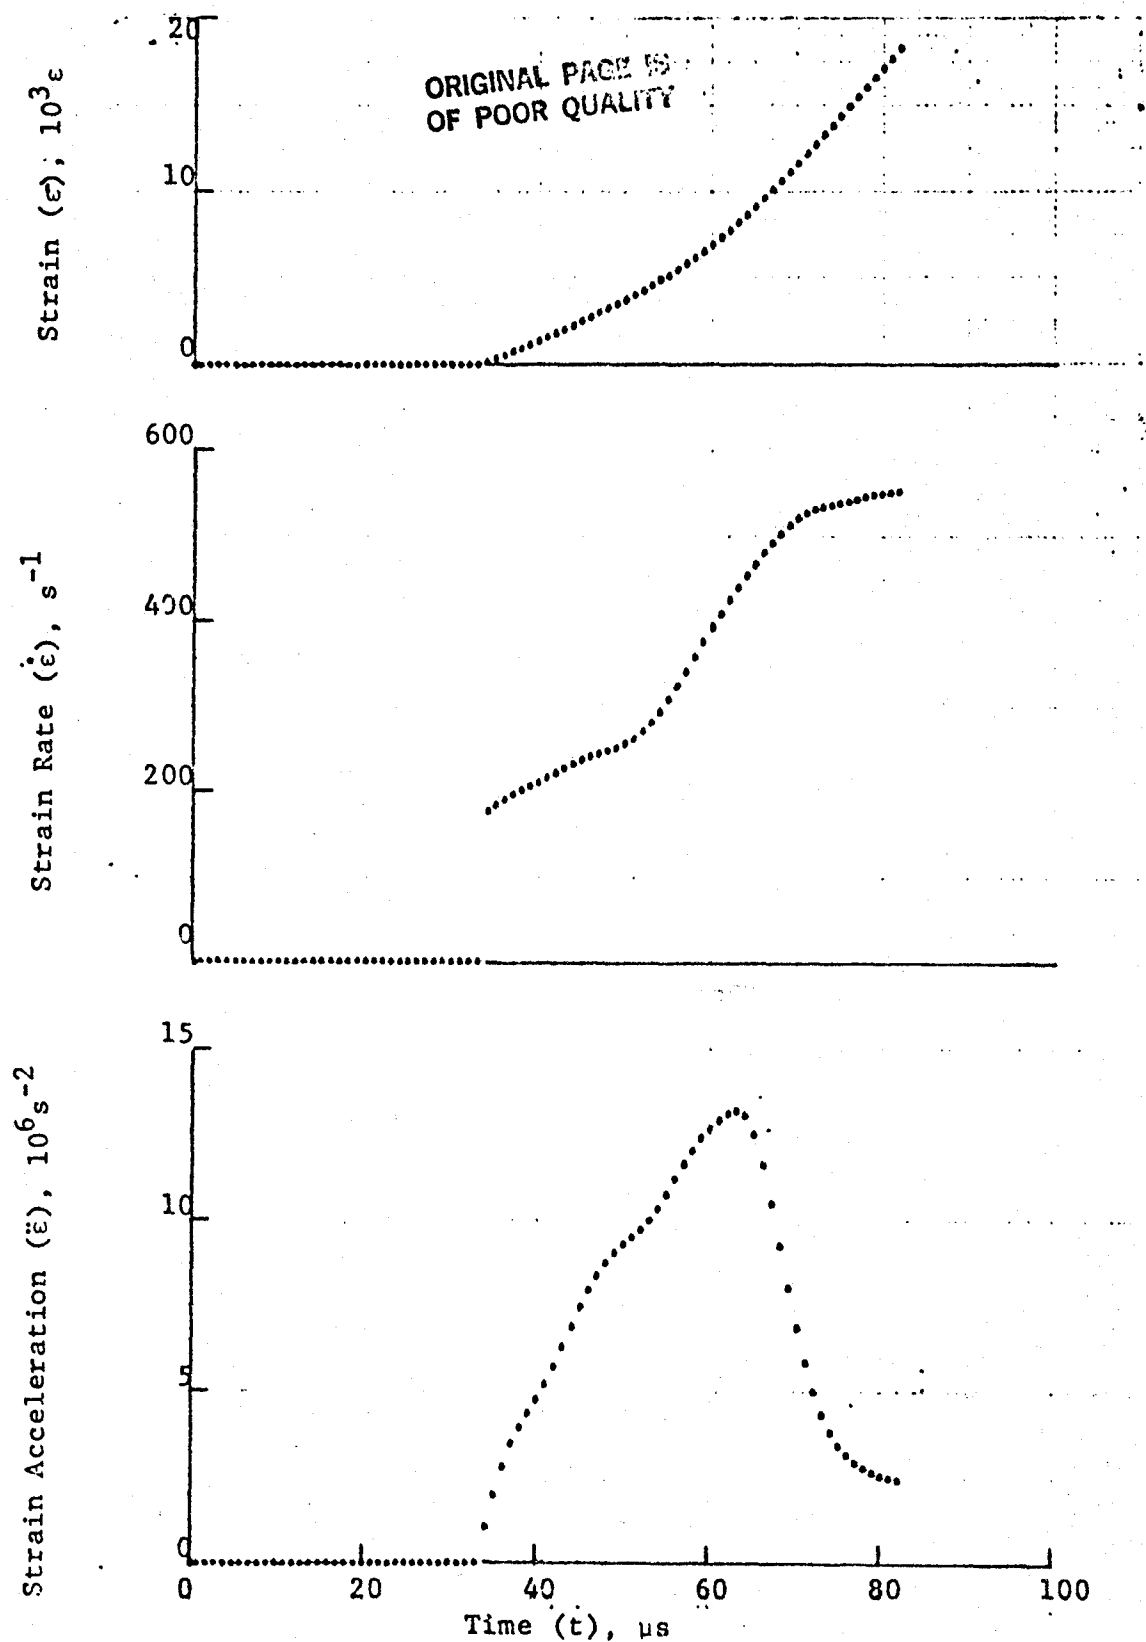


Figure 4-70. Circumferential strain and its derivatives in SP288/AS [ $\pm 45$ ]<sub>2s</sub> graphite/epoxy ring under dynamic loading for Specimen No. 24-11 (1.56 g pistol powder, KClO<sub>4</sub>, and aluminum dust).



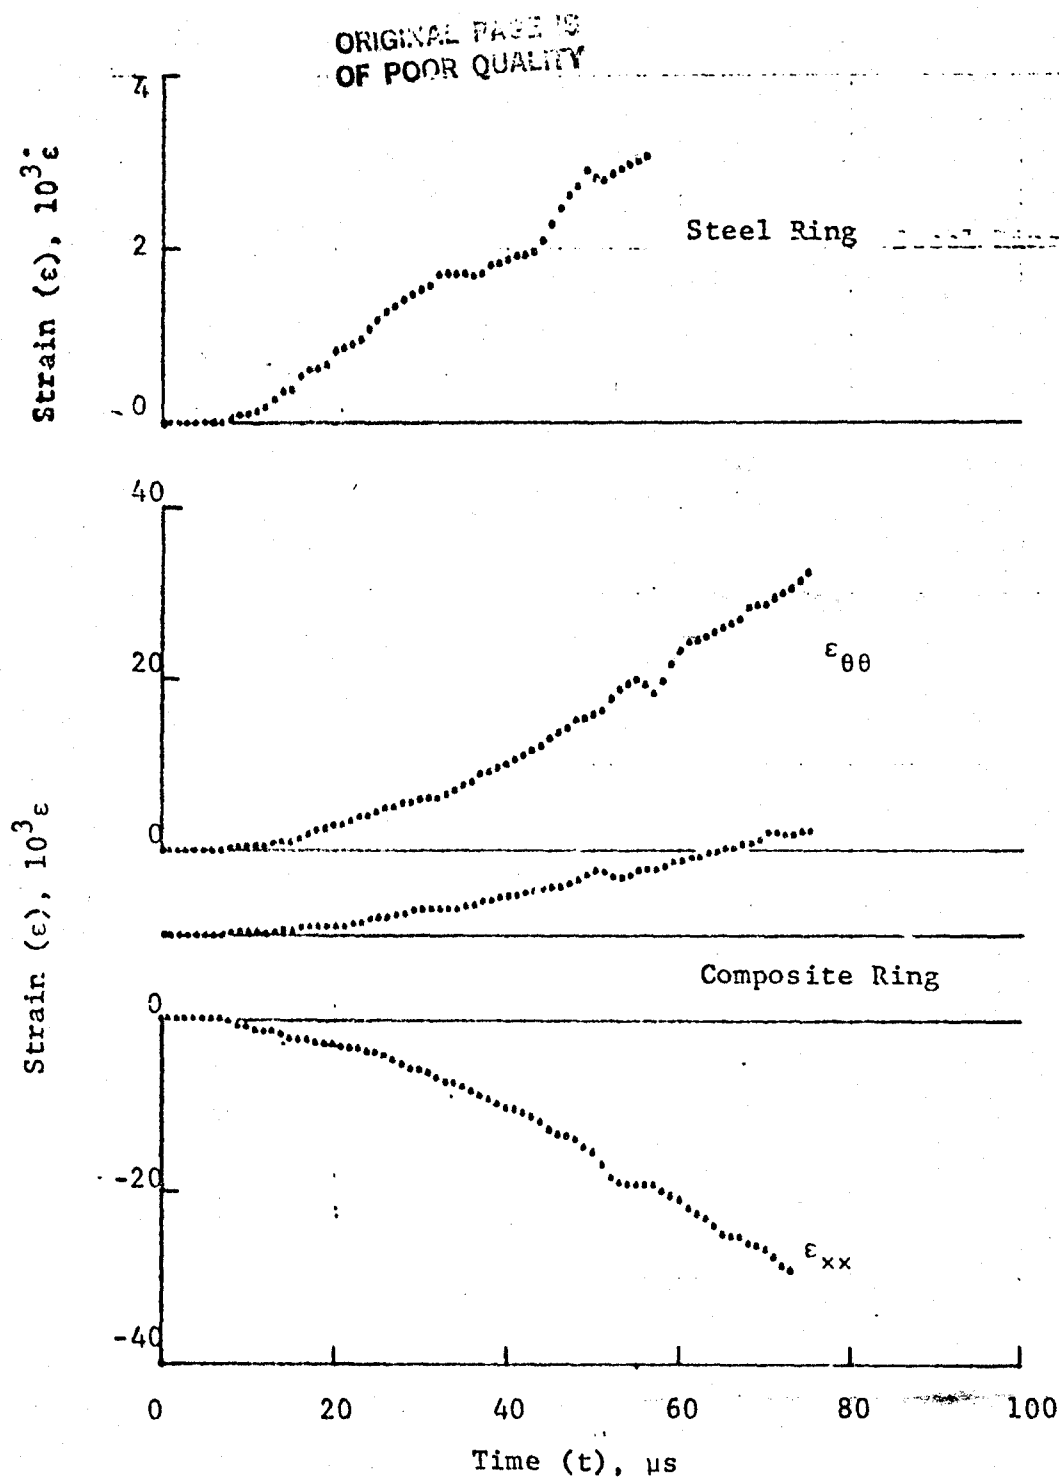


Figure 4-71. Strain records in steel ring and SP286/AS  $[\pm 45]_{2s}$  graphite/epoxy ring under dynamic loading for Specimen No. 24-12 (1.56 g pistol powder,  $KClO_4$ , and aluminum dust).

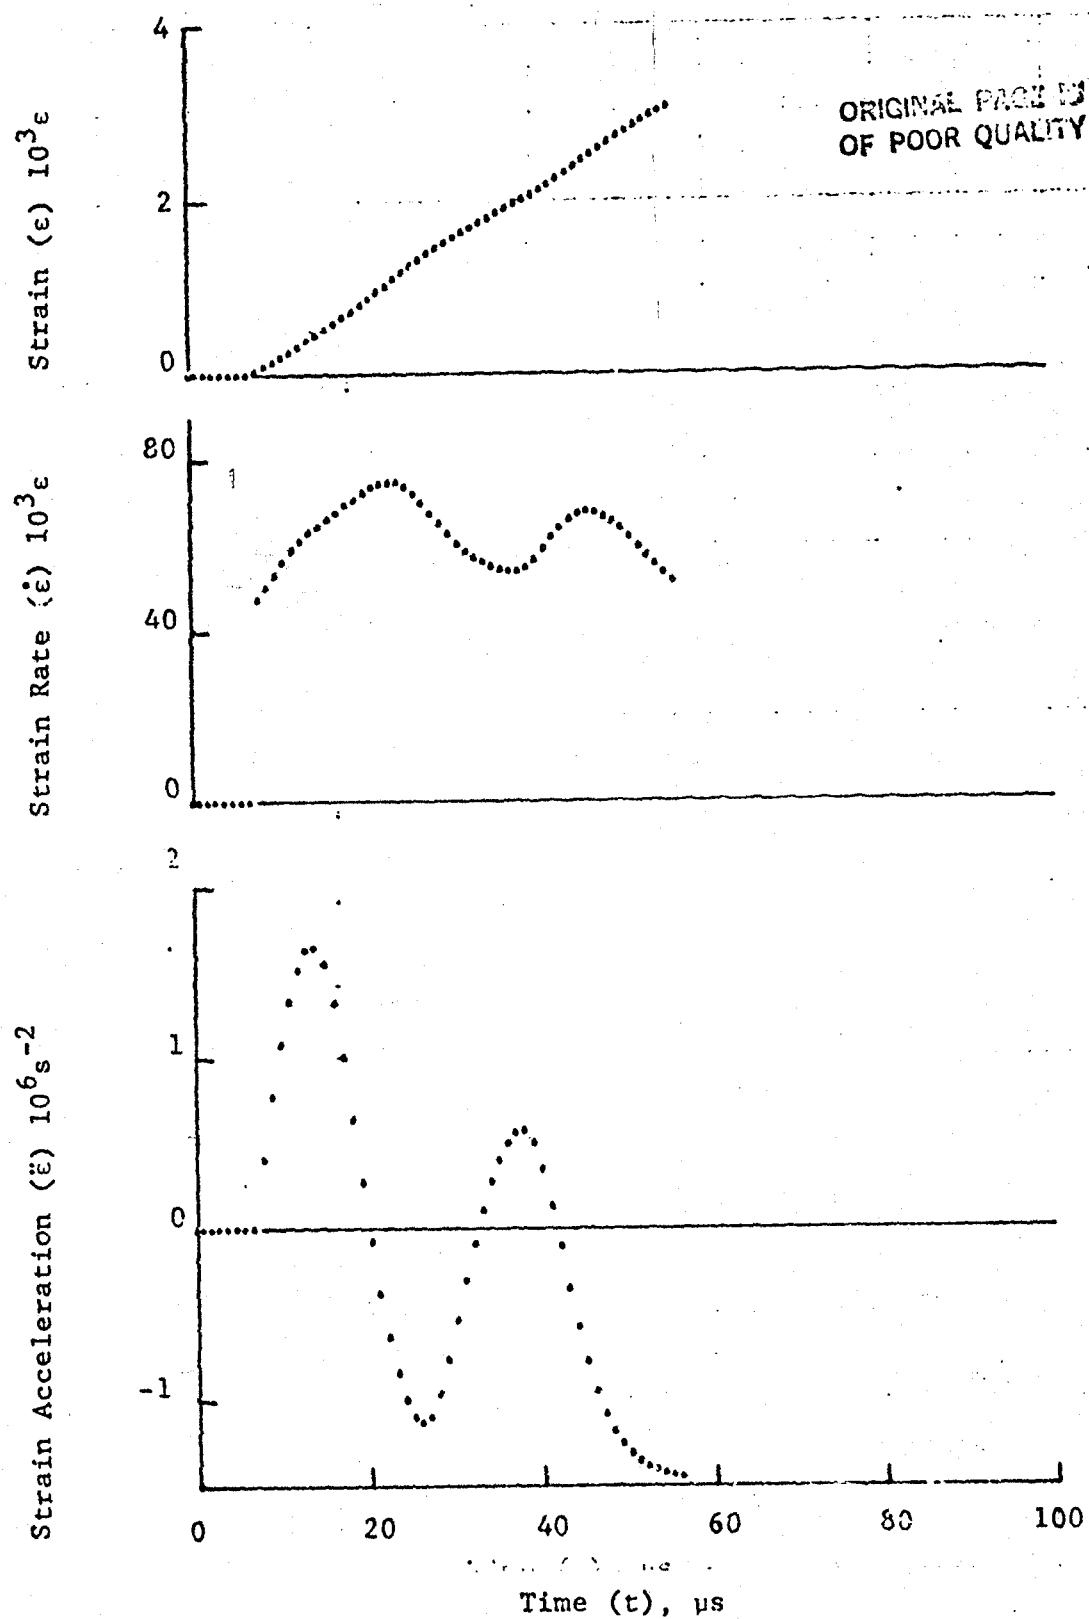


Figure 4-72. Strain and its derivatives in steel ring for Specimen No. 24-12.

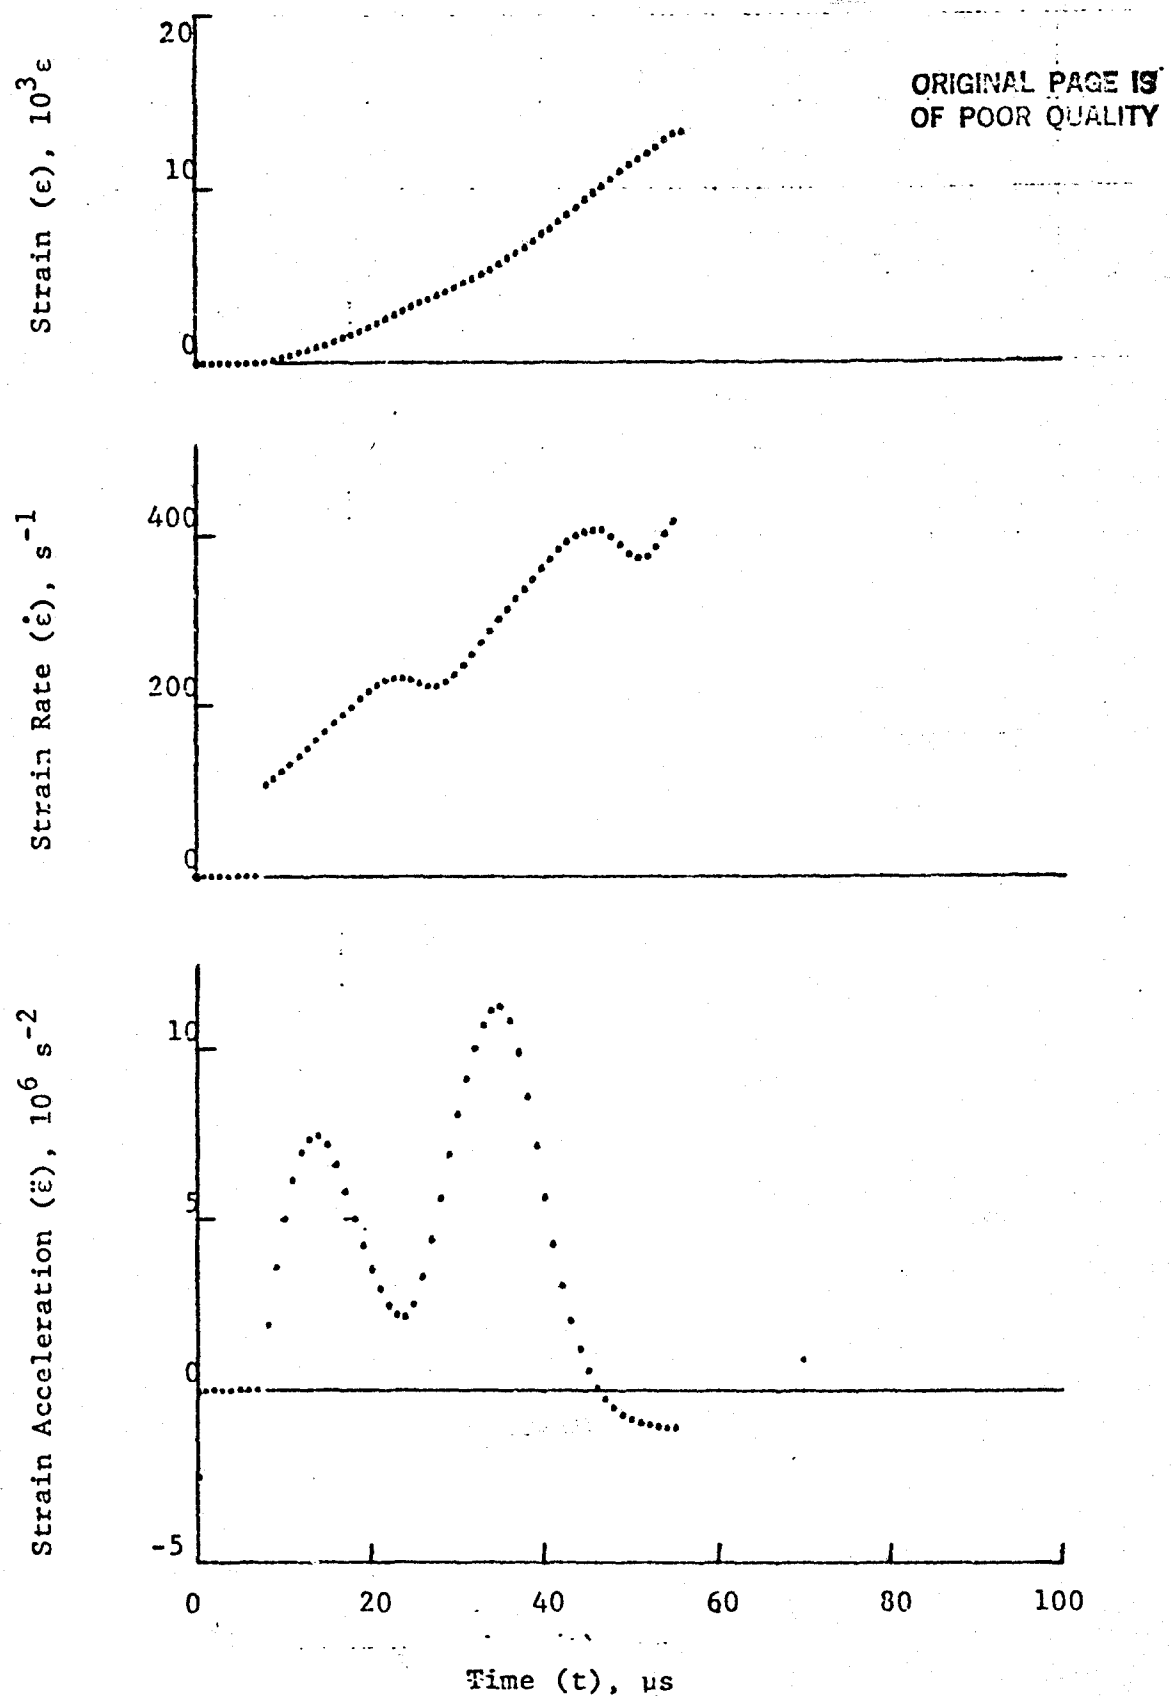


Figure 4-73. Circumferential strain and its derivatives in SP288/AS  
[±45]<sub>2s</sub> graphite/epoxy ring under dynamic loading for  
Case No. 24 12

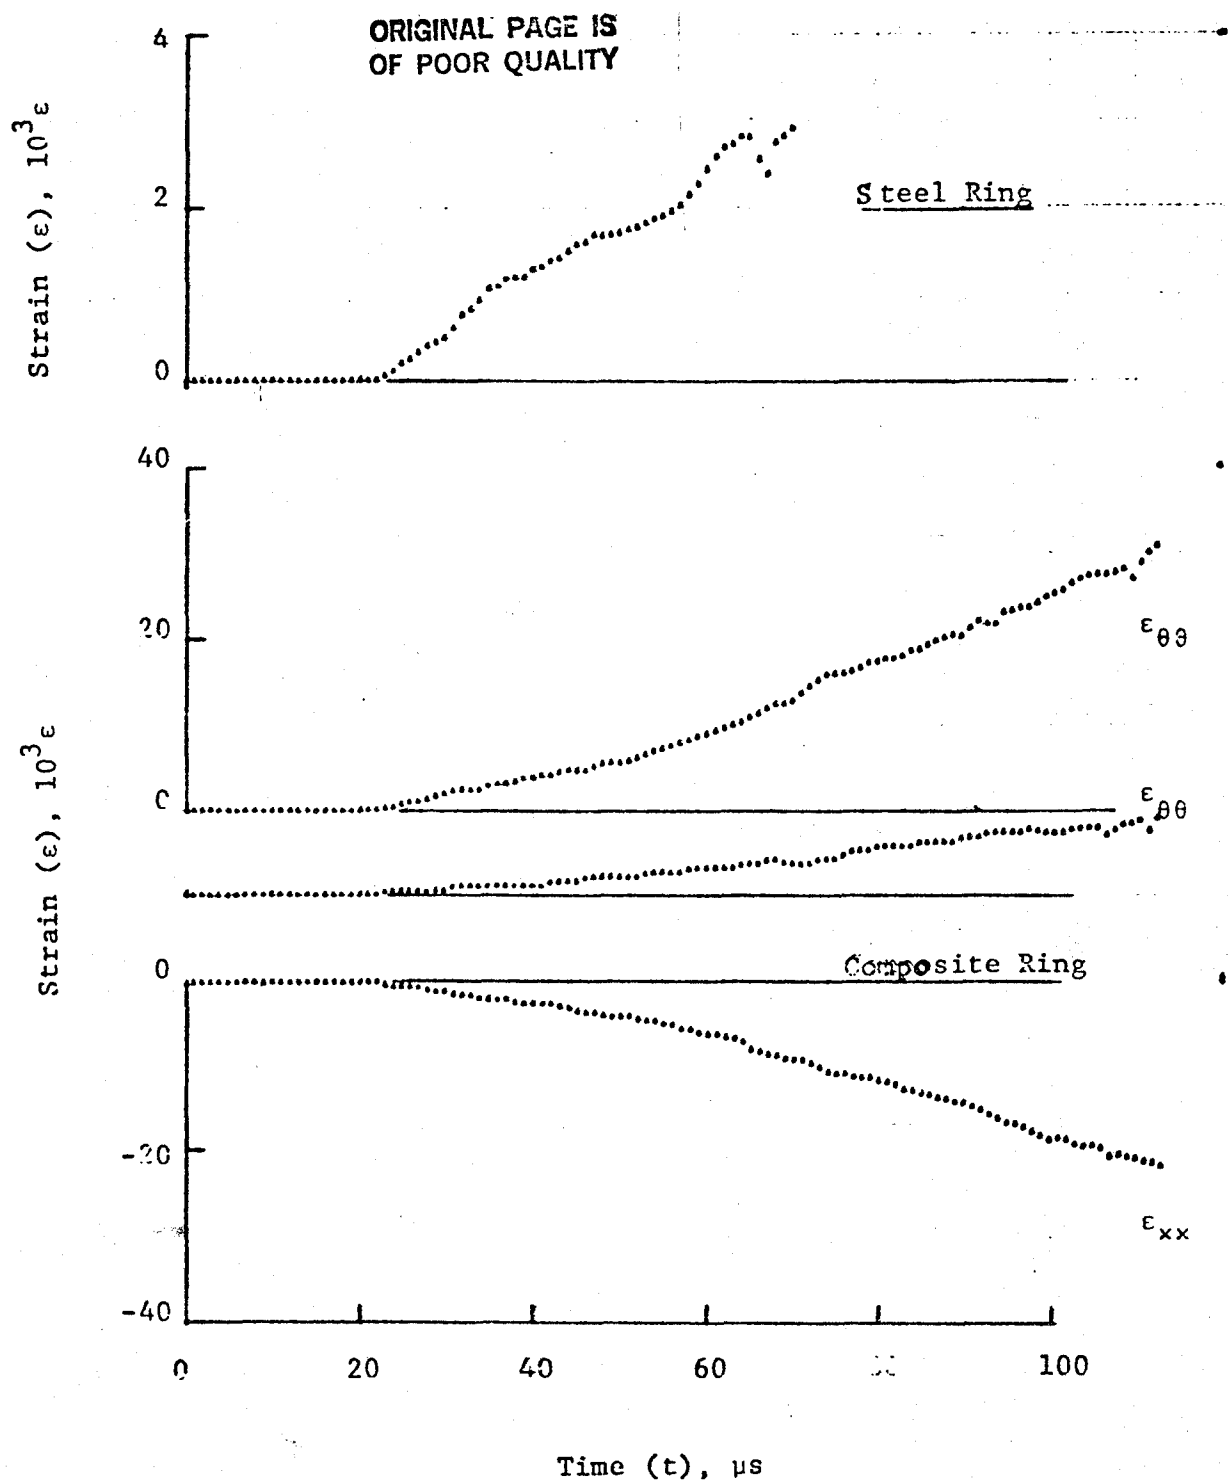


Figure 4-74. Strain records in steel ring and SP288/AS  $[\pm 45]_{2s}$  graphite/epoxy ring under dynamic loading for Specimen No. 24-13 (1.56 g pistol powder,  $KClO_4$ , and aluminum dust).

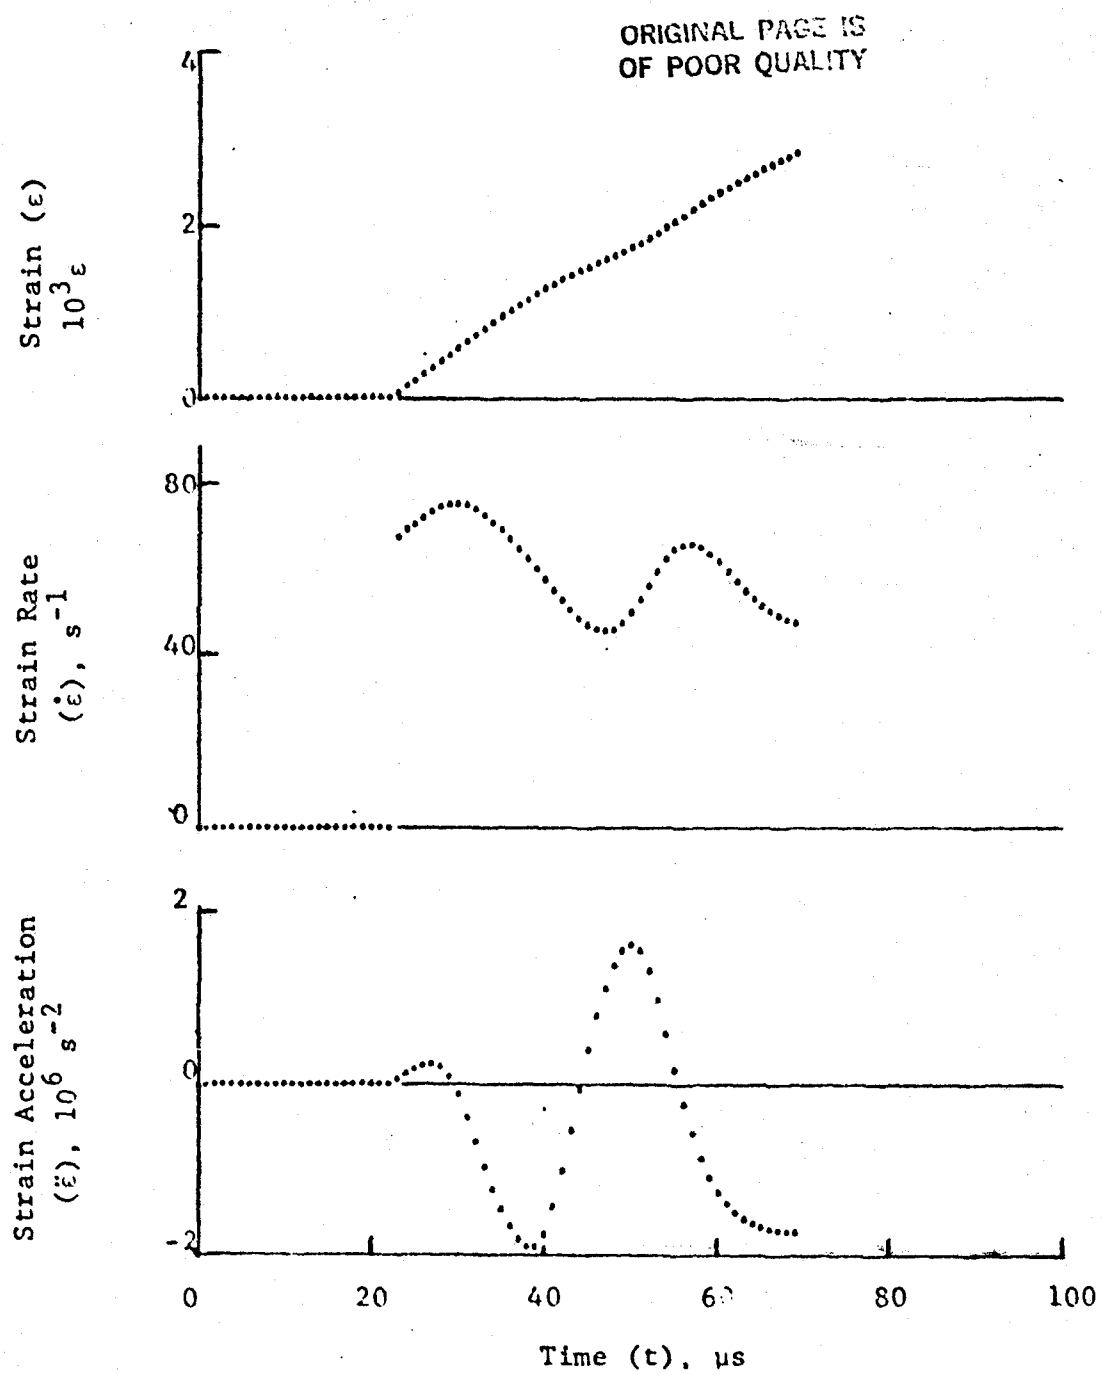


Figure 4-75. Circumferential strain and its derivatives in steel ring for Specimen No. 24-13.

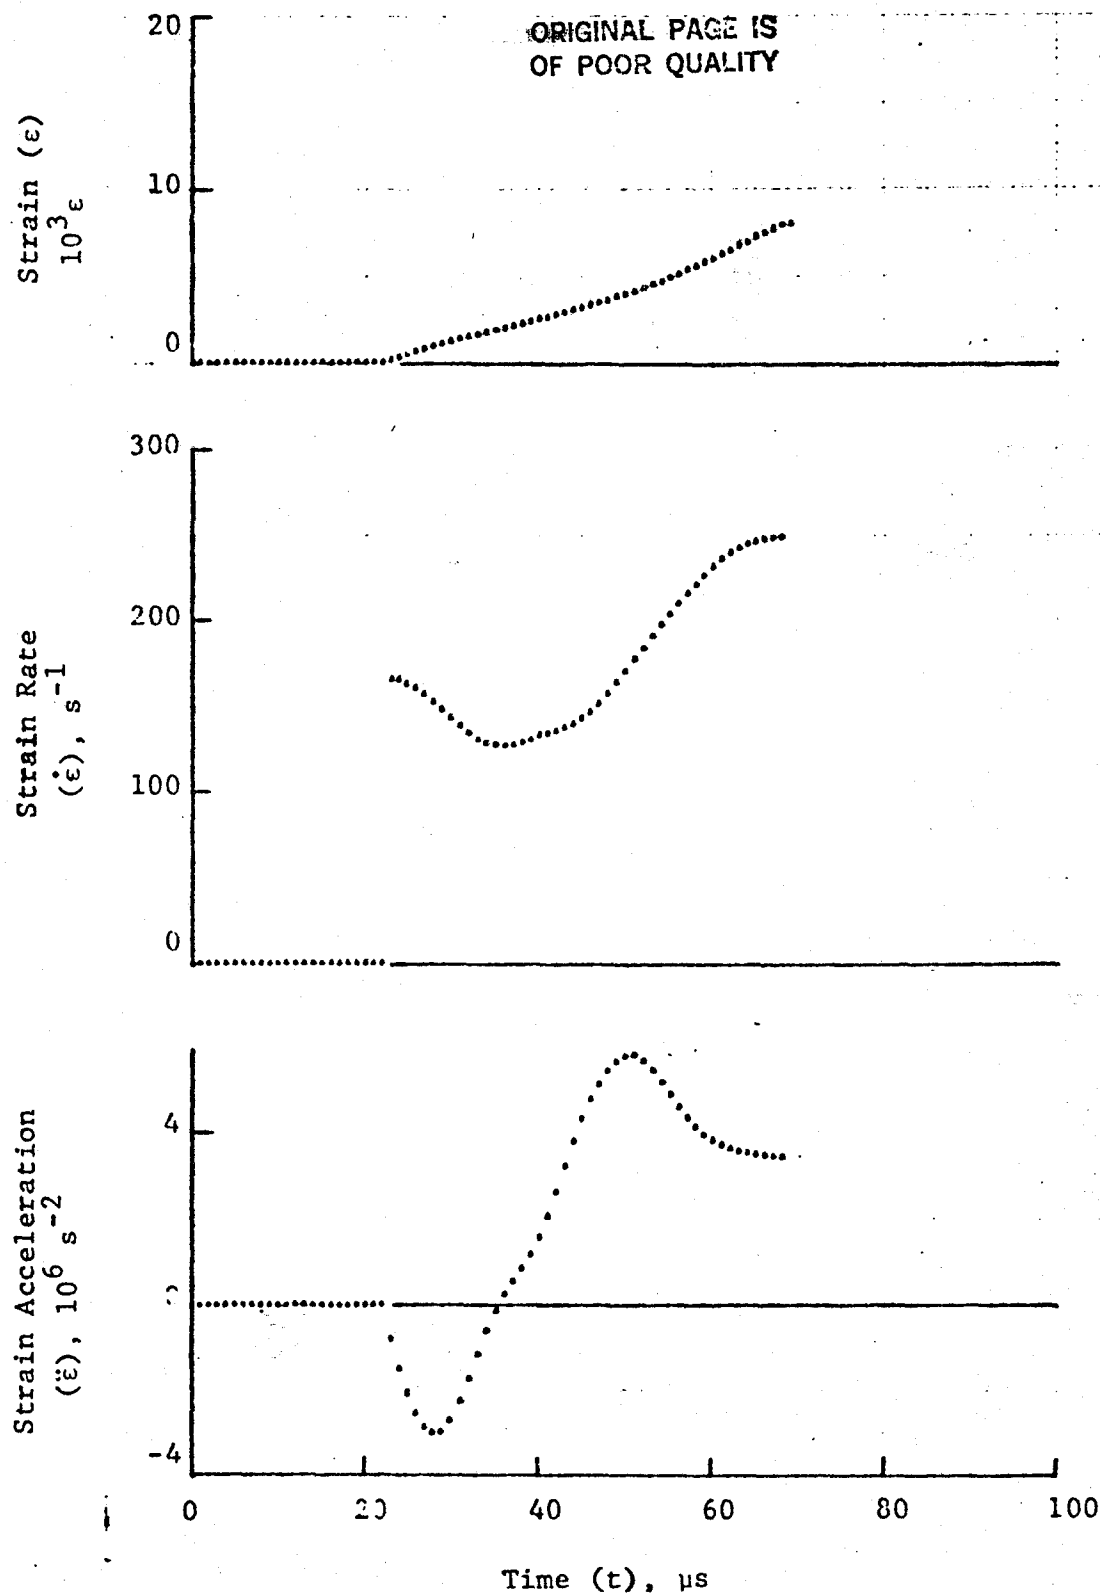


Figure 4-76. Circumferential strain and its derivatives in SP288/AS  $[\pm 45]_2$  graphite/epoxy ring under dynamic loading for Specimen No. 24-13 (1.56 g pistol powder,  $KClO_4$ , and aluminum dust).

ORIGINAL PAGE IS  
OF POOR QUALITY

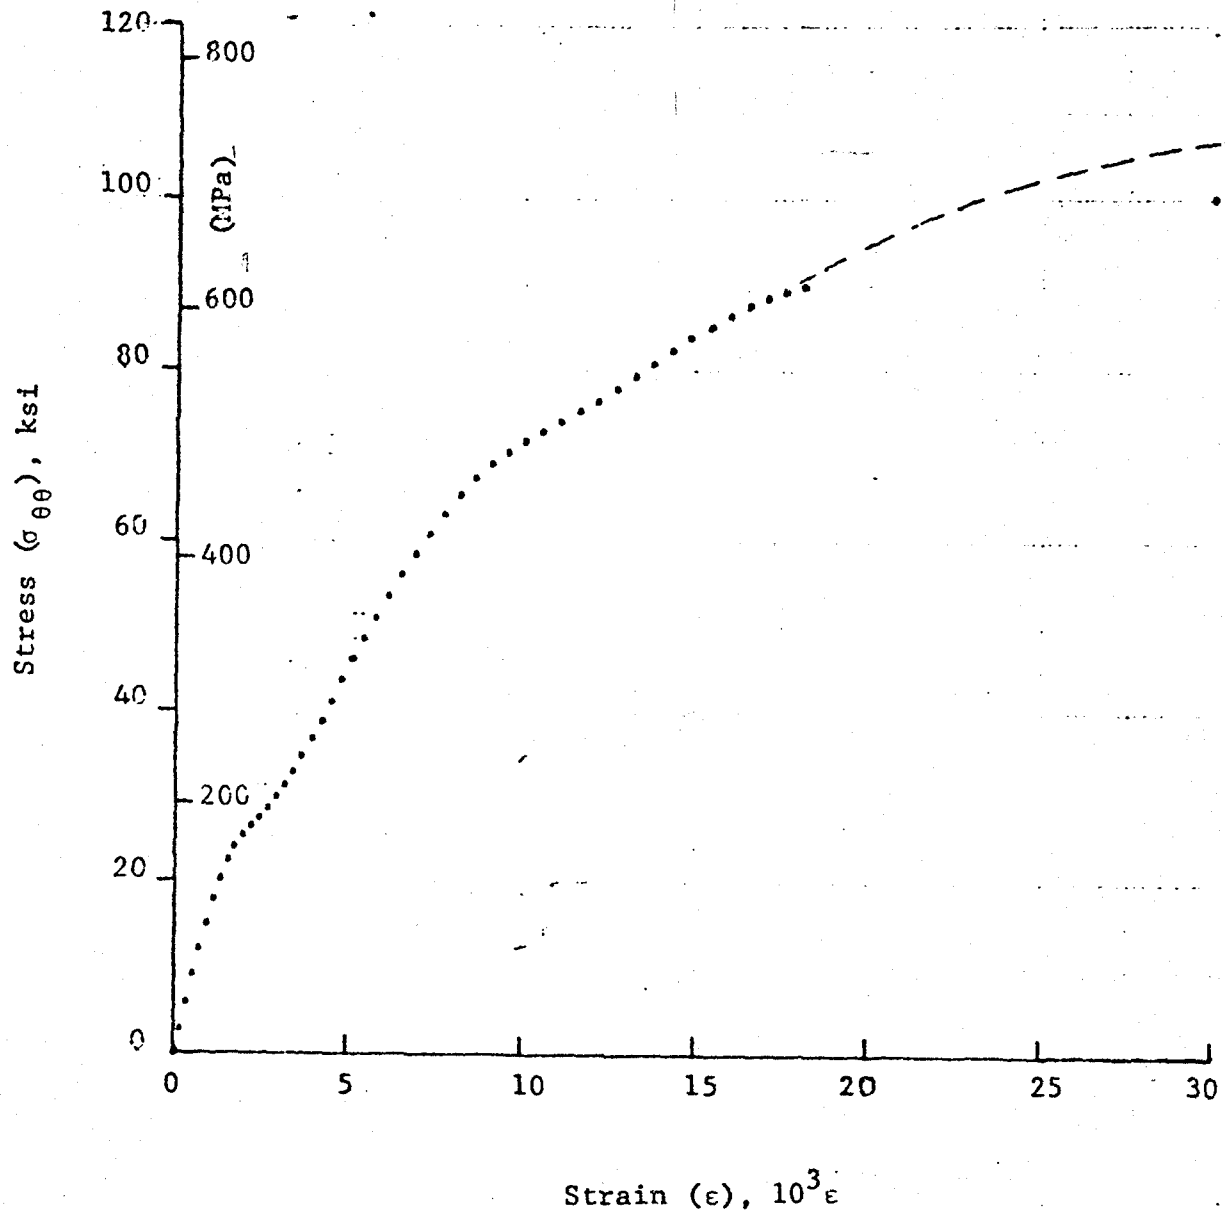


Figure 4-77. Stress-strain curve for dynamically loaded SP288/AS [ $\pm 45$ ] graphite/epoxy ring, Specimen No. 24-11 (1.56 g pistol powder,  $\text{KClO}_4$ , and aluminum dust).

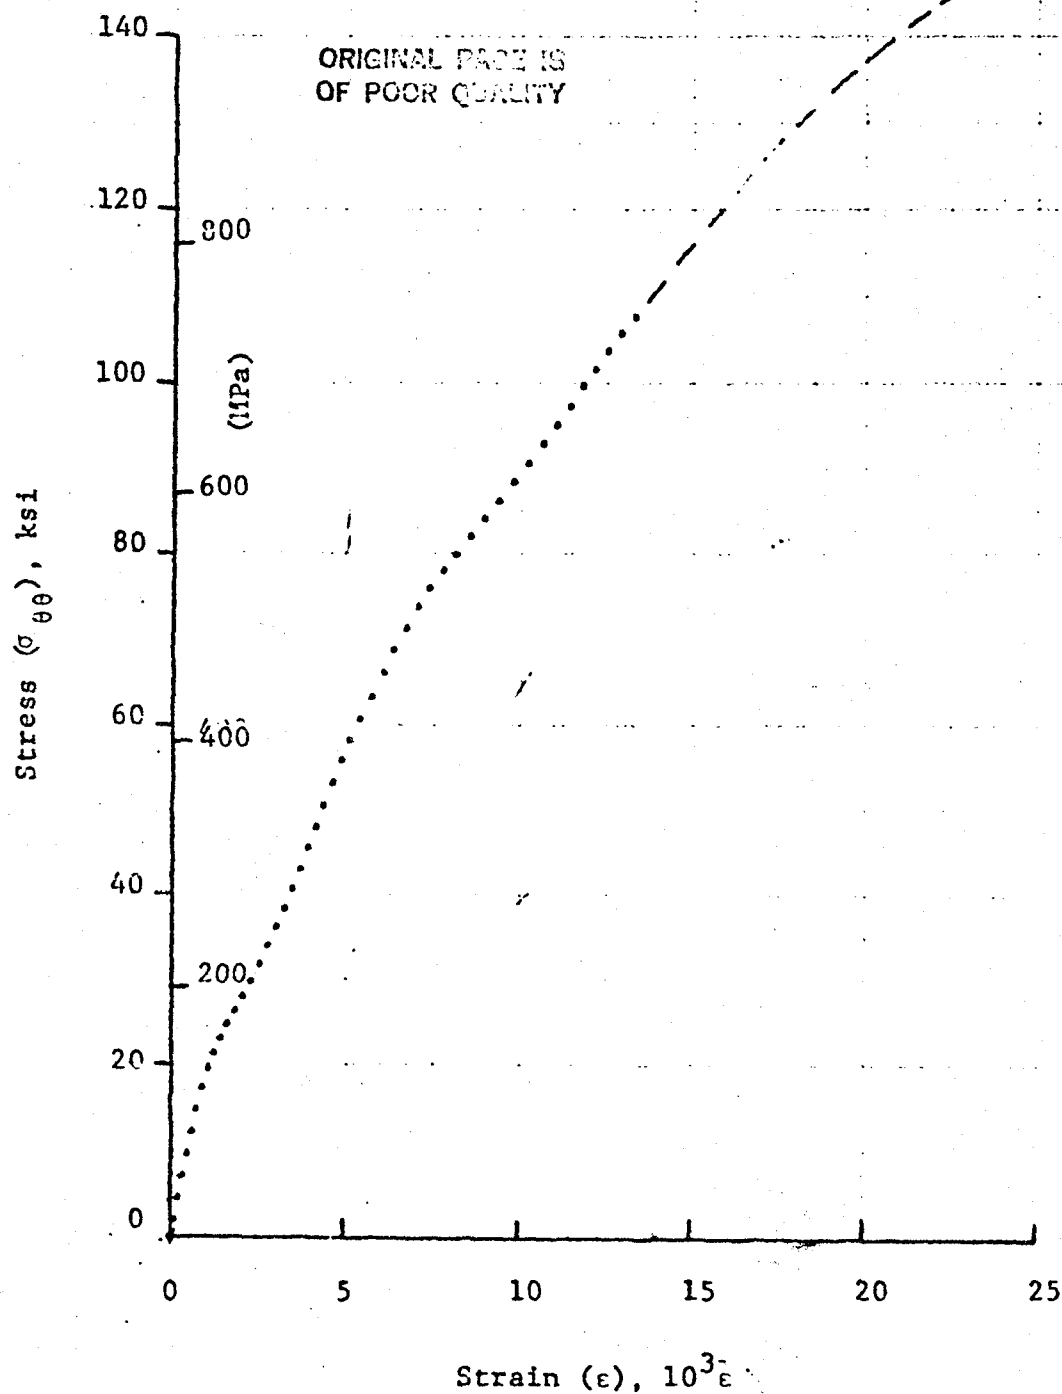


Figure 4-78. Stress-strain curve for dynamically loaded SP288/AS [ $\pm 45$ ]<sub>2s</sub> graphite/epoxy ring, Specimen No. 24-12 (1.56 g pistol powder,  $\text{KClO}_4$ , and aluminum dust).



ORIGINAL PAGE IS  
OF POOR QUALITY

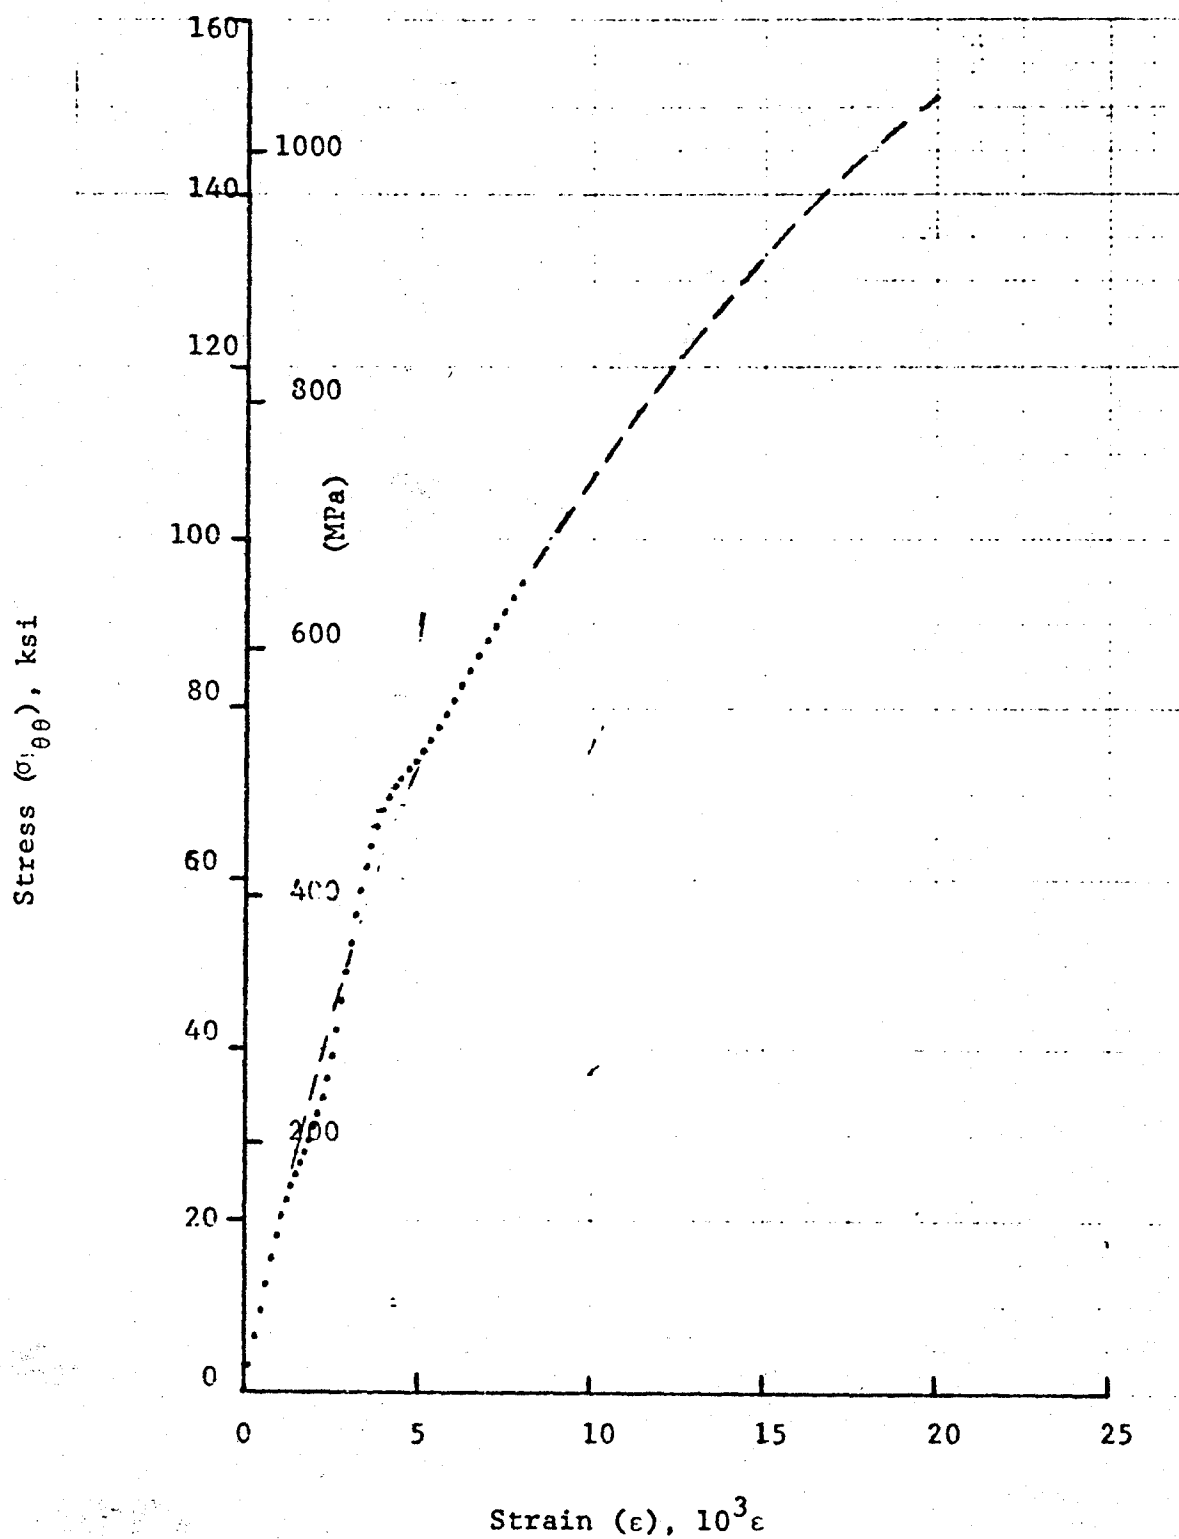


Figure 4-79. Stress-strain curve for dynamically loaded SP288/AS [±45]<sub>2s</sub> graphite/epoxy ring, Specimen No. 24-13 (1.56 g pistol powder, KClO<sub>4</sub>, and aluminum dust).

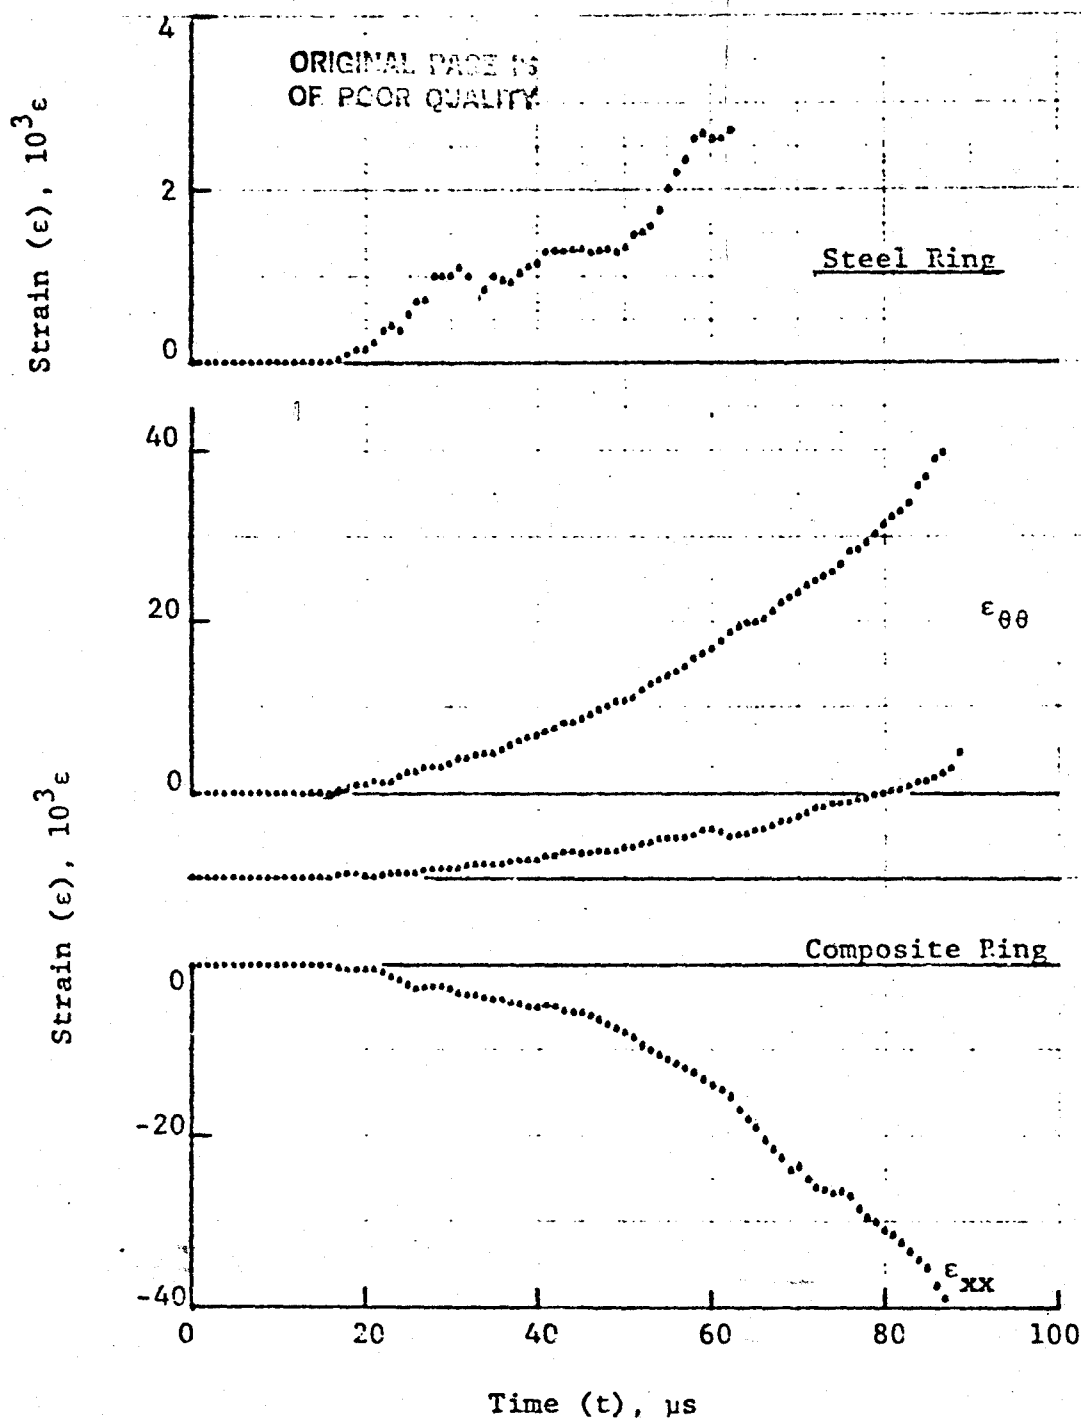


Figure 4-80. Strain records in steel ring and 80AS/20S/PR283 [ $\pm 45$ ]<sub>2s</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 25-11 (1.56 g pistol powder,  $KClO_4$ , and aluminum dust).

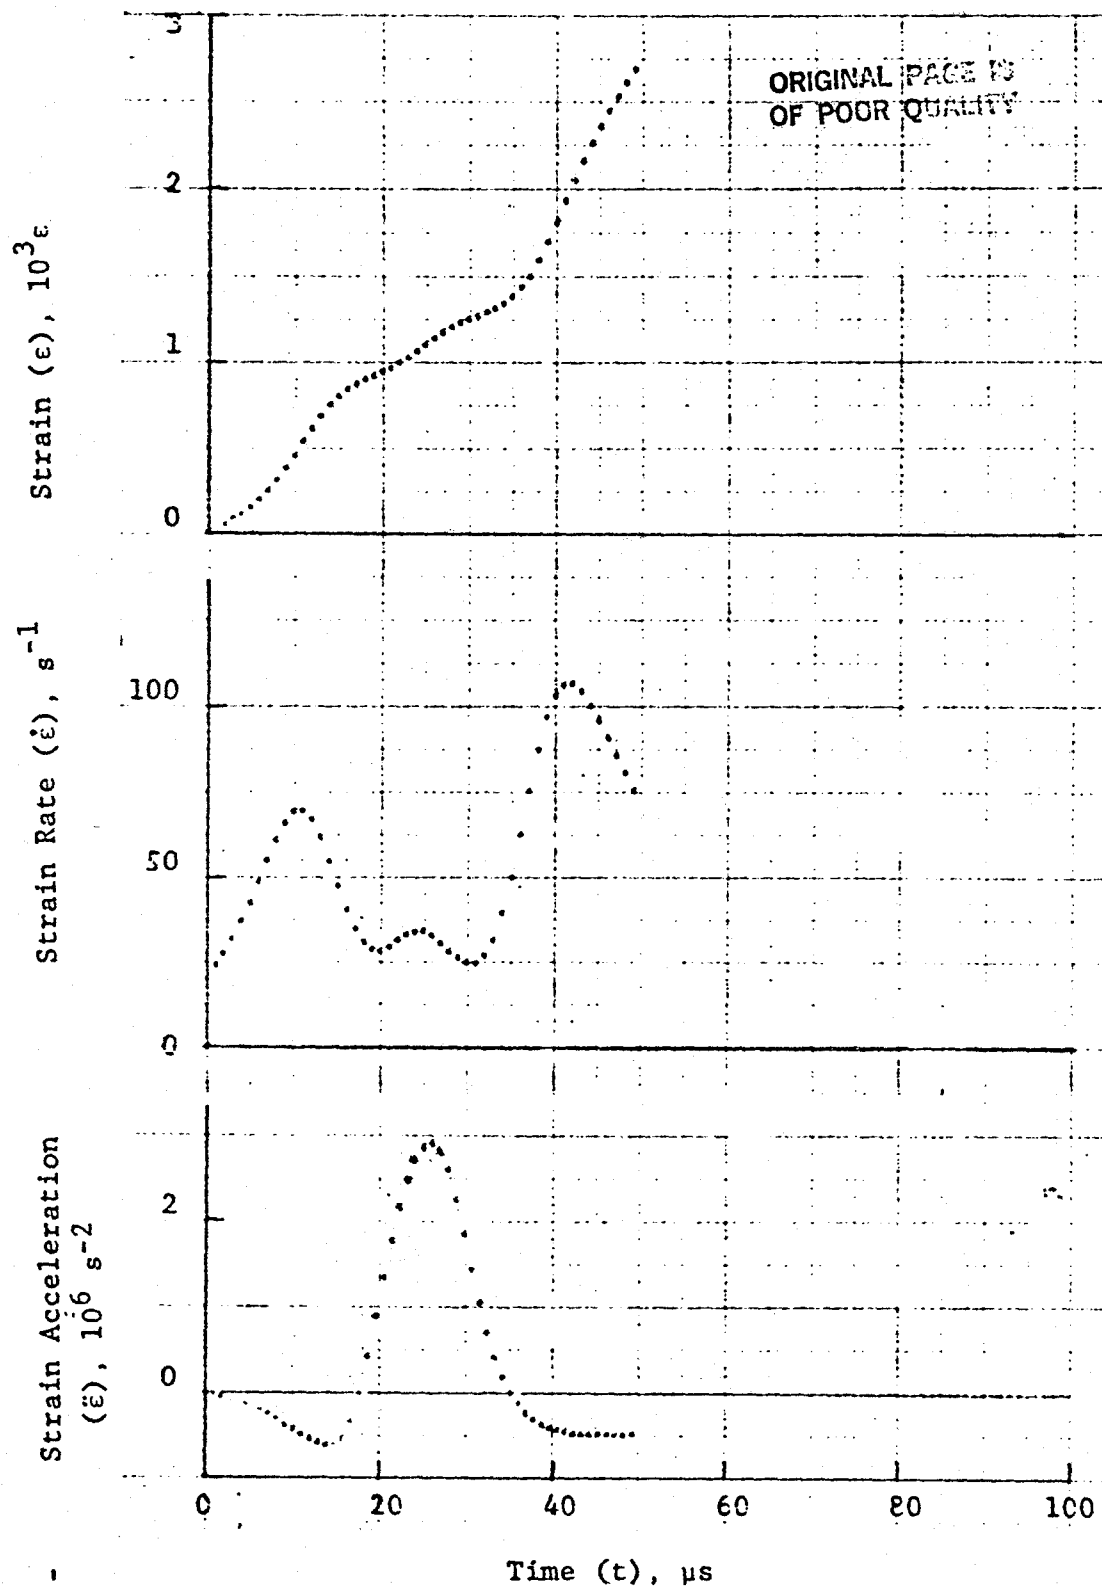


Figure 4-81. Strain and its derivatives in steel ring for Specimen No. 25-11.

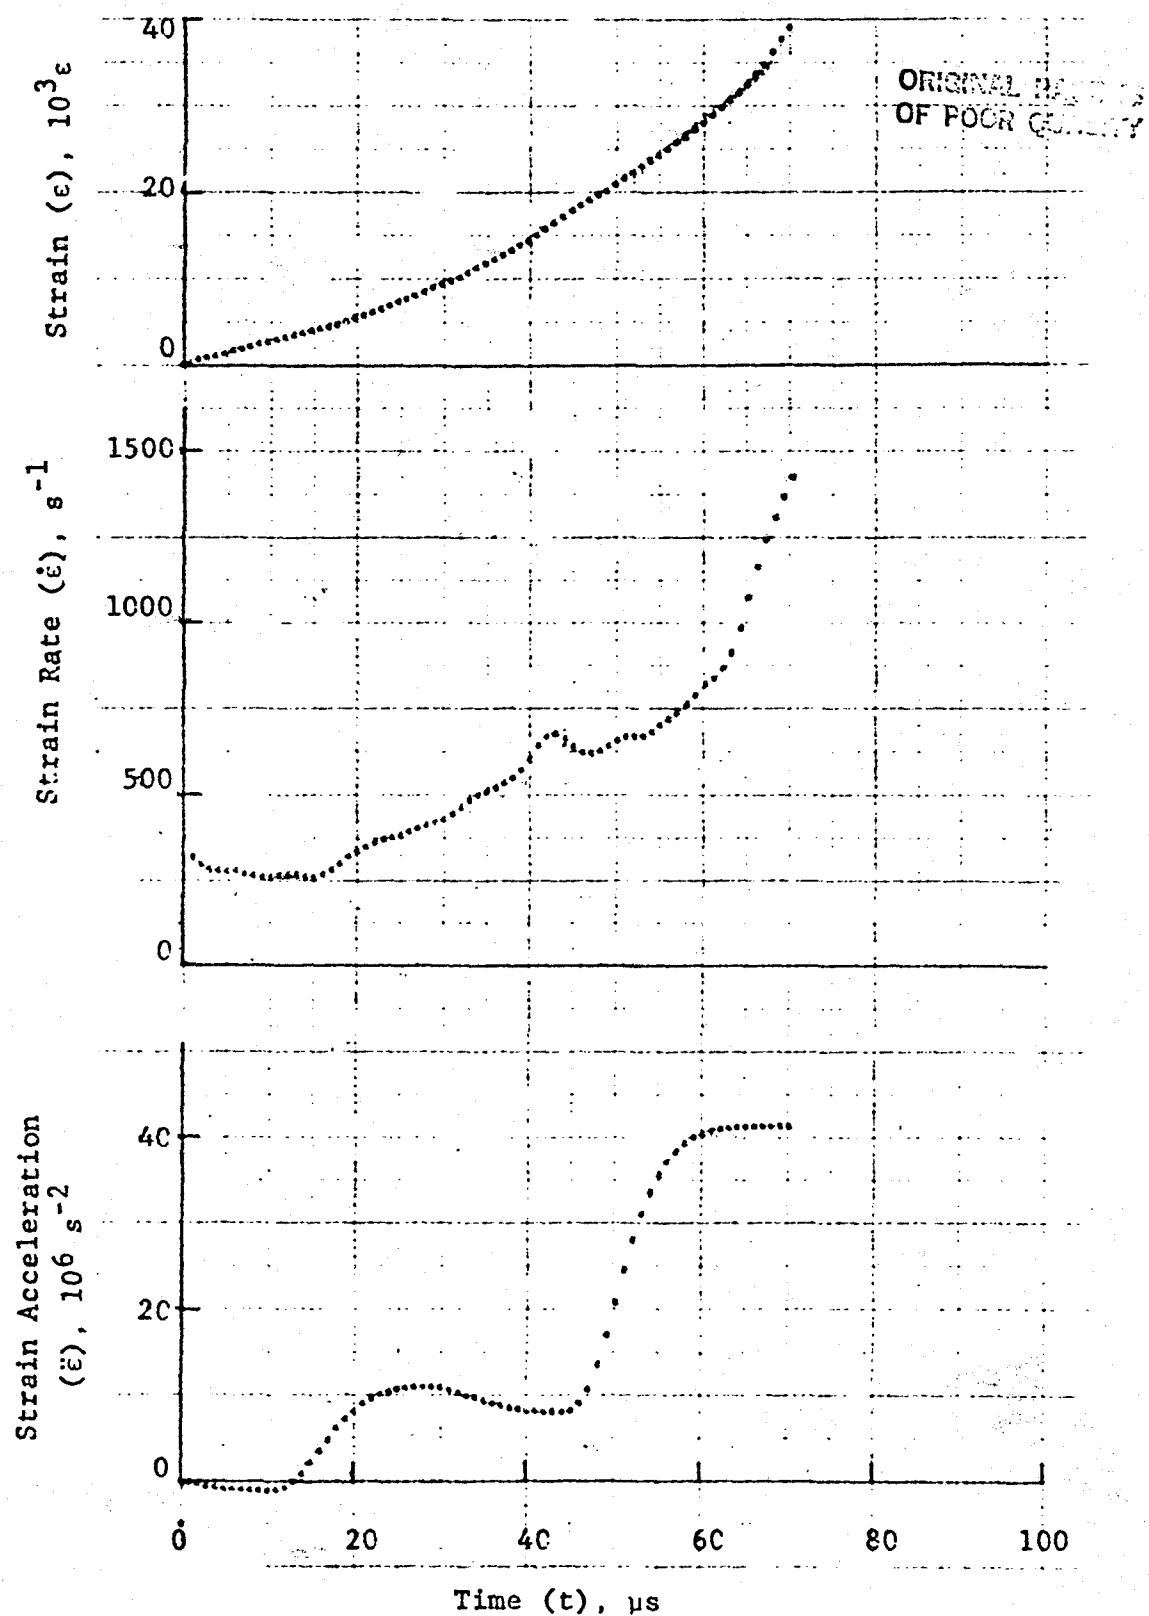


Figure 4-82. Circumferential strain and its derivatives in 80AS/20S/PR288  $[\pm 45]_{2s}$  graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 25-11 (1.56 g pistol powder,  $KClO_4$ , and aluminum dust).

ORIGINAL PAGE IS  
OF POOR QUALITY

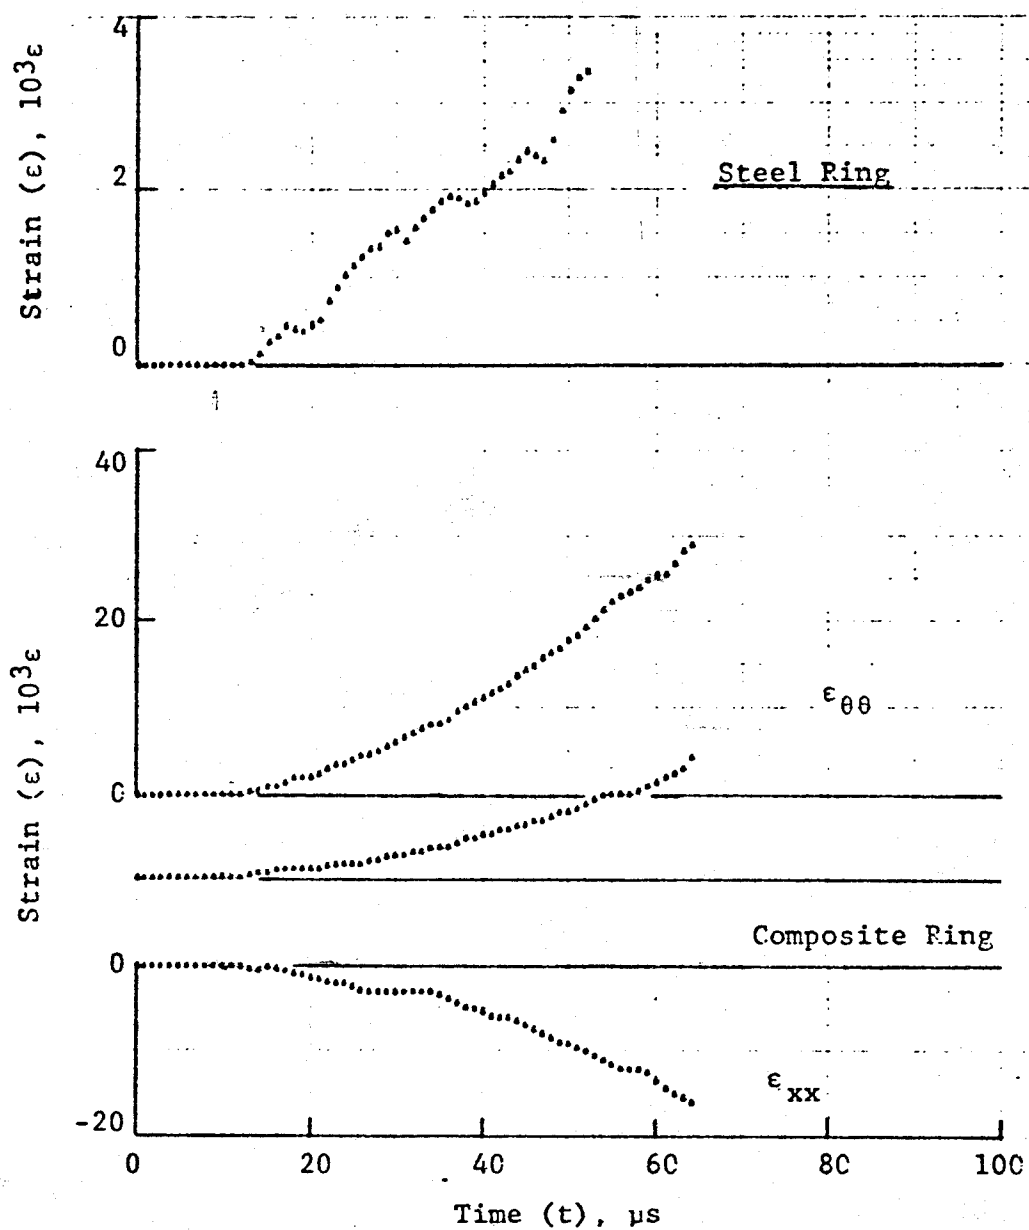


Figure 4-83. Strain records in steel ring and 80AS/20S/PR288  $[\pm 45]_{2s}$  graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 25-12 (1.56 g pistol powder,  $KClO_4$ , and aluminum dust).

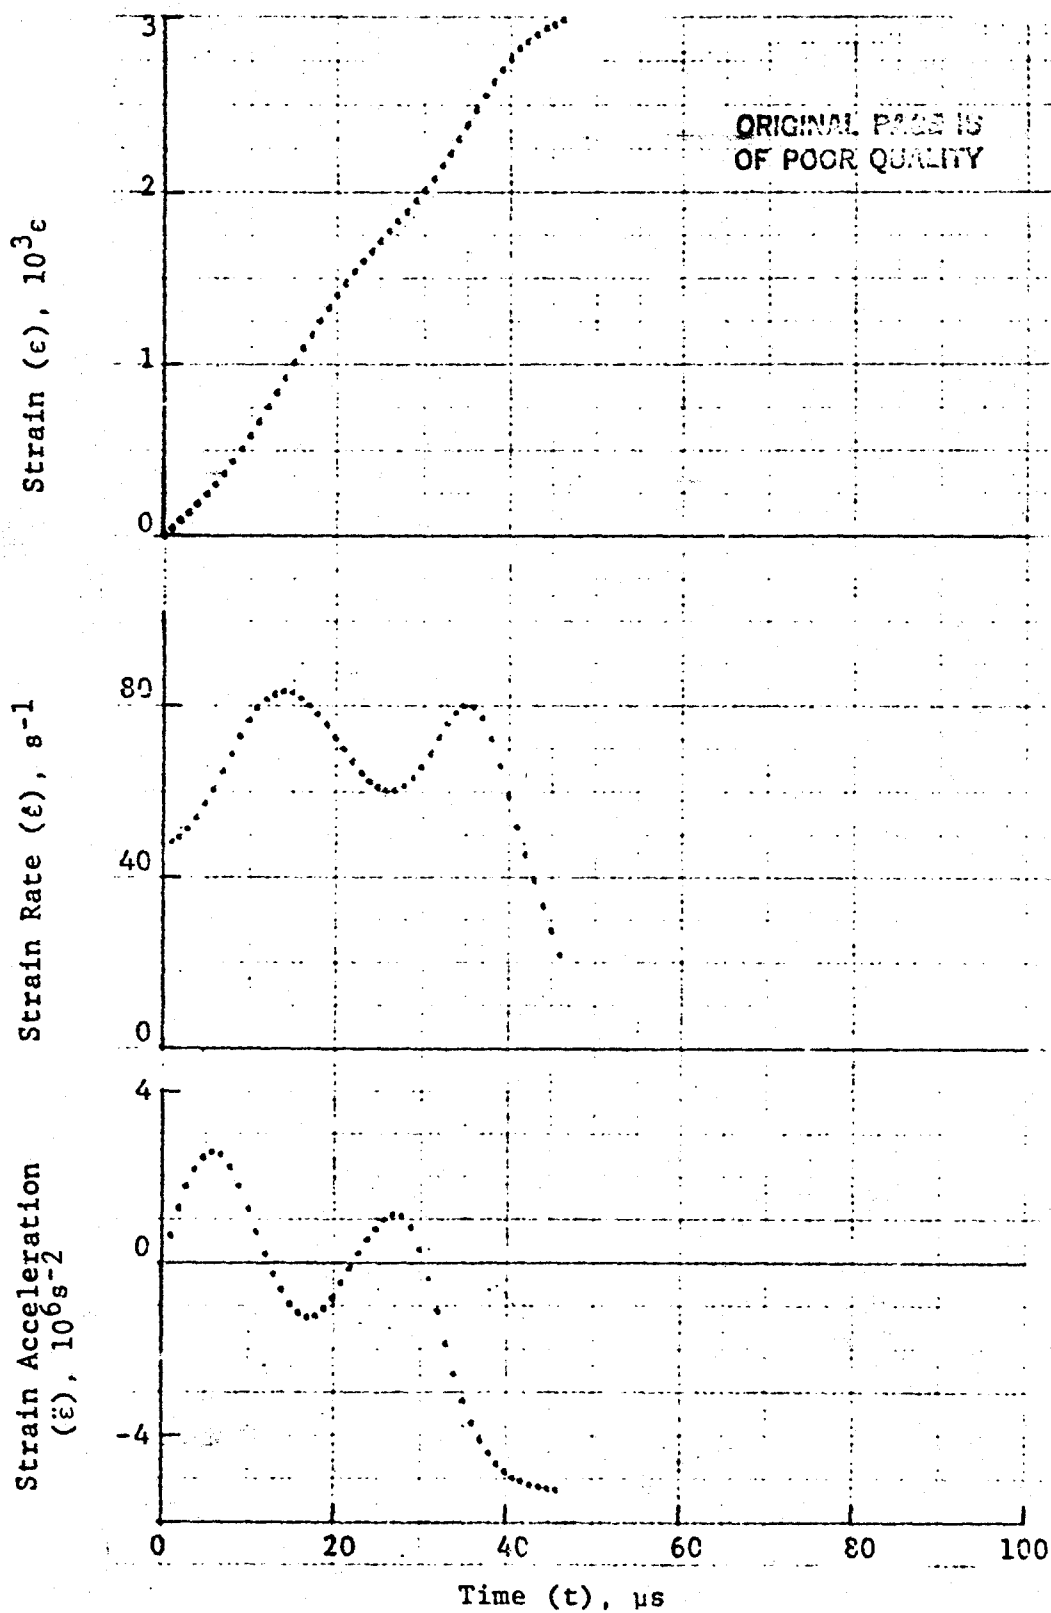


Figure 4-84. Strain and its derivatives in steel ring for Specimen No. 25-12.

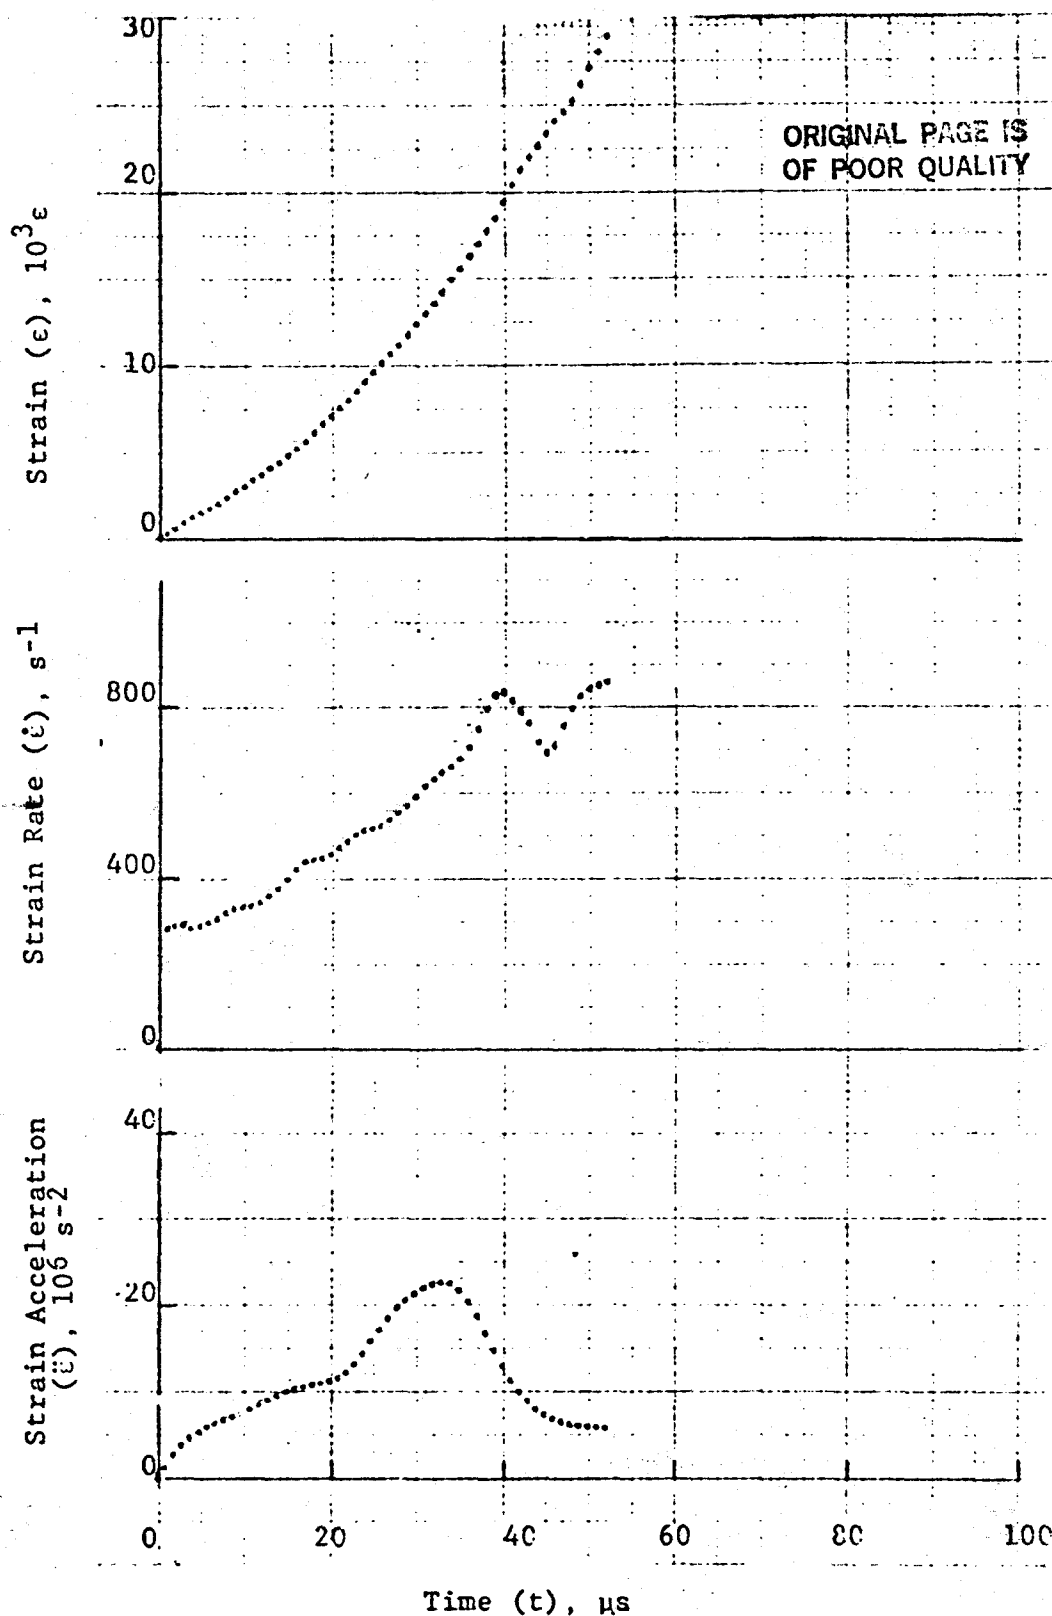


Figure 4-85. Circumferential strain and its derivatives in 80AS/20S/PR288  $[\pm 45]_{2s}$  graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 25-12 (1.56 g pistol powder,  $KClO_4$ , and aluminum dust).

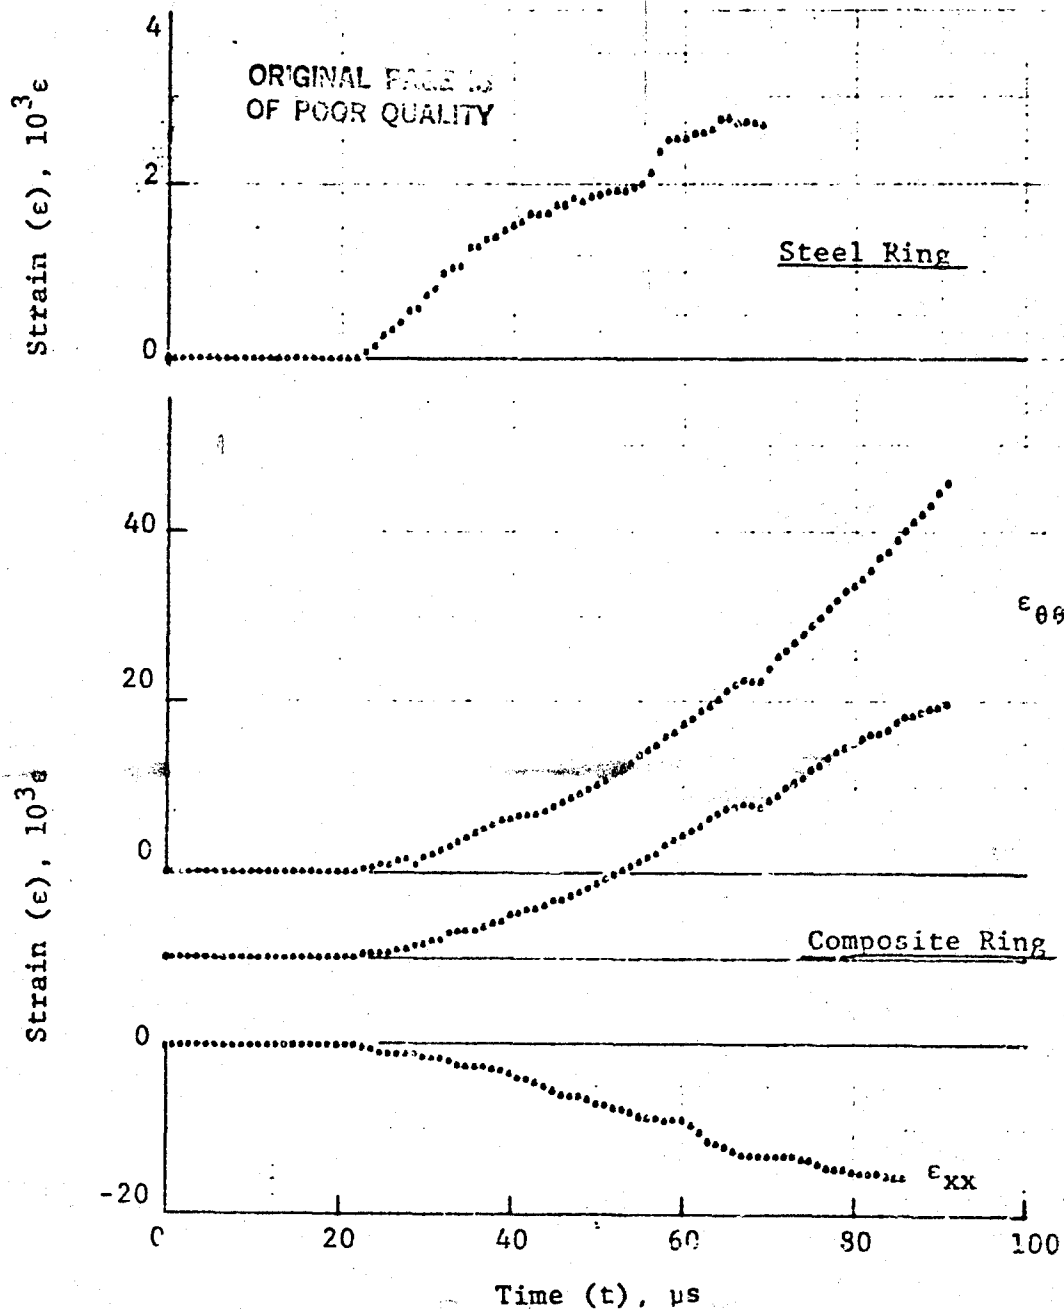


Figure 4-86. Strain records in steel ring and 80AS/20S/PR288 [ $\pm 45$ ]<sub>2t</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 25-13 (1.56 g pistol powder,  $KClO_4$ , and aluminum dust).



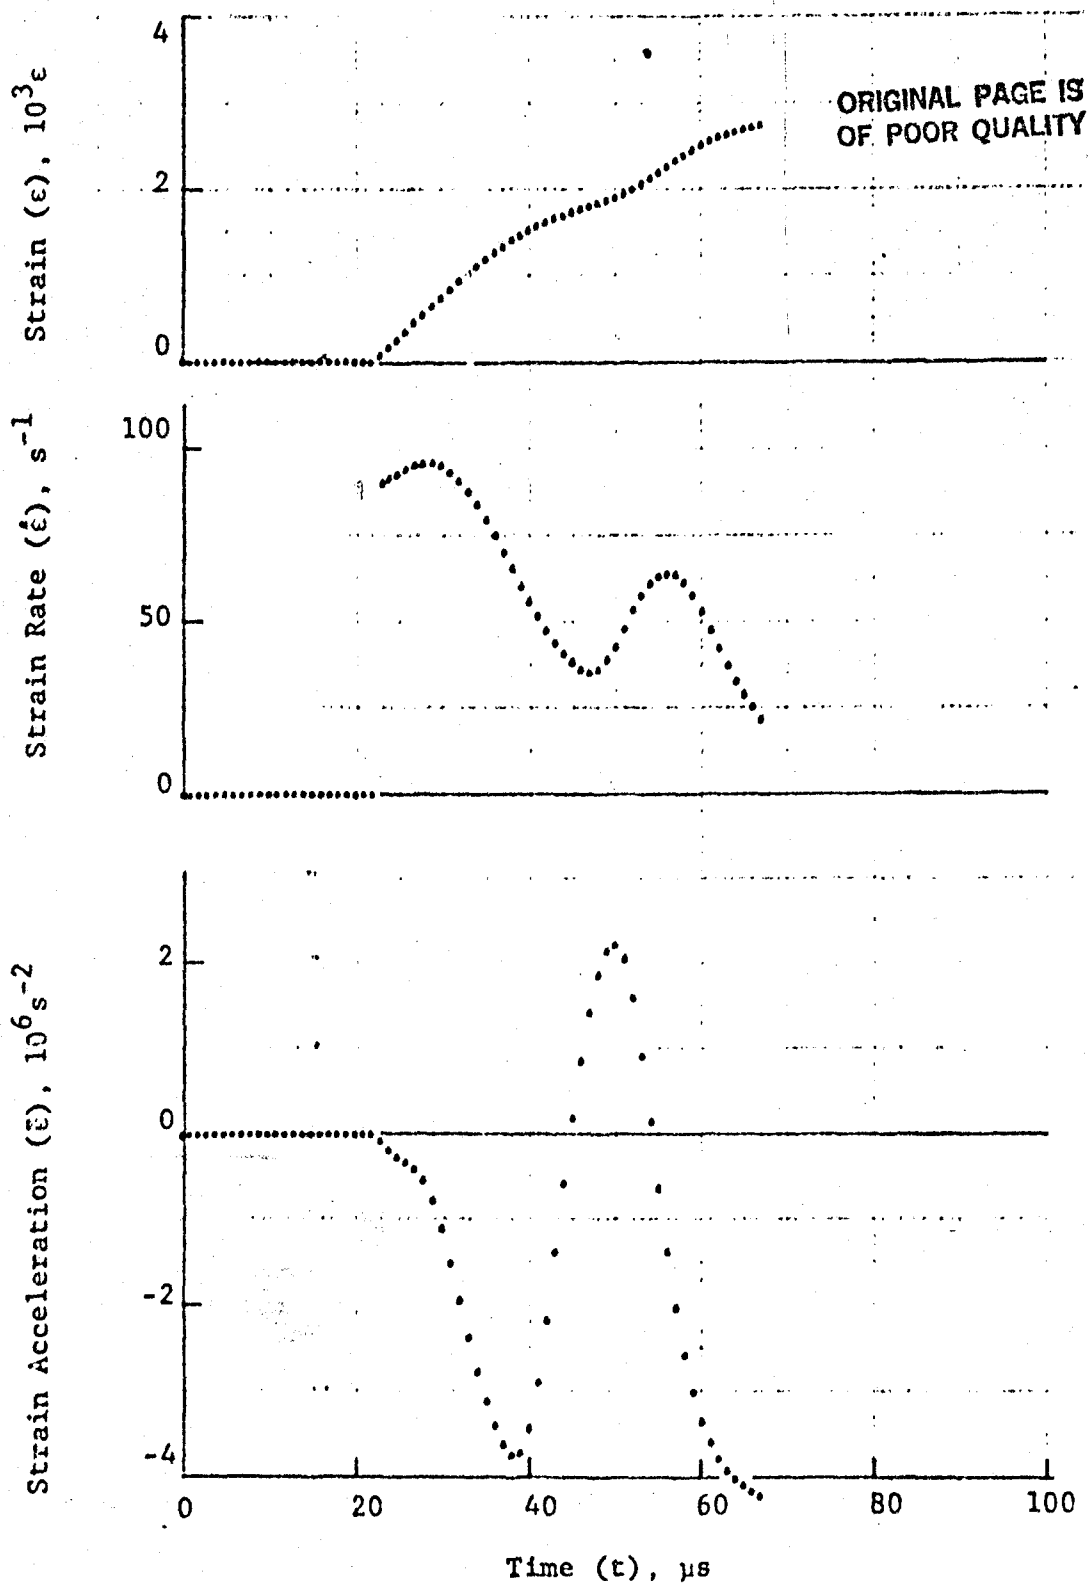


Figure 4-87. Strain and its derivatives in steel ring for Specimen No. 25-13.

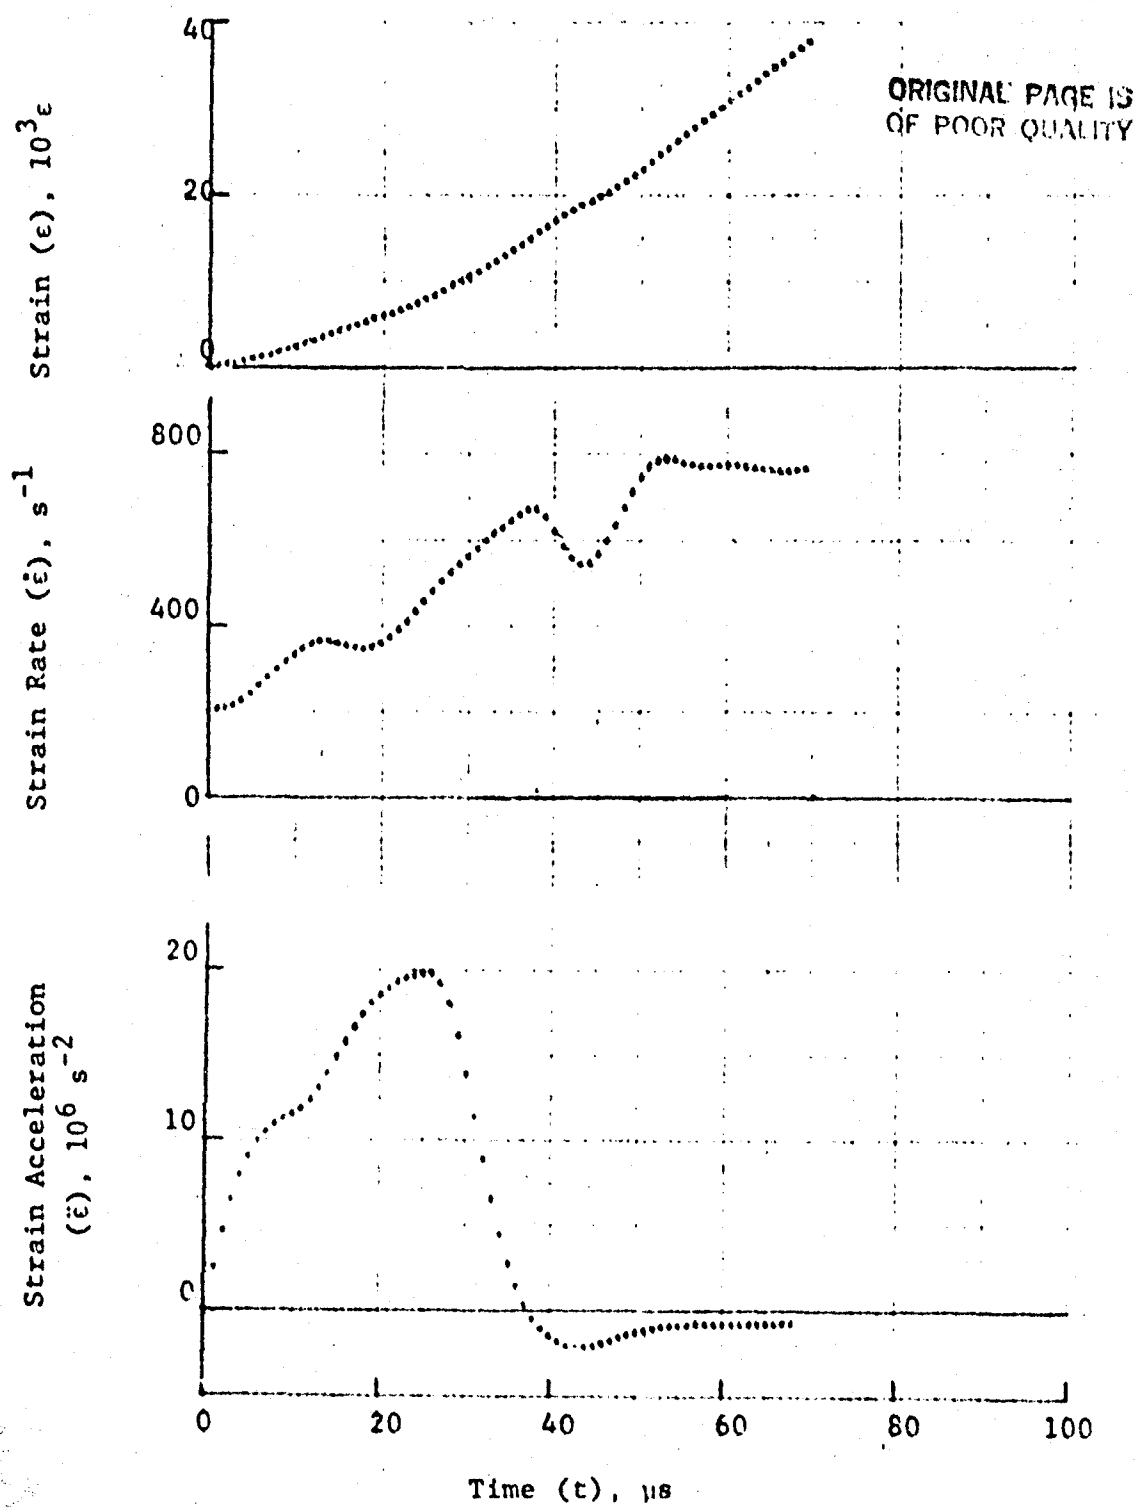


Figure 4-88. Circumferential strain and its derivatives in 80AS/20S/PR288 [ $\pm 45$ ]<sub>2s</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 25-13 (1.56 g pistol powder,  $KClO_4$ , and aluminum dust).

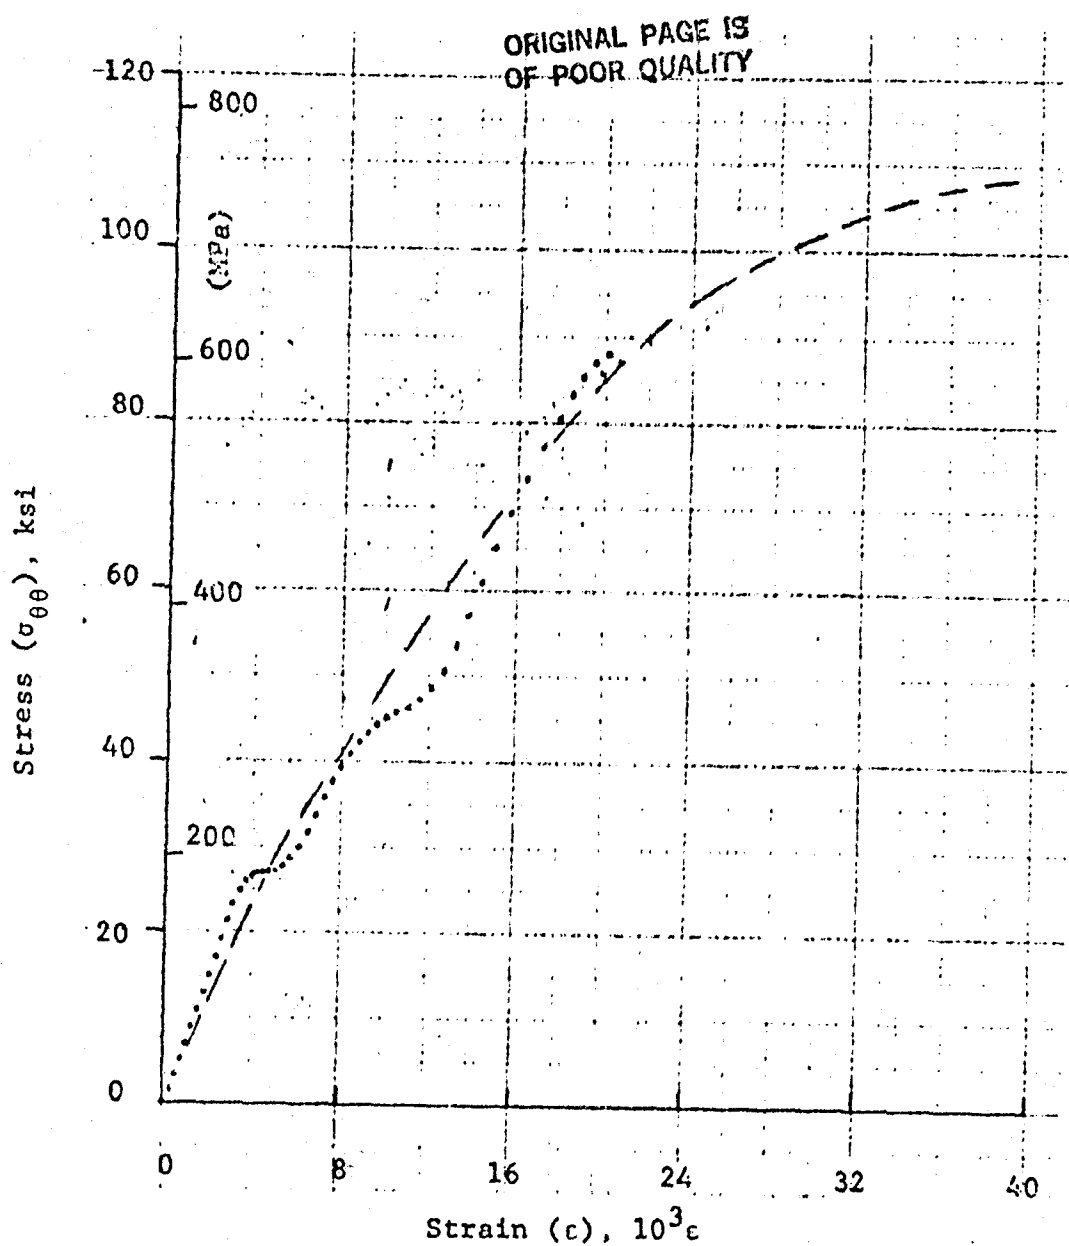


Figure 4-89. Stress-strain curve for dynamically loaded 80AS/20S/PR288  $[\pm 45]_{2s}$  graphite/S-glass/epoxy ring, Specimen No. 25-11 (1.56 g pistol powder,  $KClO_4$ , and aluminum dust).

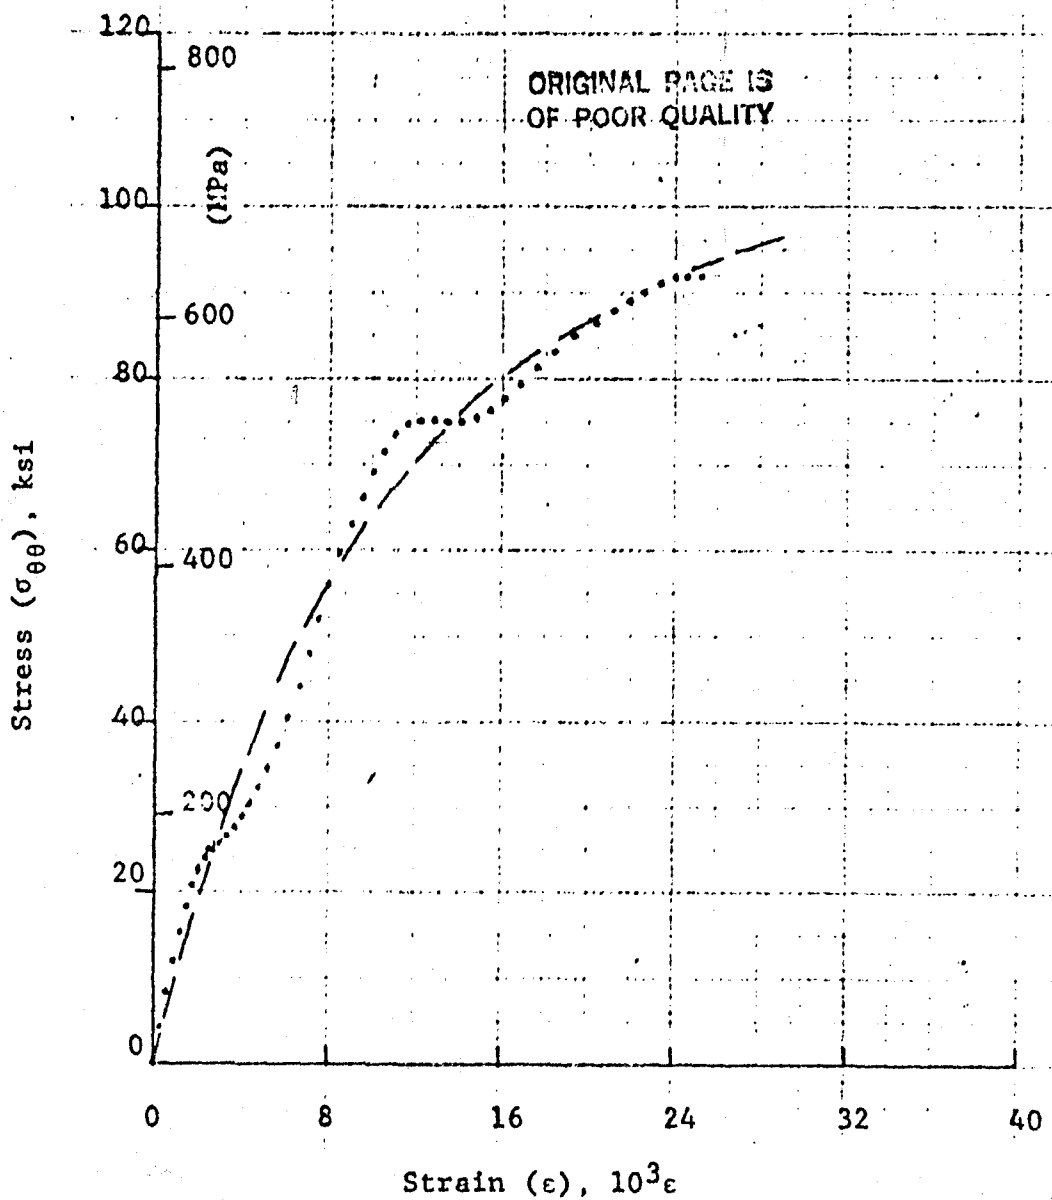


Figure 4-90. Stress-strain curve for dynamically loaded 80AS/20S/PR288  $[\pm 45]_{2s}$  graphite/S-glass/epoxy ring, Specimen No. 25-12 (1.56 g pistol powder,  $KClO_4$ , and aluminum dust).

ORIGINAL PAGE IS  
OF POOR QUALITY

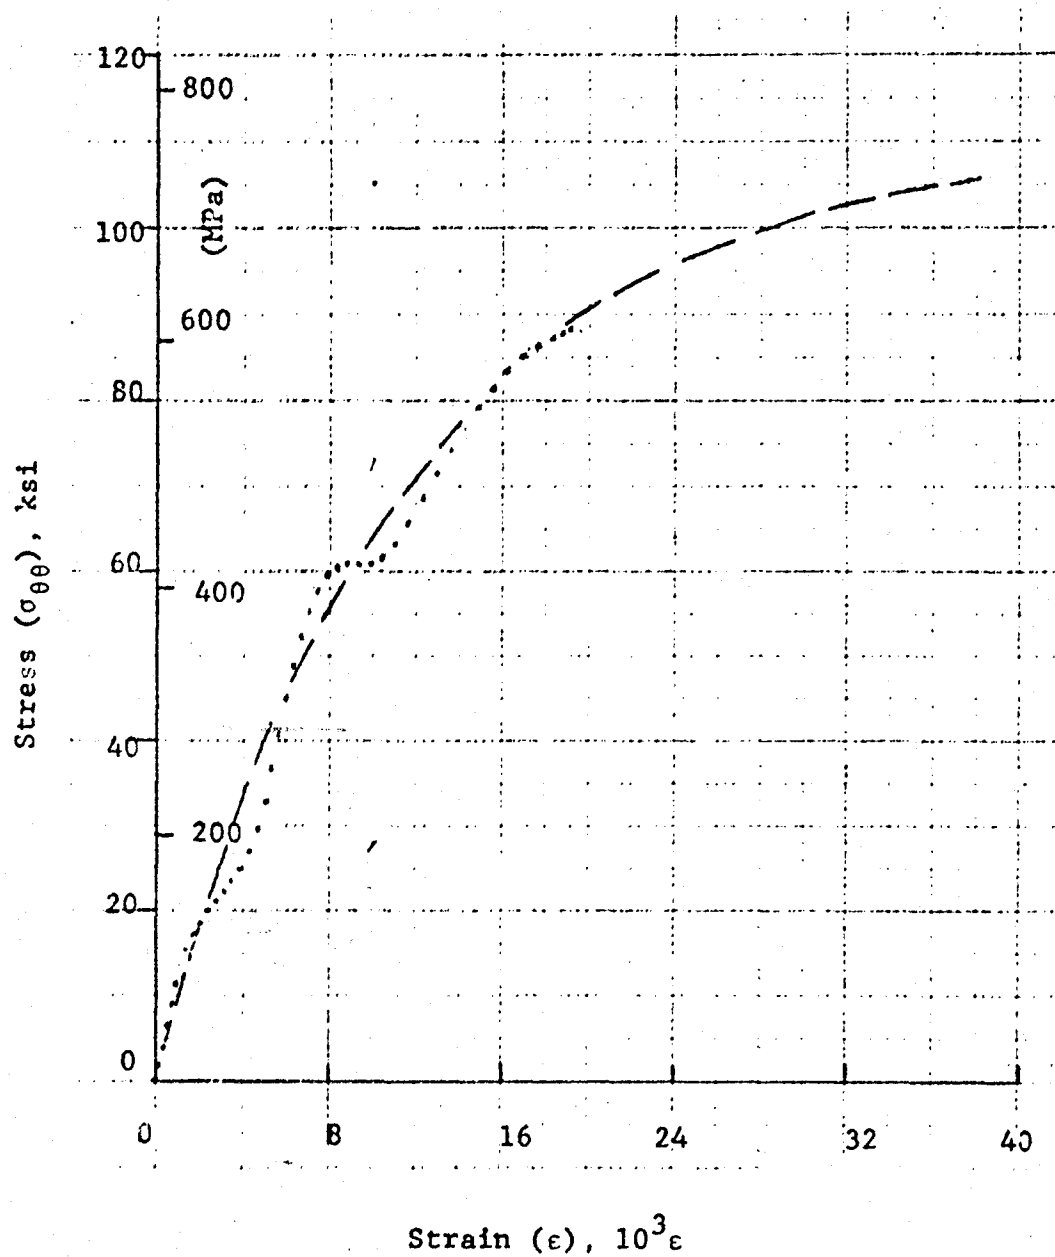


Figure 4-91. Stress-strain curve for dynamically loaded 80AS/20S/PR288  $[\pm 45]_{2s}$  graphite/S-glass/epoxy ring, Specimen No. 25-13 (1.56 g pistol powder,  $KClO_4$ , and aluminum dust).

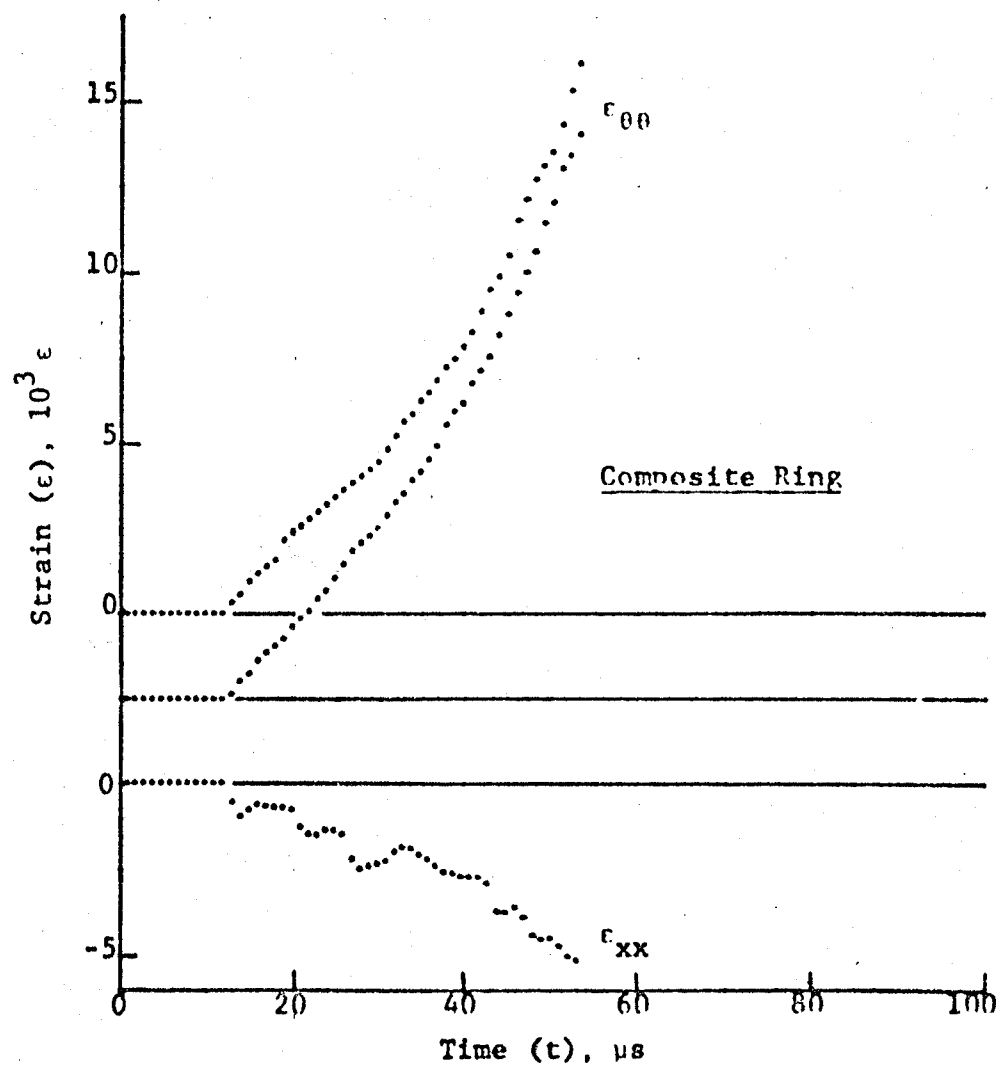
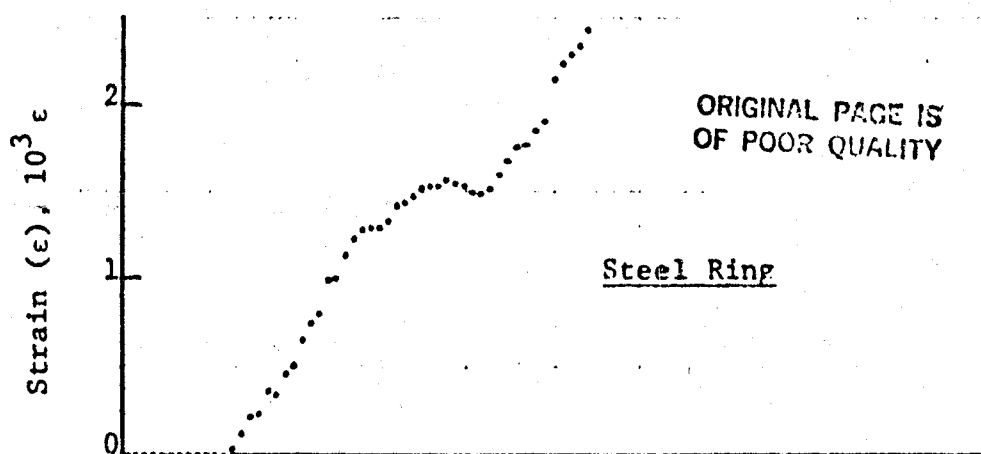


Figure 4-92. Strain records in steel ring and SP288/AS  $[\pm 60]_2$  graphite/epoxy ring under dynamic loading for Specimen No. 22-6 (1.56 g pistol powder,  $KClO_4$ , and aluminum dust).

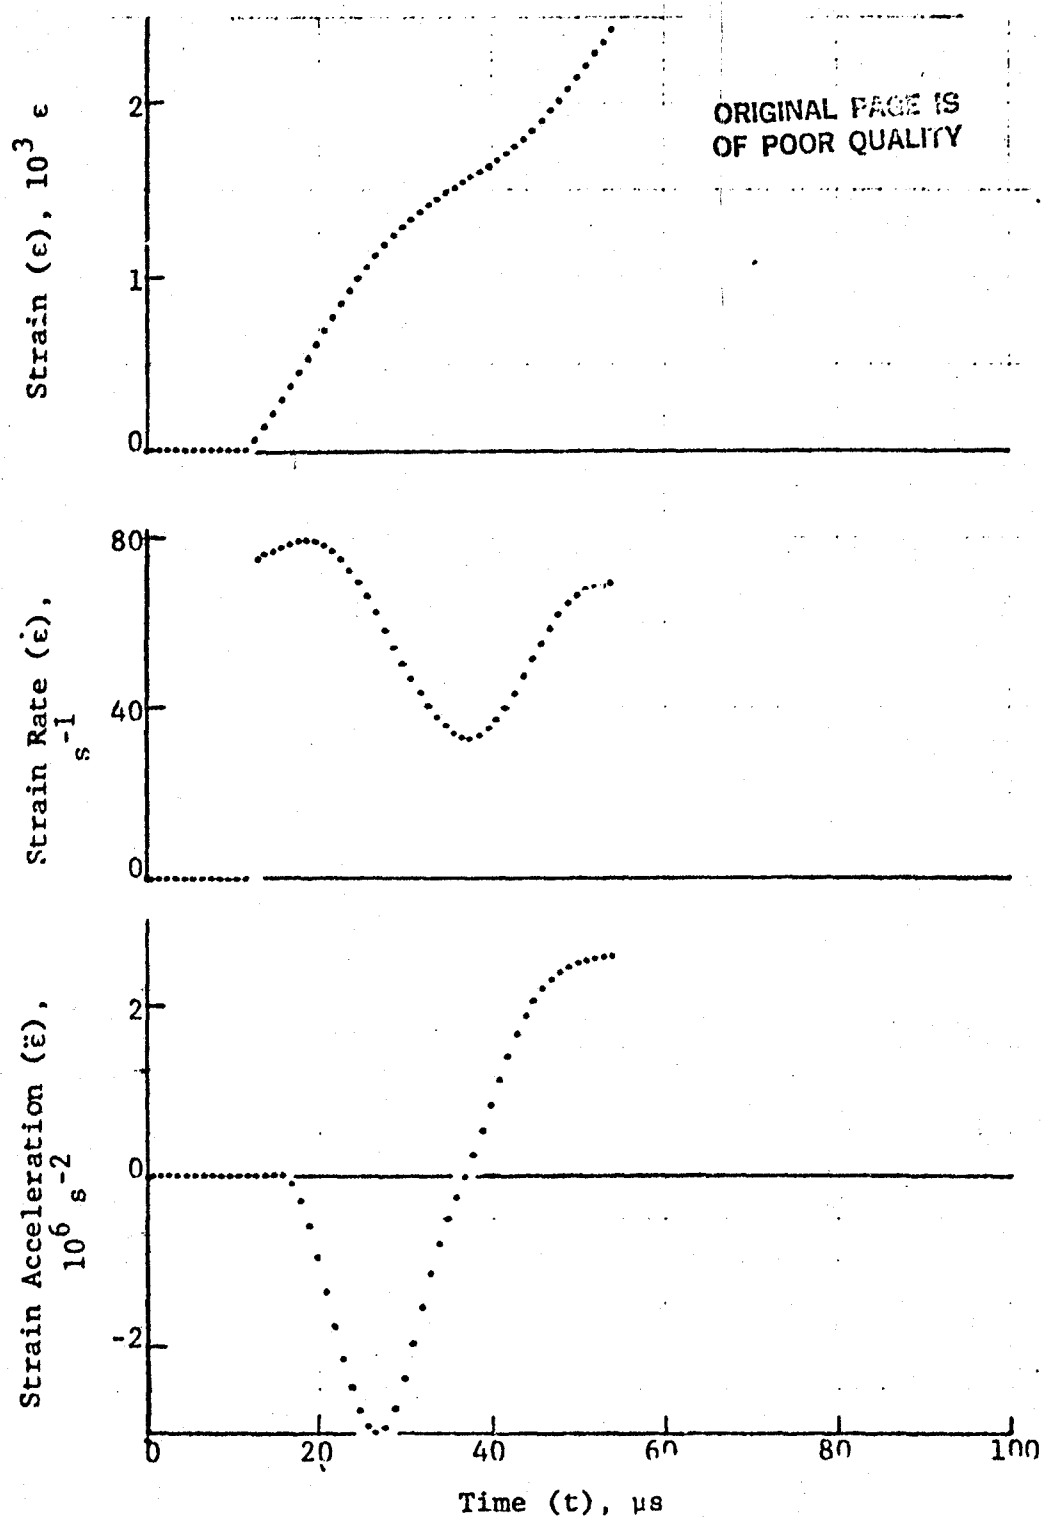


Figure 4-93. Strain and its derivatives in steel ring for Specimen No. 22-6.

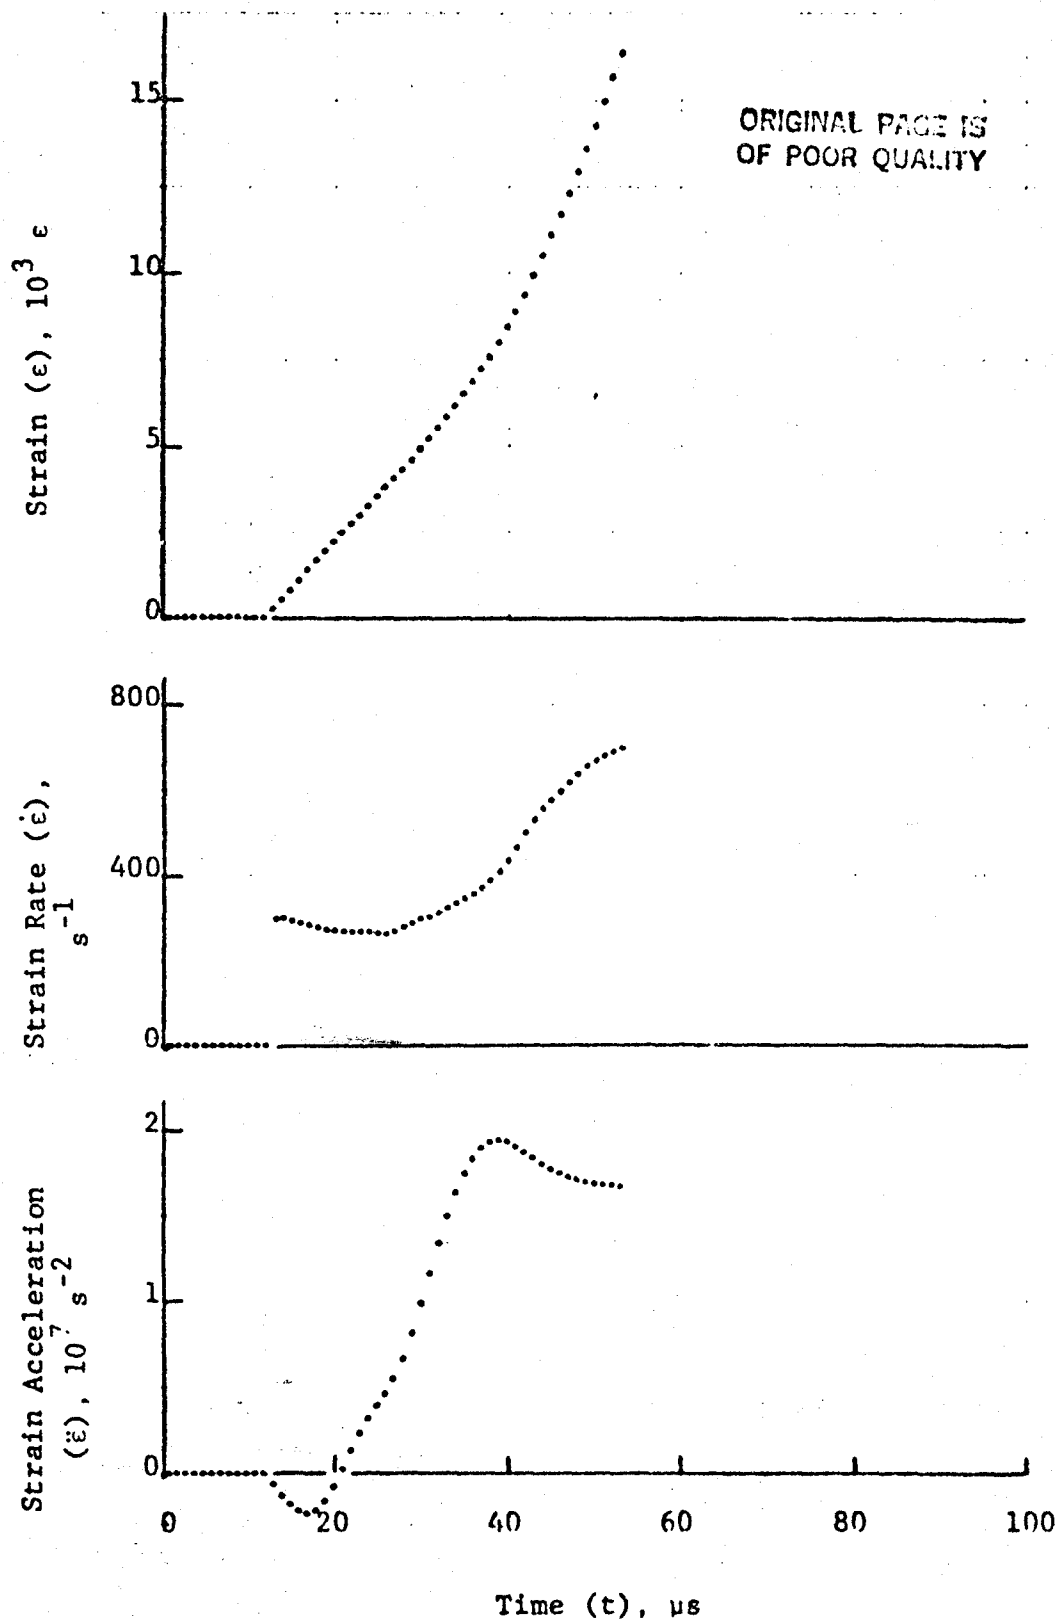


Figure 4-94. Circumferential strain and its derivatives in SP288/AS  $[\pm 60]_{2s}$  graphite/epoxy ring under dynamic loading for Specimen No. 22-6.



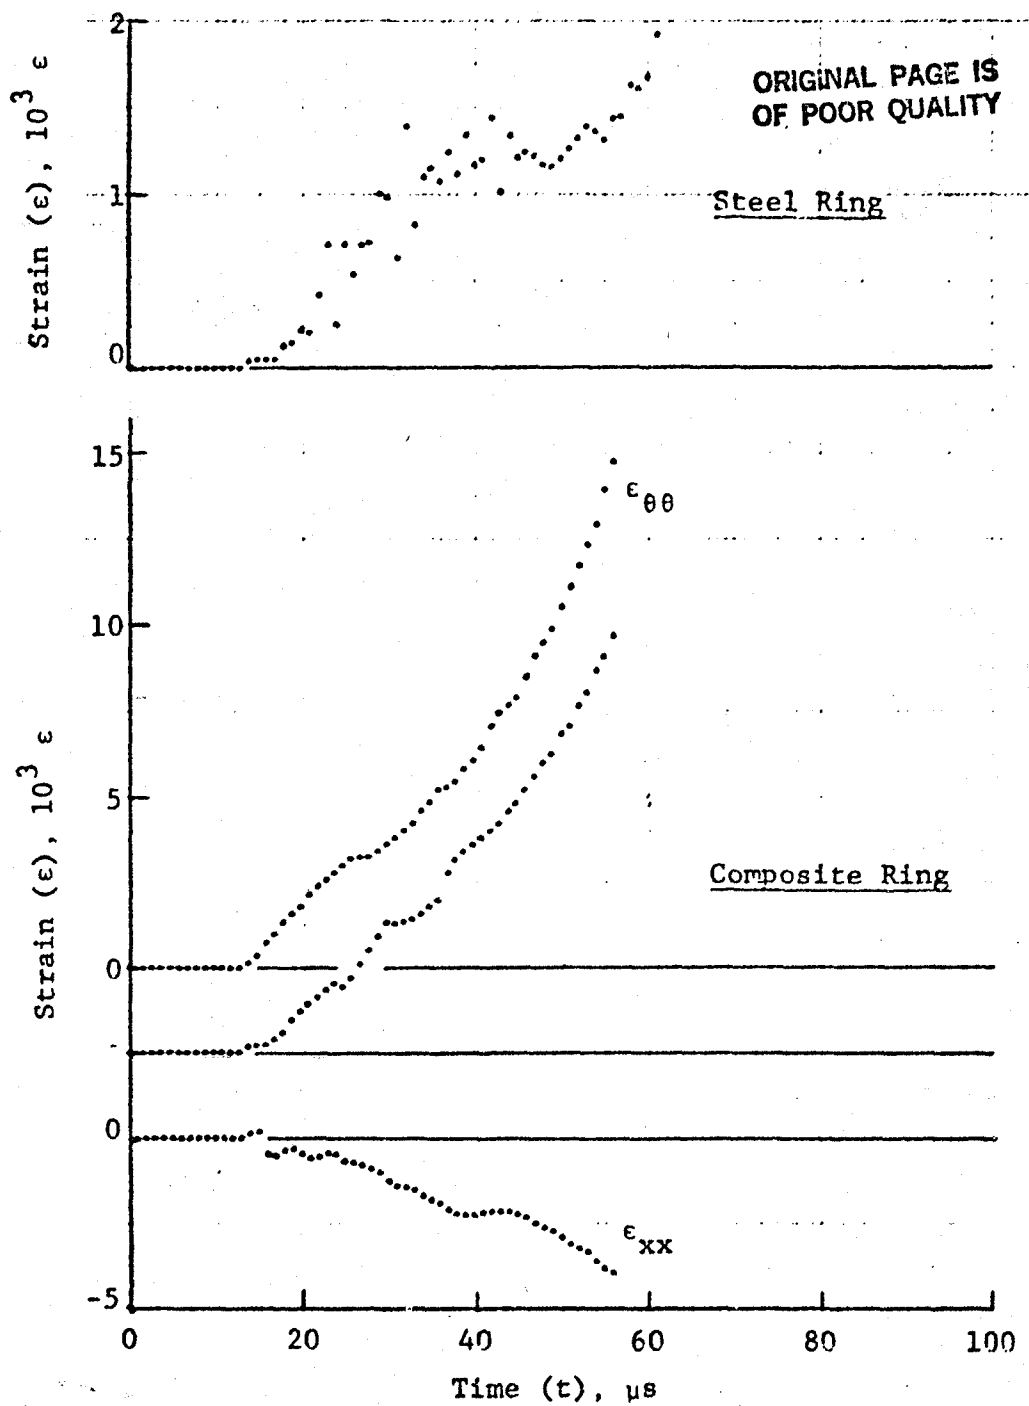


Figure 4-95. Strain records in steel ring and SP288/AS  $[\pm 60]_{25}$  graphite/epoxy ring under dynamic loading for Specimen No. 22-7 (1.56 g pistol powder,  $KClO_4$ , and aluminum dust).

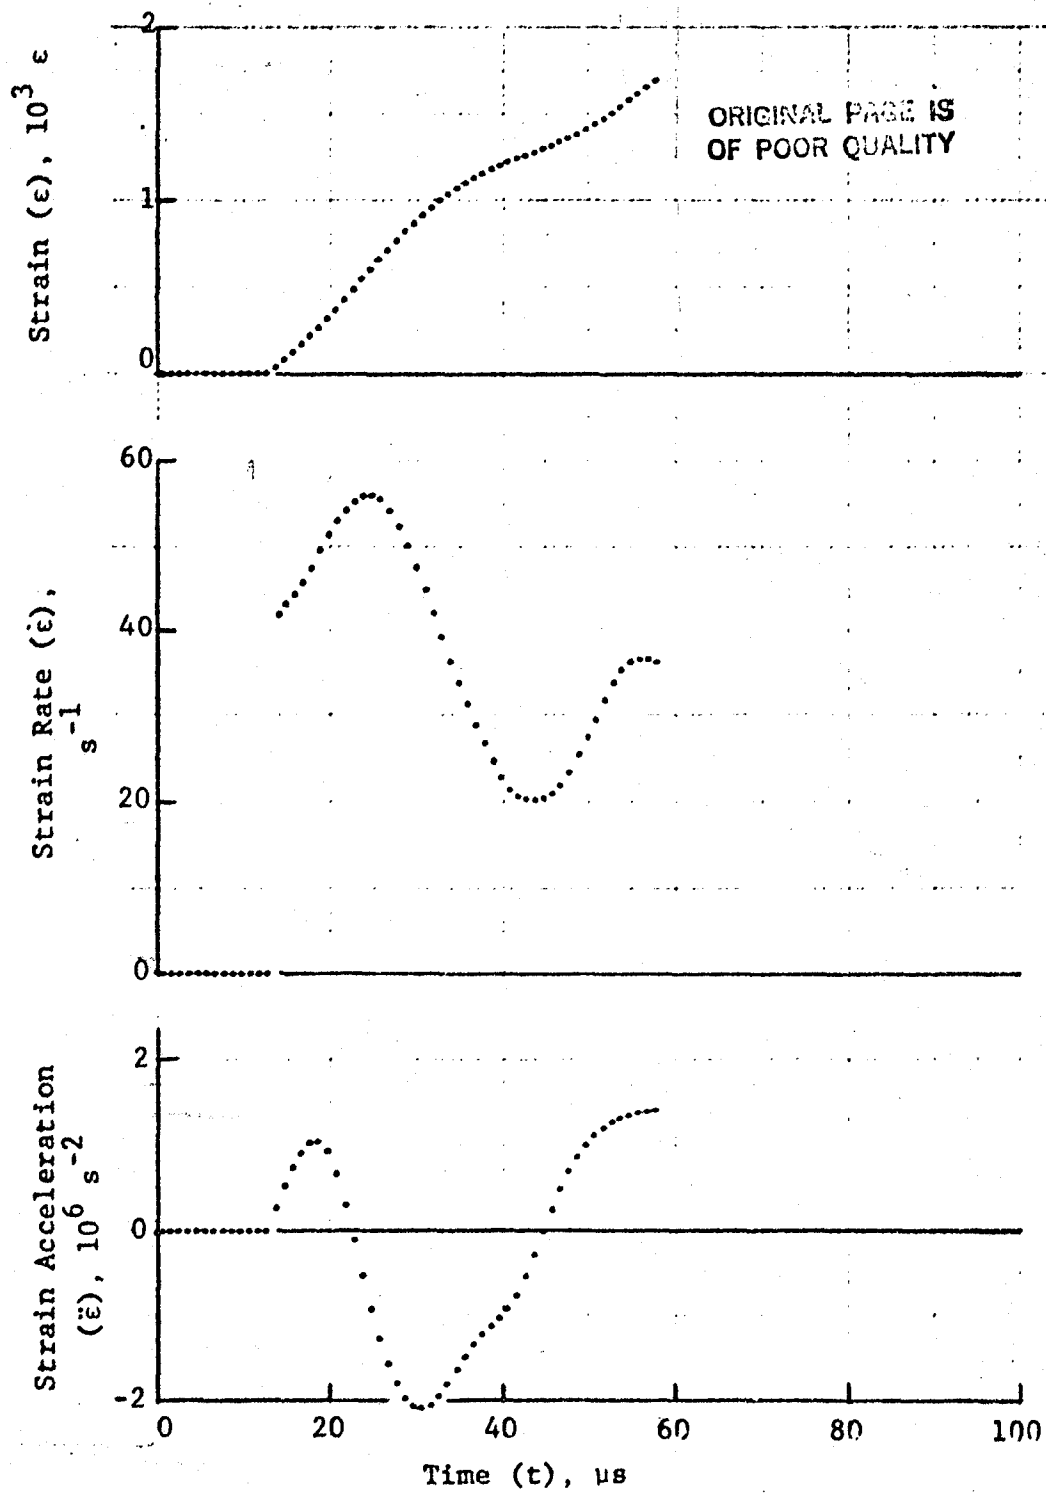


Figure 4-96. Strain and its derivatives in steel ring for Specimen No. 22-7.

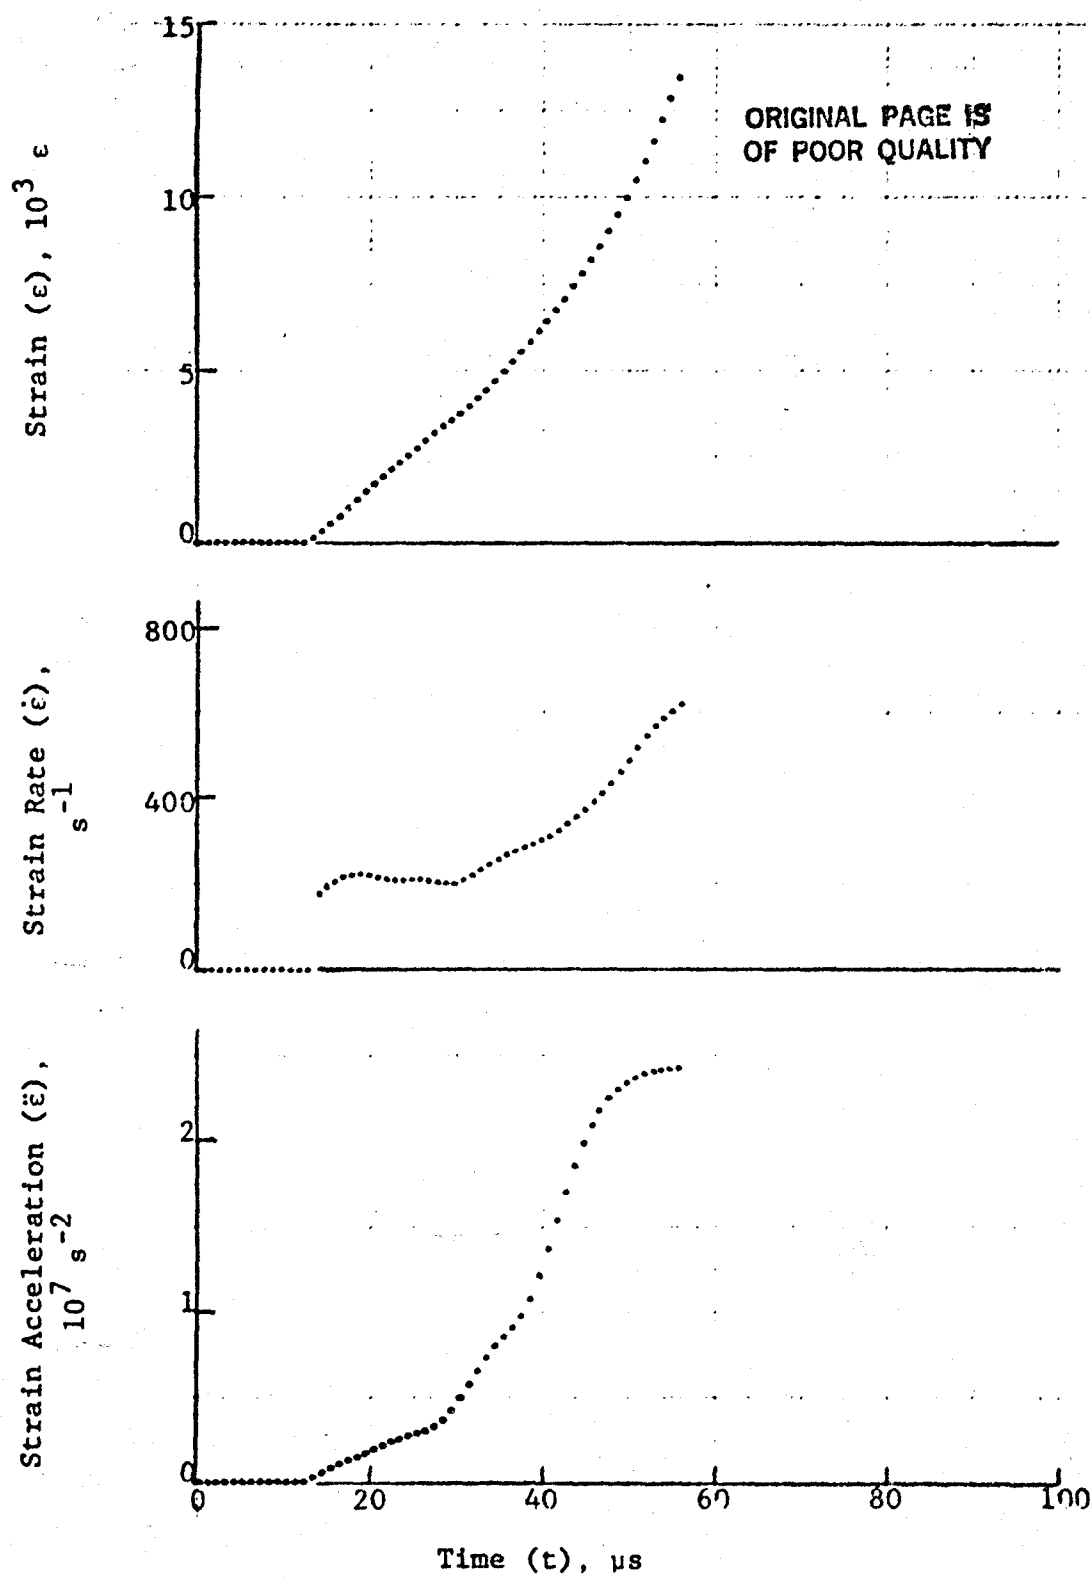


Figure 4-97. Circumferential strain and its derivatives in SP288/AS  $[\pm 60]_{2s}$  graphite/epoxy ring under dynamic loading for Specimen No. 22-7.

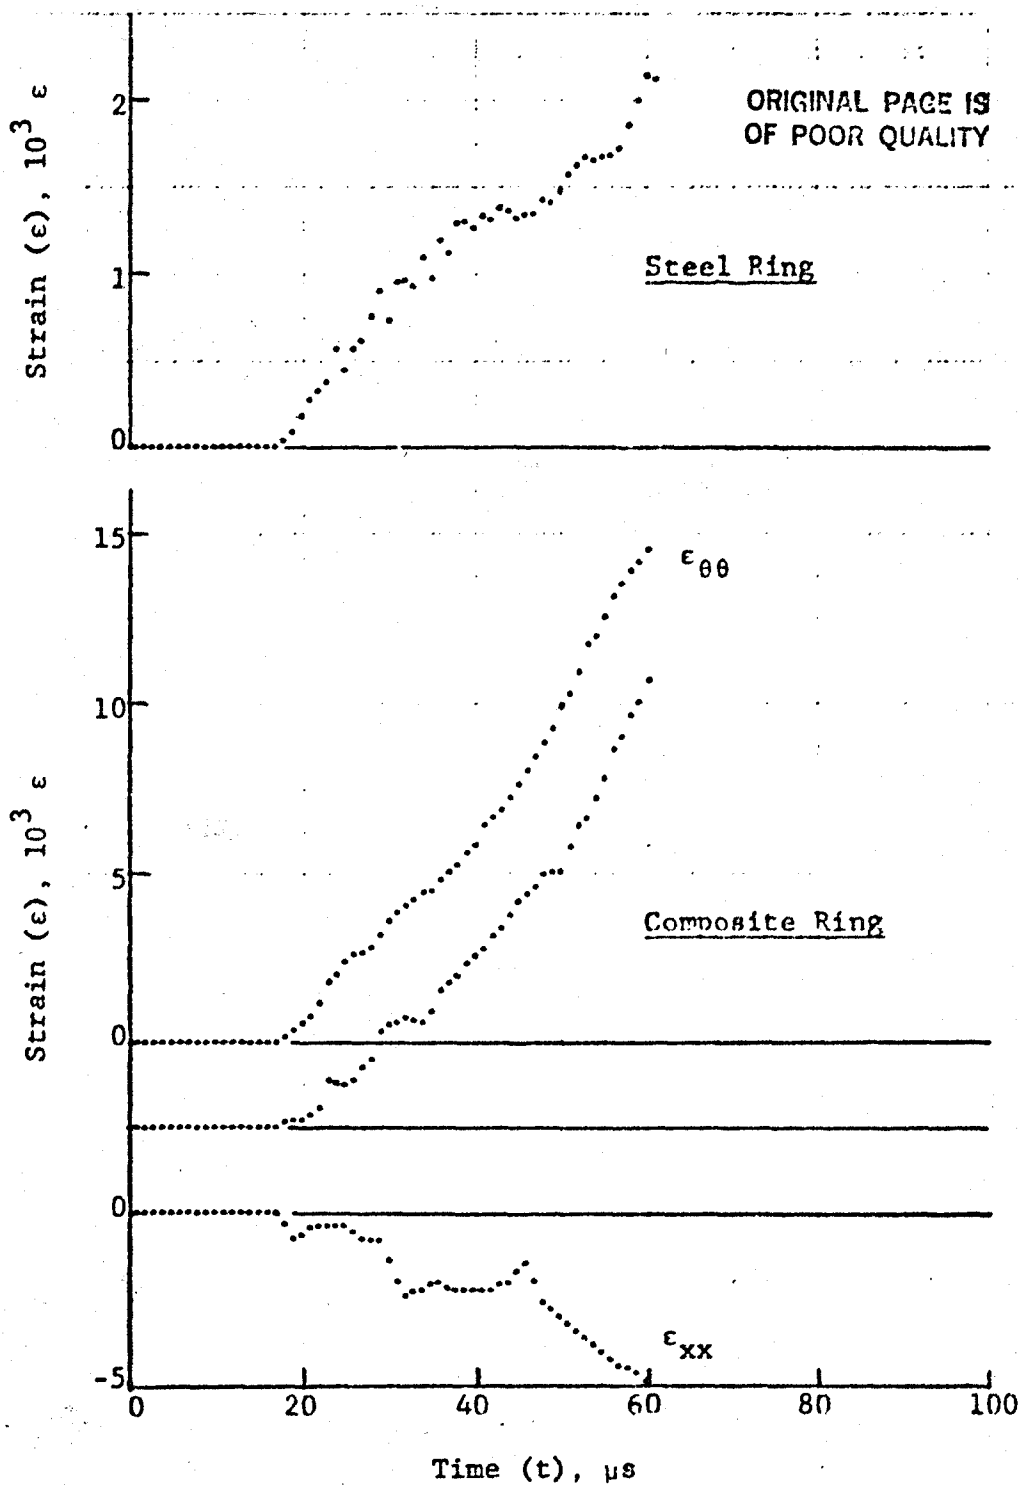


Figure 4-98. Strain records in steel ring and SP288/AS  $[\pm 60]_{2s}$  graphite/epoxy ring under dynamic loading for Specimen No. 22-8 (1.56 g pistol powder,  $KClO_4$ , and aluminum dust).

ORIGINAL PAGE IS  
OF POOR QUALITY

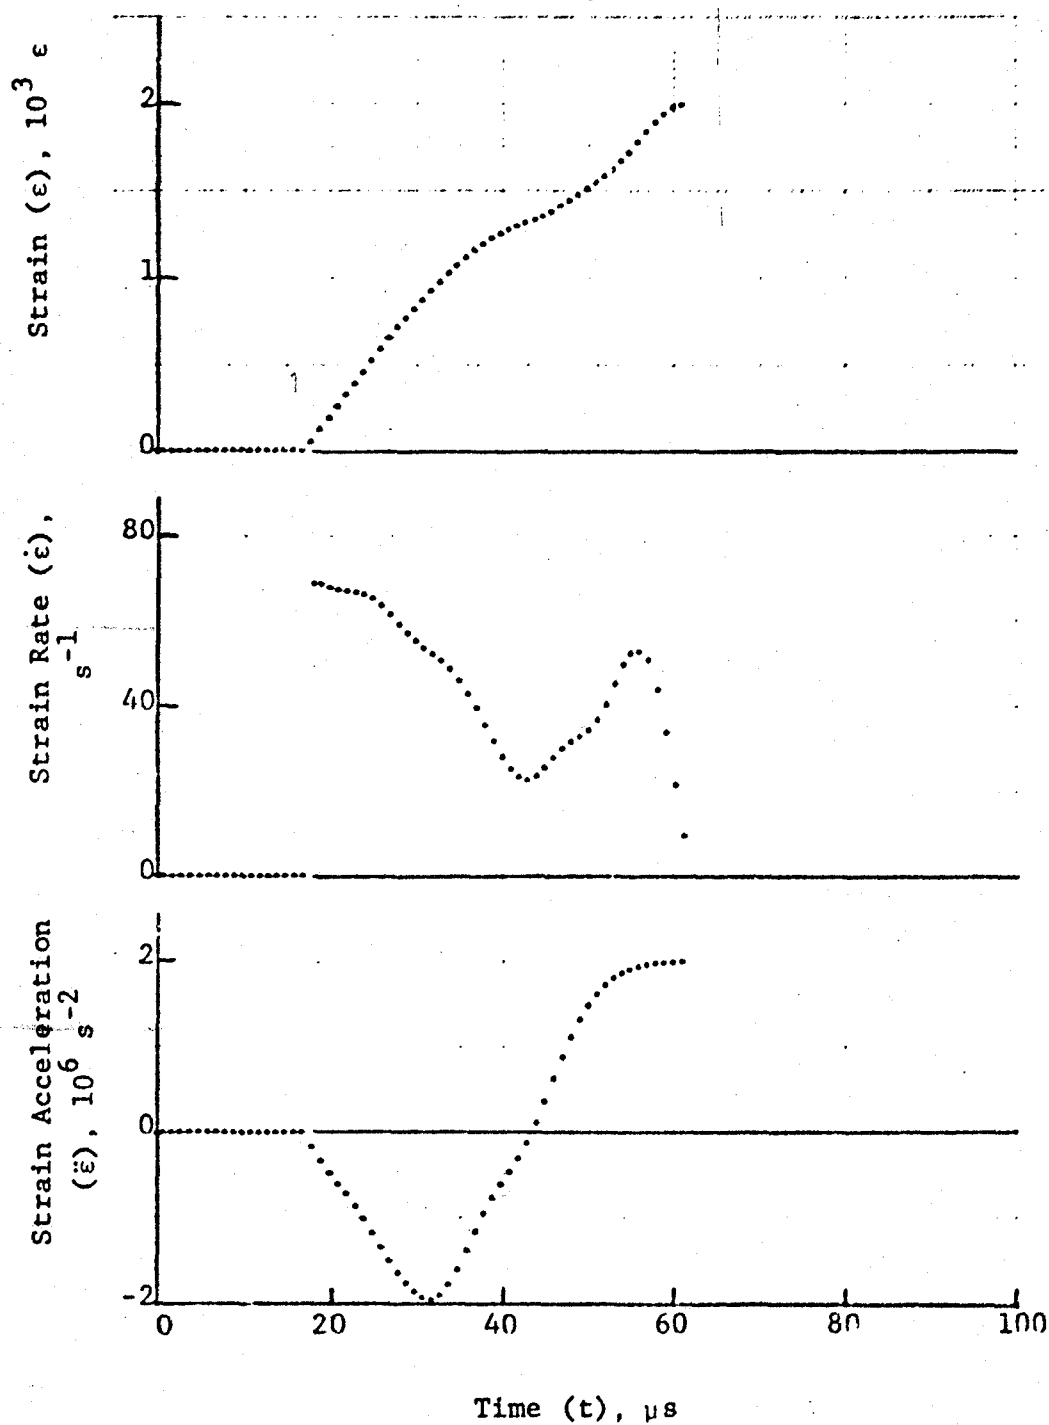


Figure 4-29. Strain and its derivatives in steel ring for Specimen No. 22-8.

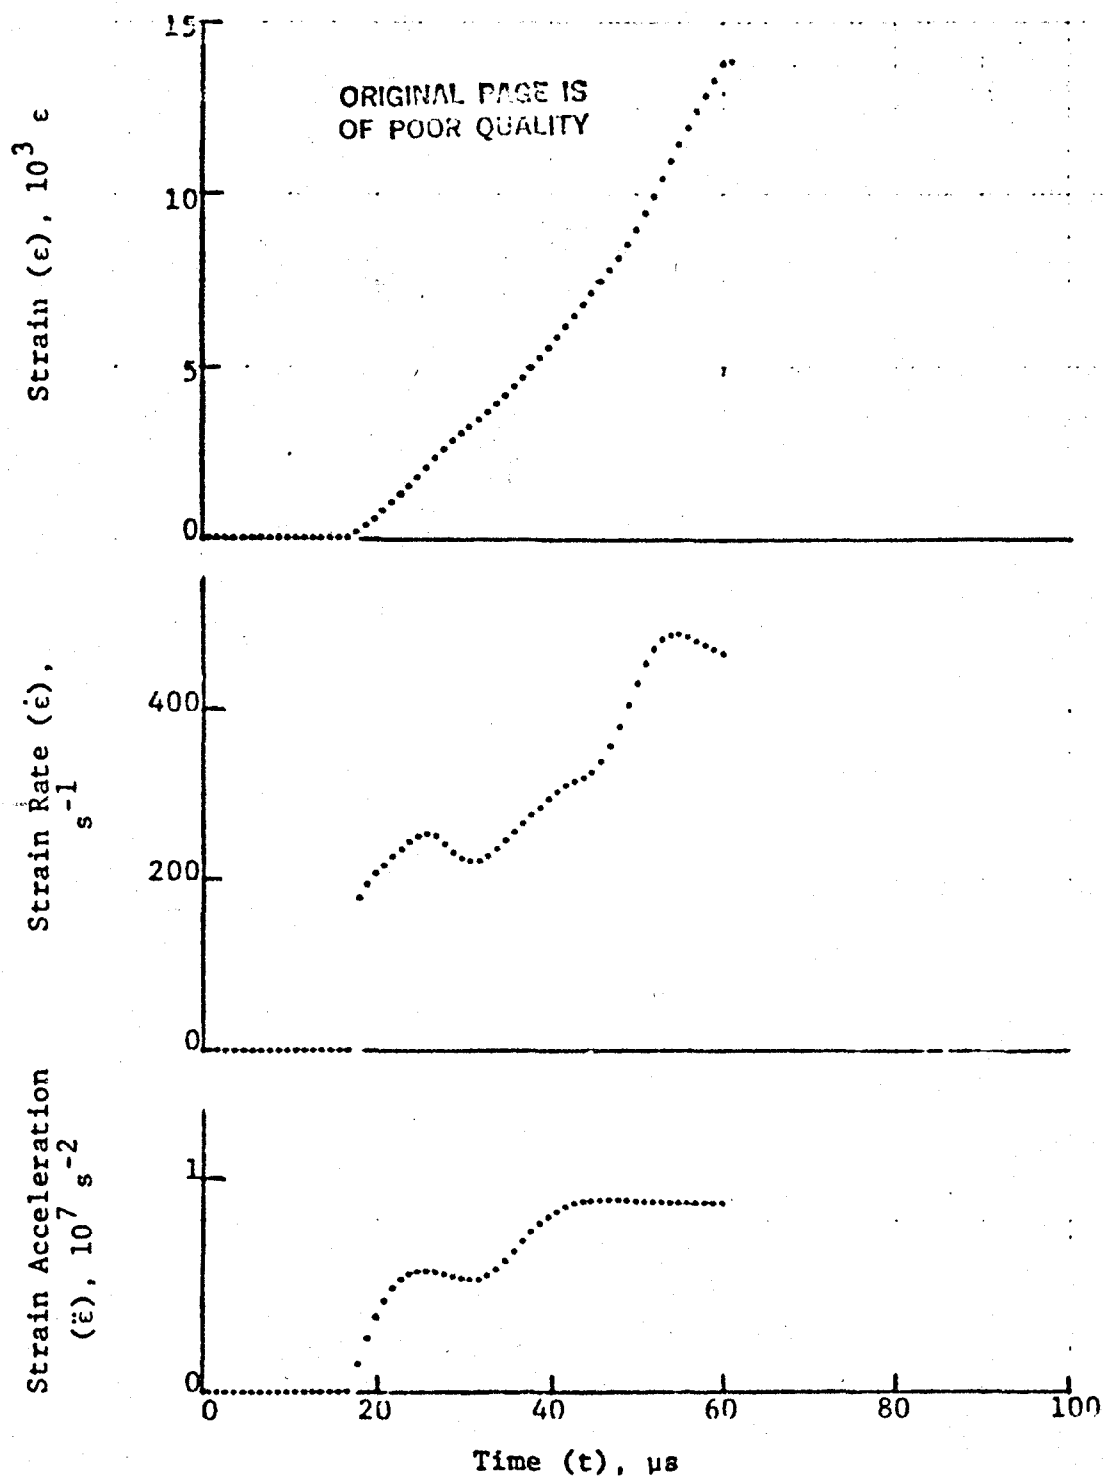


Figure 4-100. Circumferential strain and its derivatives in SP288/AS  $[\pm 60]_{2s}$  graphite/epoxy ring under dynamic loading for Specimen No. 22-8.

ORIGINAL PAGE IS  
OF POOR QUALITY

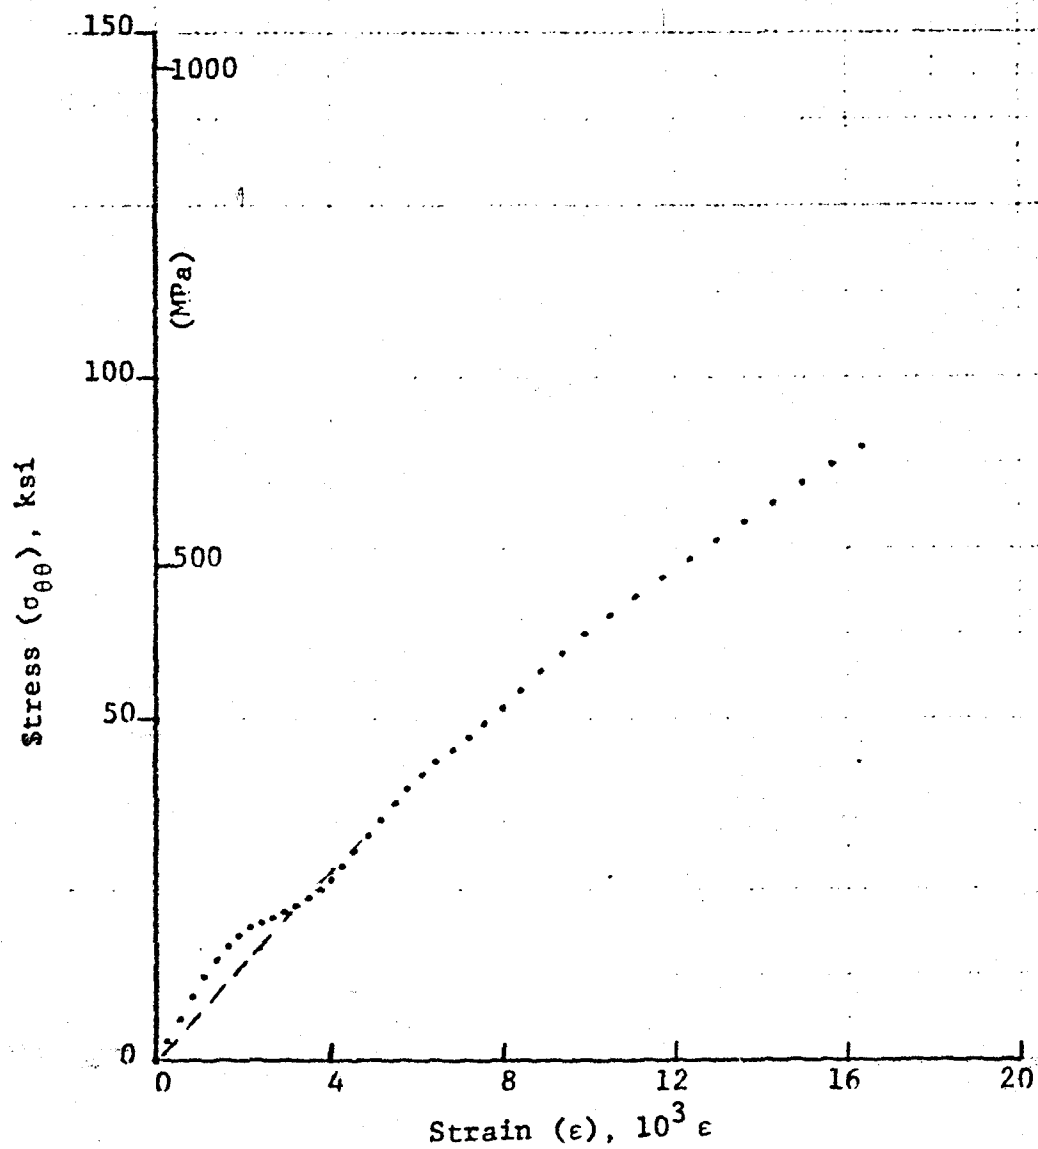


Figure 4-101. Stress-strain curve for dynamically loaded SP288/AS [±60]<sub>2s</sub> graphite/epoxy ring, Specimen No. 22-6 (1.56 g pistol powder,  $\text{KClO}_4$ , and aluminum dust).

ORIGINAL PAGE IS  
OF POOR QUALITY

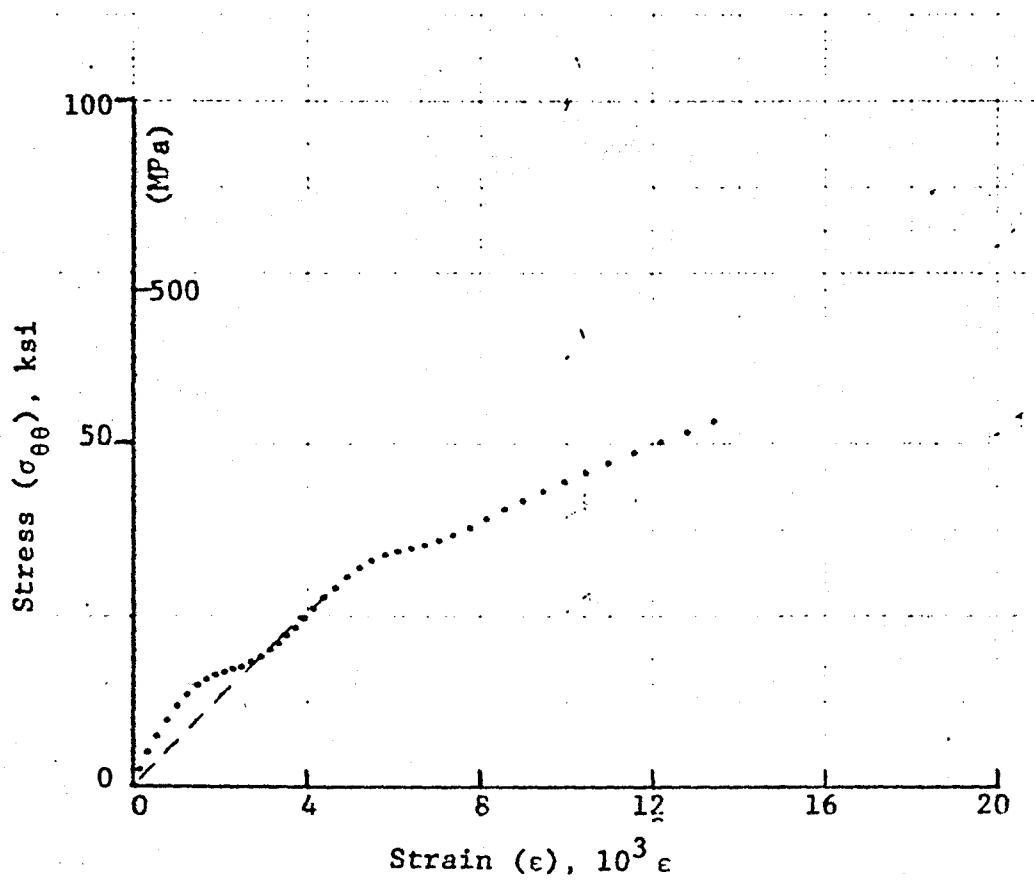


Figure 4-102. Stress-strain curve for dynamically loaded SP288/AS [±60]<sub>2s</sub> graphite/epoxy ring, Specimen No. 22-7 (1.56 g pistol powder, KClO<sub>4</sub>, and aluminum dust).



ORIGINAL PAGE IS  
OF POOR QUALITY

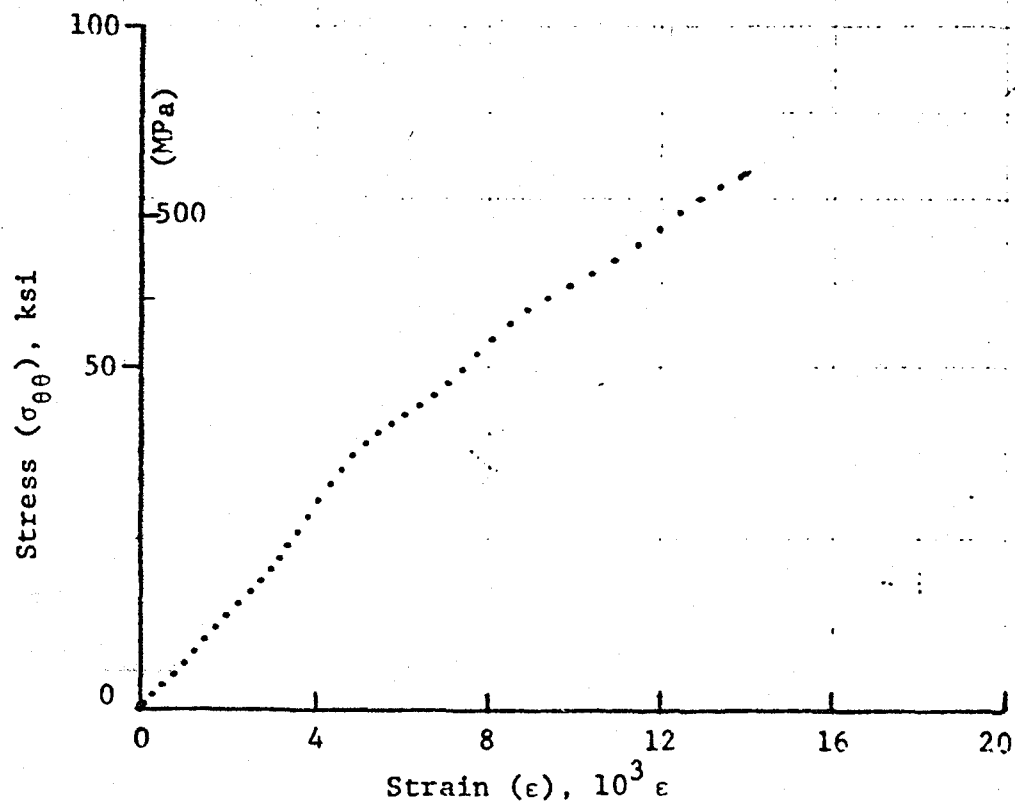


Figure 4-103. Stress-strain curve for dynamically loaded SP288/AS  $[\pm 60]_{2s}$  graphite/epoxy ring, Specimen No. 22-8 (1.56 g pistol powder,  $KClO_4$ , and aluminum dust).

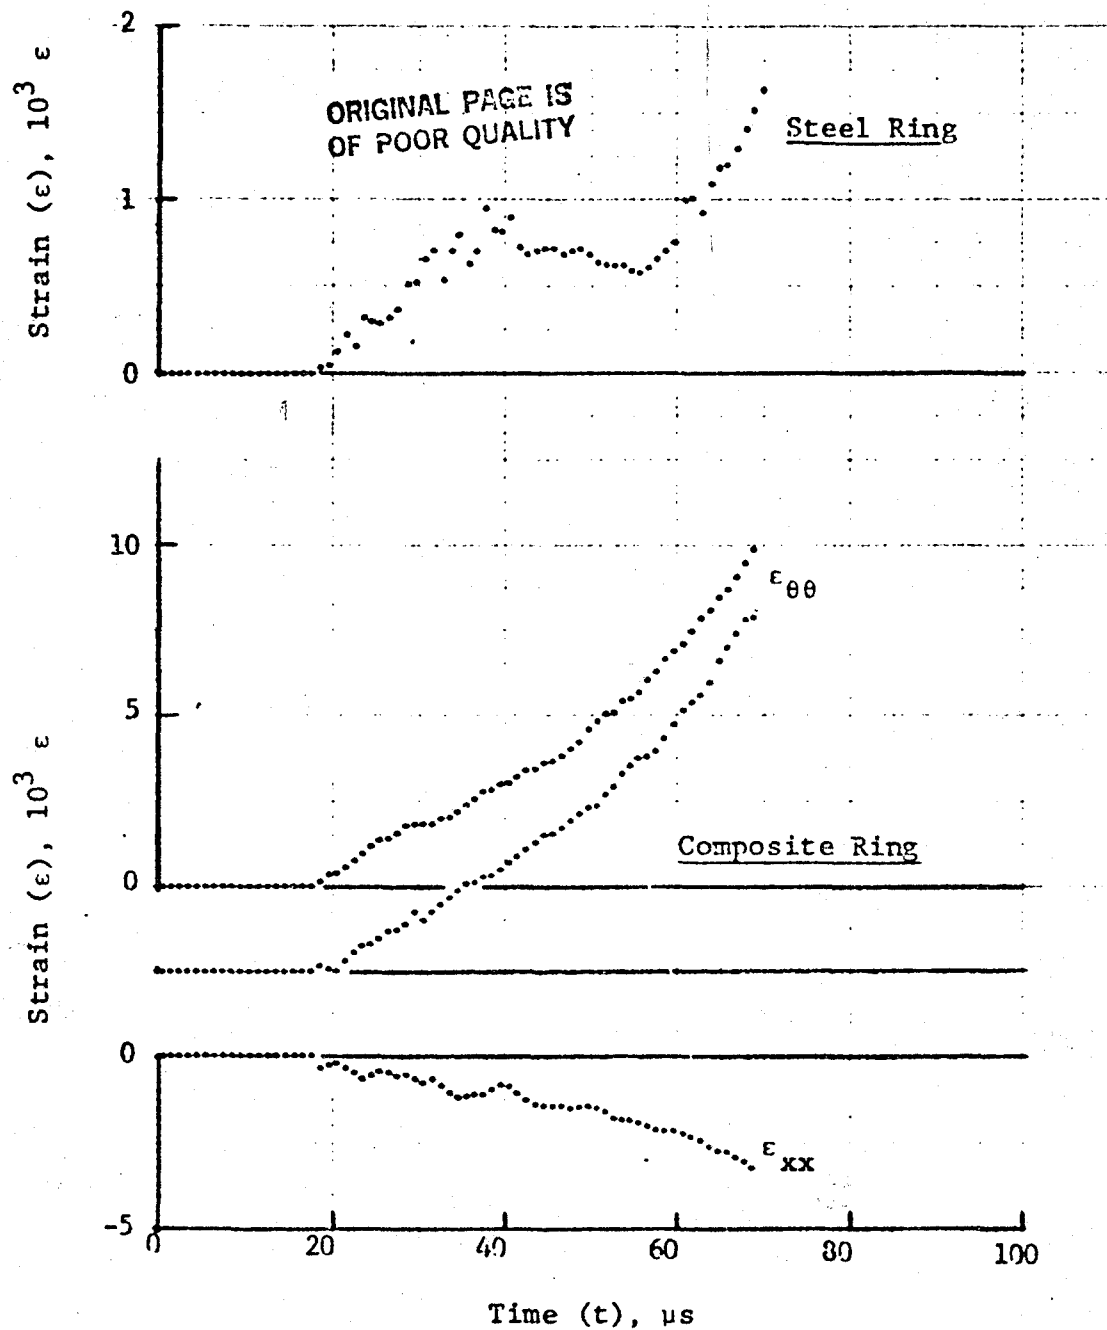


Figure 4-104. Strain records in steel ring and  $[\pm 60]_2$  80AS/20S/PR288 graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 23-2 (1.56 g pistol powder,  $KClO_4$ , and aluminum dust).

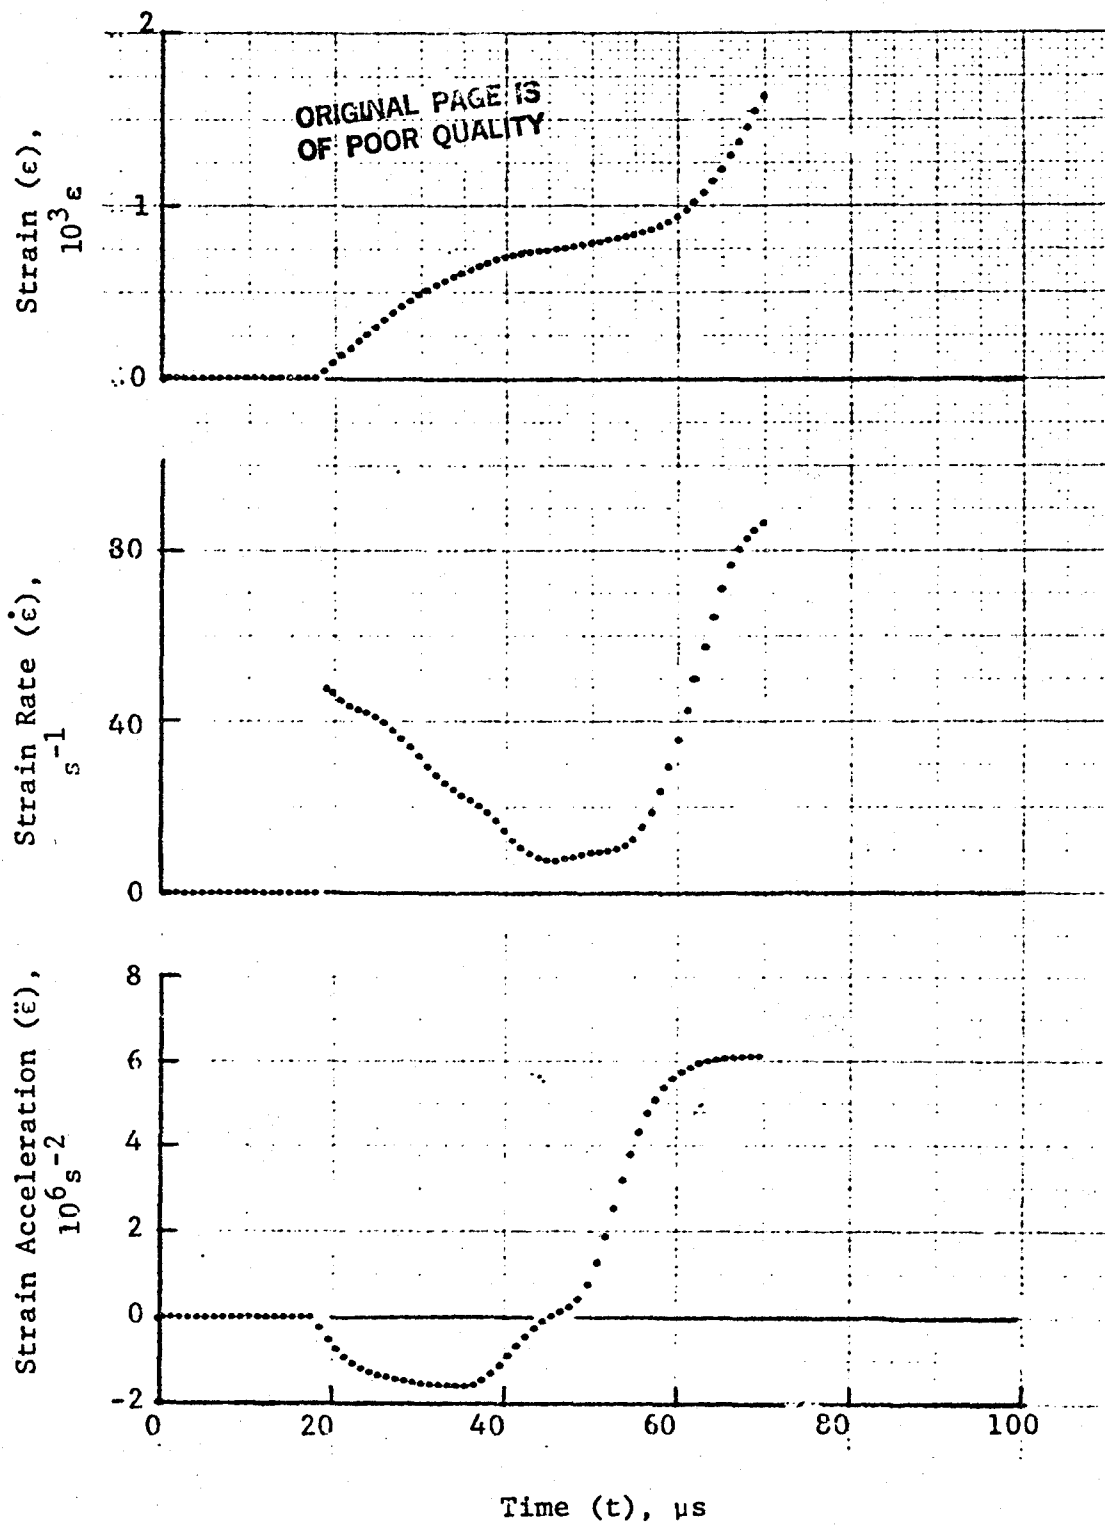


Figure 4-105. Strain and its derivatives in steel ring for Specimen No. 23-2.

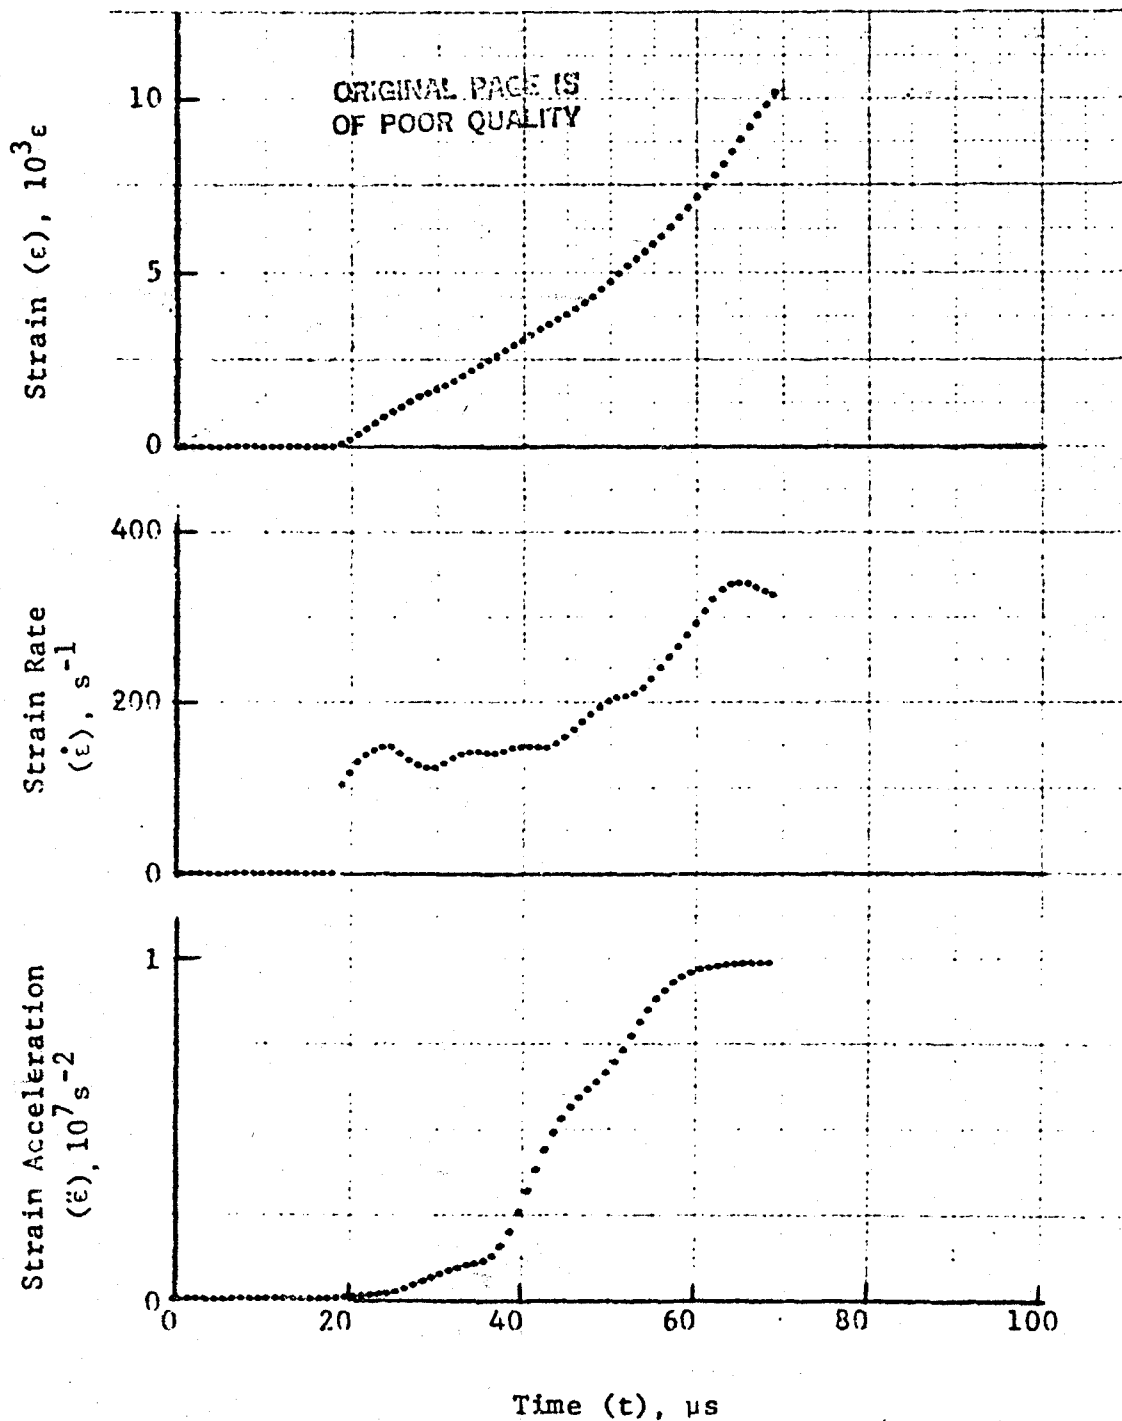


Figure 4-106. Circumferential strain and its derivatives in  $[\pm 60]_{2s}$  80AS/20S/PR288 graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 23-2.

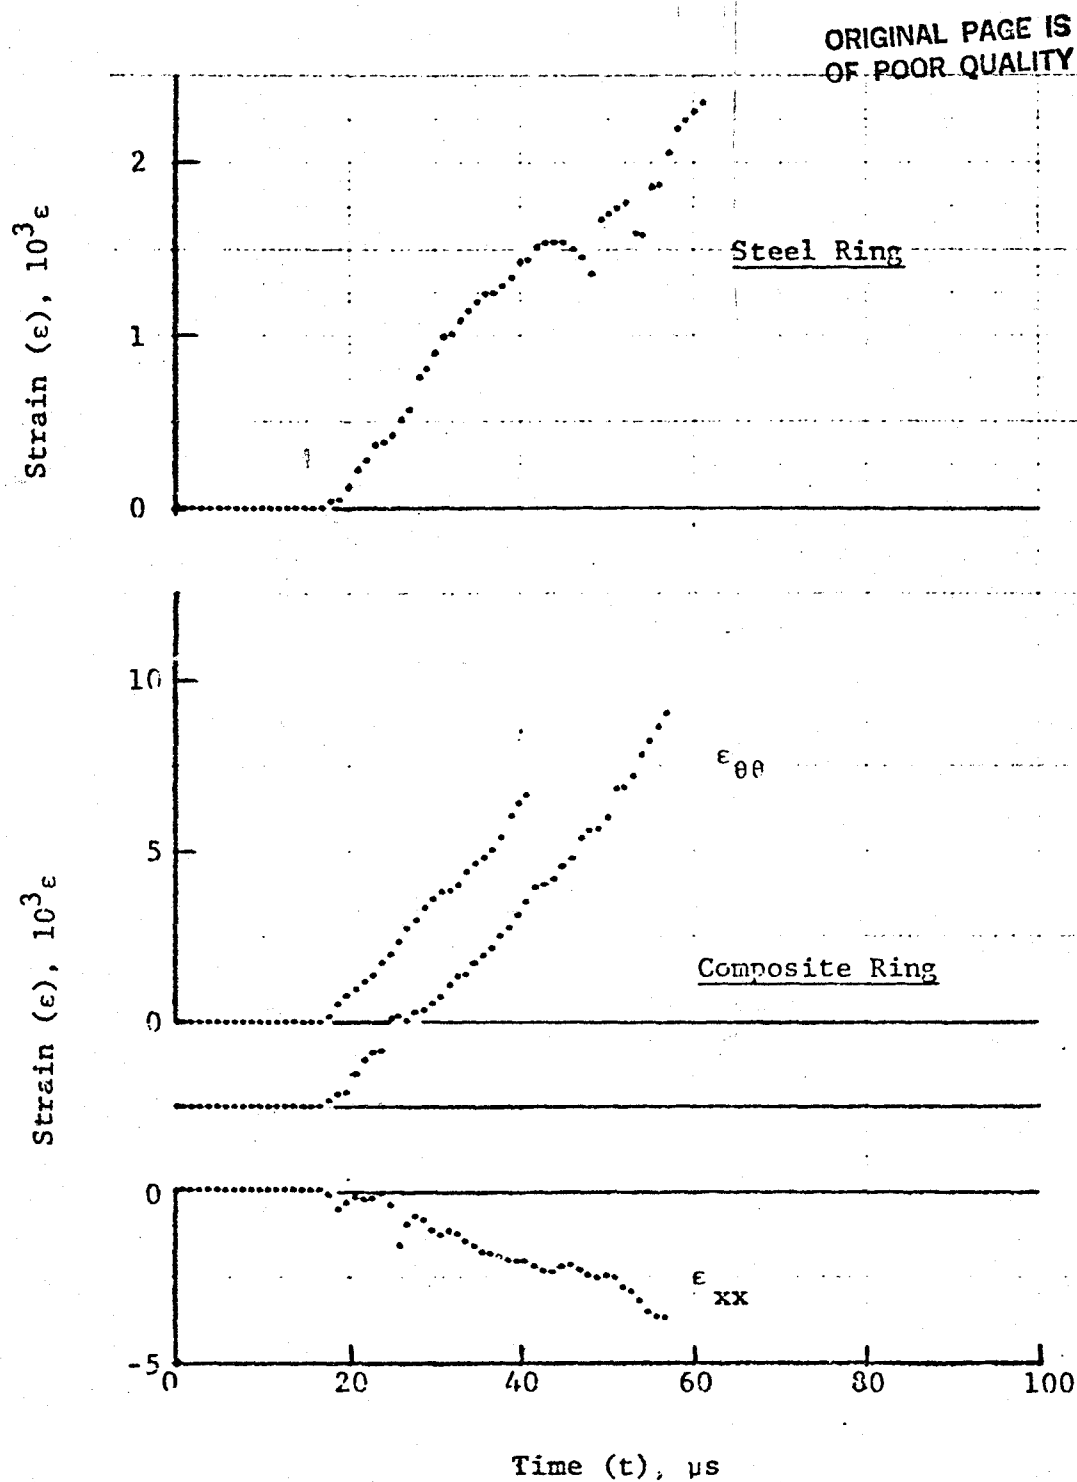


Figure 4-107. Strain records in steel ring and  $[\pm 60]_{2s}$  80AS/20S/PR288 graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 23-4 (1.56 g pistol powder,  $KClO_4$ , and aluminum dust).

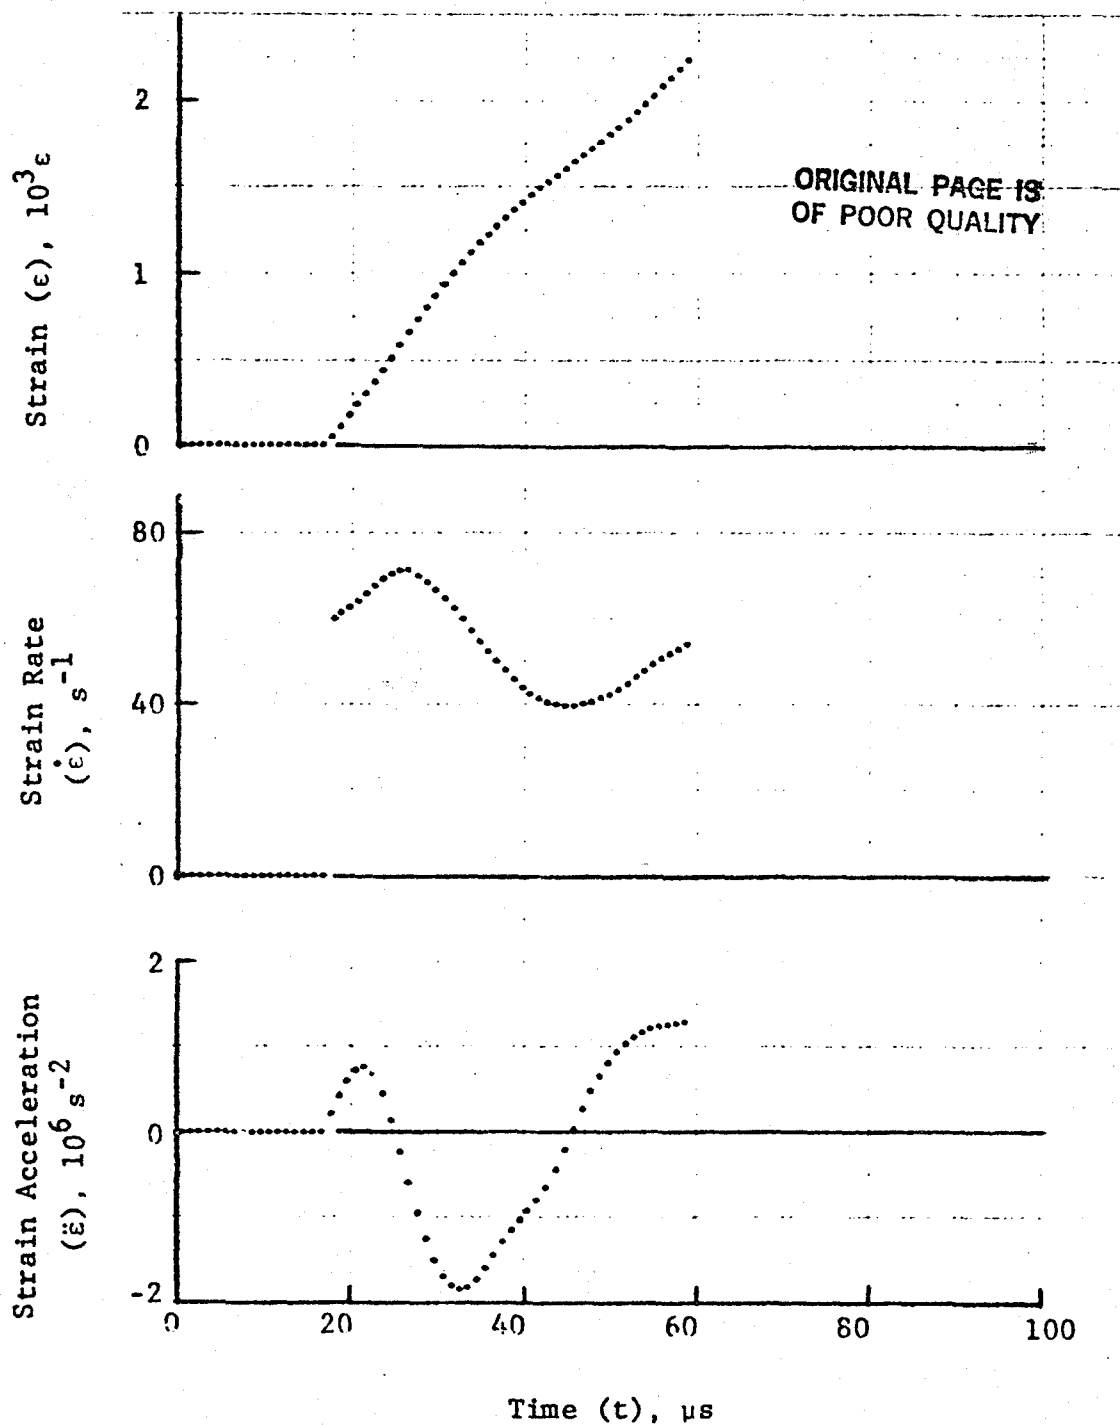


Figure 4-108. Strain and its derivatives in steel ring for Specimen No. 23-4.

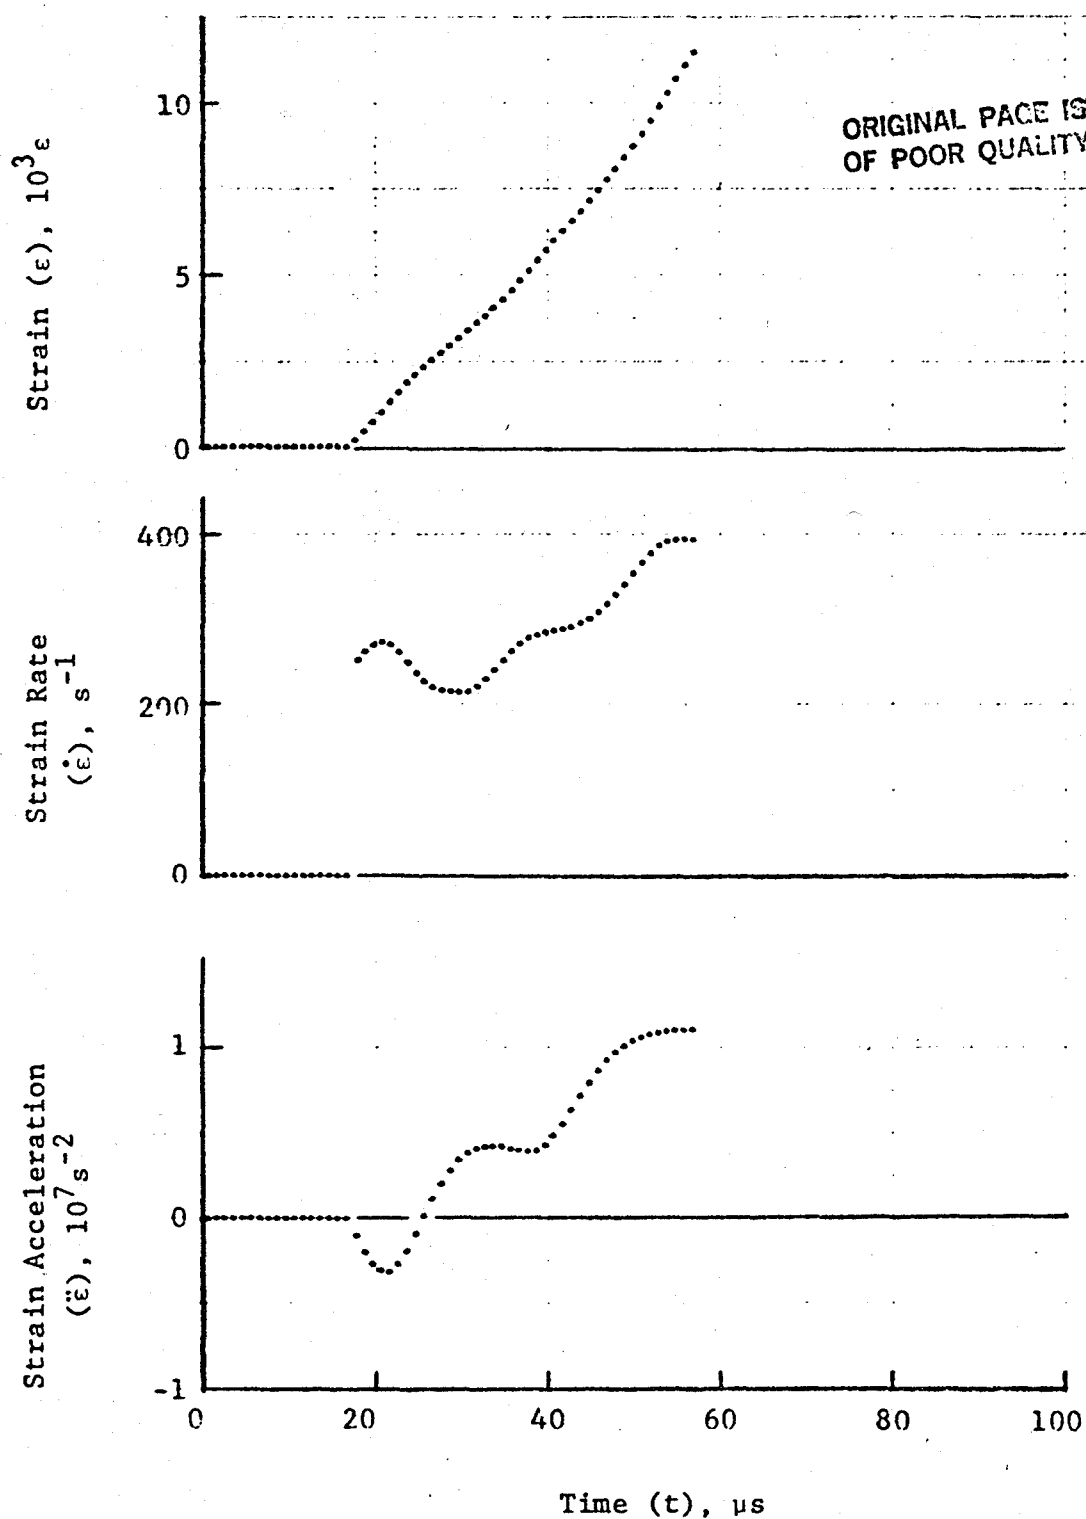


Figure 4-109. Circumferential strain and its derivatives in  $[\pm 60]_{2s}$  80AS/20S/PR288 graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 23-4.

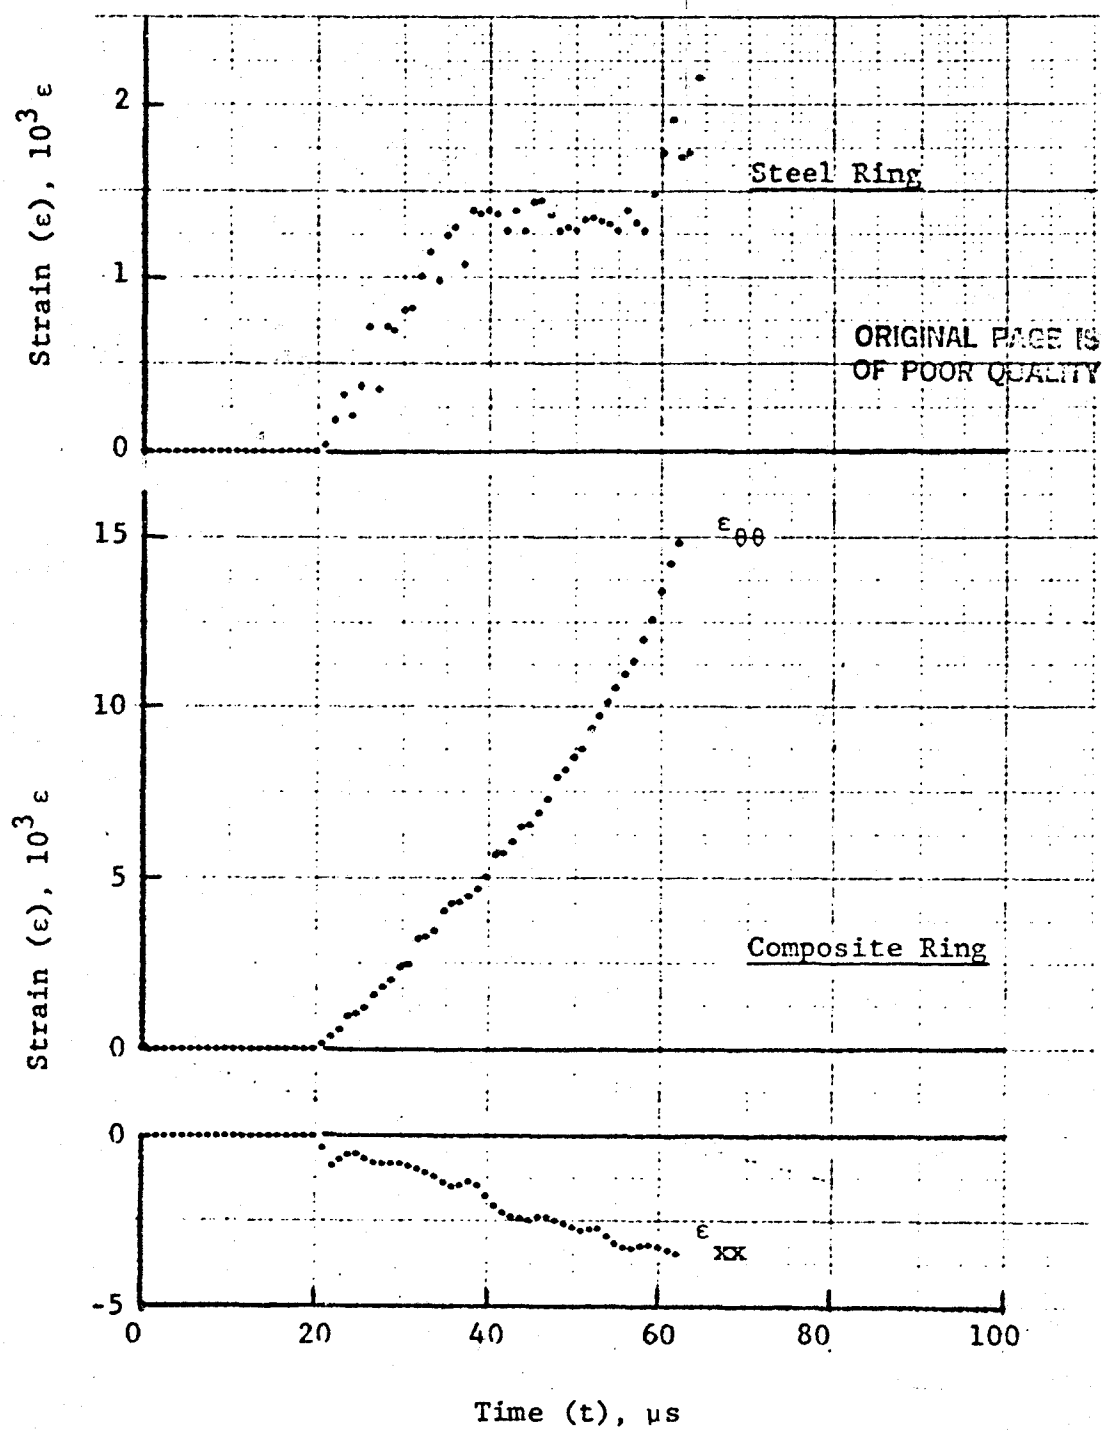


Figure 4-110. Strain records in steel ring and  $[\pm 60]_{2S}$  80AS/20S/PR288 graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 23-6 (1.56 g pistol powder,  $KClO_4$ , and aluminum dust).



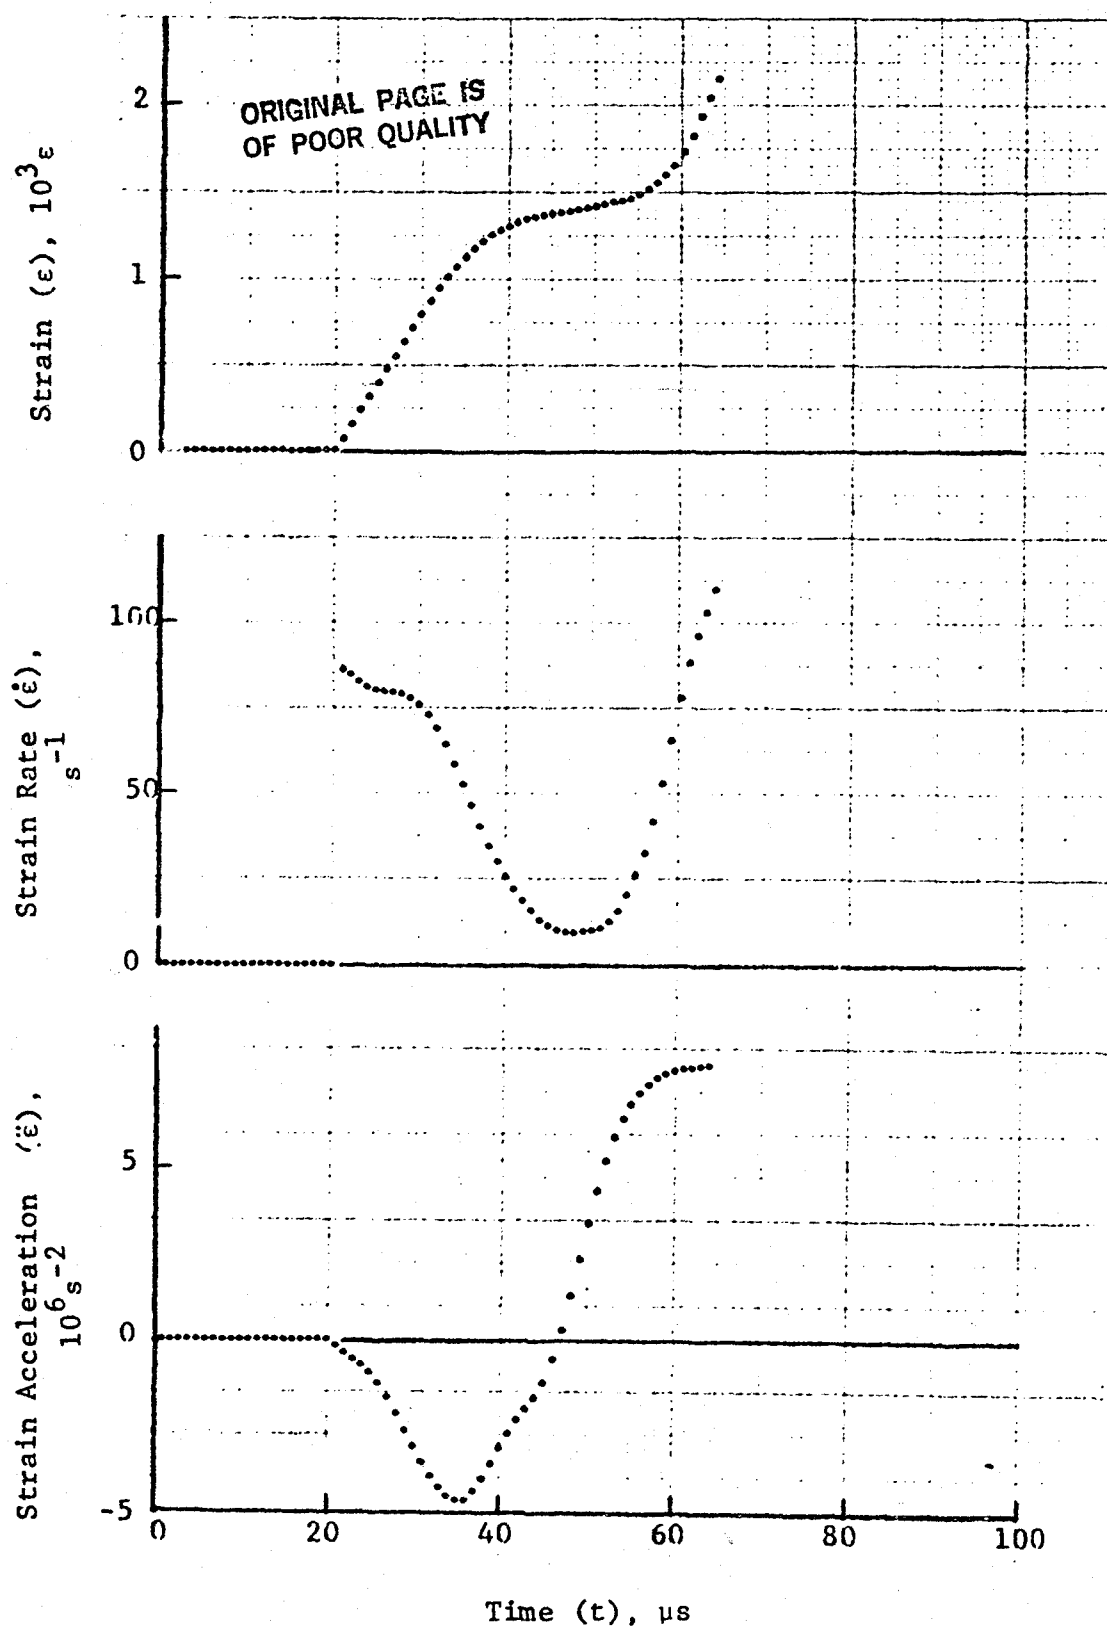


Figure 4-111. Strain and its derivatives in steel ring for Specimen No. 23-6.

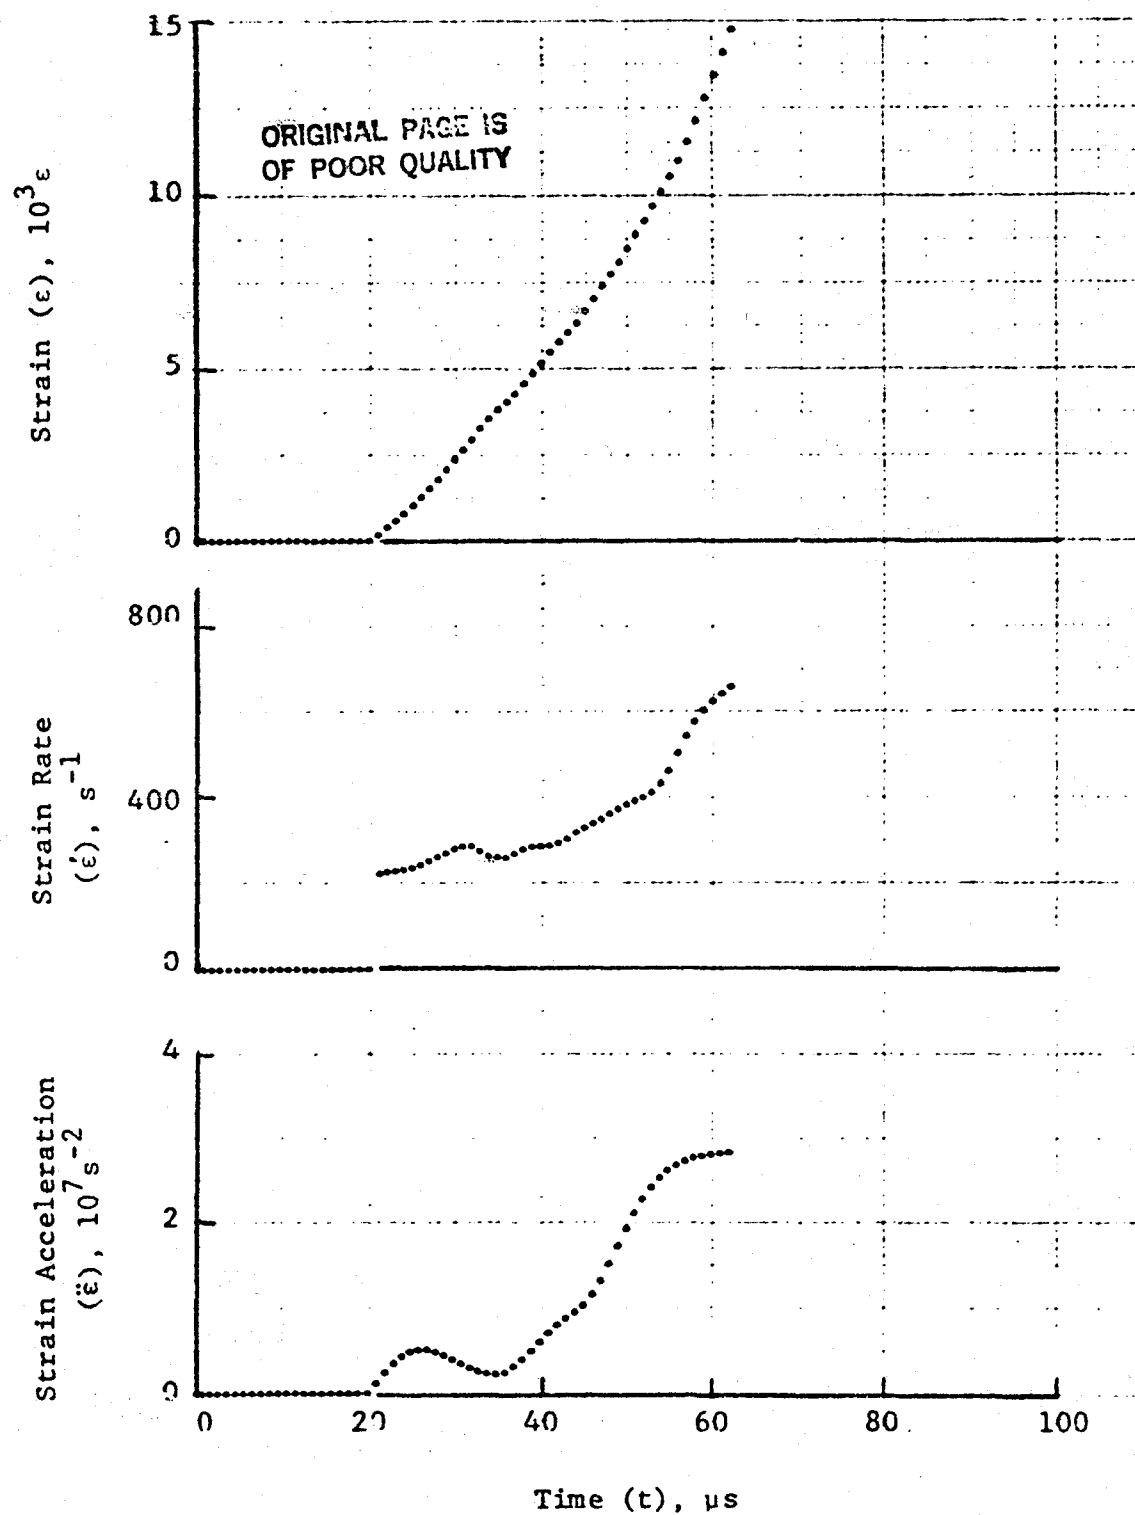


Figure 4-112. Circumferential strain and its derivatives in  $[\pm 60]_{2s}$  80AS/20S/PR288 graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 23-6.

ORIGINAL PAGE IS  
OF POOR QUALITY

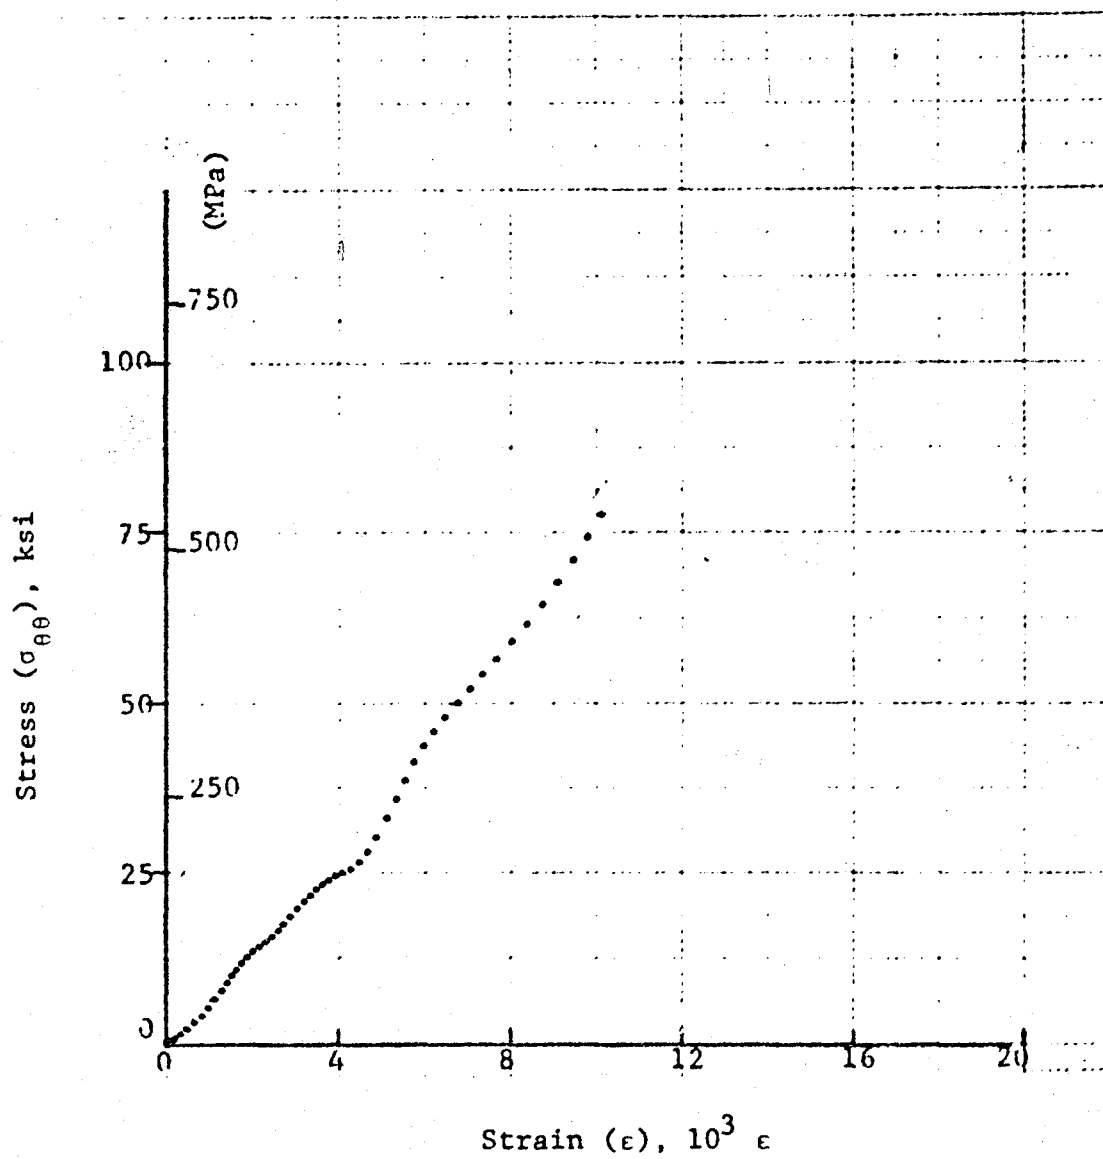


Figure 4-113. Stress-strain curve for dynamically loaded  $[\pm 60]_2^s$  80AS/20S/PR288 graphite/S-glass/epoxy ring, Specimen No. 23-2<sup>2s</sup> (1.56 g pistol powder,  $KClO_4$ , and aluminum dust).

ORIGINAL PAGE IS  
OF POOR QUALITY

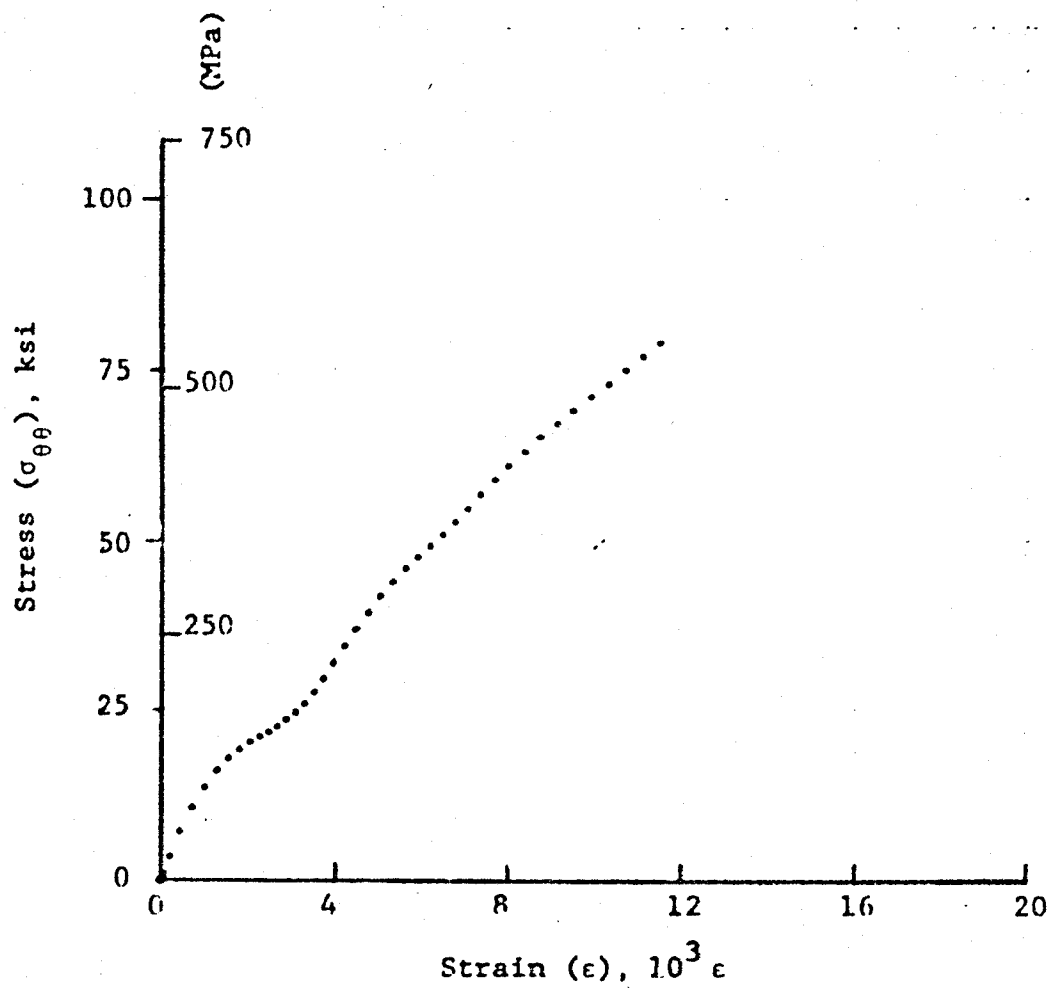


Figure 4-114. Stress-strain curve for dynamically loaded  $[\pm 60]_{2s}$  80AS/20S/PR288 graphite/S-glass/epoxy ring, Specimen No. 23-4<sup>2s</sup> (1.56 g pistol powder,  $KClO_4$ , and aluminum dust).

ORIGINAL PAGE IS  
OF POOR QUALITY

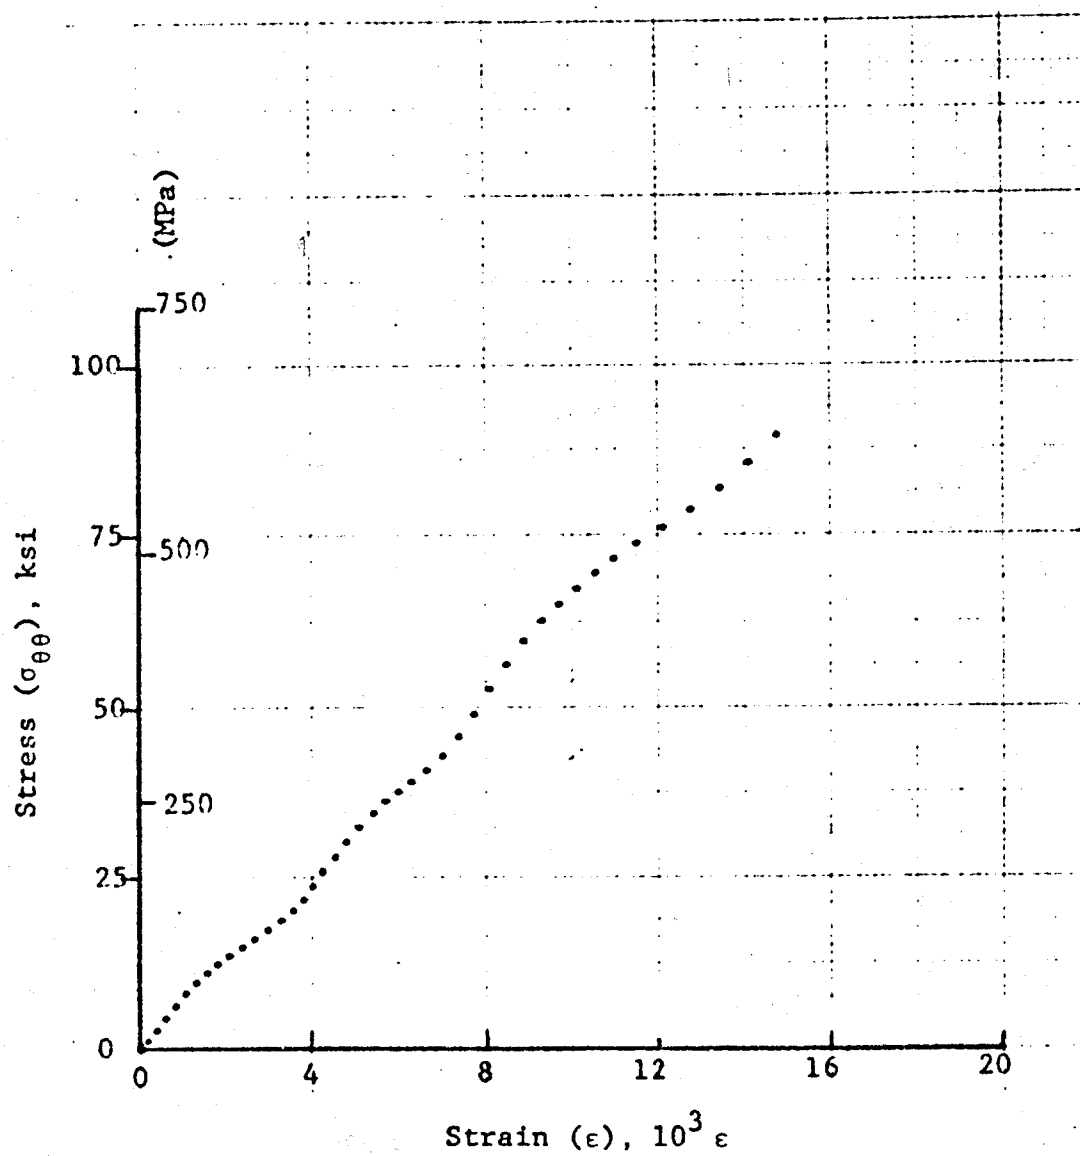


Figure 4-115. Stress-strain curve for dynamically loaded  $[\pm 60]_{2s}$  80AS/20S/PR288 graphite/S-glass/epoxy ring, Specimen No. 23-6<sup>2s</sup> (1.56 g pistol powder,  $KClO_4$ , and aluminum dust).

ORIGINAL PAGE IS  
OF POOR QUALITY

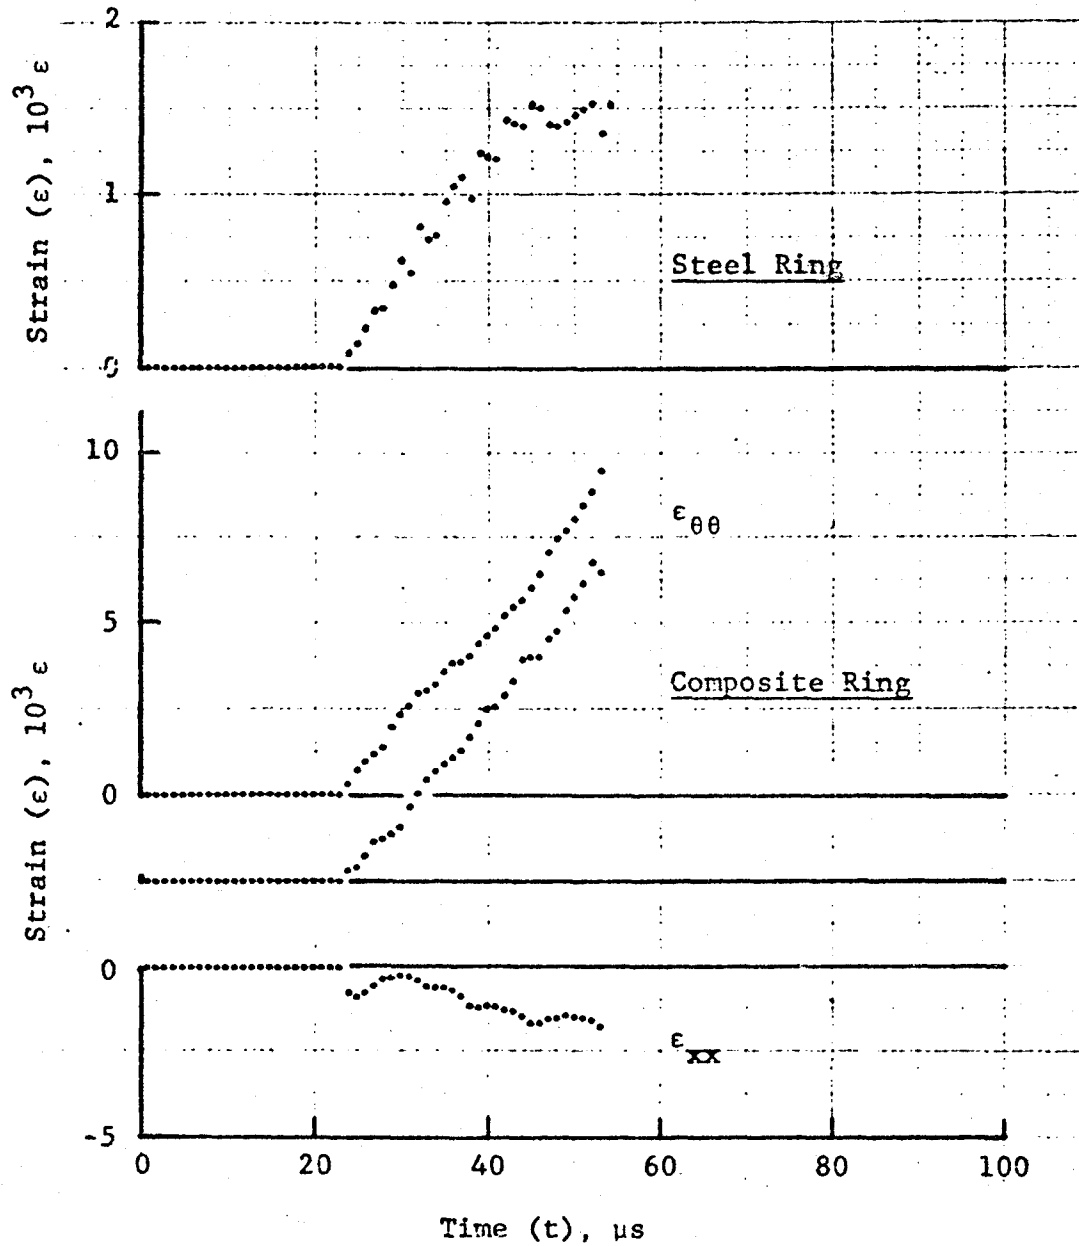


Figure 4-116. Strain records in steel ring and  $[\pm 67.5]_{2s}$  SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 26-2 (1.56 g pistol powder,  $KClO_4$ , and aluminum dust).

ORIGINAL PAGE IS  
OF POOR QUALITY

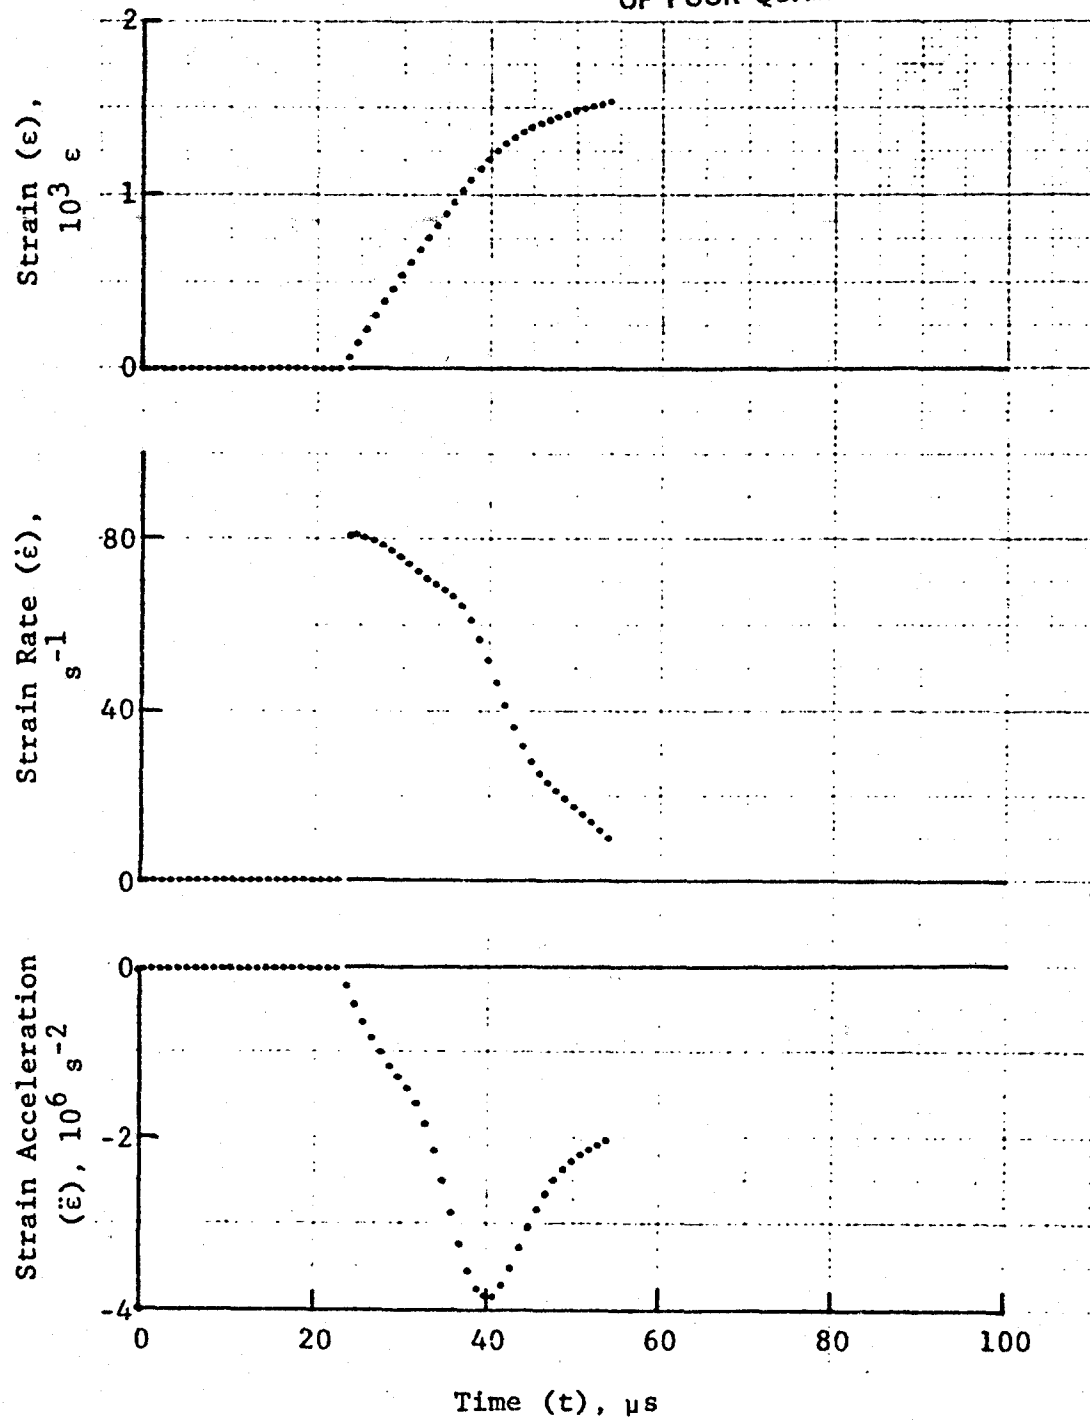


Figure 4-117. Strain and its derivatives in steel ring  
for Specimen No. 26-2.

ORIGINAL PRICE IS  
OF POOR QUALITY

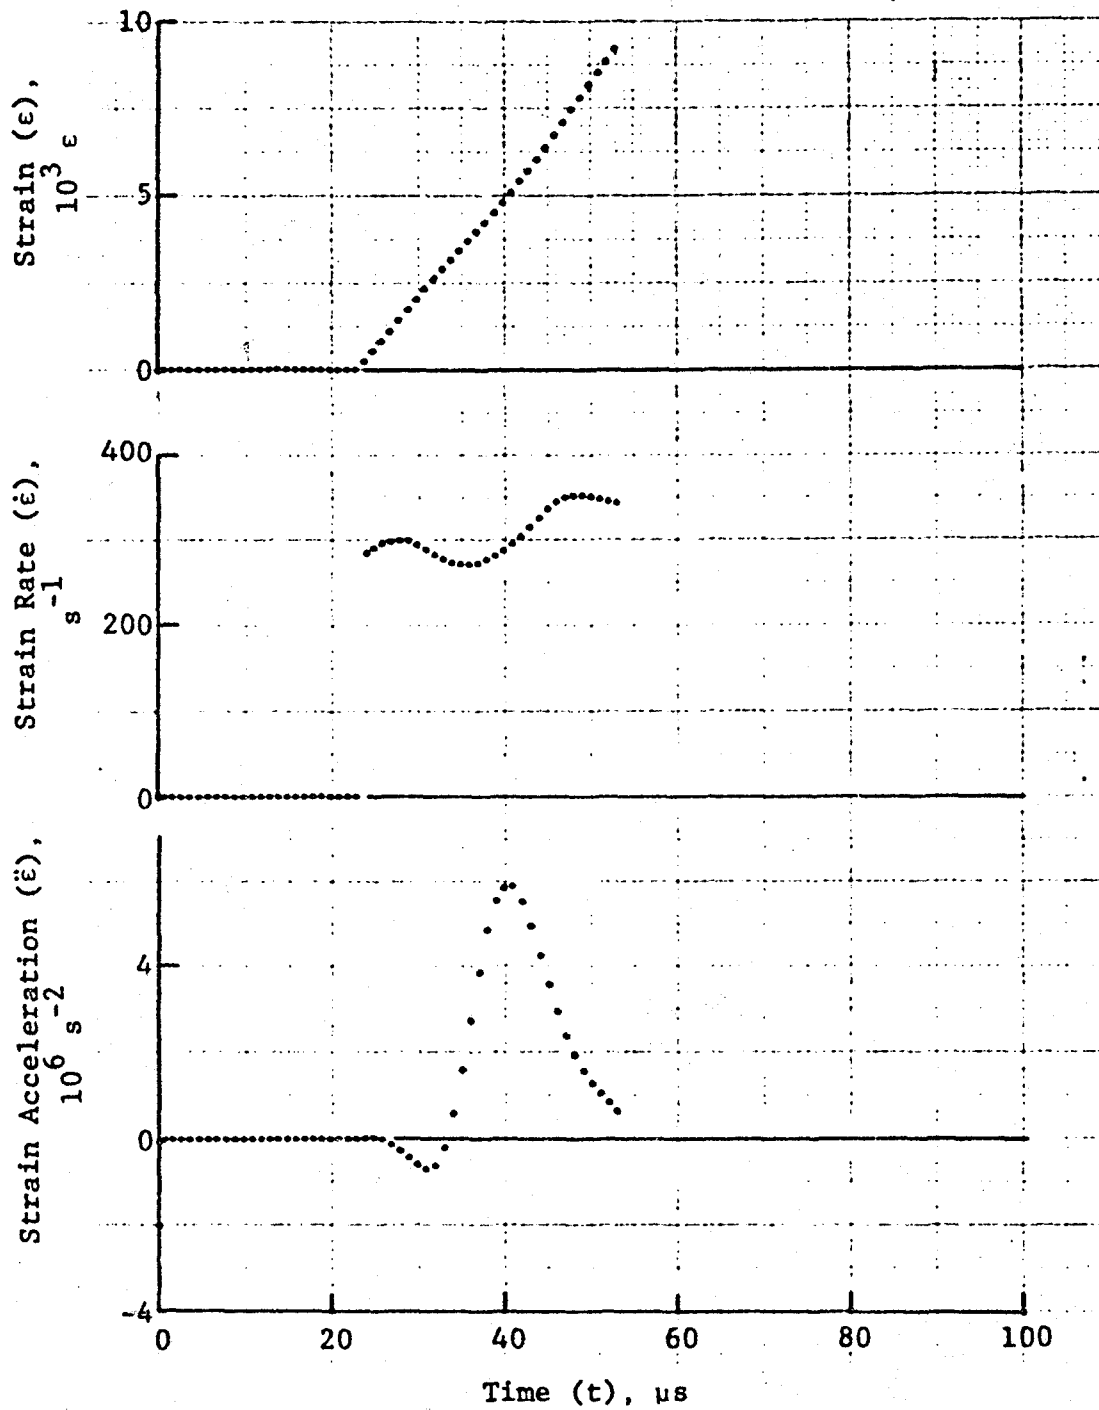


Figure 4-118. Circumferential strain and its derivatives in  $[\pm 67.5]_{2s}$  SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 26-2.



ORIGINAL PAGE IS  
OF POOR QUALITY

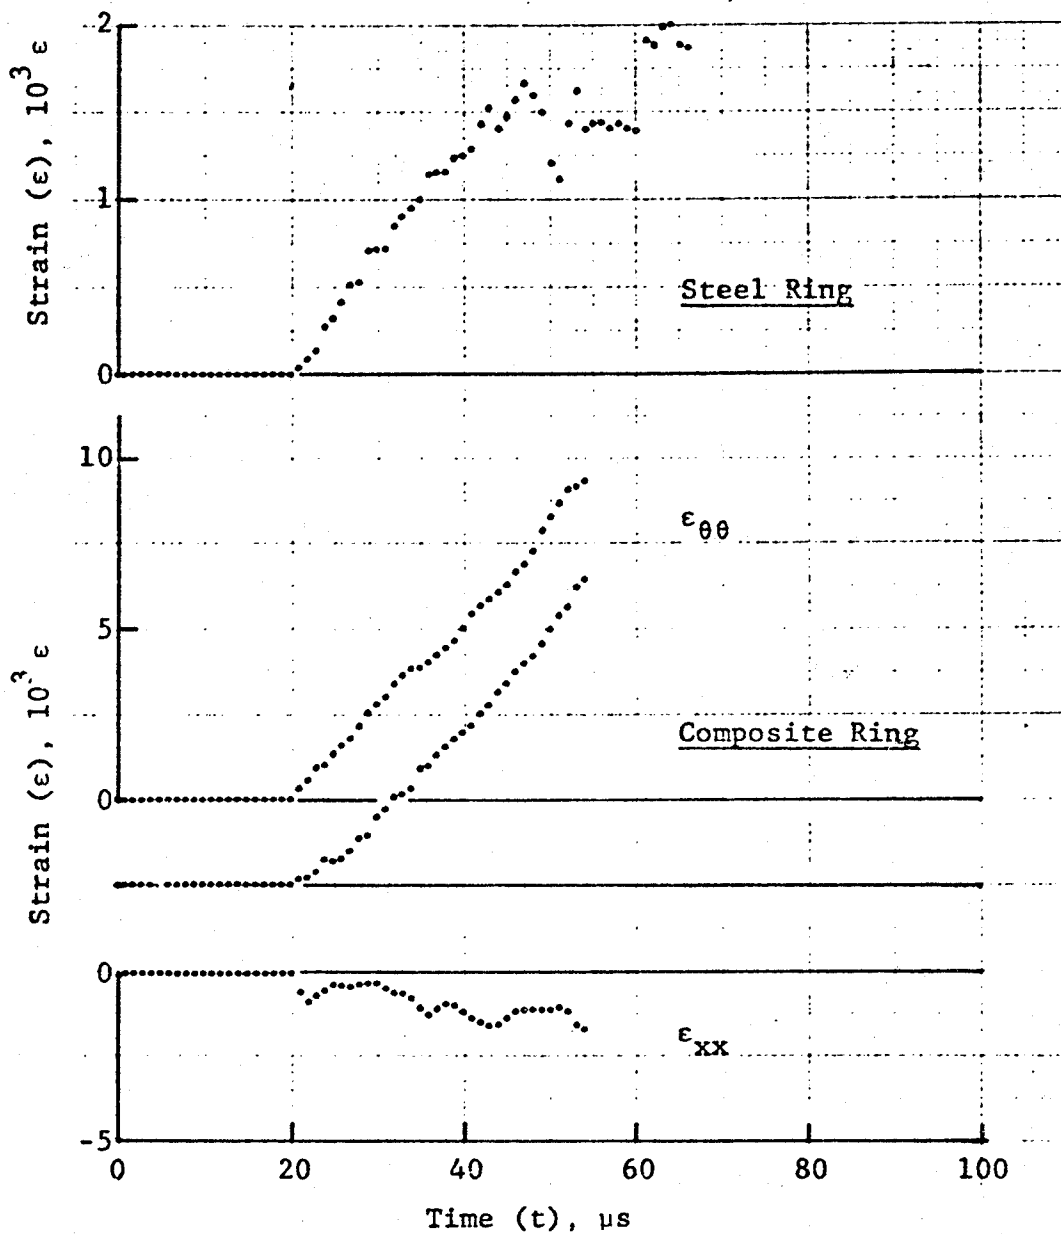


Figure 4-119. Strain records in steel ring and  $[\pm 67.5]_{2s}$  SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 26-4 (1.56 g psitol powder,  $KClO_4$ , and aluminum dust).

ORIGINAL PAGE IS  
OF POOR QUALITY

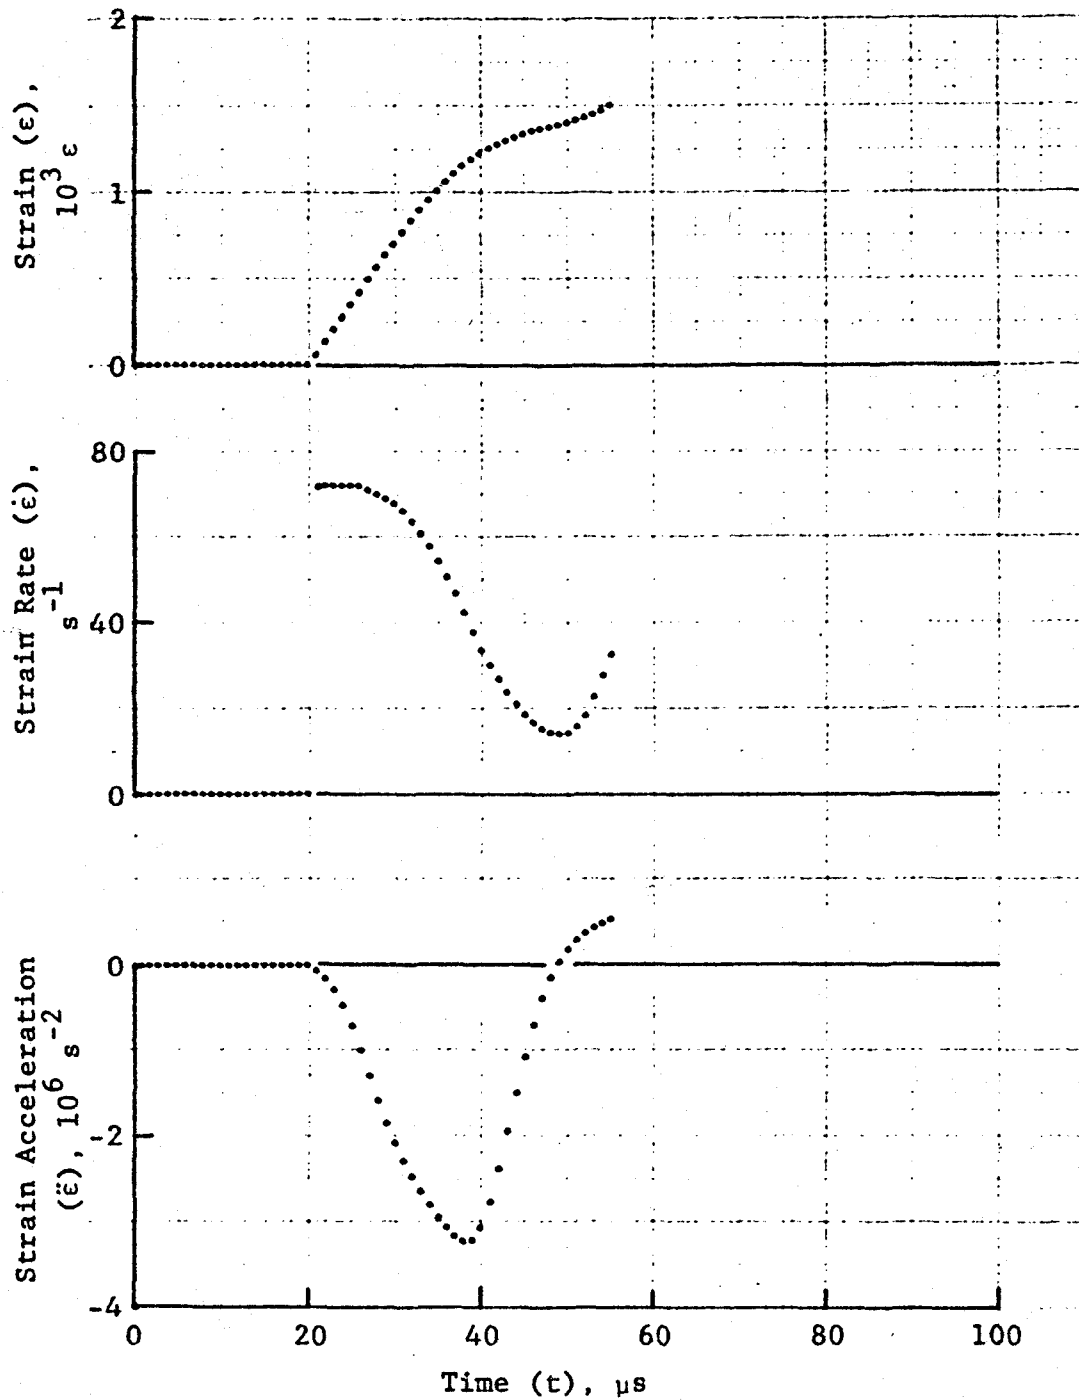


Figure 4-120. Strain and its derivatives in steel ring  
for Specimen No. 26-4.

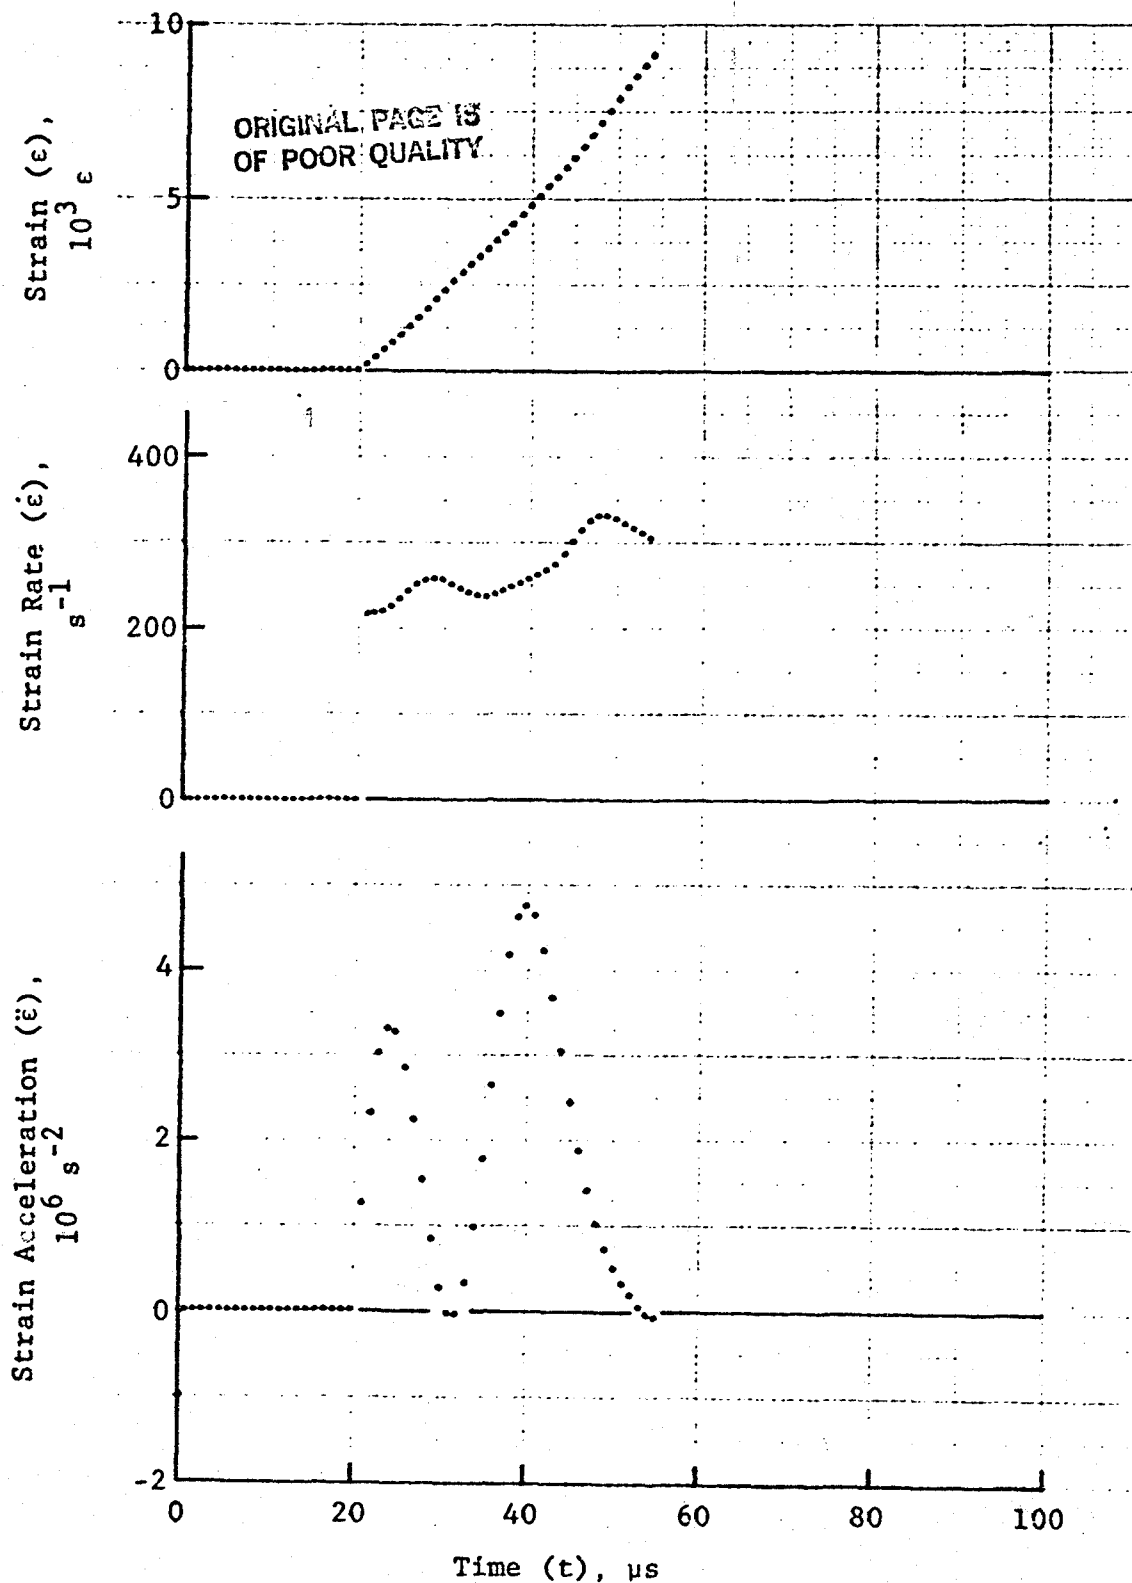


Figure 4-121. Circumferential strain and its derivatives in  $[\pm 67.5]_{2s}$  SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 26-4.

ORIGINAL PAGE IS  
OF POOR QUALITY

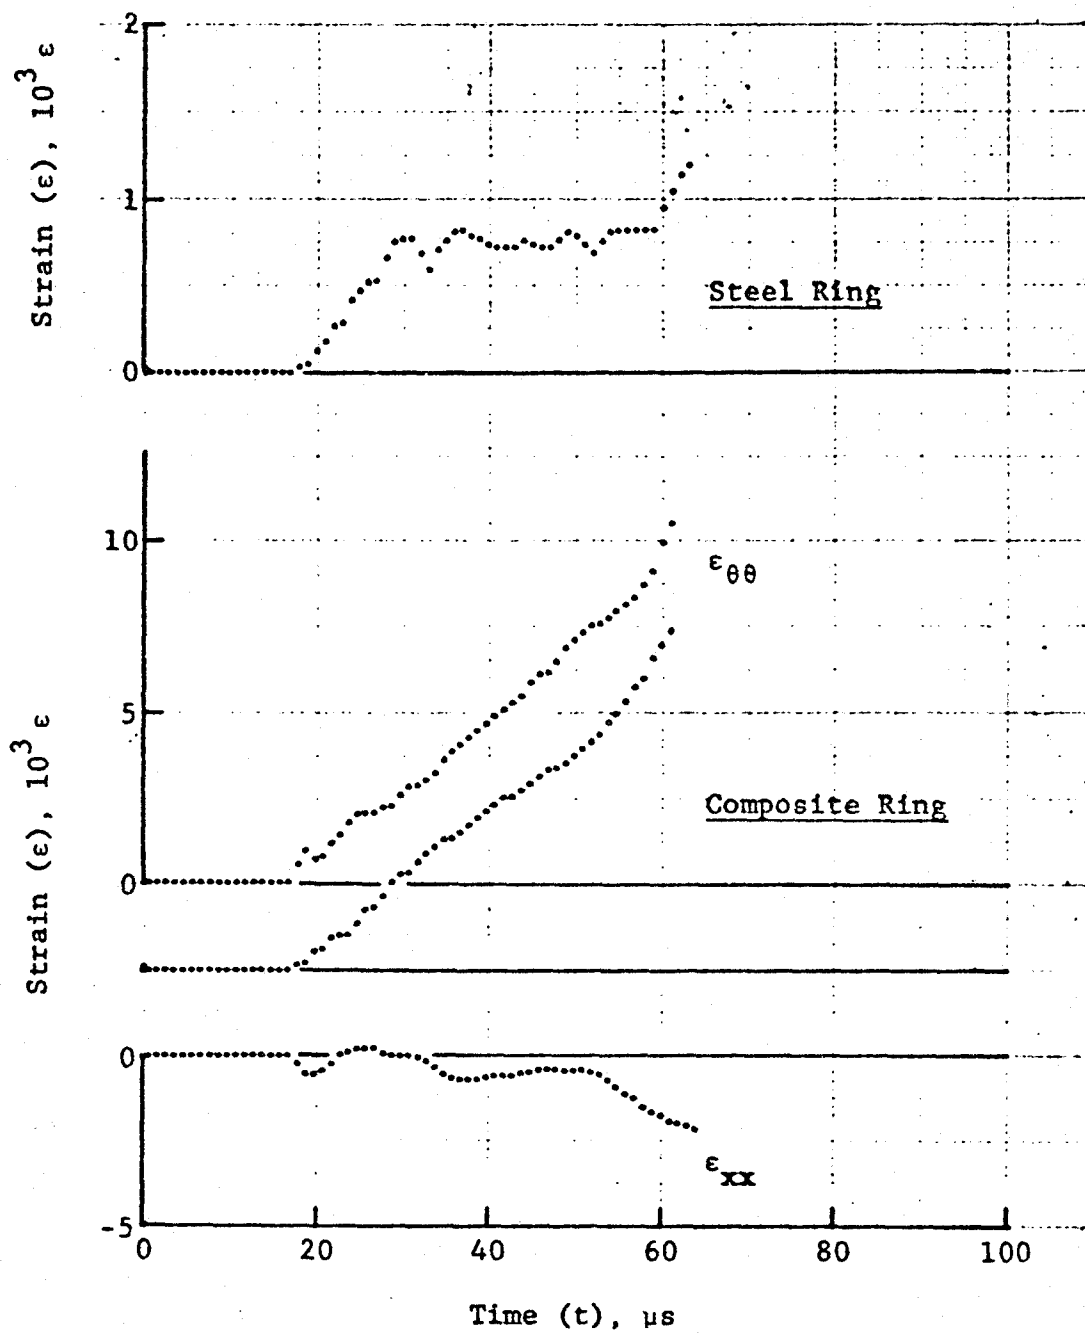


Figure 4-122. Strain records in steel ring and  $[\pm 67.5]_2$  SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 26-6 (1.56 g pistol powder,  $KClO_4$ , and aluminum dust).

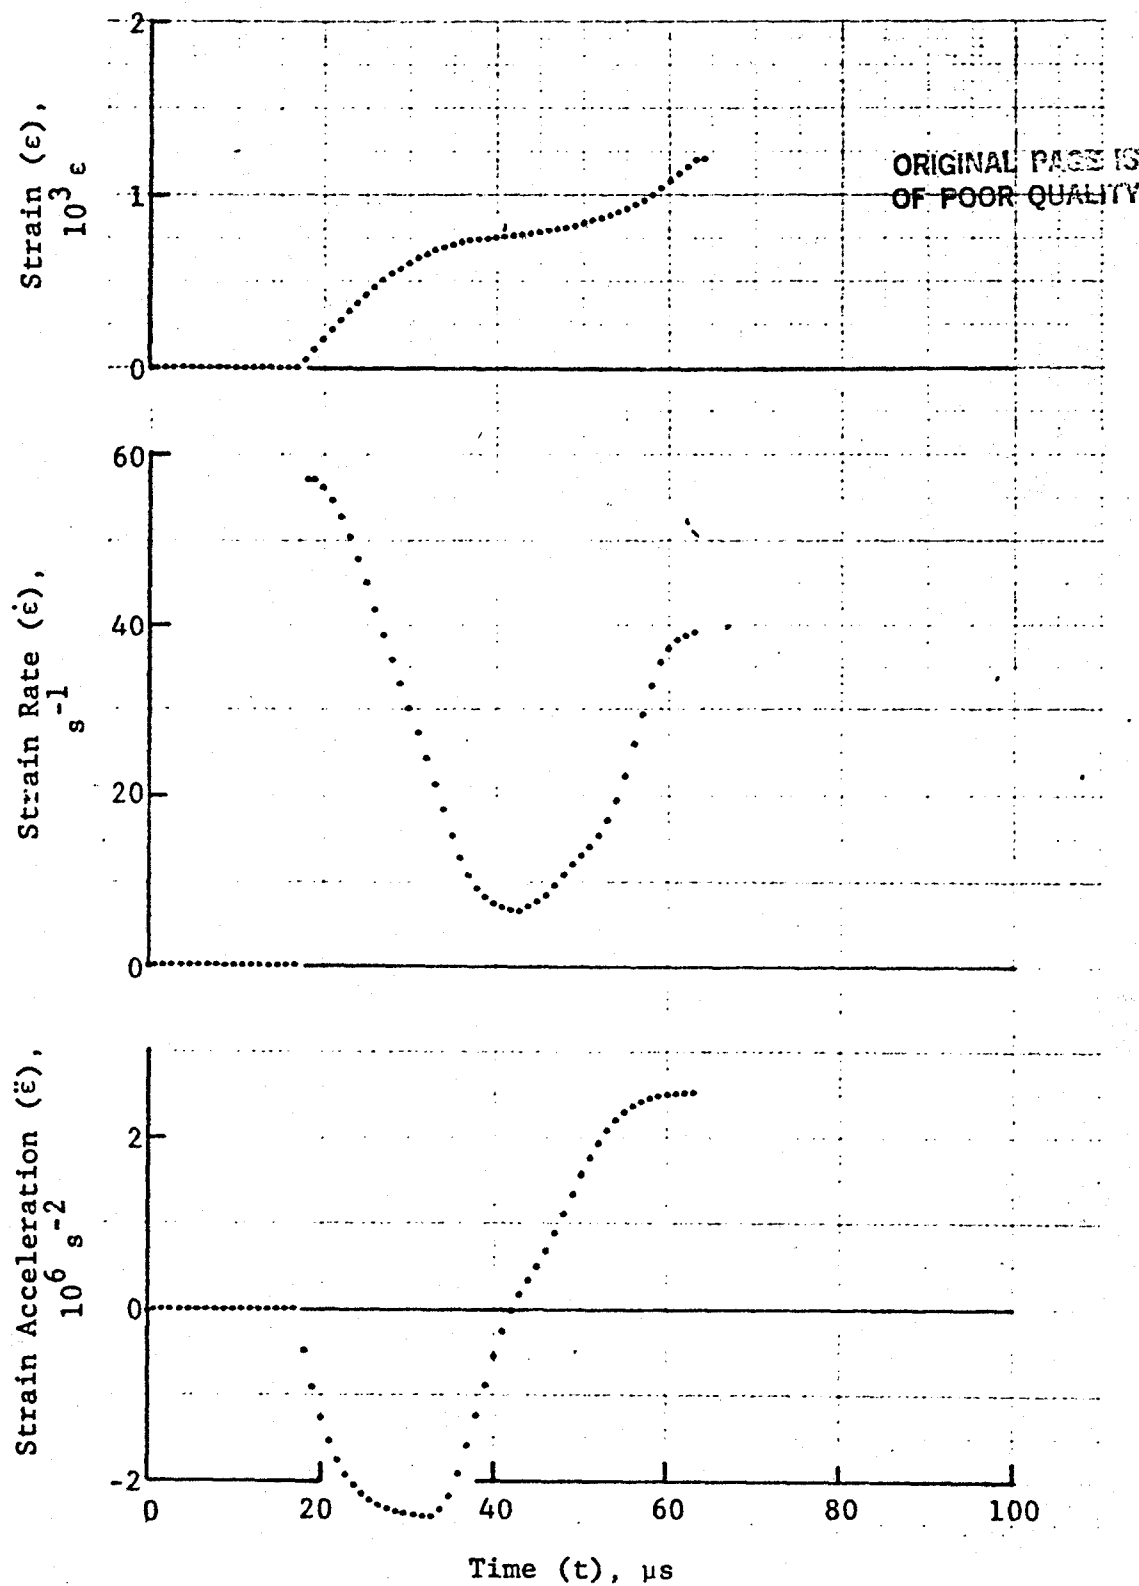


Figure 4-123. Strain and its derivatives in steel ring for Specimen No. 26-6.

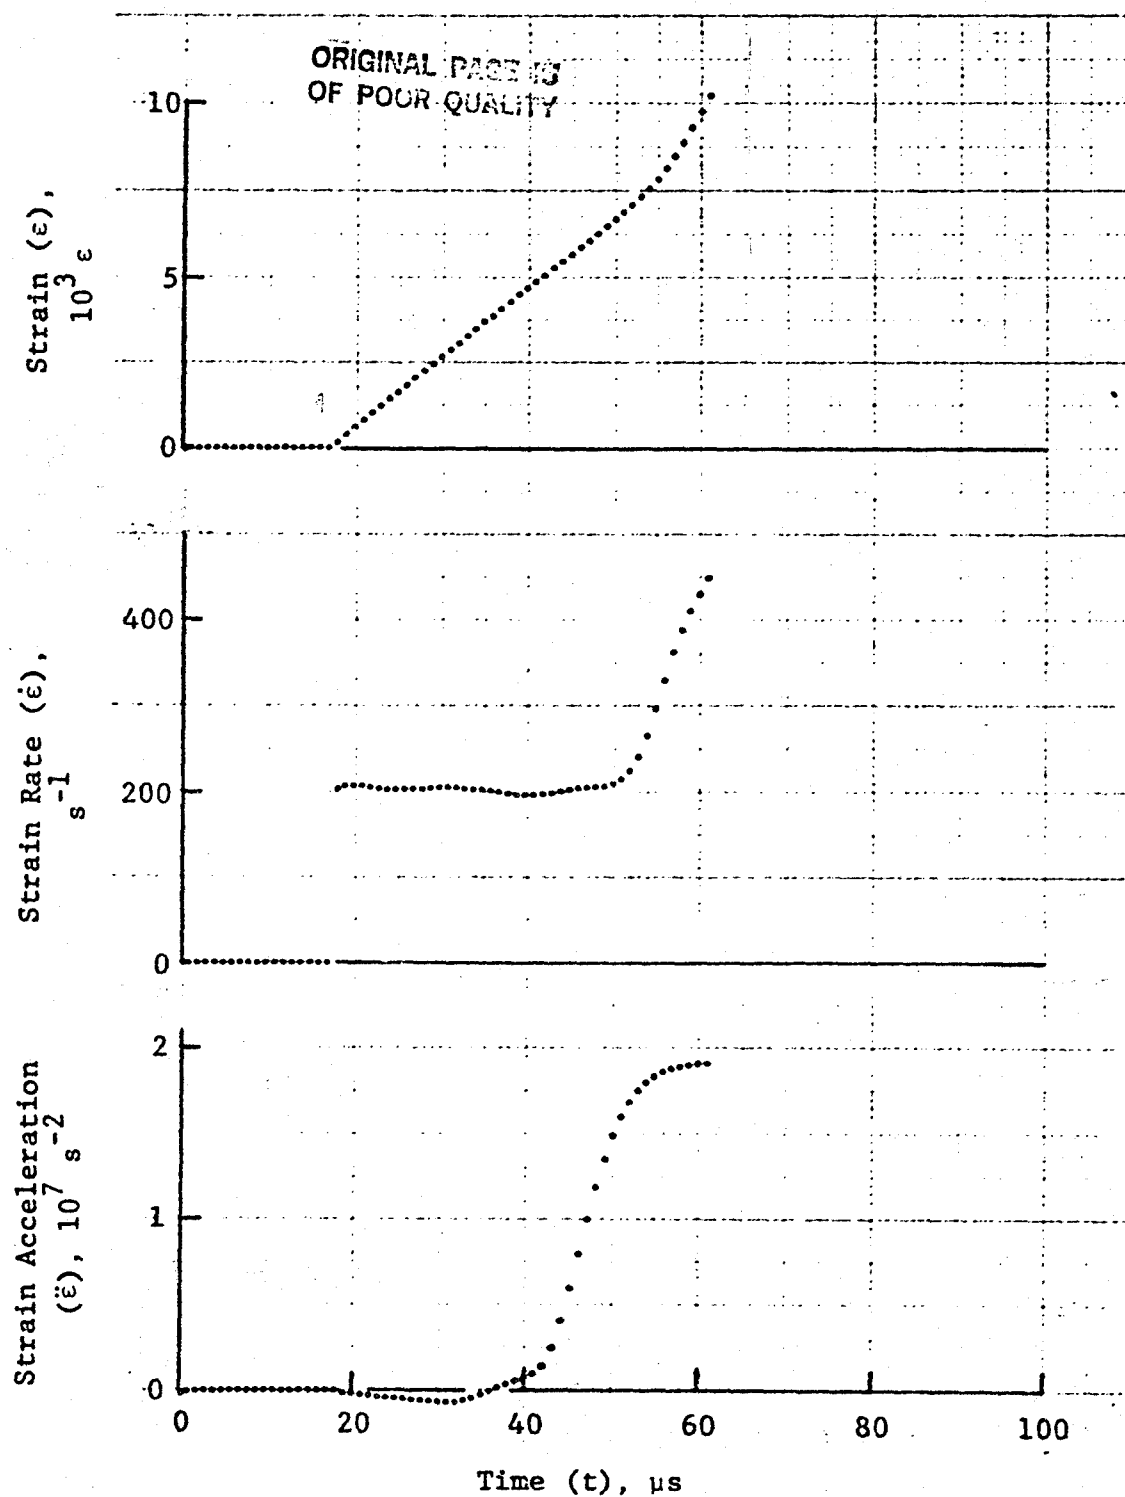


Figure 4-124. Circumferential strain and its derivatives in  $[\pm 67.5]_{2s}$  SP288/AS graphite/epoxy ring under dynamic loading for Specimen No. 26-6.

ORIGINAL PAGE IS  
OF POOR QUALITY

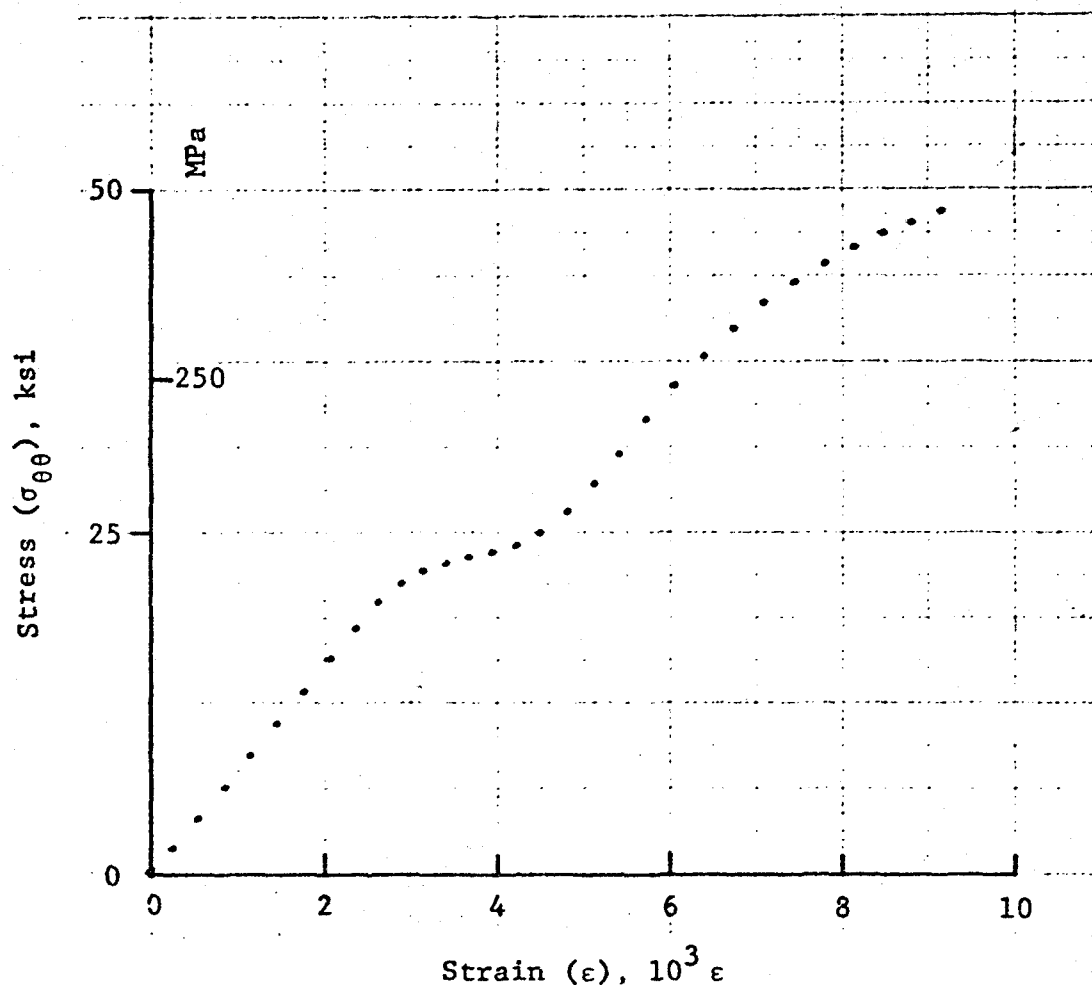


Figure 4-125. Stress-strain curve for dynamically loaded  $[\pm 67.5]_{2s}$  SP288/AS graphite/epoxy ring, Specimen No. 26-2 (1.56 g pistol powder,  $KClO_4$ , and aluminum dust).

ORIGINAL PAGE IS  
OF POOR QUALITY

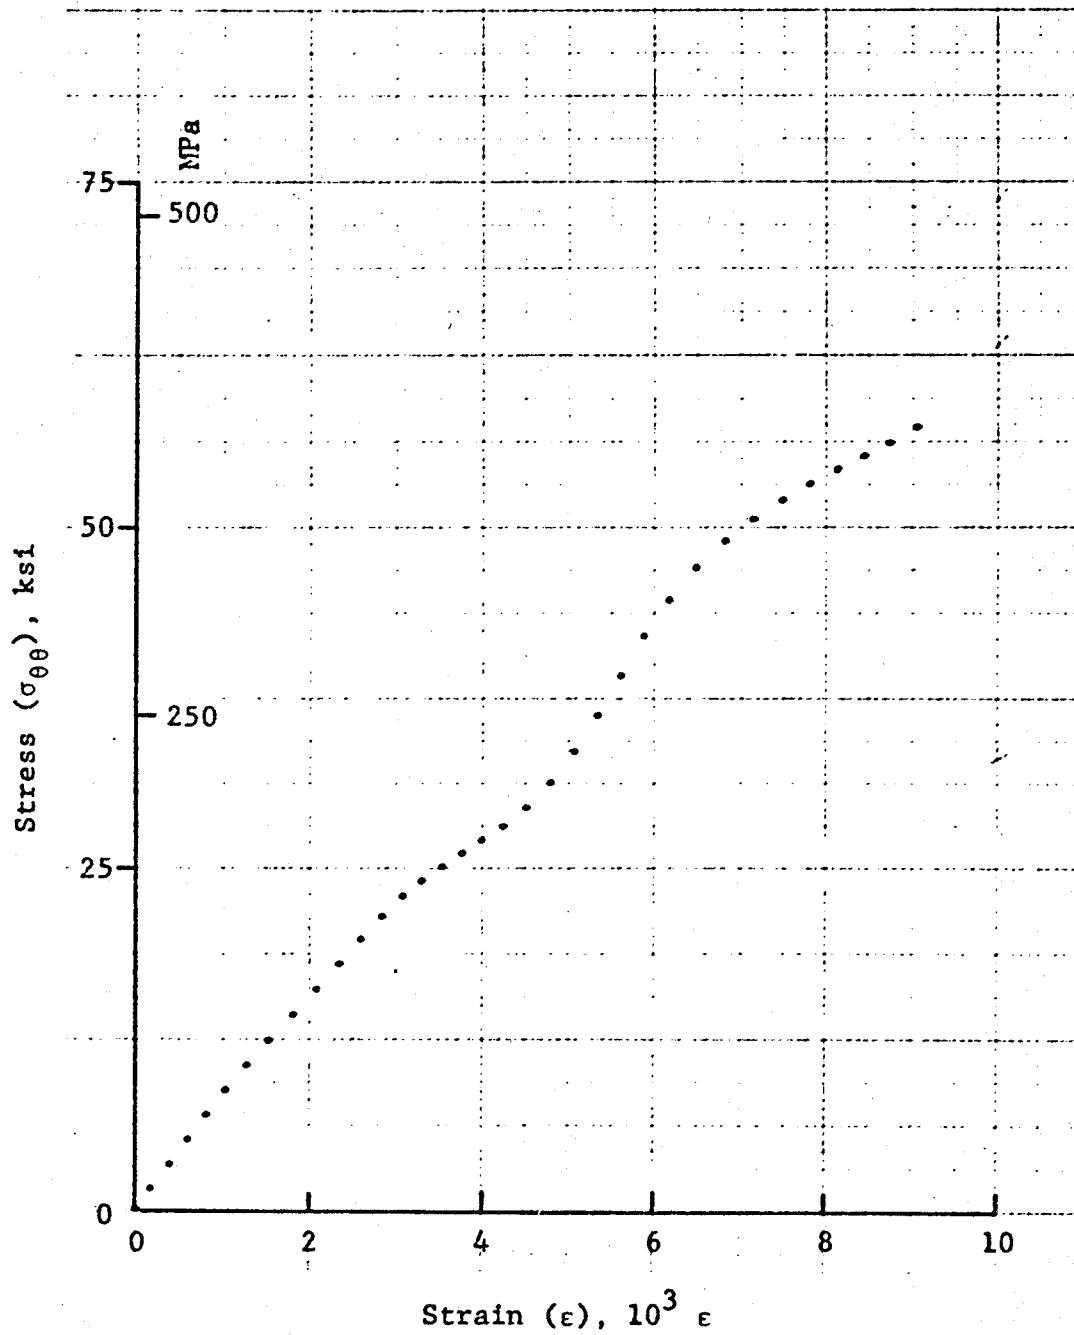


Figure 4-126. Stress-strain curve for dynamically loaded  $[\pm 67.5]_{2s}$  SP288/AS graphite/epoxy ring, Specimen No. 26-4 (1.56 g pistol powder,  $KClO_4$ , and aluminum dust).



ORIGINAL PAGE IS  
OF POOR QUALITY

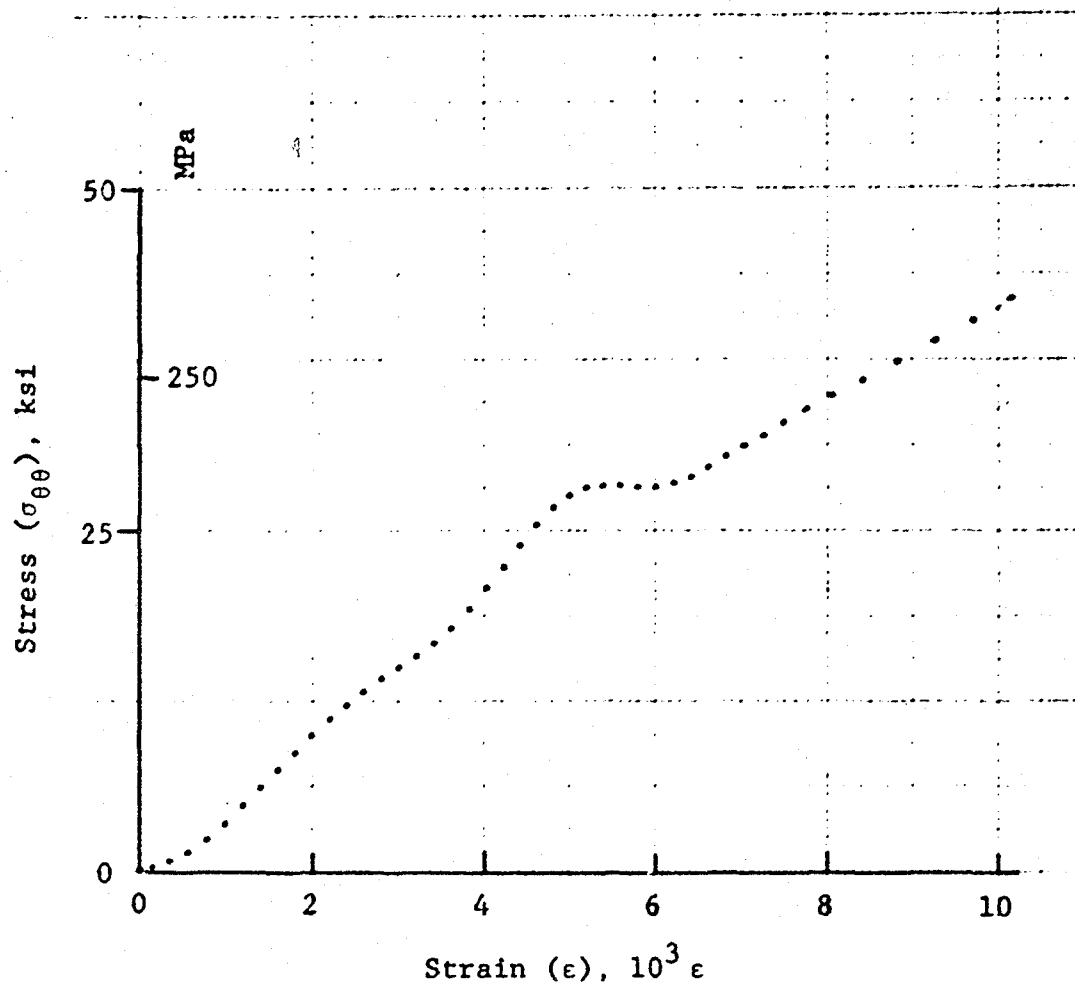


Figure 4-127. Stress-strain curve for dynamically loaded  $[\pm 67.5]_{2s}$  SP288/AS graphite/epoxy ring, Specimen No. 26-6 (1.36 g pistol powder,  $KClO_4$ , and aluminum dust).

ORIGINAL PHOTOGRAPH  
OF POOR QUALITY

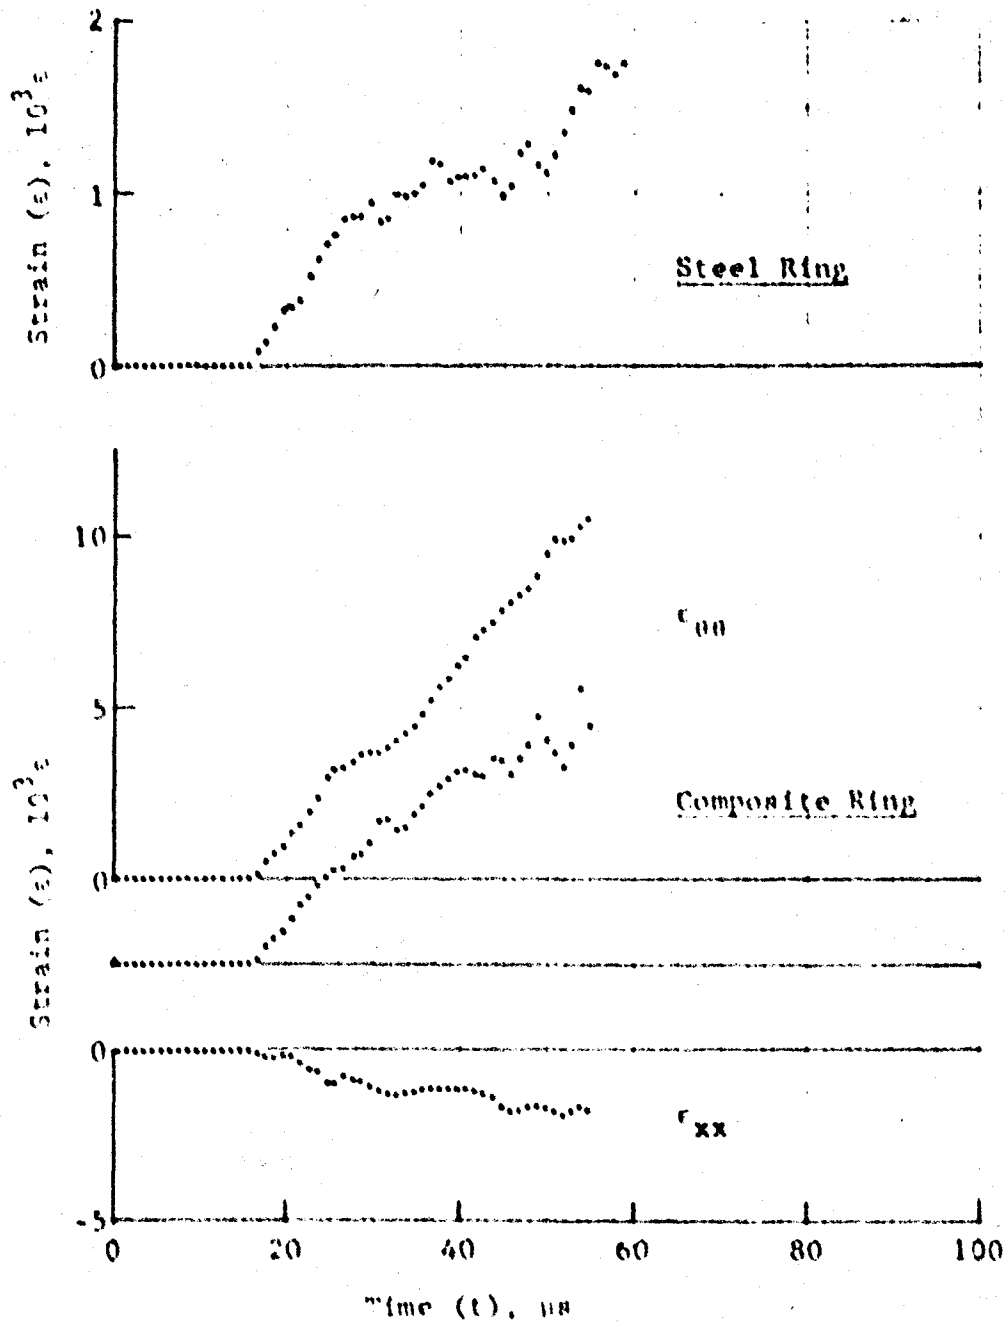


Figure 4-128. Strain records in steel ring and 80AS/20S/PR288 [167.5]<sub>s</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 27-2 (1.56 g pistol powder, KClO<sub>4</sub>, and aluminum dust).

ORIGINAL PAGE IS  
OF POOR QUALITY

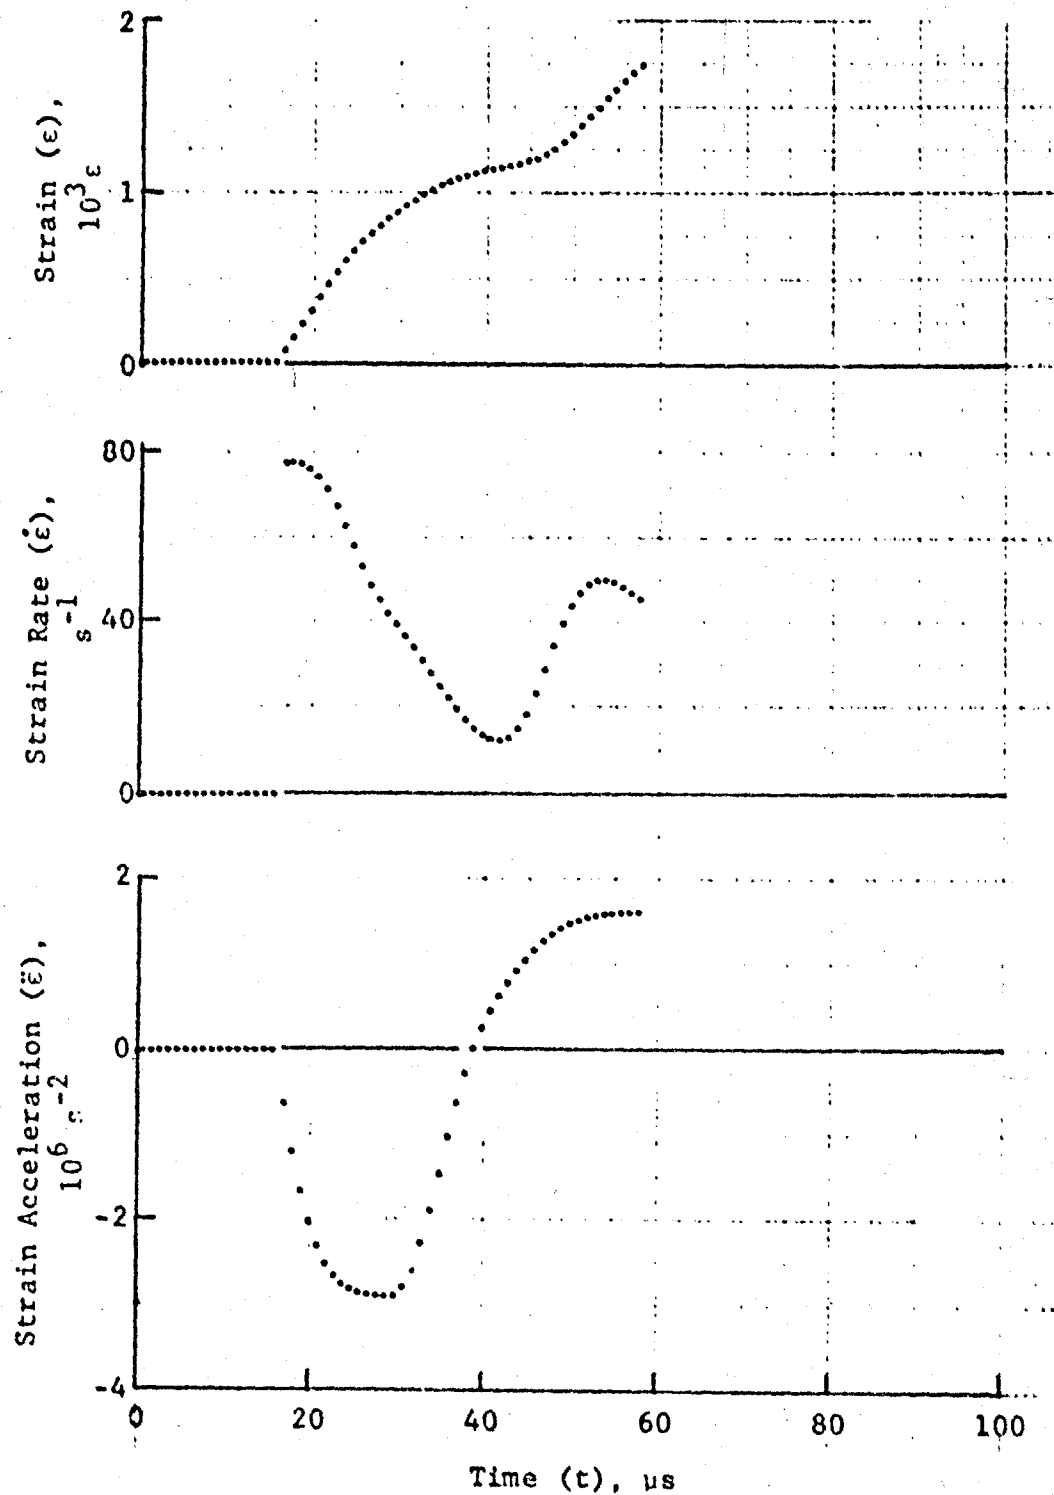


Figure 4-129. Strain and its derivatives in steel ring  
for Specimen No. 27-2.

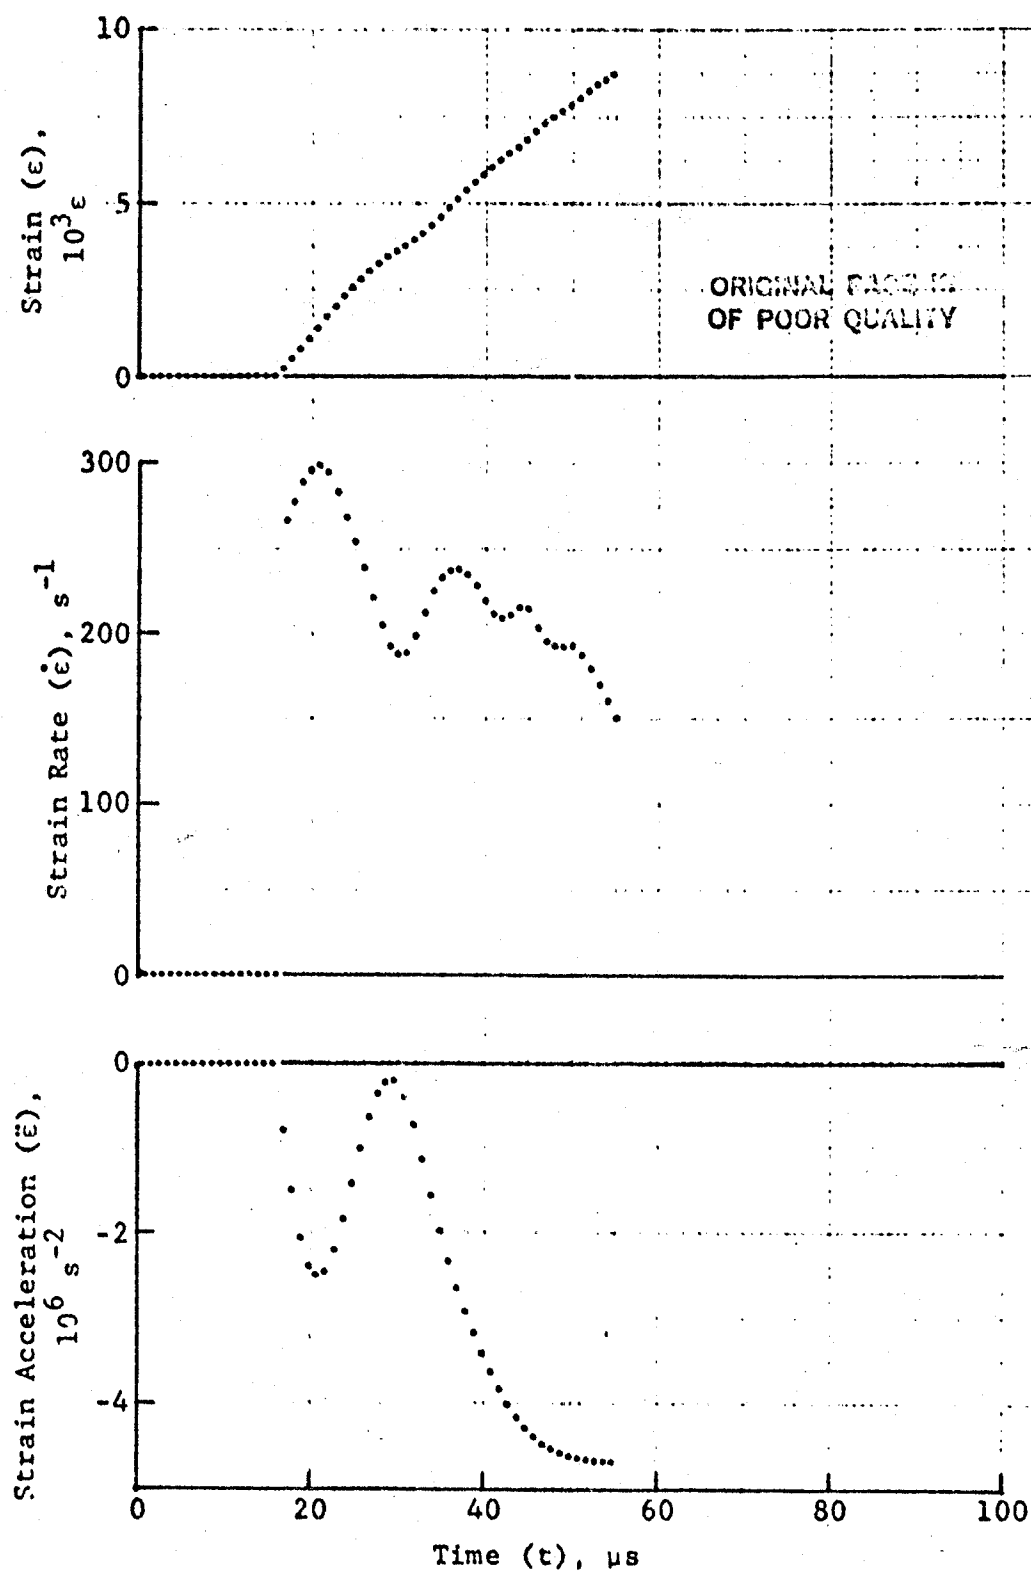


Figure 4-130. Circumferential strain and its derivatives in 80AS/20S/PR288  $[\pm 67.5]_{2s}$  graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 27-2 (1.56 g pistol powder,  $KClO_4$ , and aluminum dust).

ORIGINAL PAGE IS  
OF POOR QUALITY

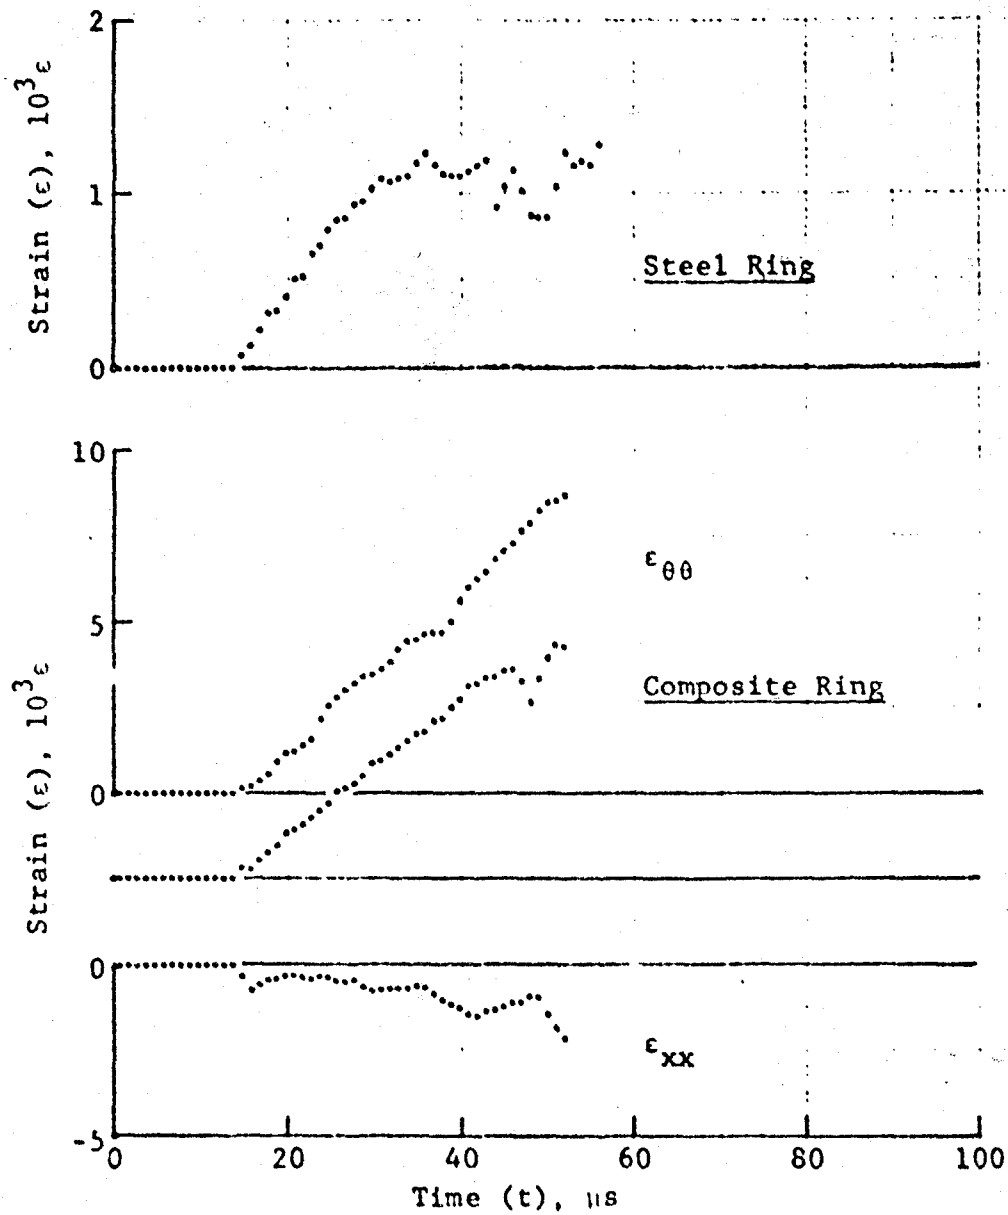


Figure 4-131. Strain records in steel ring and 80AS/20S/PR288 [ $\pm 67.5$ ]<sub>2</sub>s graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 27-4 (1.56 g pistol powder,  $KClO_4$ , and aluminum dust).

ORIGINAL PAGE IS  
OF POOR QUALITY

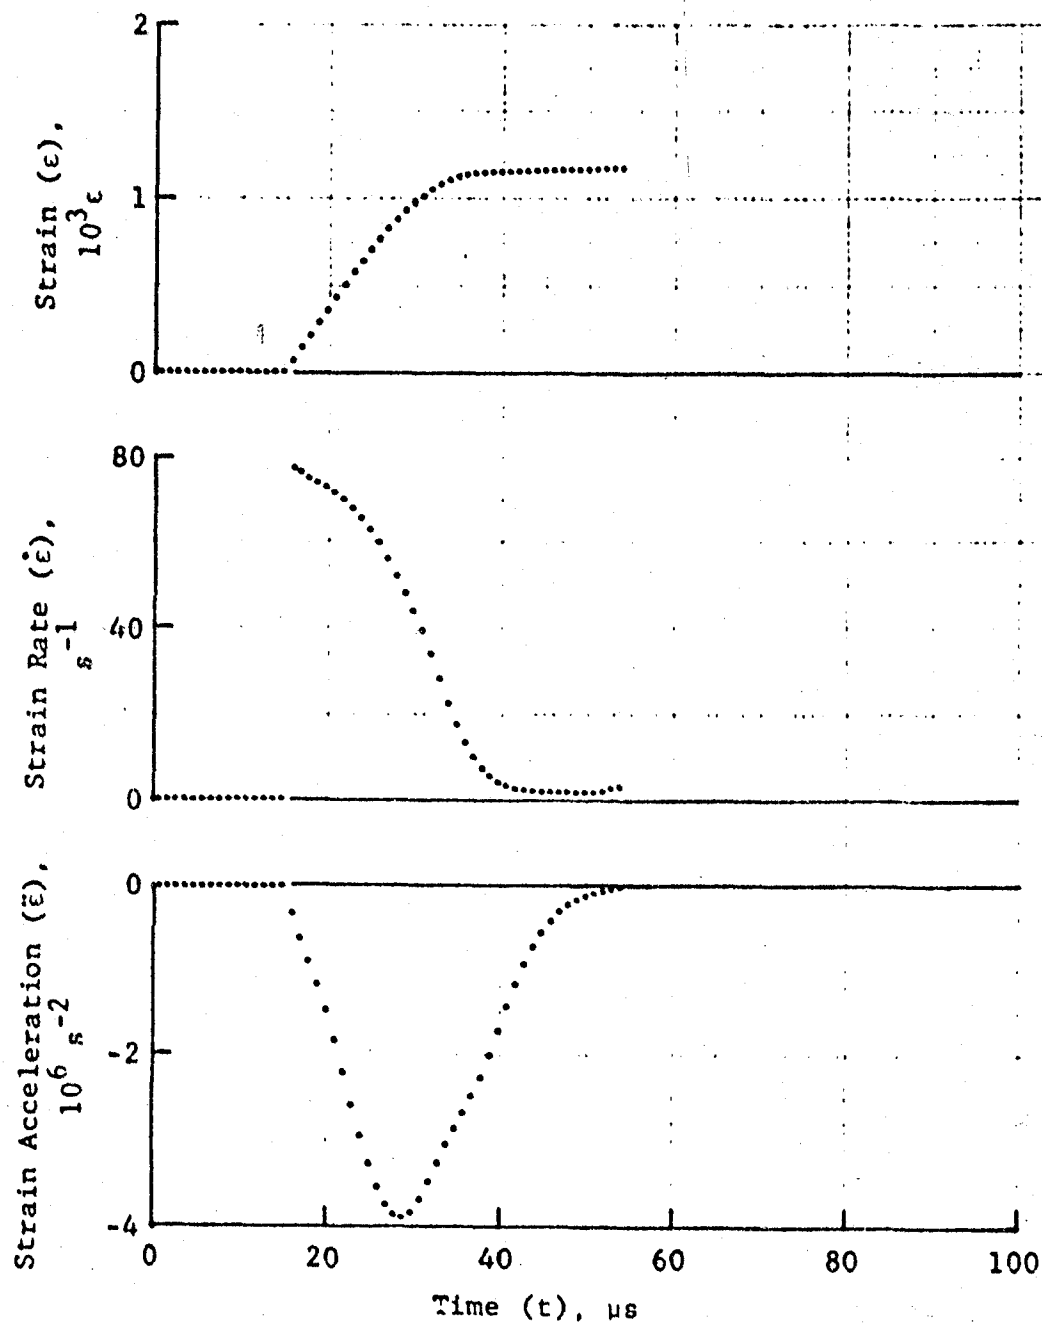


Figure 4-132. Strain and its derivatives in steel ring  
for Specimen No. 27-4.

ORIGINAL PAGE IS  
OF POOR QUALITY

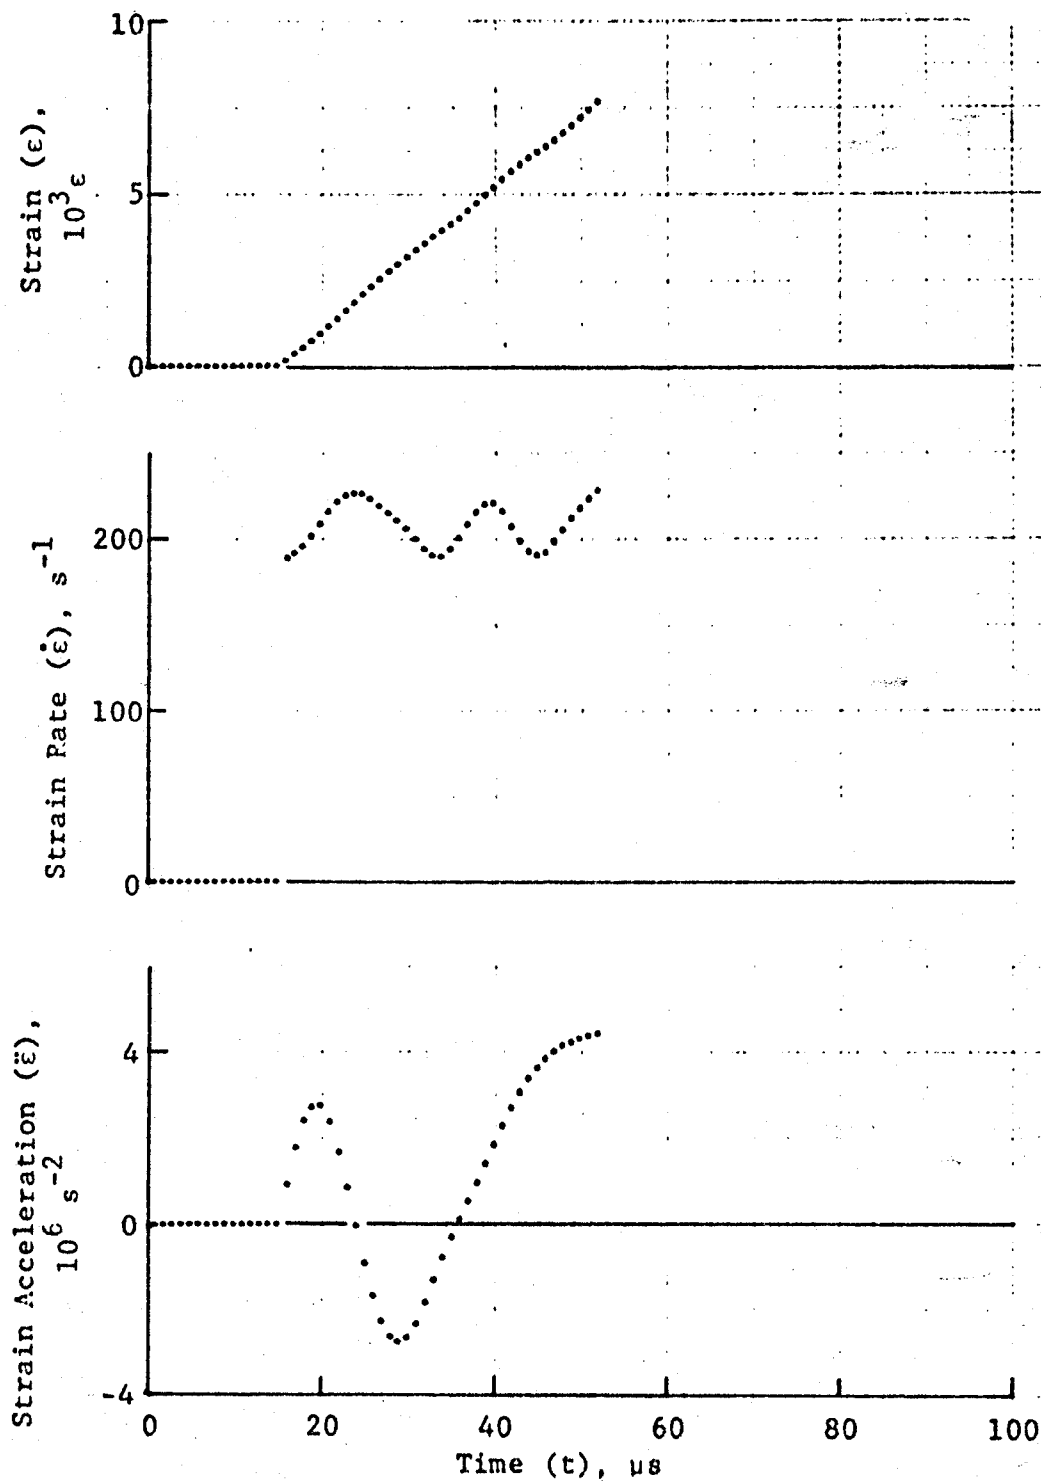


Figure 4-133. Circumferential strain and its derivatives in 80AS/20S/PR288 [ $\pm 67.5$ ]<sub>2</sub>s graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 27-4 (1.56 g pistol powder KC2O4, and aluminum dust).

ORIGINAL PAGE IS  
OF POOR QUALITY

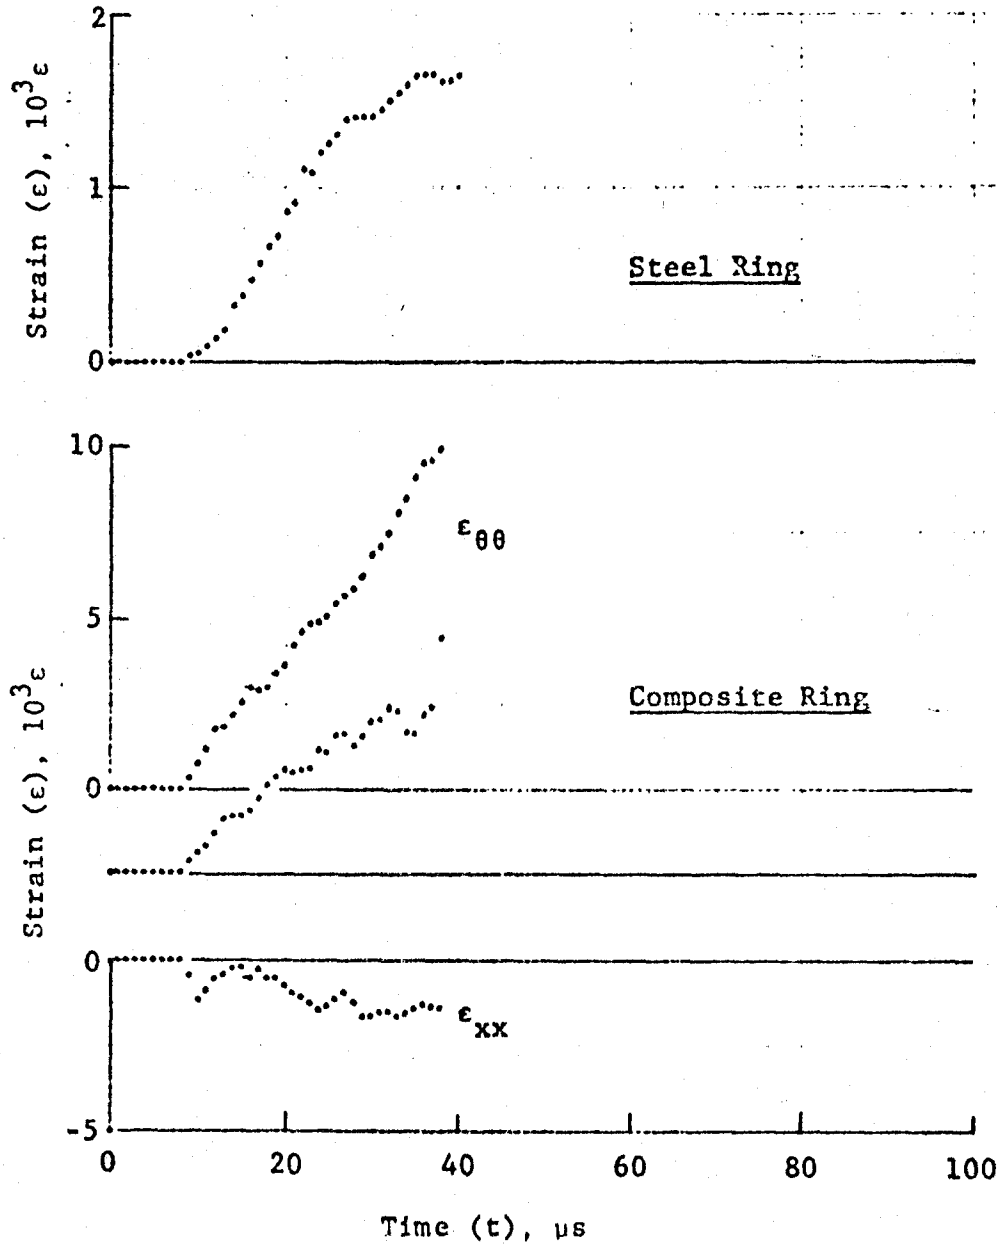


Figure 4-134. Strain records in steel ring and 80AS/20S/PR288  $[\pm 67.5]_2$  graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 27-6 (1.56 g pistol powder,  $KClO_4$ , and aluminum dust).



ORIGINAL PAGE IS  
OF POOR QUALITY

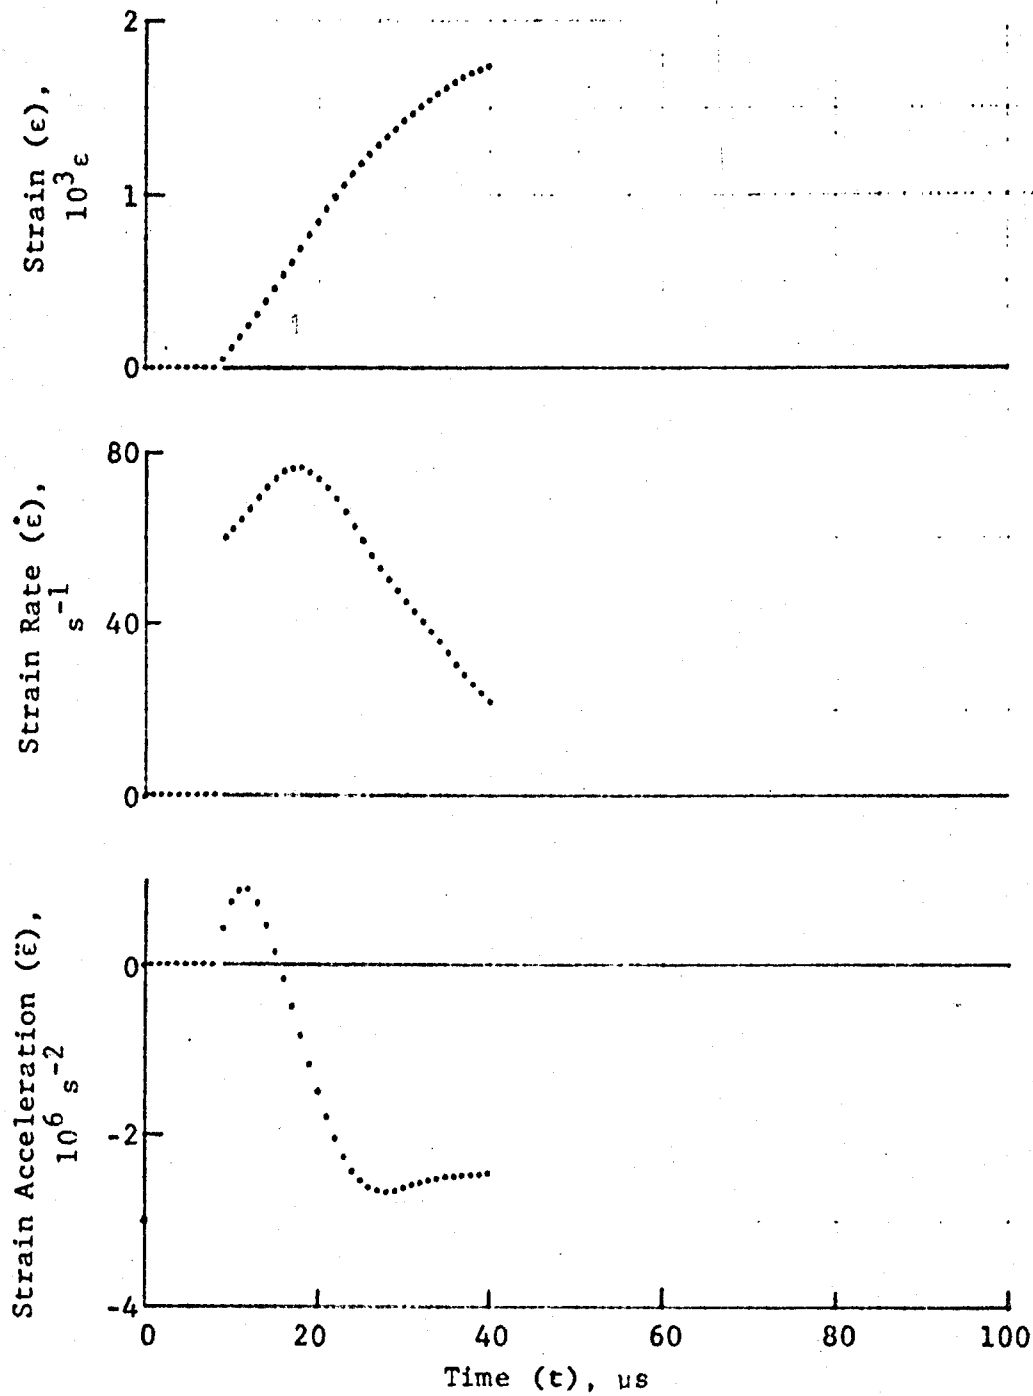


Figure 4-135. Strain and its derivatives in steel ring  
for Specimen No. 27-6.

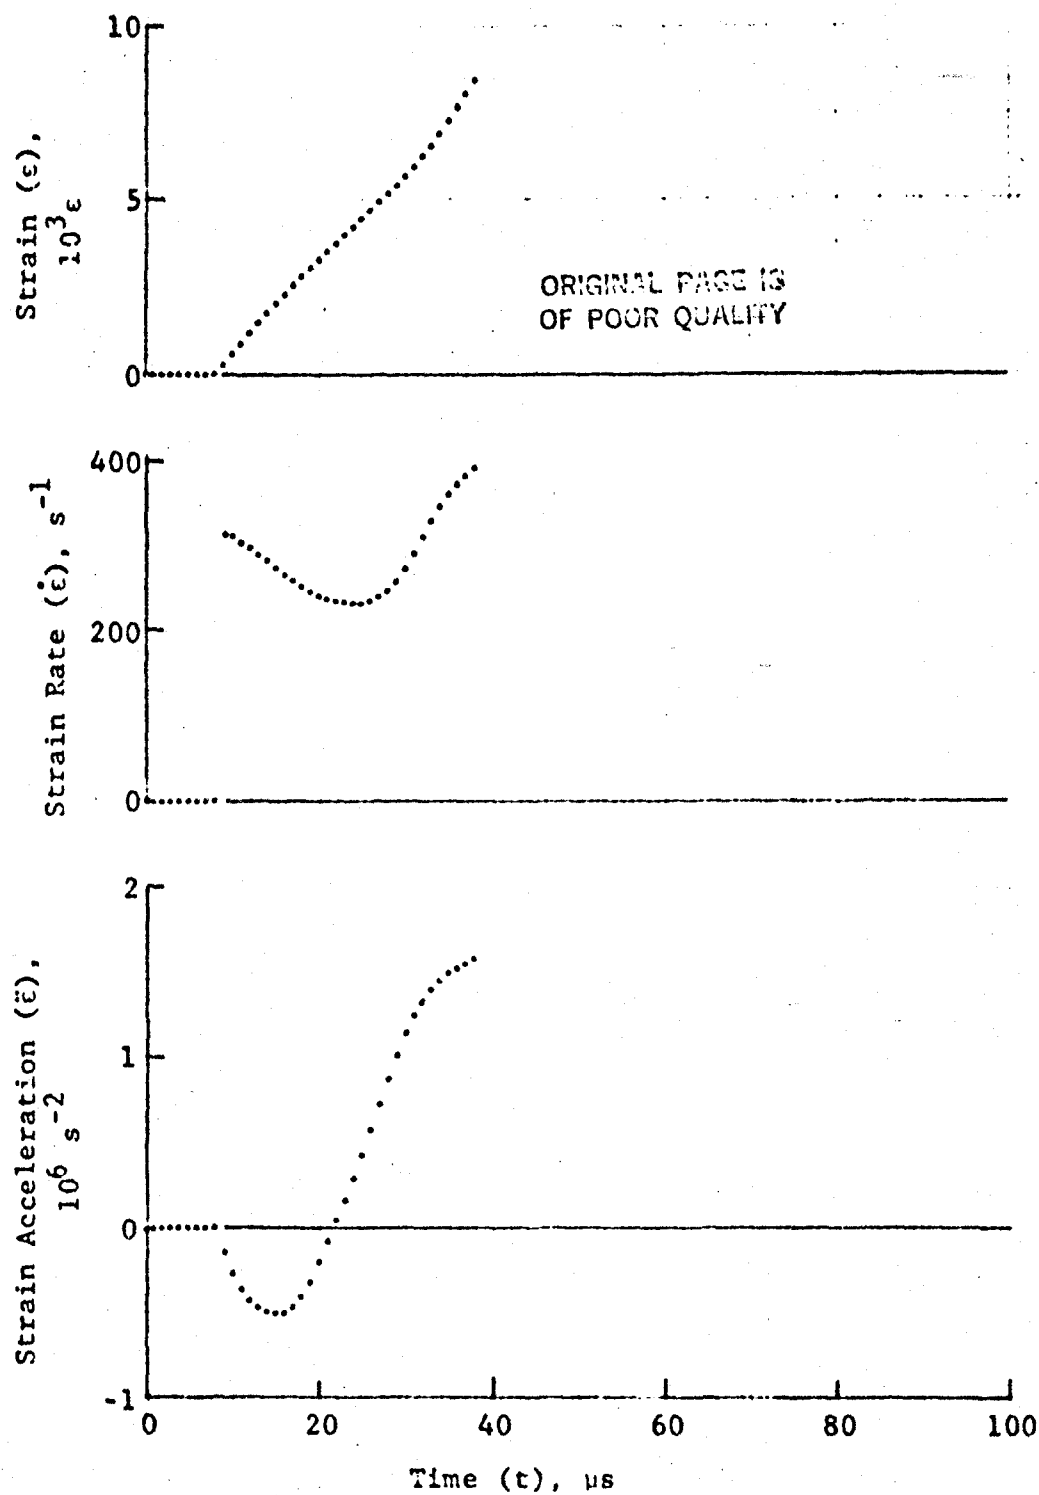


Figure 4-136. Circumferential strain and its derivatives in 80AS/20S/PR288 [ $\pm 67.5$ ]<sub>2s</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 27-6 (1.56 g pistol powder,  $KClO_4$ , and aluminum dust).

ORIGINAL PAGE IS  
OF POOR QUALITY

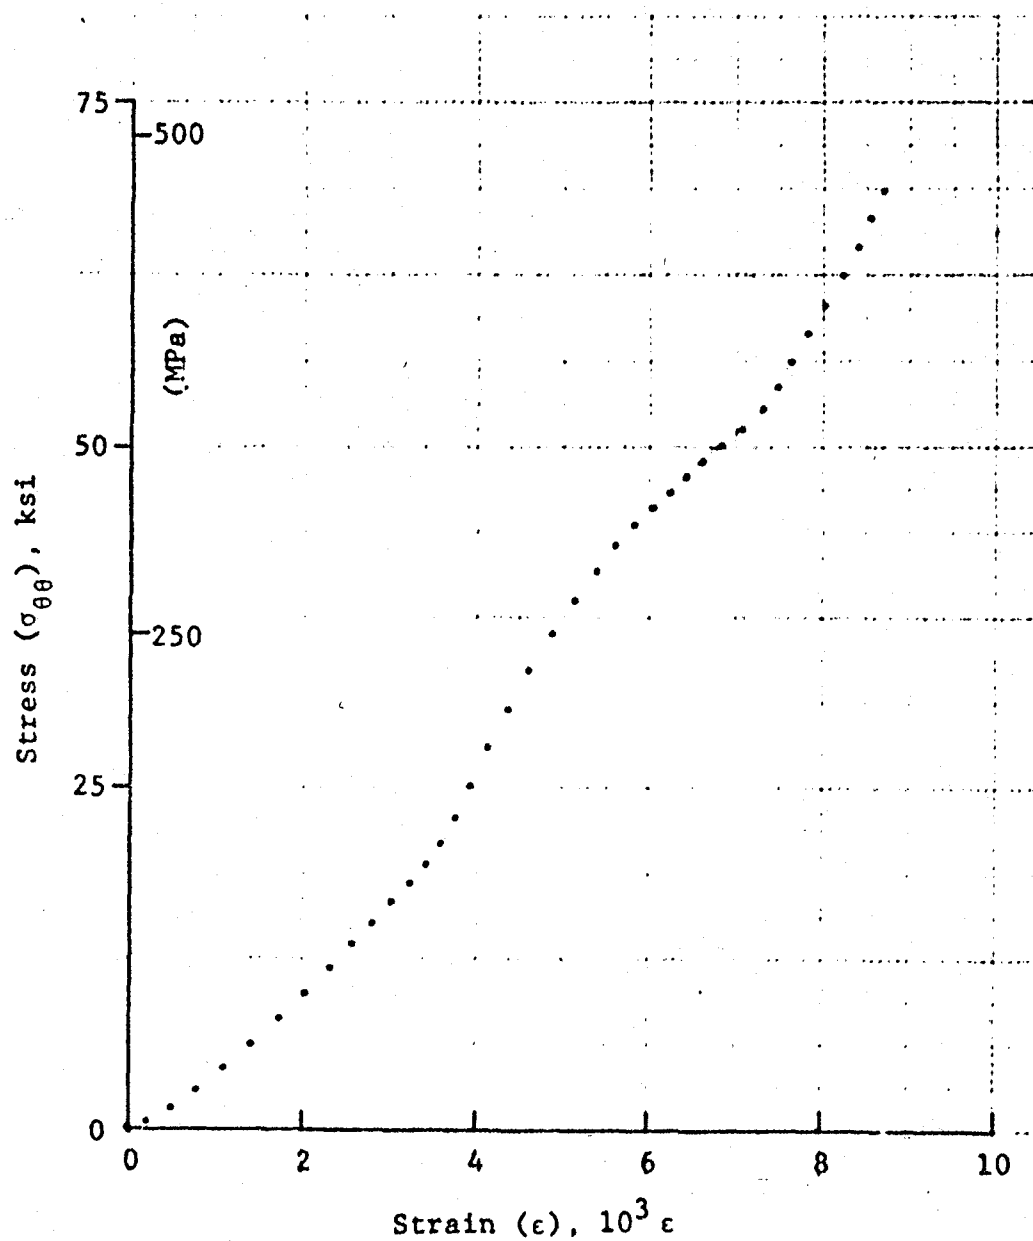


Figure 4-137. Stress-strain curve for dynamically loaded 80AS/20S/PR288  $[\pm 67.5]_2$ s graphite/S-glass/epoxy ring, Specimen No. 27-2 (1.56 g pistol powder,  $\text{KClO}_4$ , and aluminum dust).

ORIGINAL PAGE IS  
OF POOR QUALITY

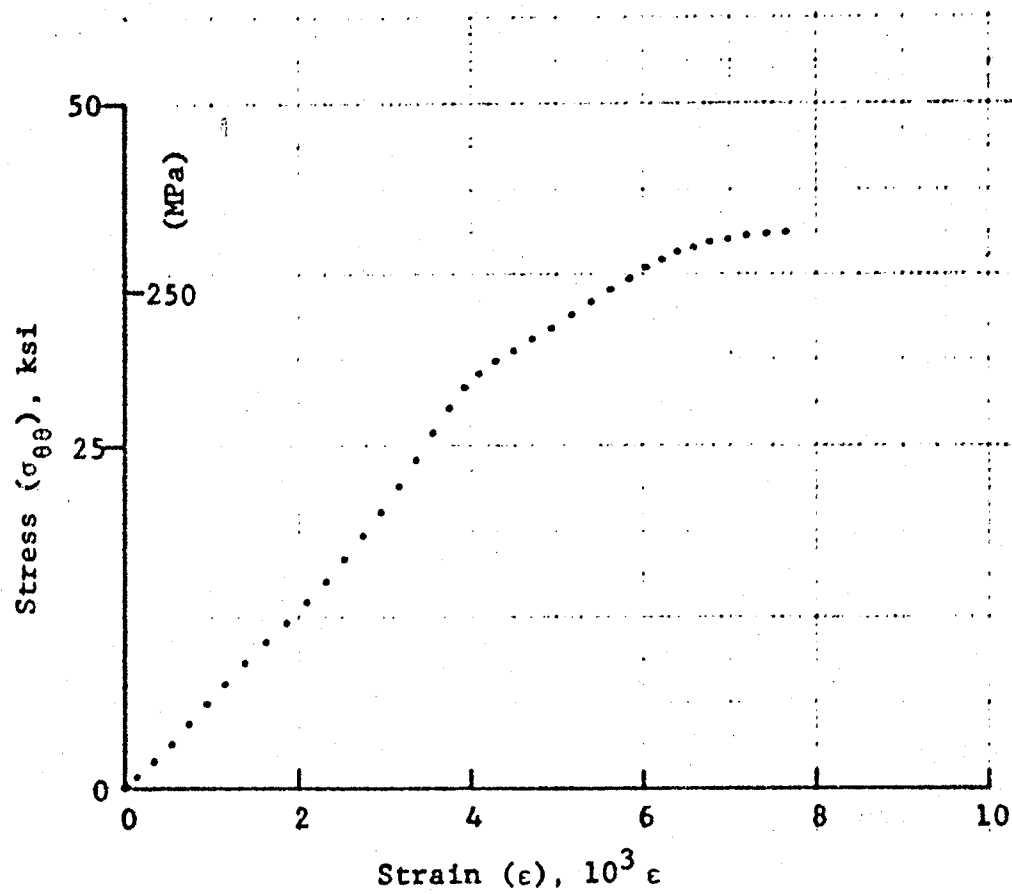


Figure 4-138. Stress-strain curve for dynamically loaded 80AS/20S/PR288  $[\pm 67.5]_{2s}$  graphite/S-glass/epoxy ring, Specimen No. 27-4 (1.56 g pistol powder,  $KClO_4$ , and aluminum dust).

ORIGINAL PAGE IS  
OF POOR QUALITY

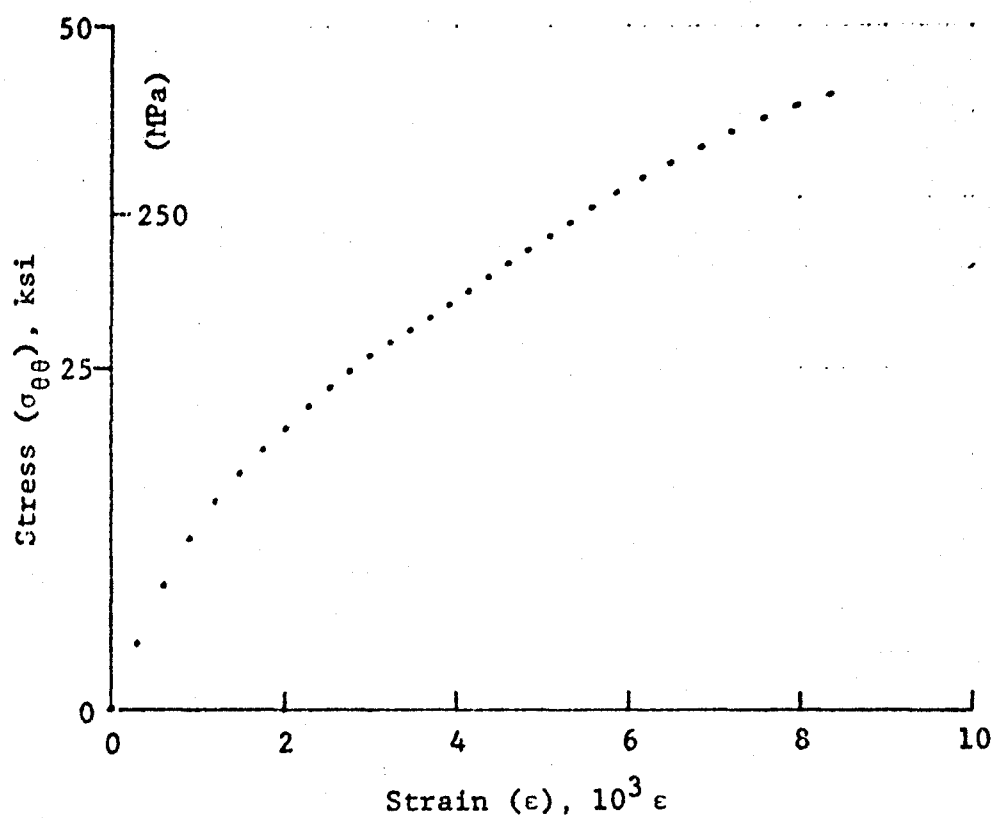


Figure 4-139. Stress-strain curve for dynamically loaded 80AS/20S/PR288 [ $\pm 67.5$ ]<sub>25</sub> graphite/S-glass/epoxy ring, Specimen No. 27-6 (1.56 g pistol powder,  $\text{KClO}_4$ , and aluminum dust).

ORIGINAL PAGE IS  
OF POOR QUALITY

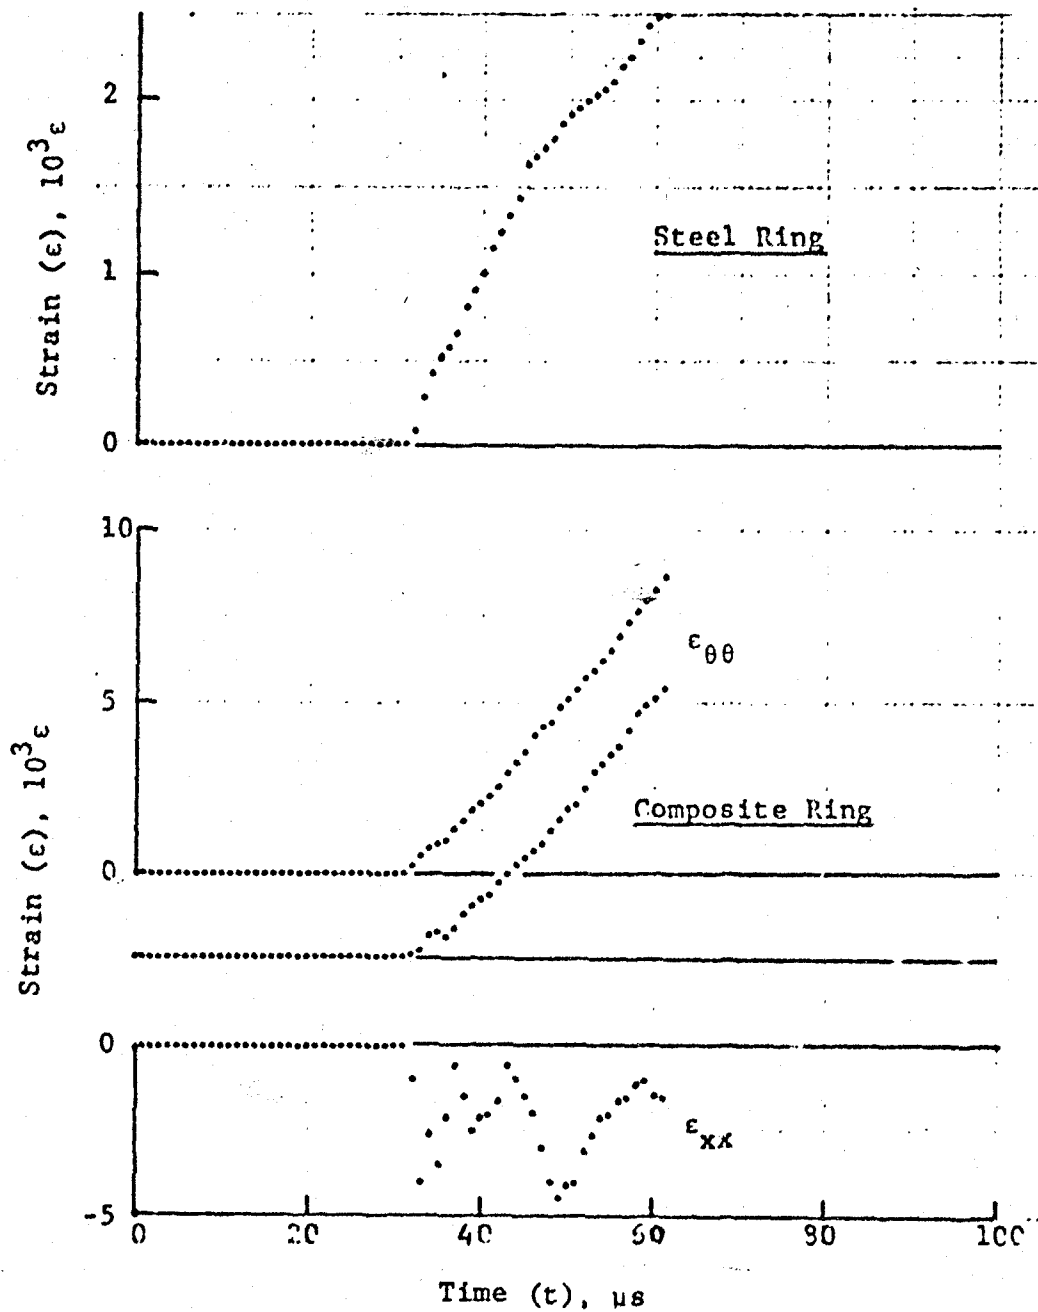


Figure 4-140. Strain records in steel ring and SP288/AS [ $\pm 75$ ]<sub>2s</sub> graphite/epoxy ring under dynamic loading for Specimen No. 20-2 (1.56 g pistol powder,  $KClO_4$ , and aluminum dust).

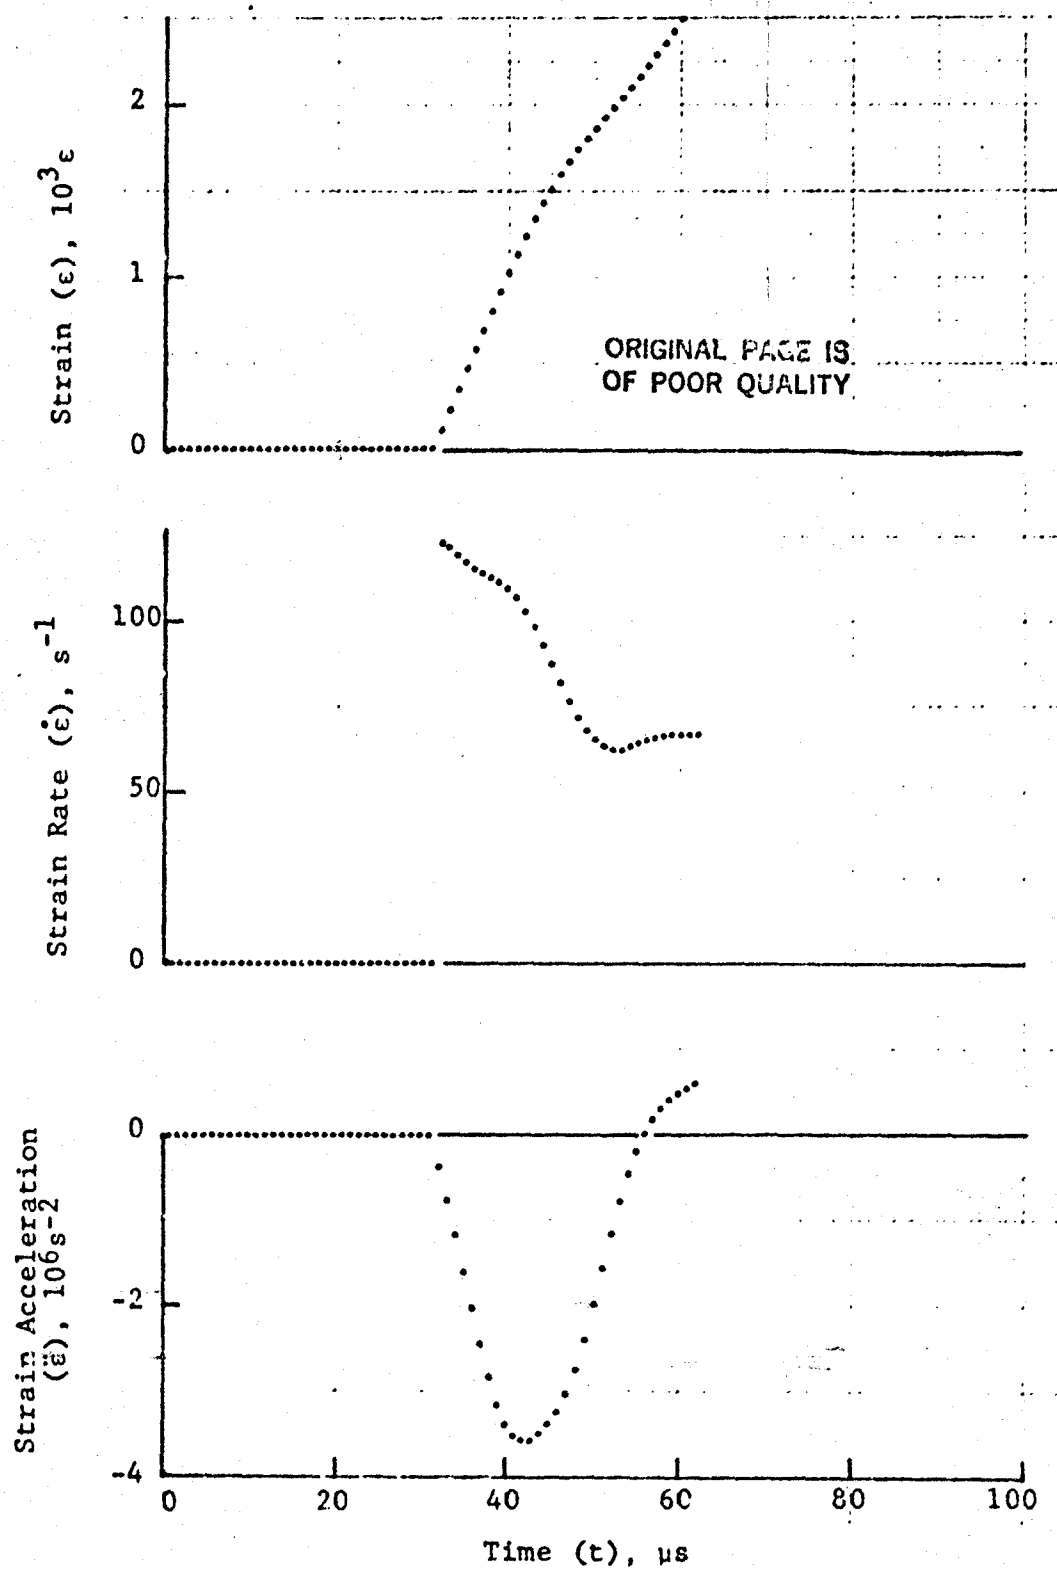


Figure 4-141. Strain and its derivatives in steel ring for Specimen No. 20-2.

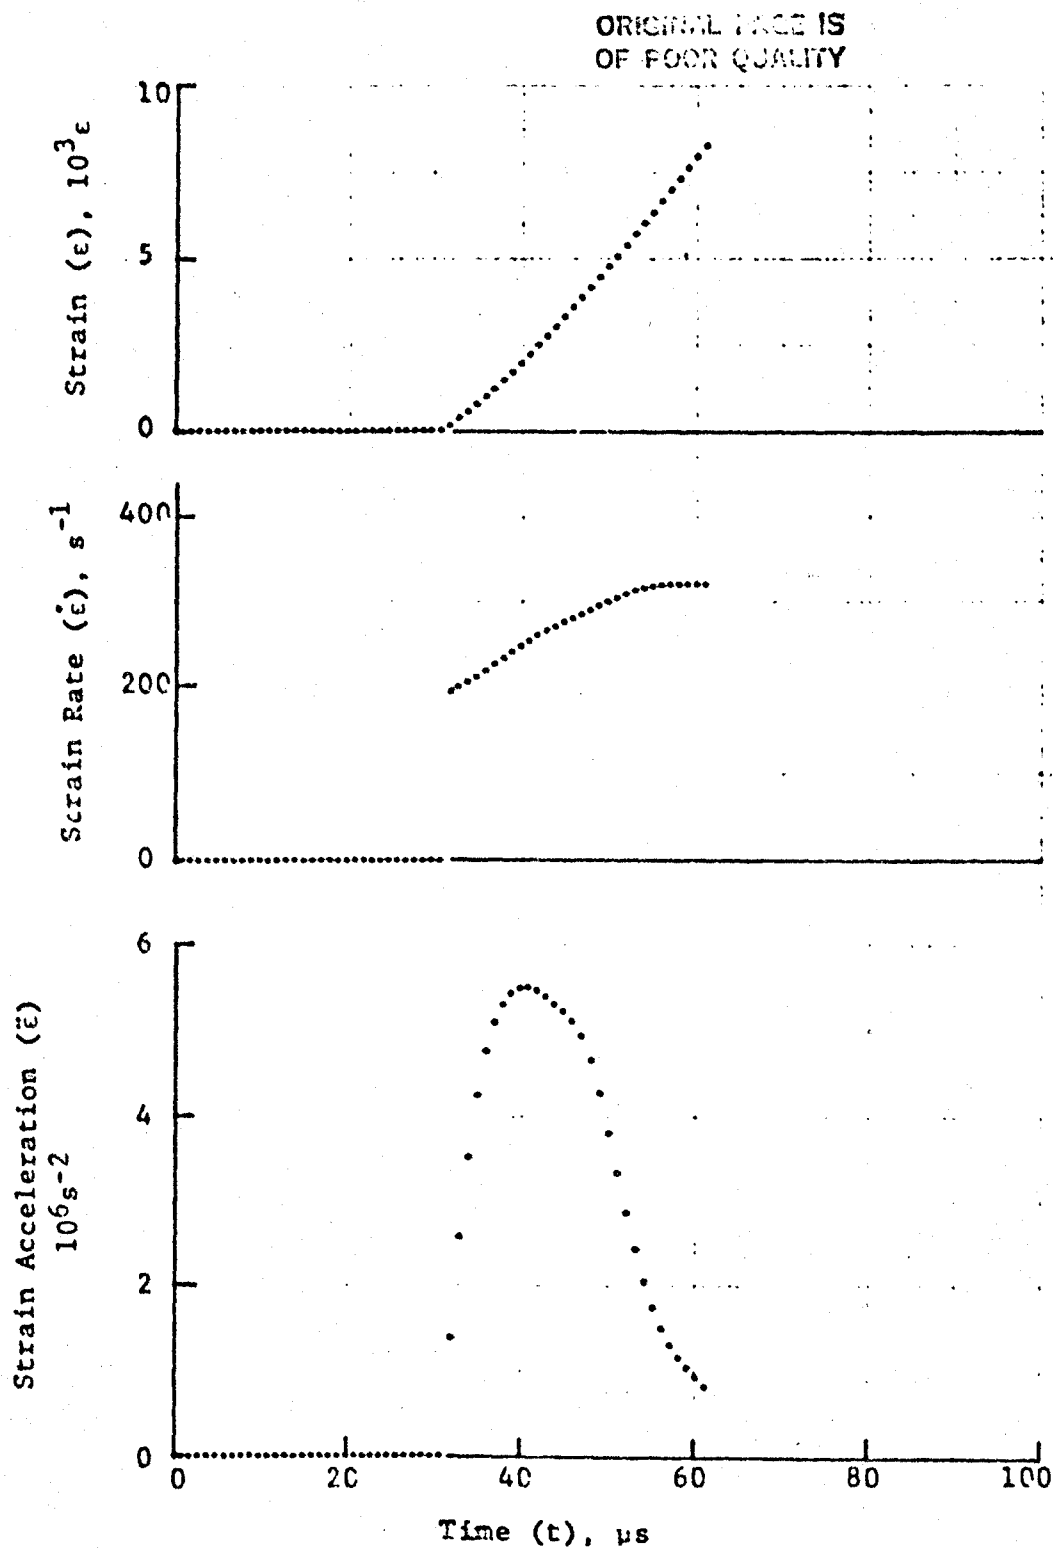


Figure 4-142. Circumferential strain and its derivatives in SP288/AS  $[\pm 75]_2$ s graphite/epoxy ring under dynamic loading for Specimen No. 20-2 (1.56 g pistol powder,  $KClO_4$ , and aluminum dust).



ORIGINAL PAGE IS  
OF POOR QUALITY

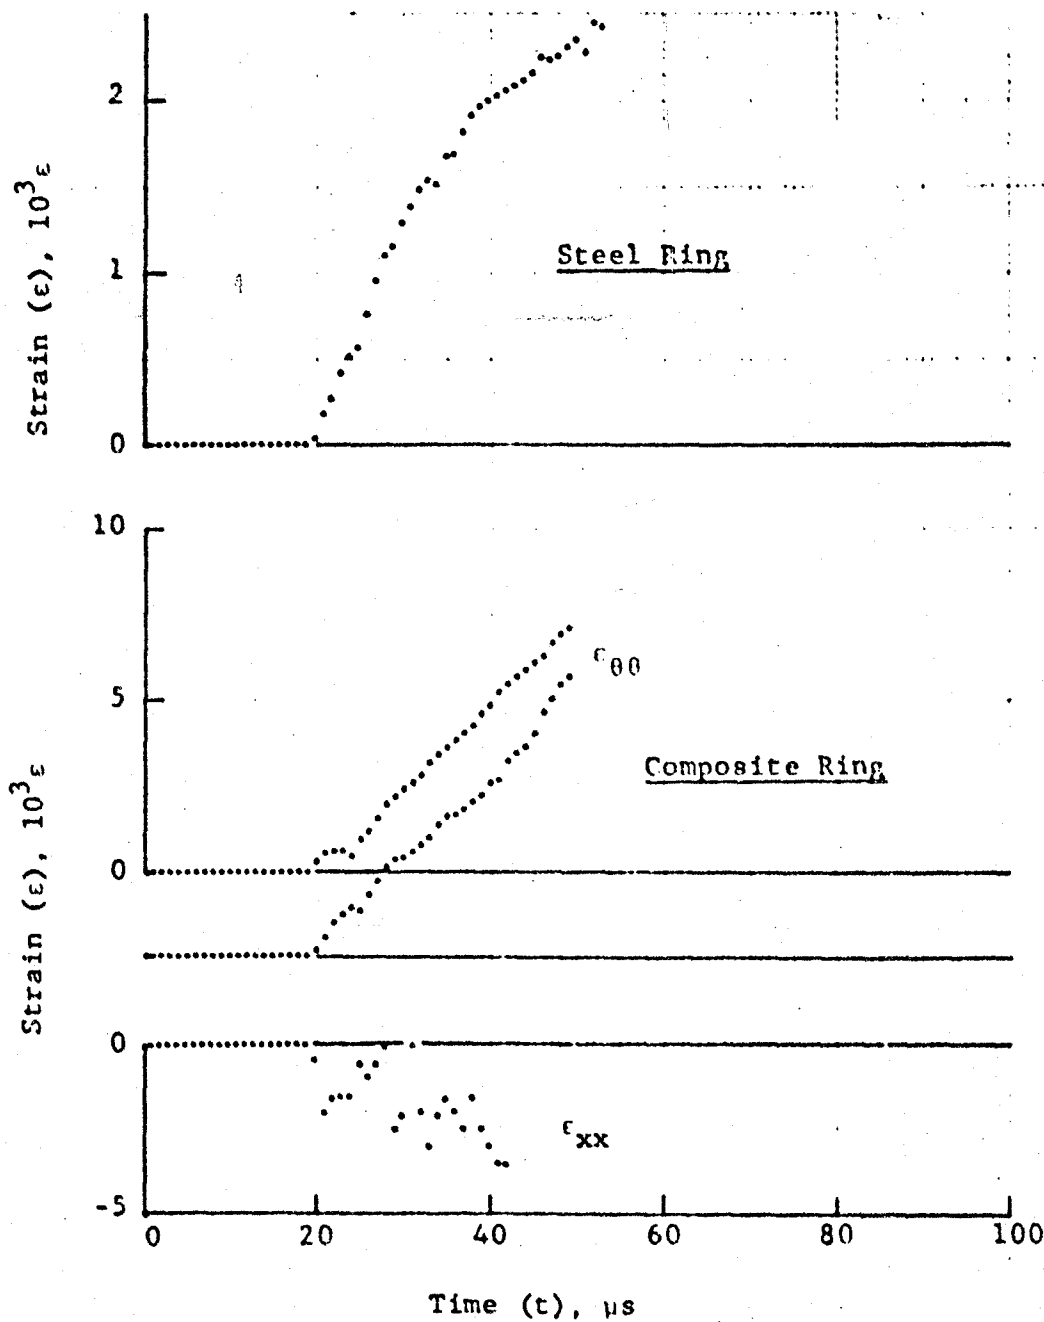


Figure 4-143. Strain records in steel ring and SP288/AS  $[\pm 75]_{2s}$  graphite/epoxy ring under dynamic loading for Specimen No. 20-4 (1.56 g pistol powder,  $KClO_4$ , and aluminum dust).

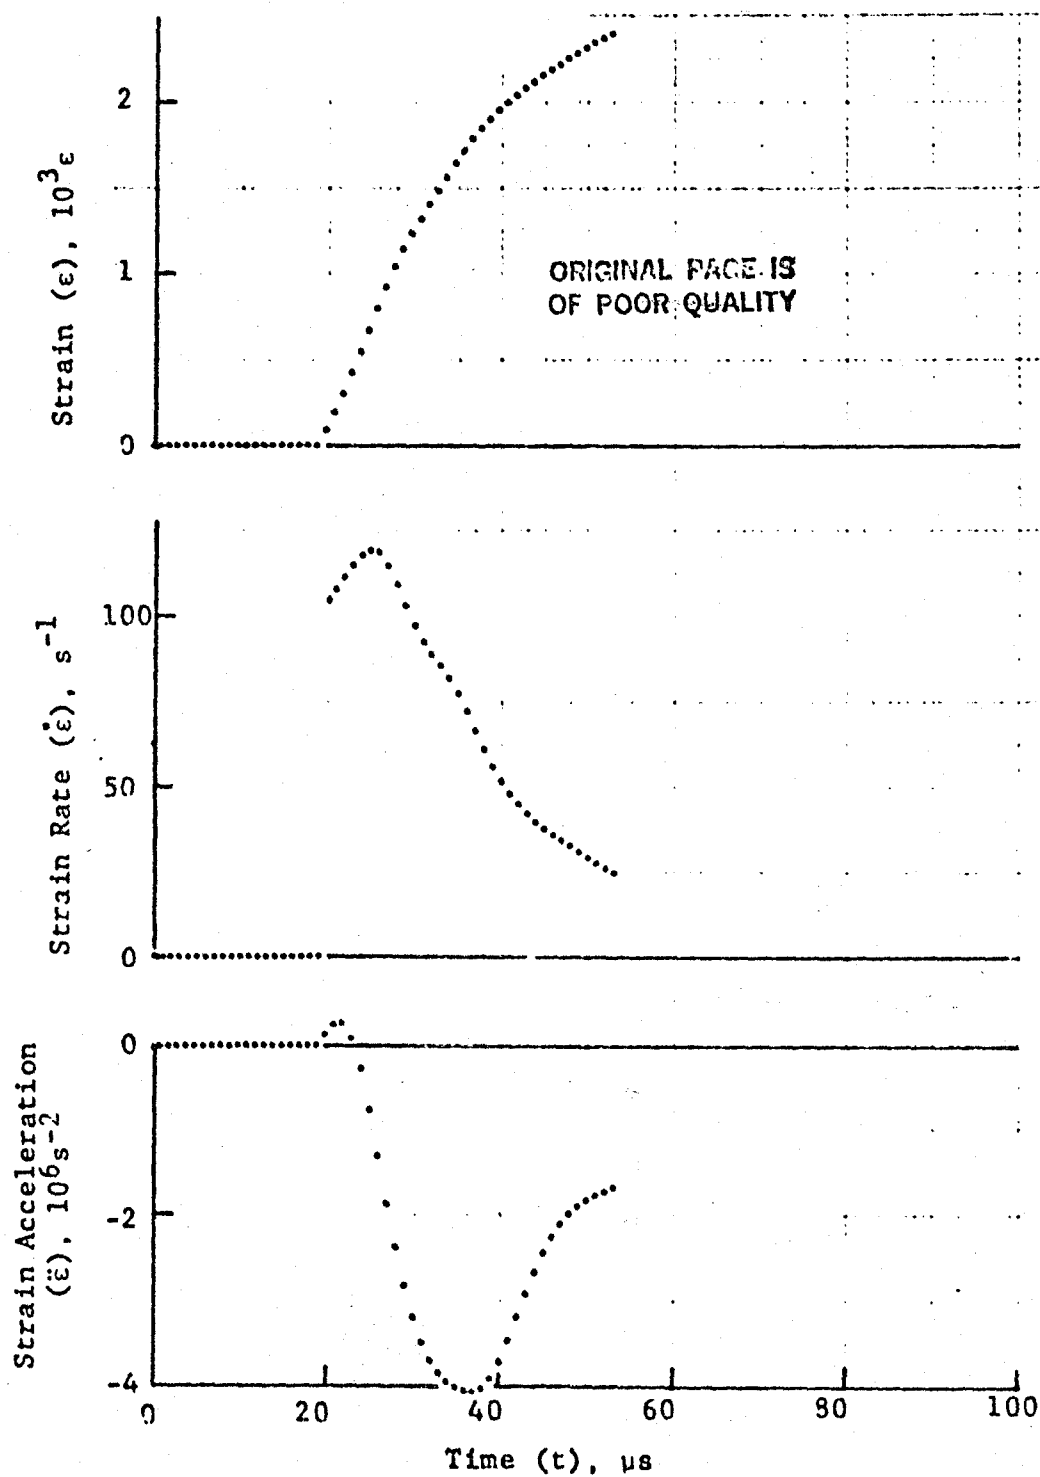


Figure 4-144. Strain and its derivatives in steel ring for Specimen No. 20-4.

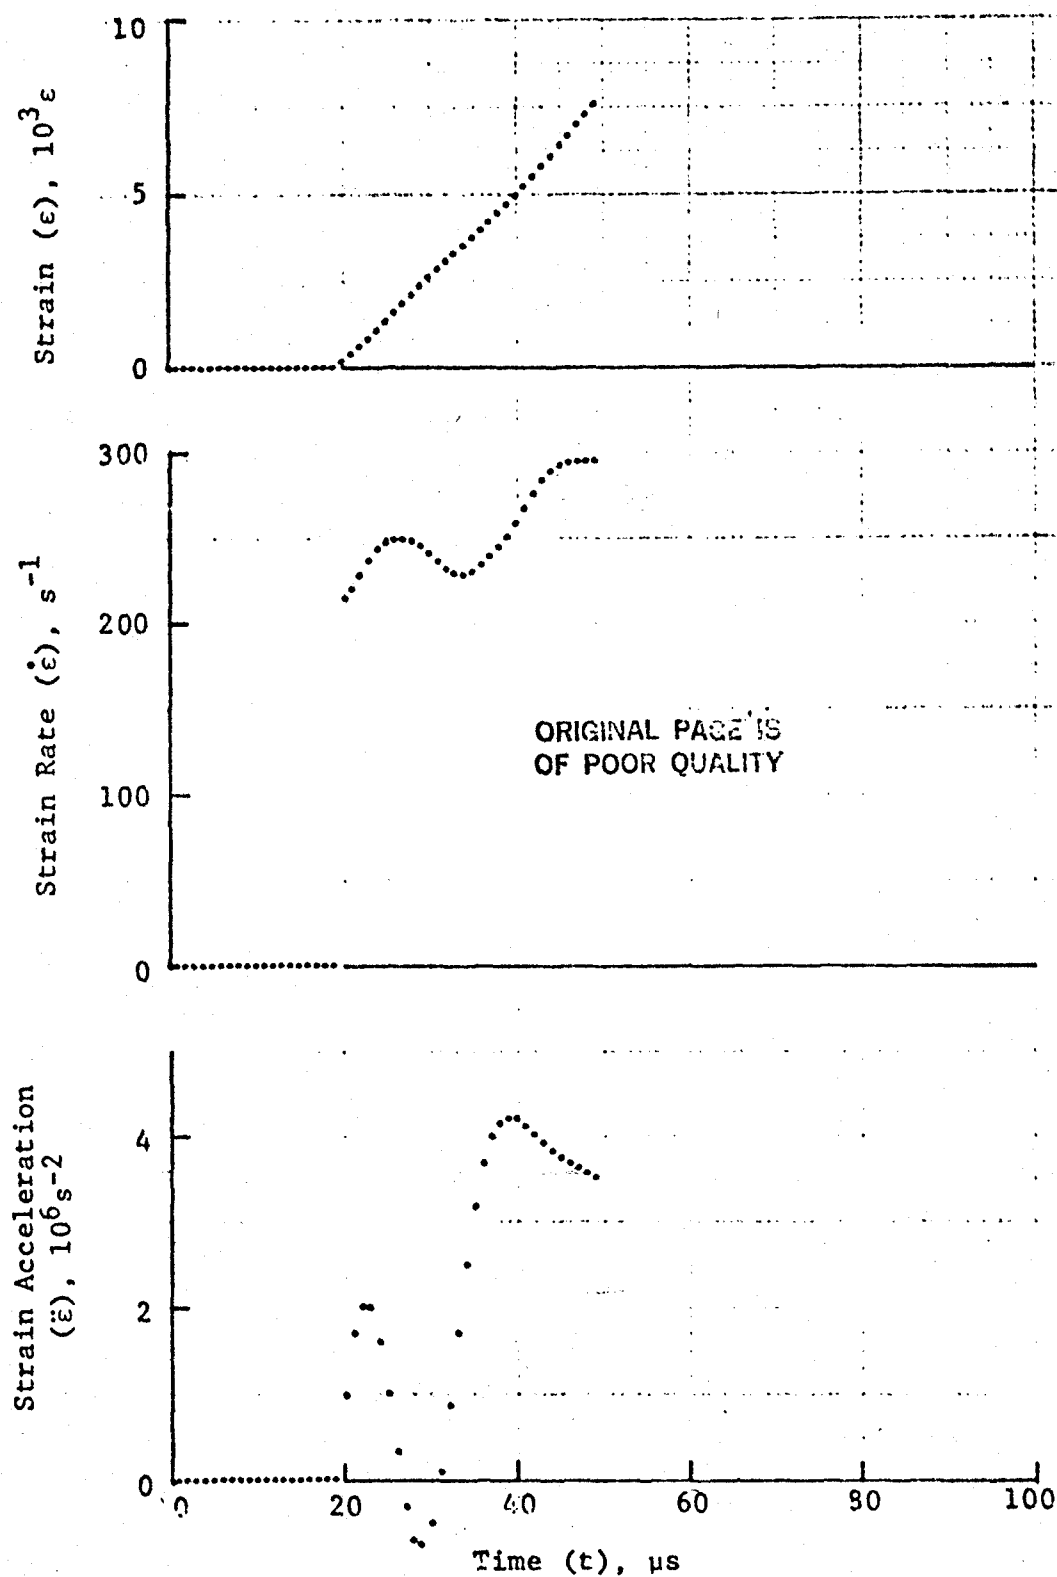


Figure 4-145. Circumferential strain and its derivatives in SP288/AS [ $\pm 75$ ]<sub>2s</sub> graphite/epoxy ring under dynamic loading for Specimen No. 20-4 (1.56 g pistol powder,  $KClO_4$ , and aluminum dust).

ORIGINAL PAGE IS  
OF POOR QUALITY

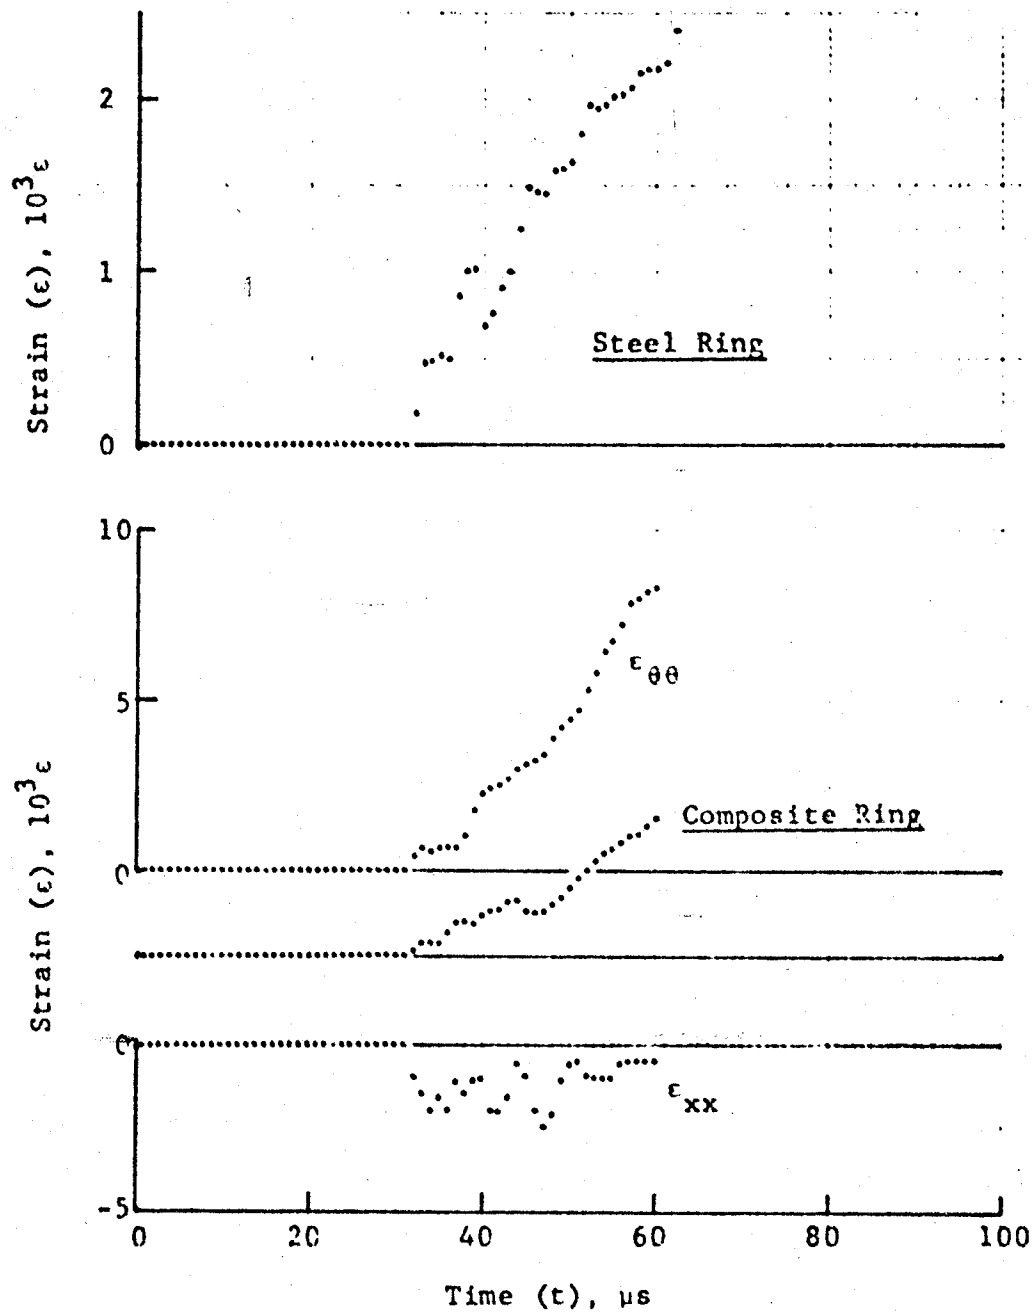


Figure 4-146. Strain records in steel ring and SP288/AS [ $\pm 75$ ]<sub>s</sub> graphite/epoxy ring under dynamic loading for Specimen No. 20-7 (1.56 g pistol powder, KClO<sub>4</sub>, and aluminum dust).

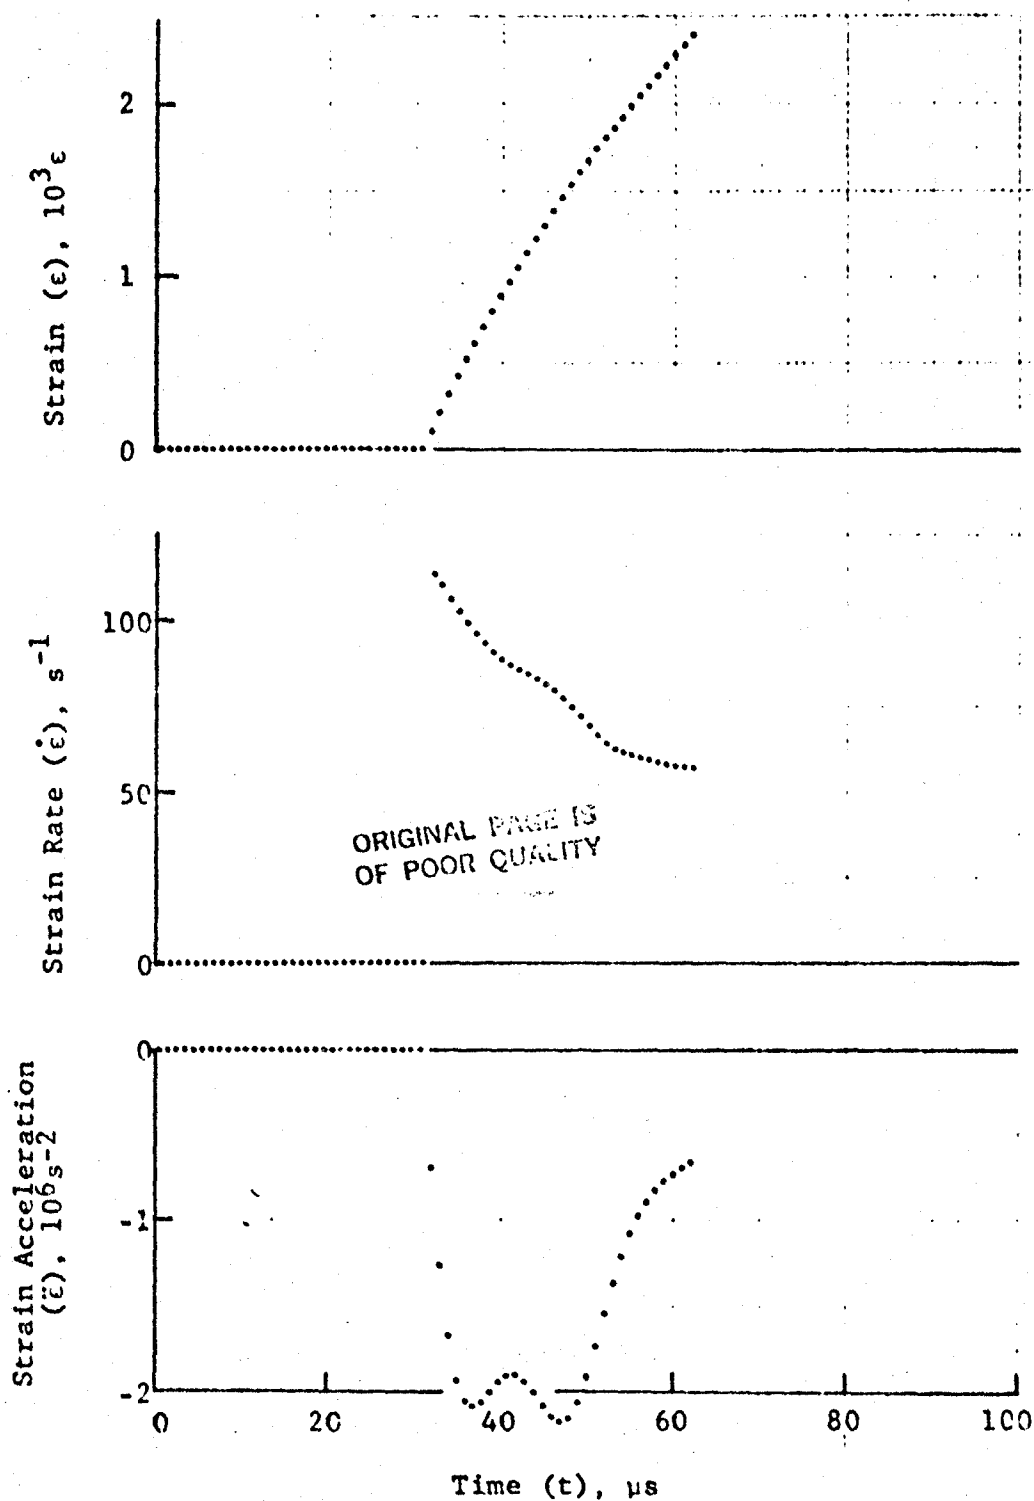


Figure 4-147. Strain and its derivatives in steel ring for Specimen No. 20-7.

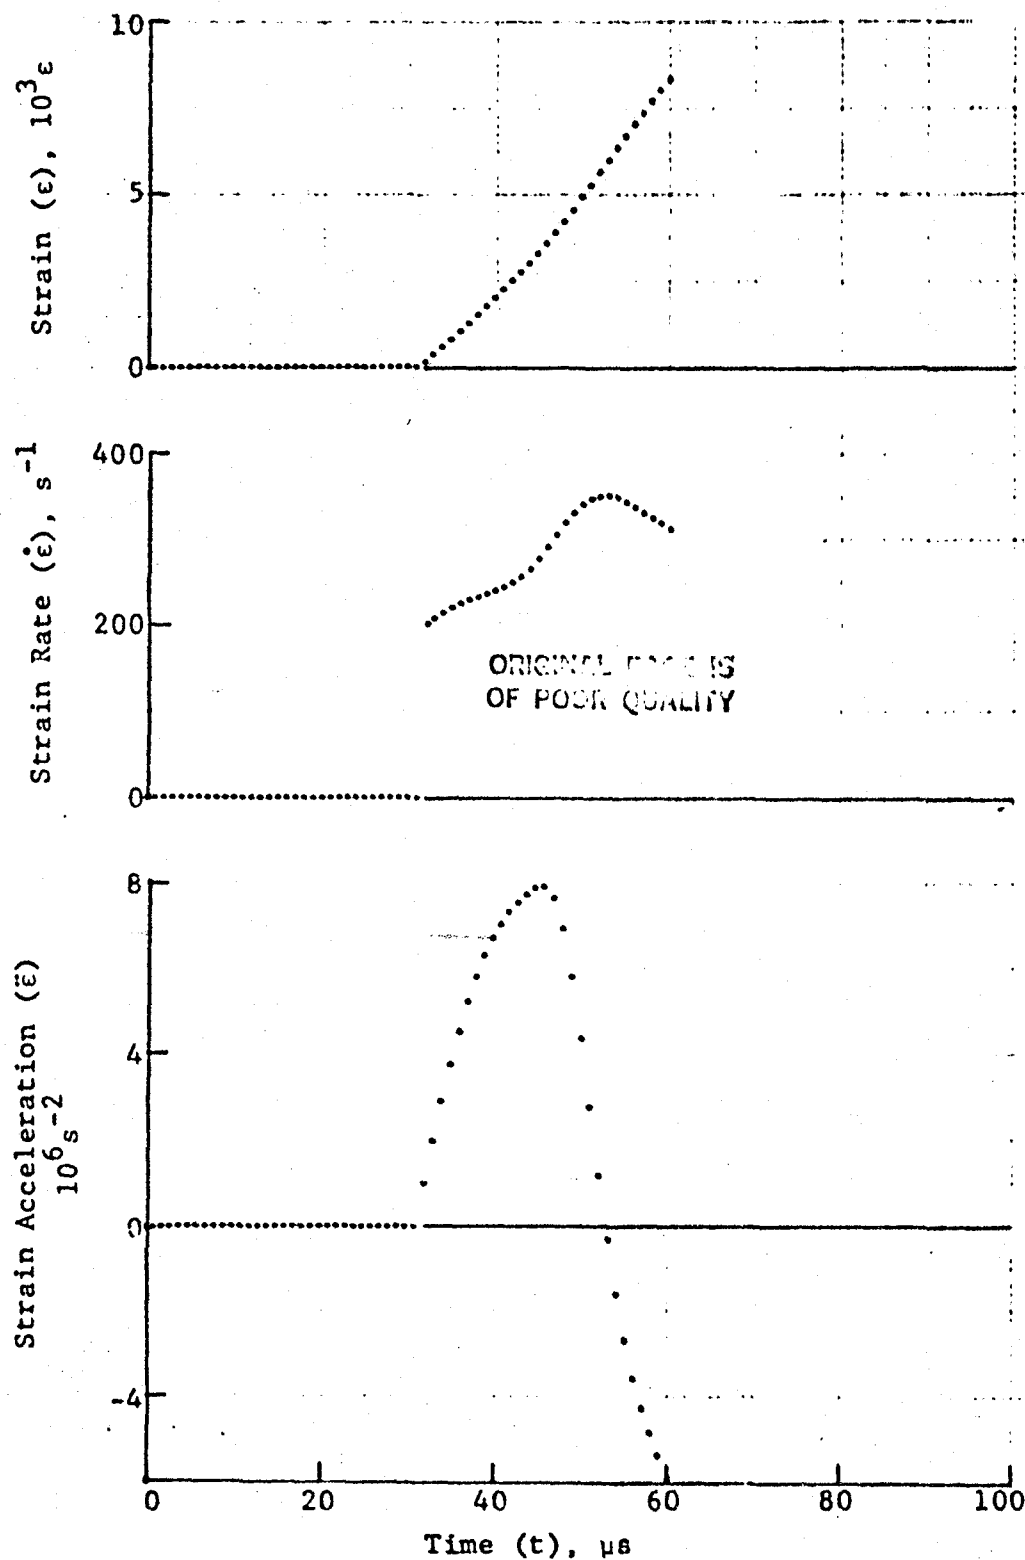


Figure 4-148. Circumferential strain and its derivatives in SP288/AS  $[\pm 75]_s$  graphite/epoxy ring under dynamic loading for Specimen No. 20-7 (1.56 g pistol powder,  $KClO_4$ , and aluminum dust).

ORIGINAL PAGE IS  
OF POOR QUALITY

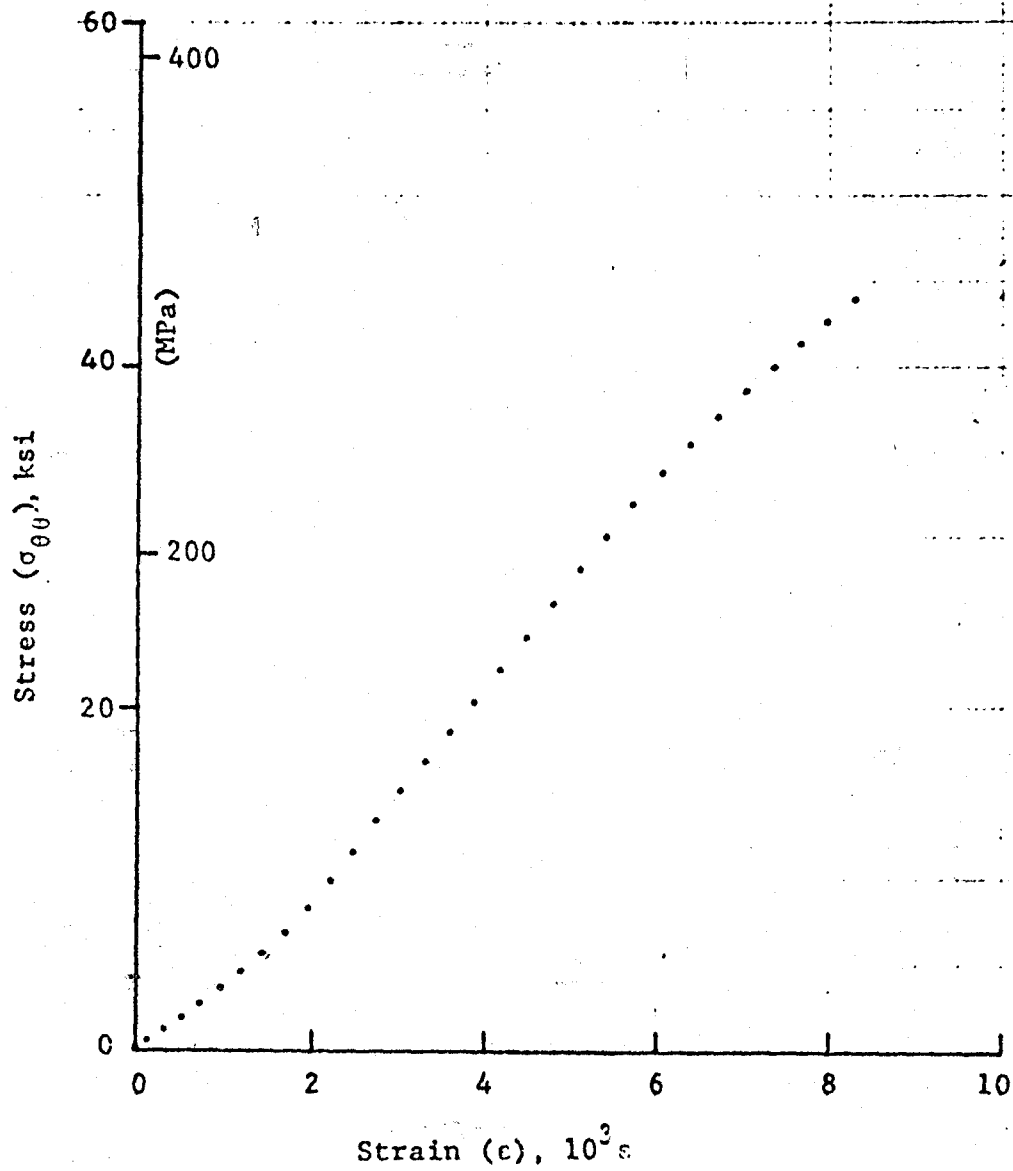


Figure 4-149. Stress-strain curve for dynamically loaded SP288/AS  
[ $\pm 75$ ]<sub>2s</sub> graphite/epoxy ring, Specimen No. 20-2 (1.56 pistol  
powder,  $\text{KClO}_4$ , and aluminum dust).

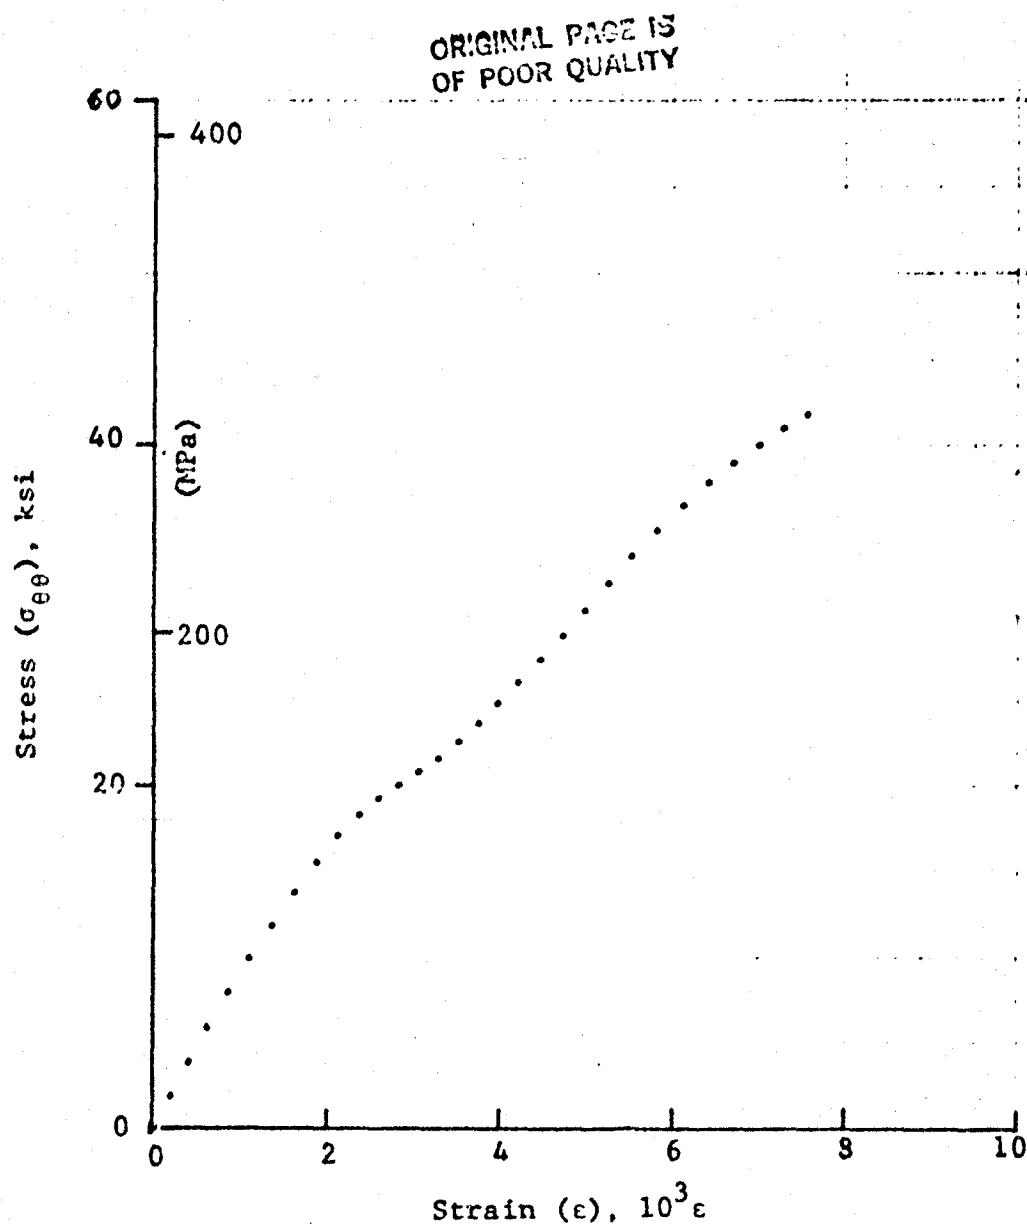


Figure 4-150. Stress-strain curve for dynamically loaded SP288/AS  $[\pm 75]_{2s}$  graphite/epoxy ring, Specimen No. 20-4 (1.56 g pistol powder,  $KClO_4$ , and aluminum dust).



ORIGINAL PAGE IS  
OF POOR QUALITY

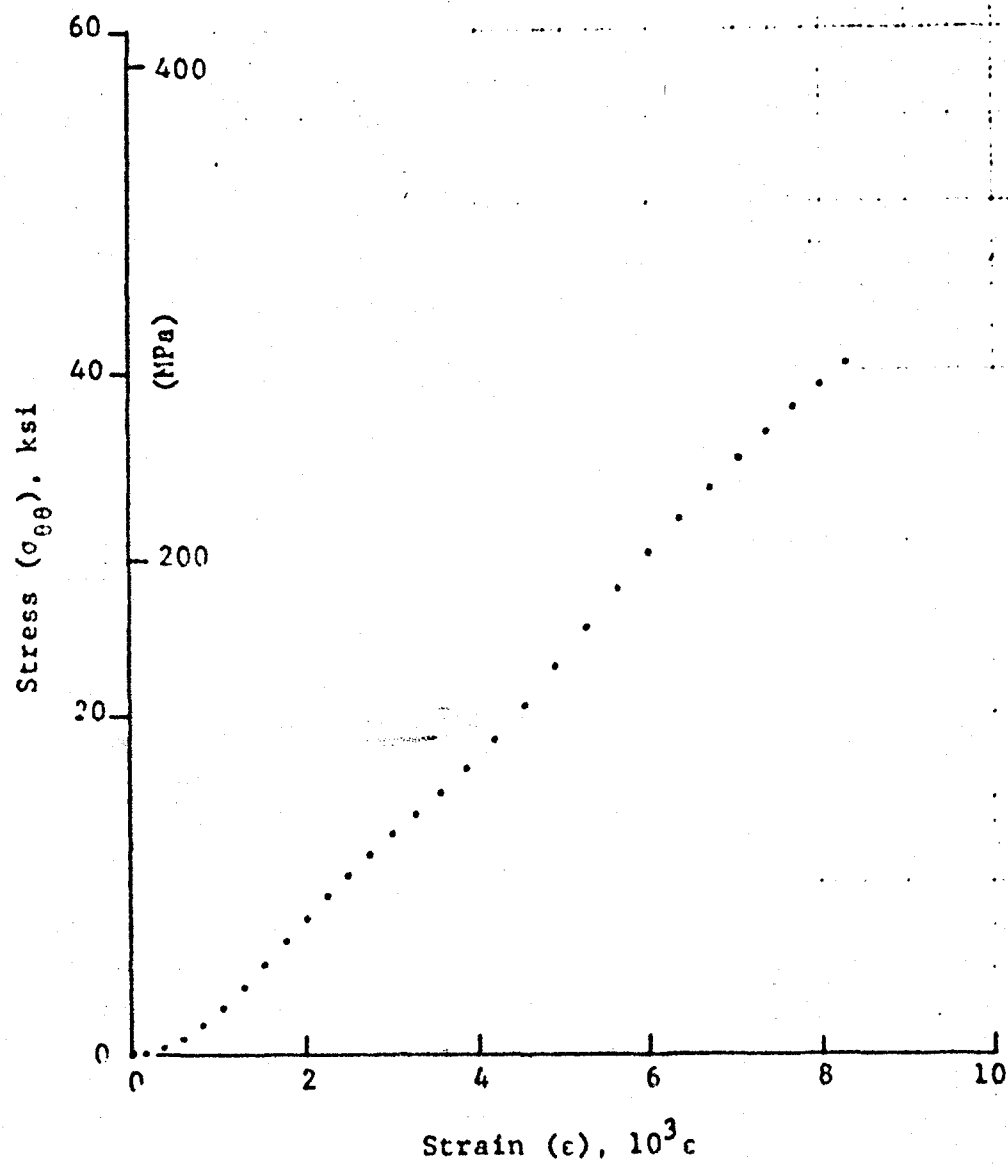


Figure 4-151. Stress-strain curve for dynamically loaded SP288/AS  $[\pm 75]_{2s}$  graphite/epoxy ring, Specimen No. 20-7 (1.56 g pistol powder,  $KClO_4$ , and aluminum dust).

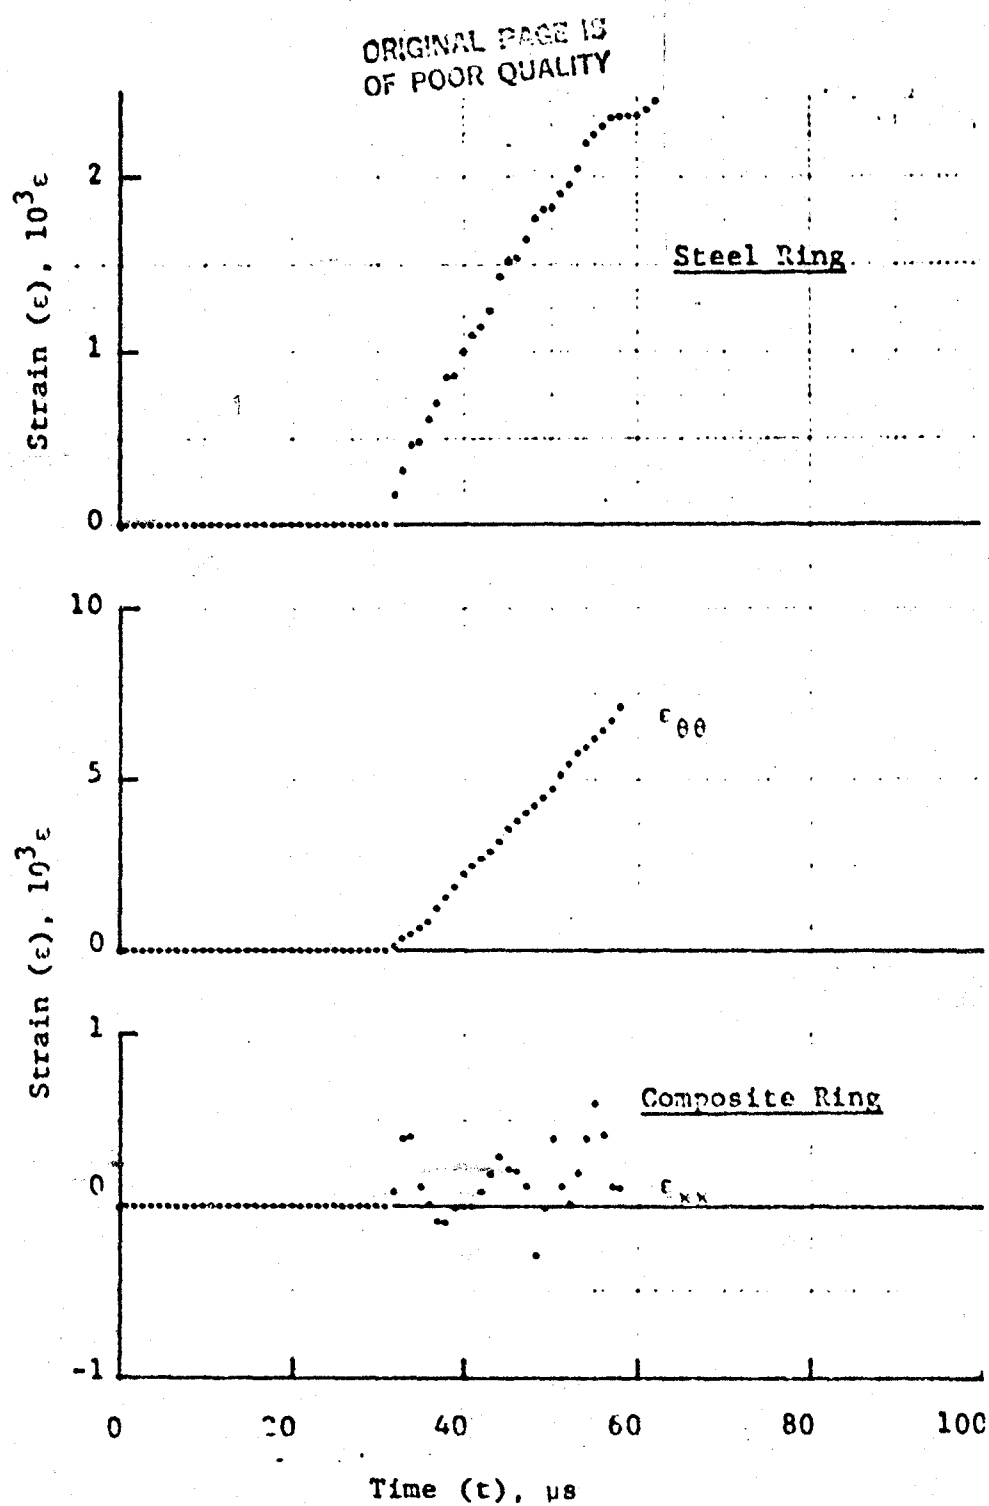


Figure 4-152. Strain records in steel ring and 80AS/20S/PR288 [ $\pm 75$ ]<sub>2s</sub> graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 21-2 (1.56 g pistol powder,  $KClO_4$ , and aluminum dust).

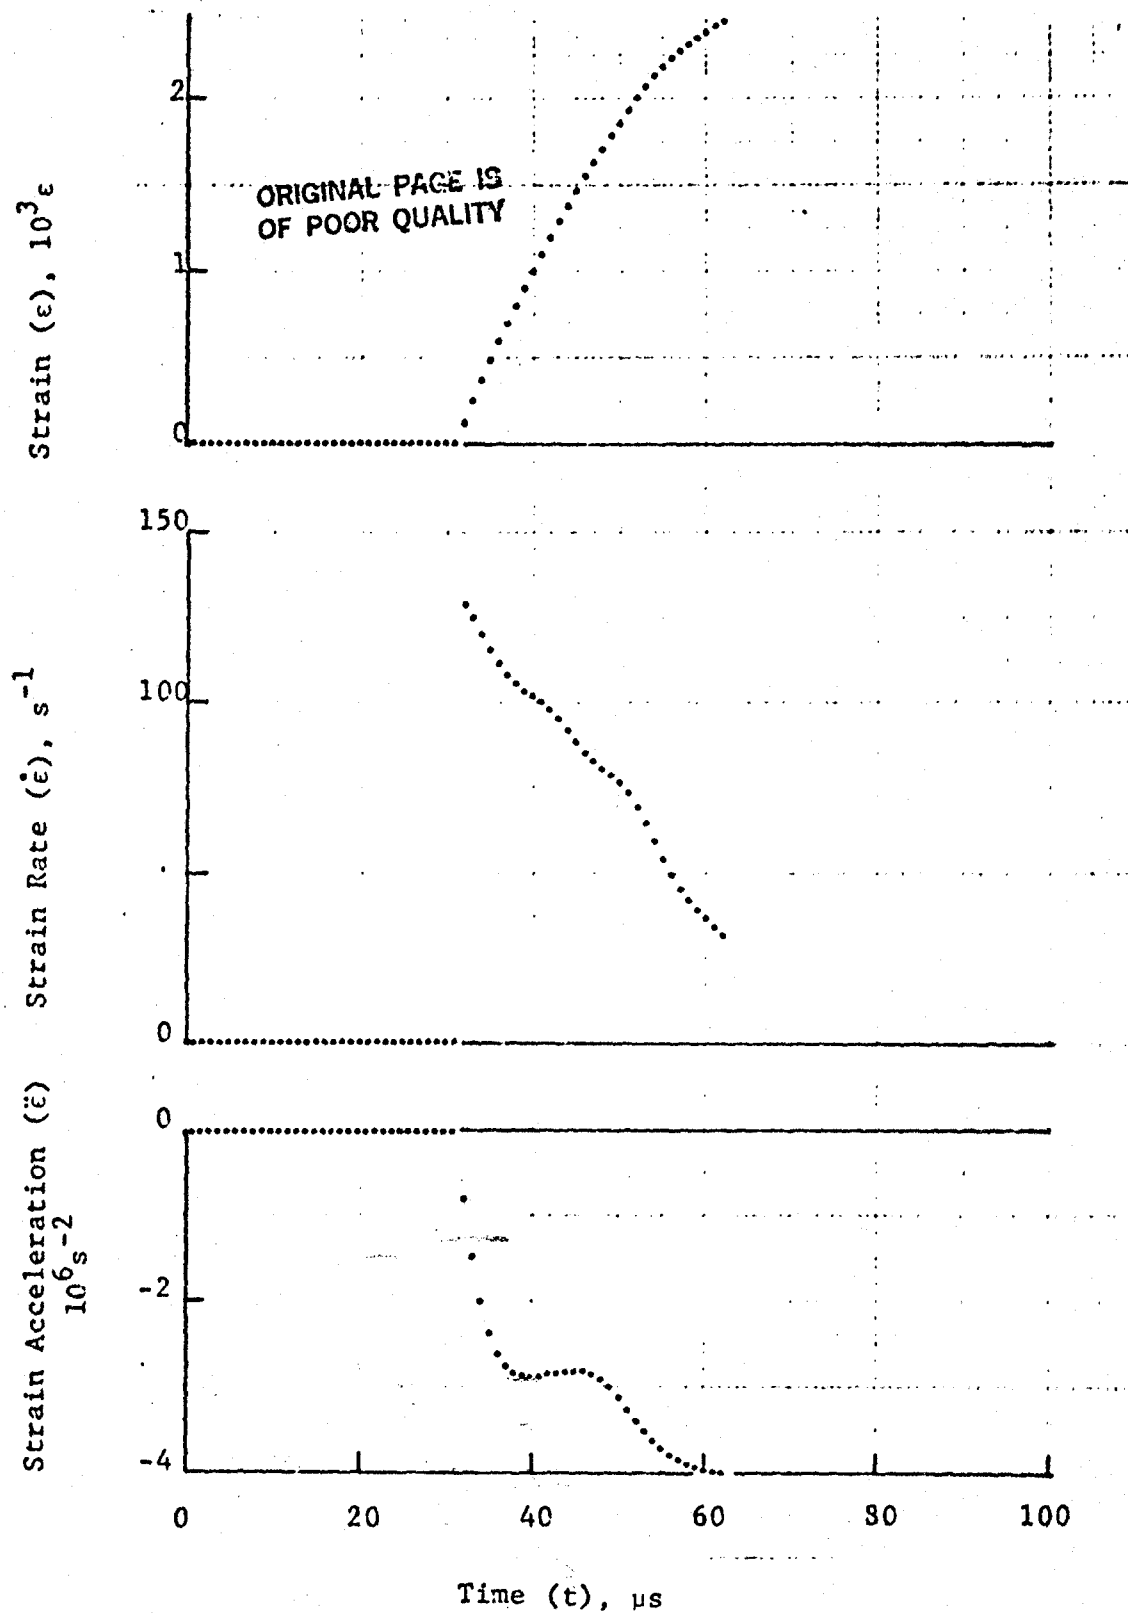


Figure 4-153. Strain and its derivatives in steel ring for Specimen No. 21-2.

ORIGINAL PAGE IS  
OF POOR QUALITY

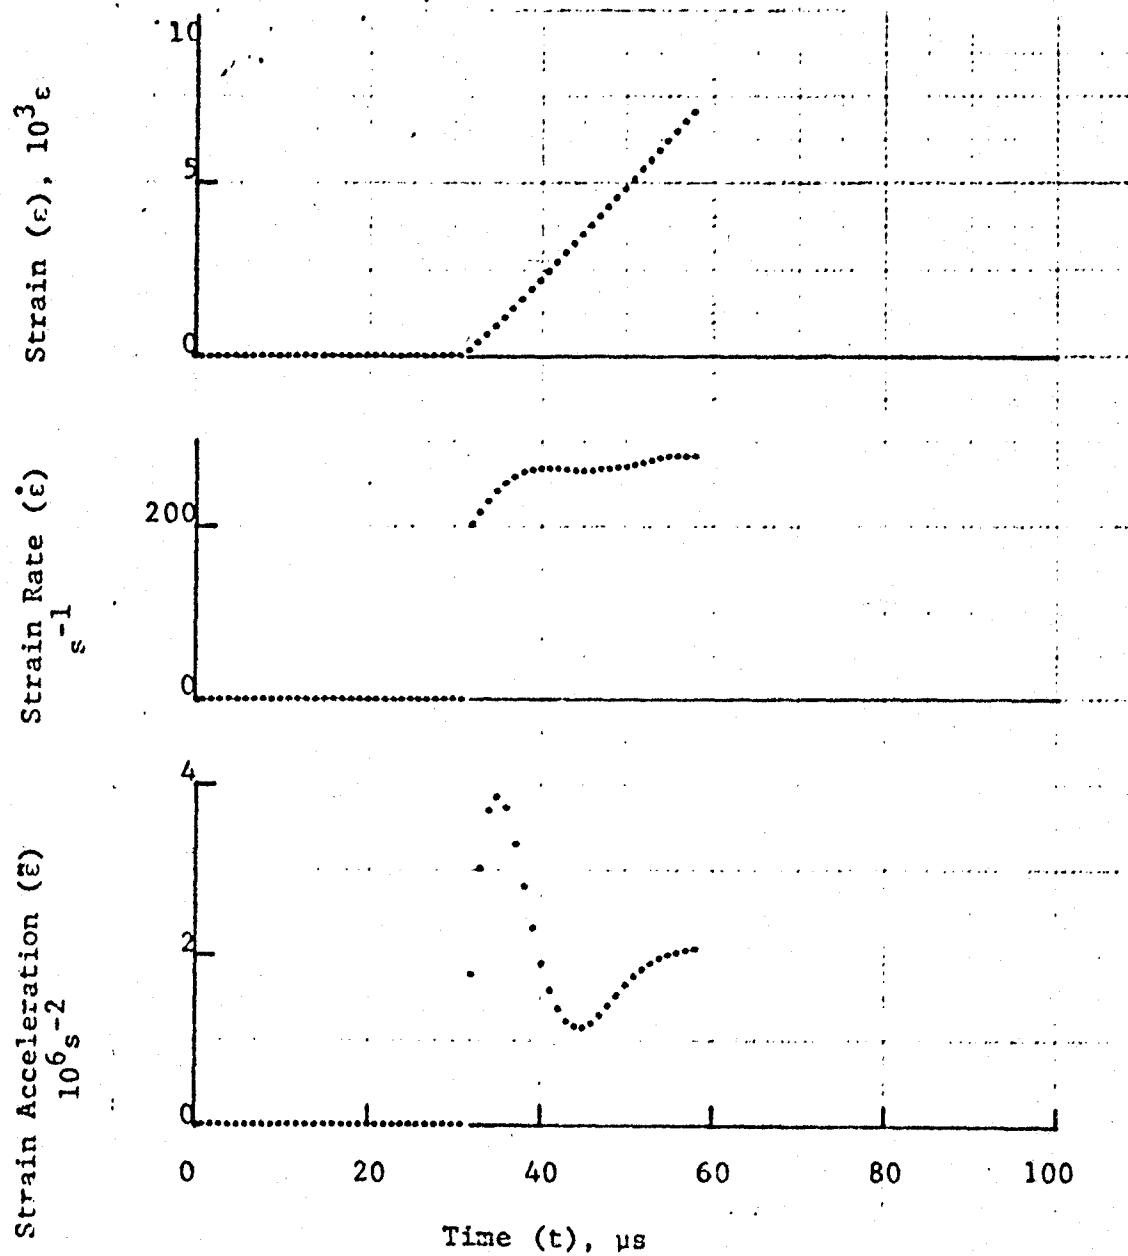


Figure 4-154. Circumferential strain and its derivatives in  $[\pm 75]_{2s}$  80AS/20S/PR288 graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 21-2.

ORIGINAL PAGE IS  
OF POOR QUALITY

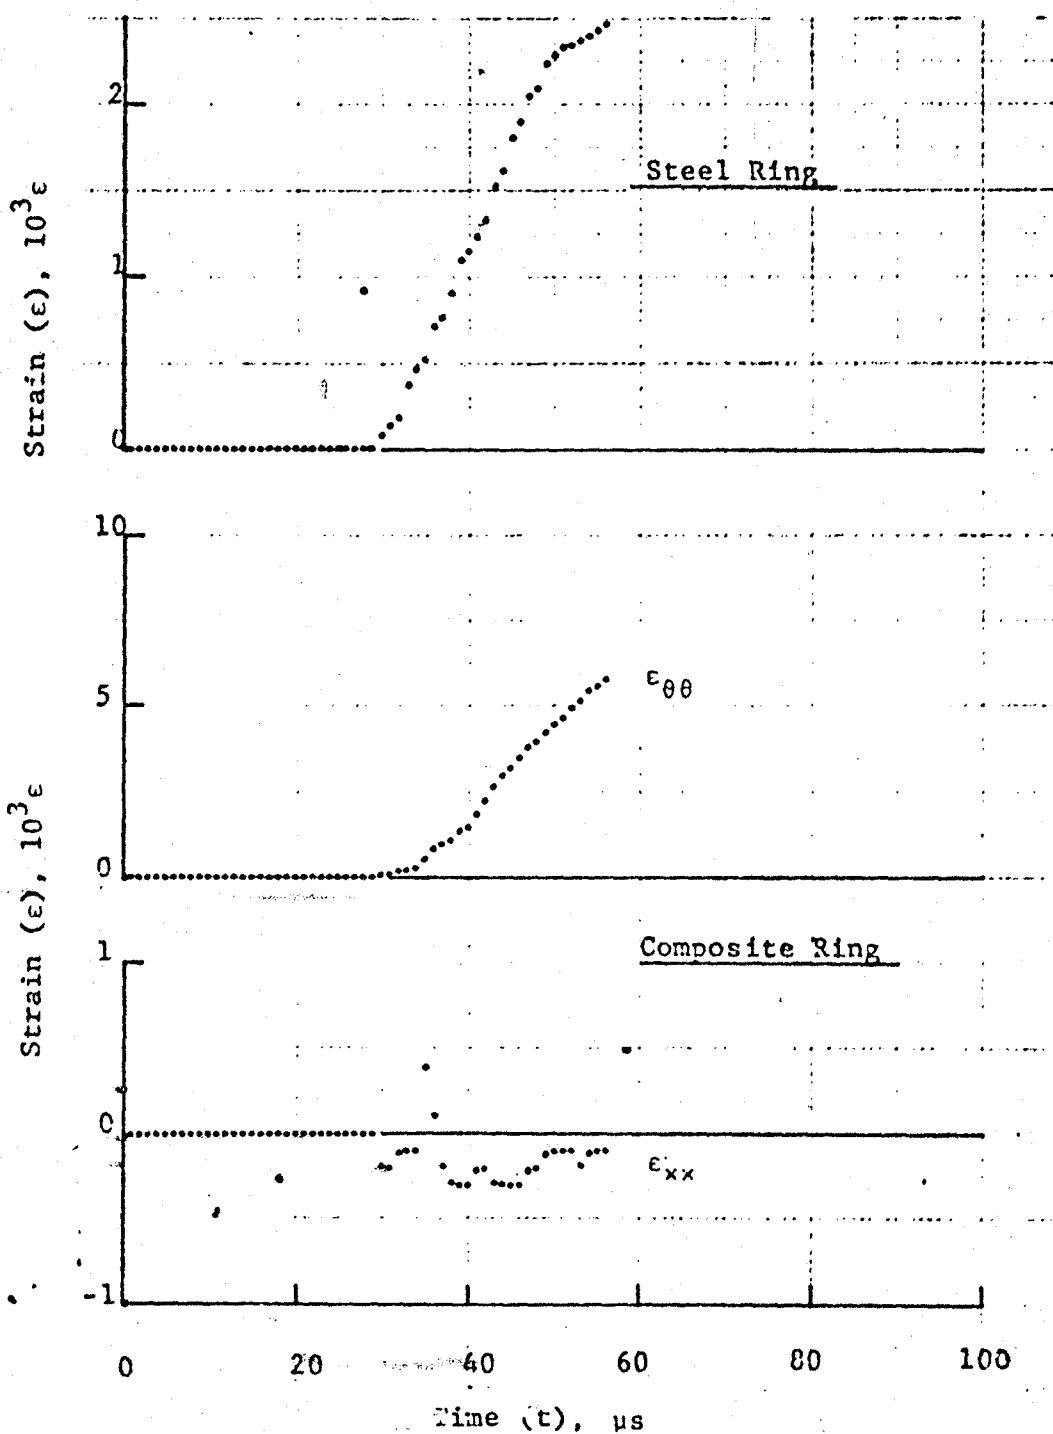


Figure 4-155. Strain records in steel ring and 80AS/20S/PR288  $[\pm 75]_2$  graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 21-4 (1.56 g pistol powder,  $KClO_4$ , and aluminum dust).

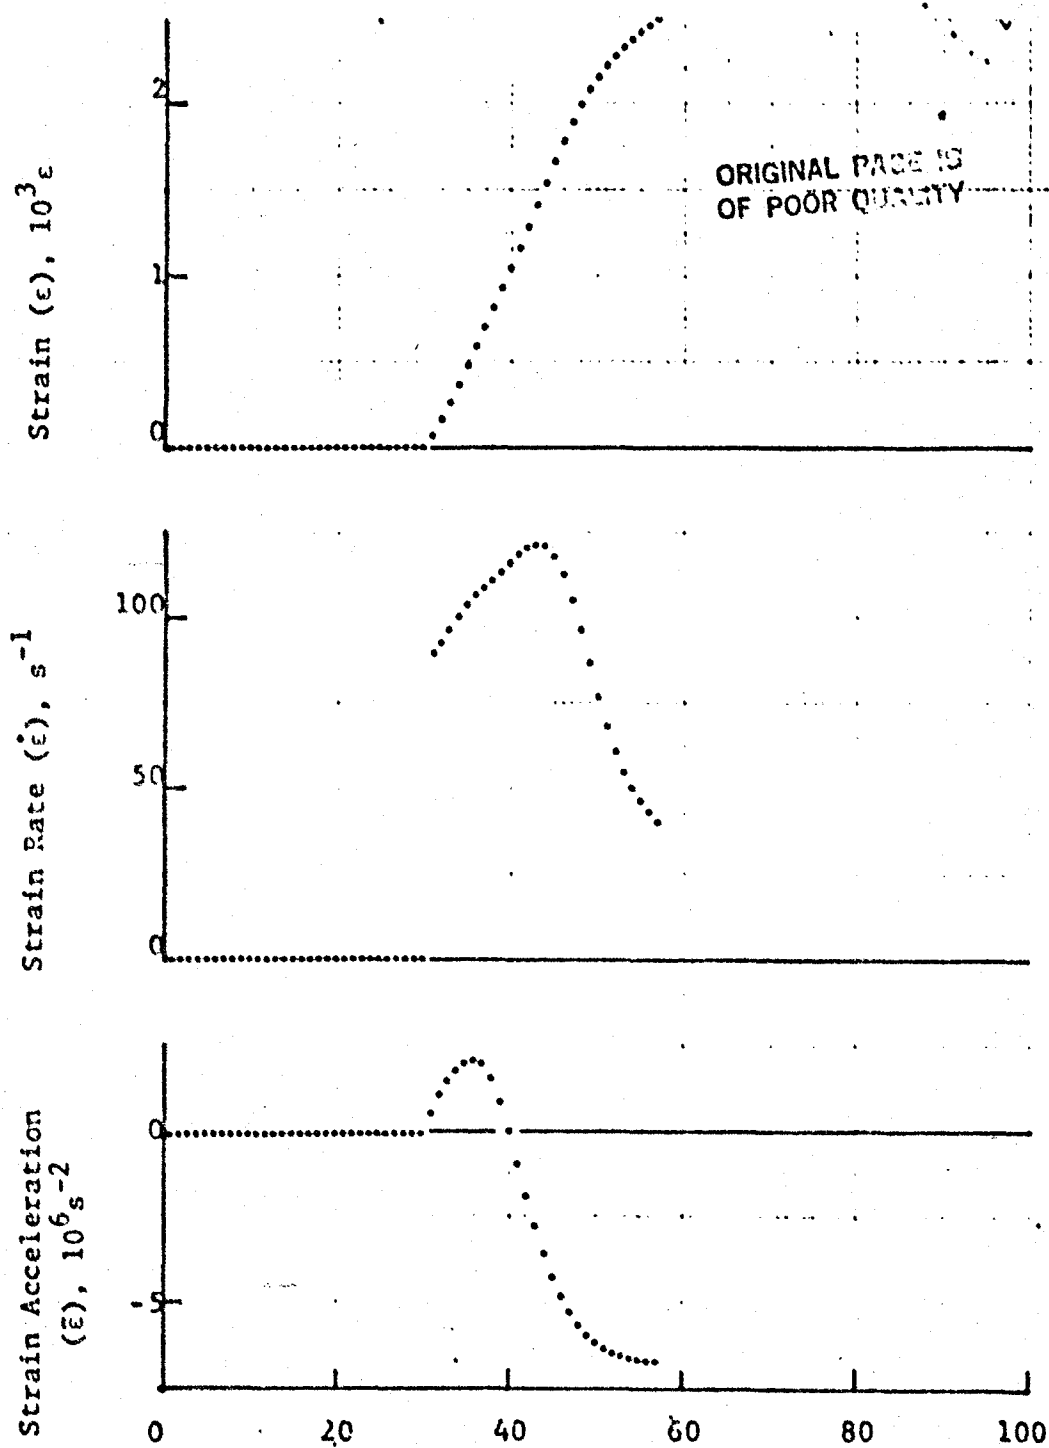


Figure 4-156. Strain and its derivatives in steel ring for Specimen No. 21-4.

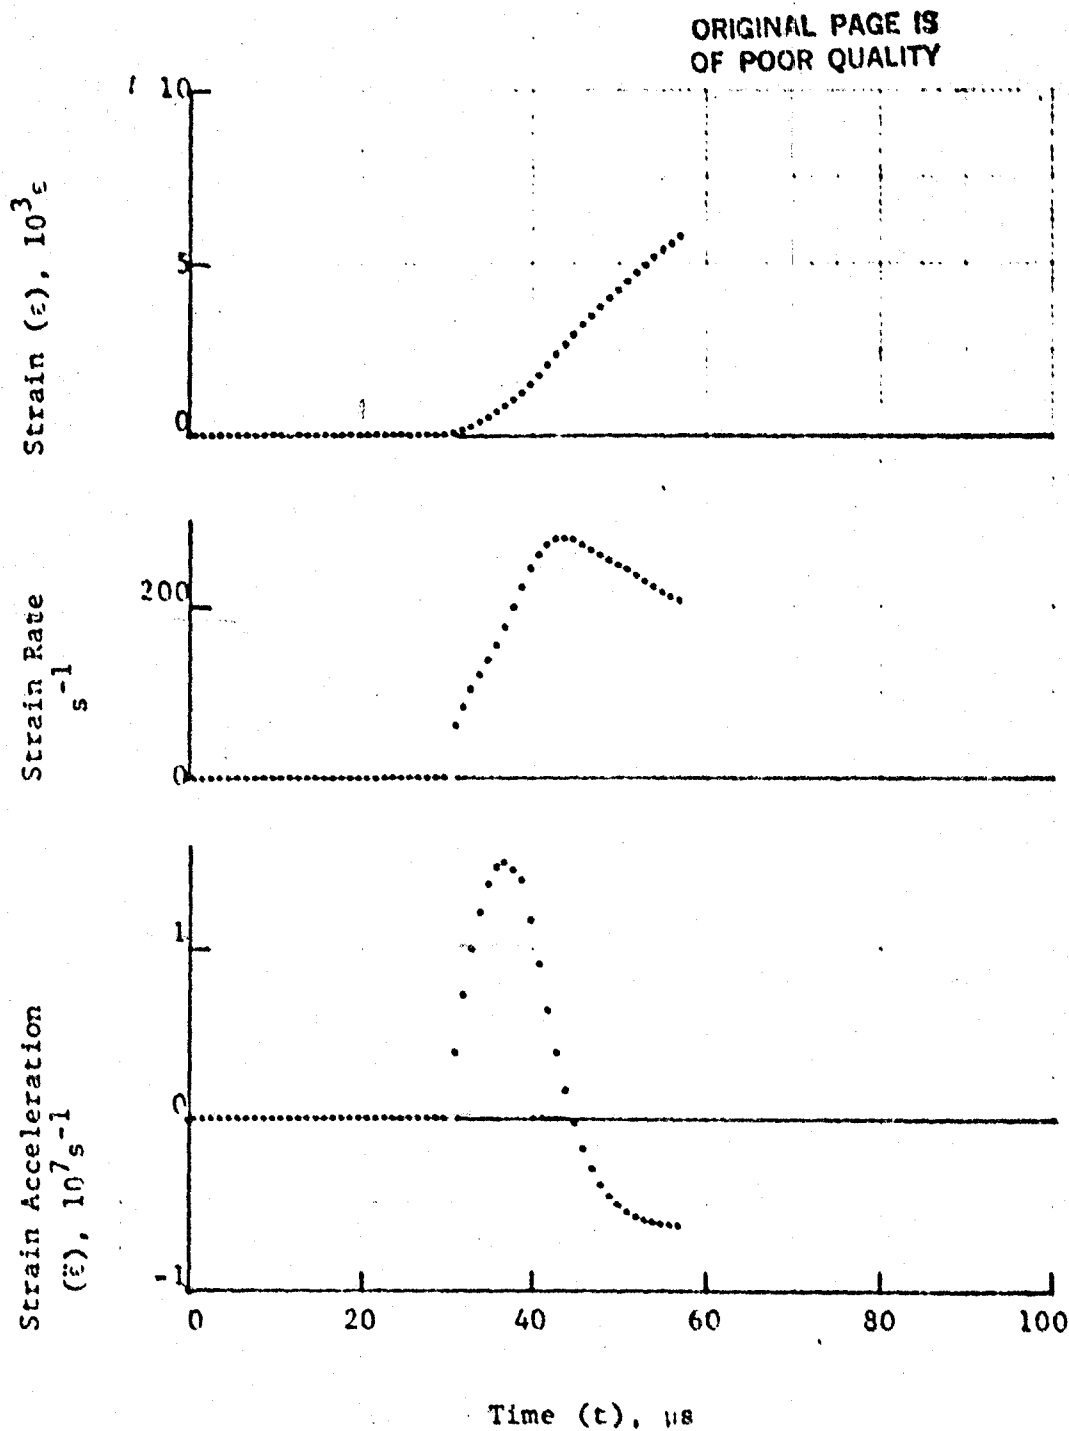


Figure 4-157. Circumferential strain and its derivatives in  $[+75]_{2s}$  80AS/20S/PR288 graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 21-4.

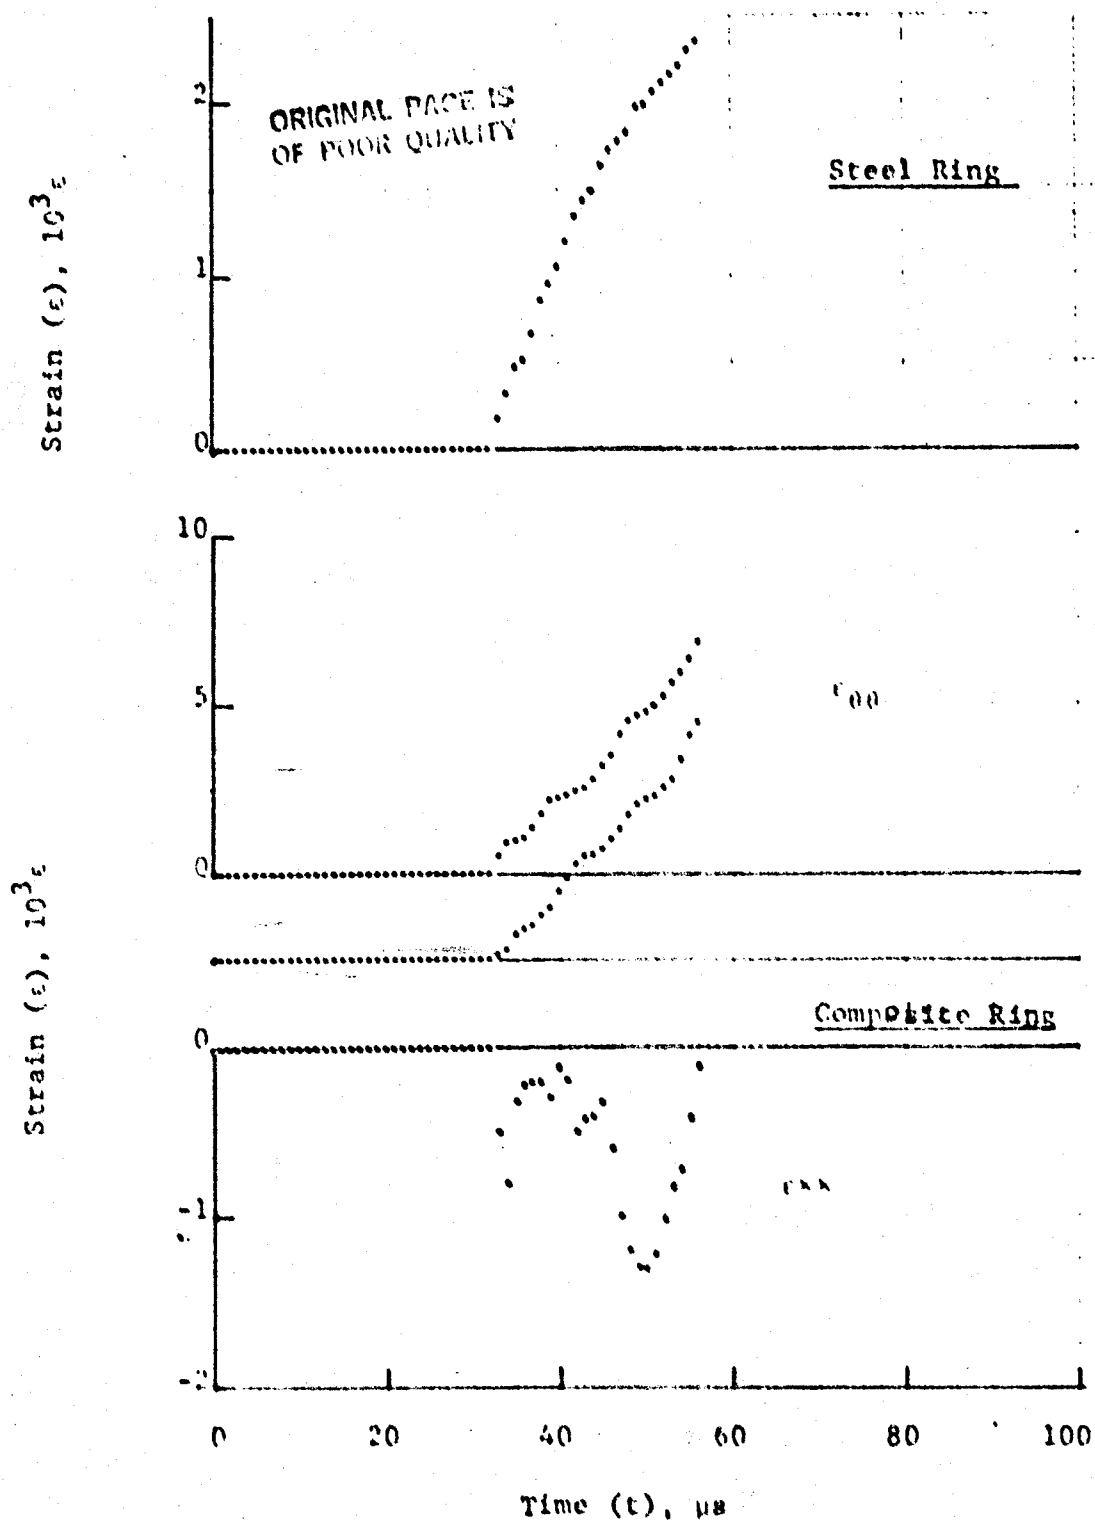


Figure 4-158. Strain records in steel ring and ROAS/20S/PR288 [ $\pm 75$ ], graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 21-6 (1.56 g pistol powder,  $KClO_4$ , and aluminum dust).



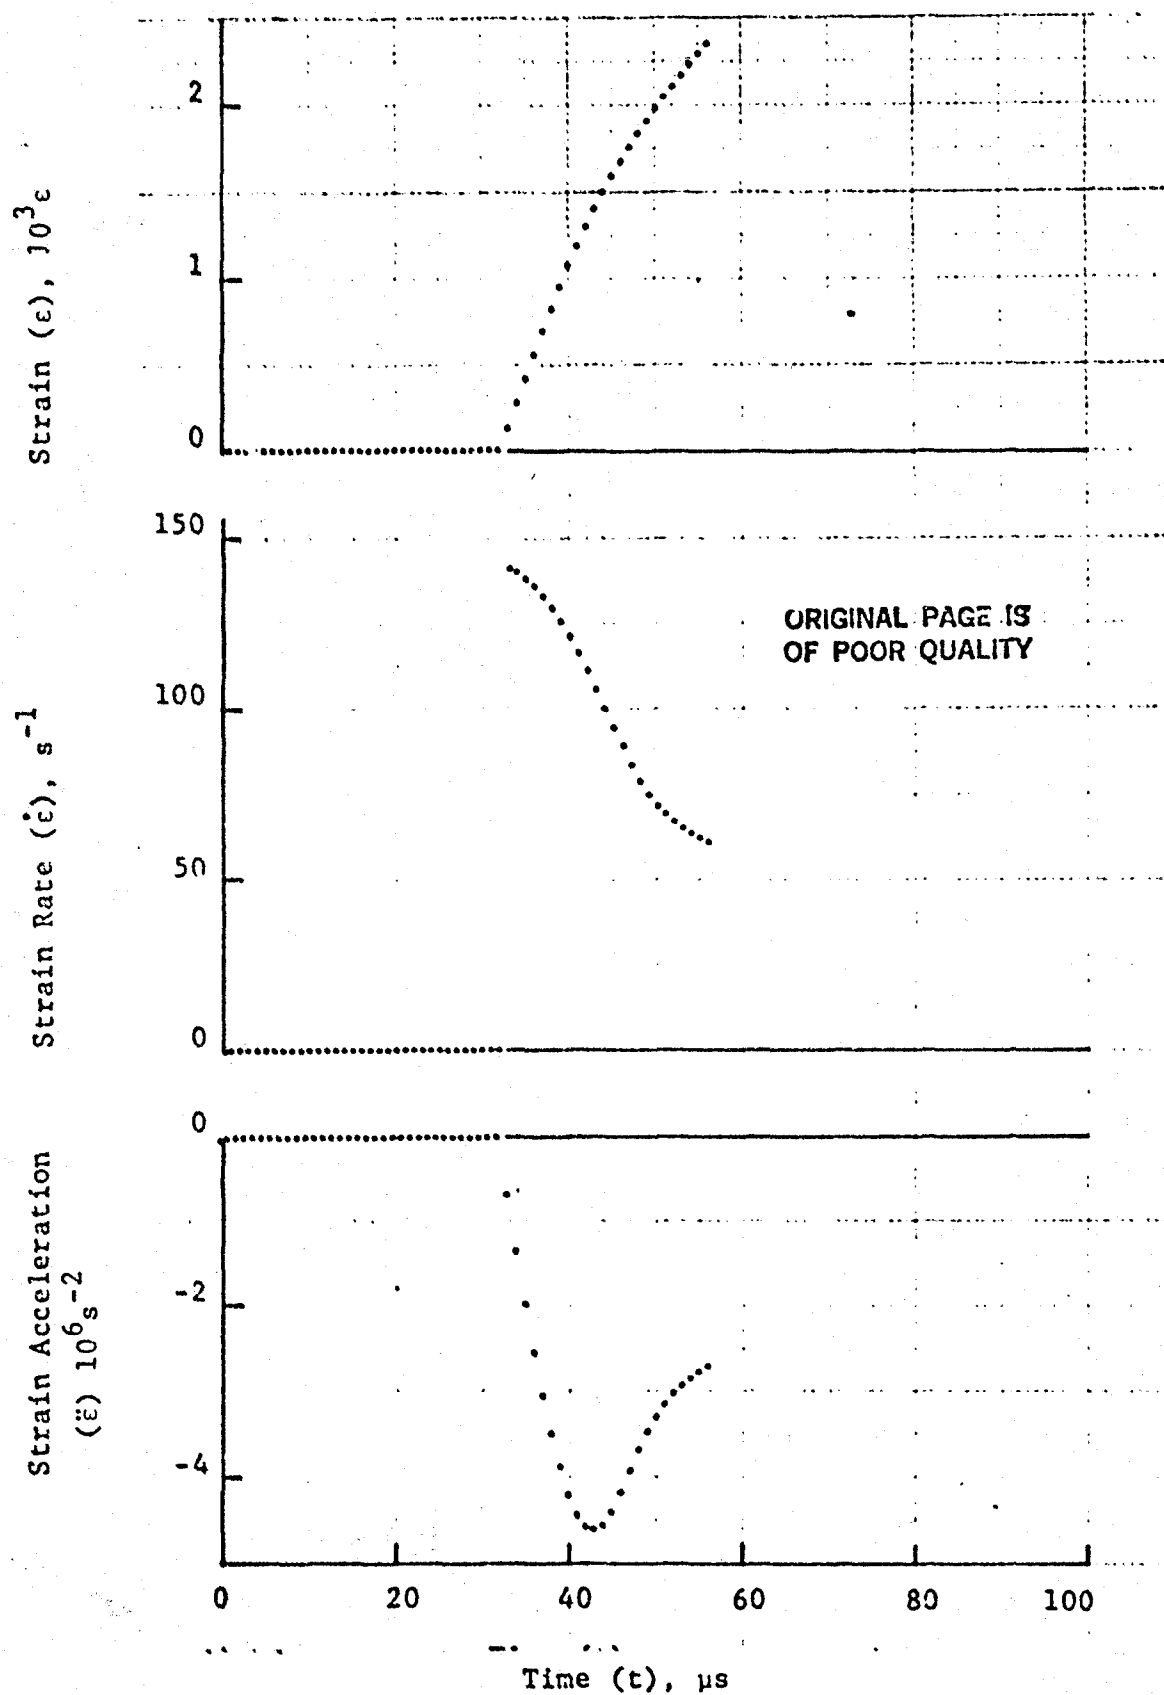


Figure 4-159. Strain and its derivatives in steel ring for Specimen No. 21-6.

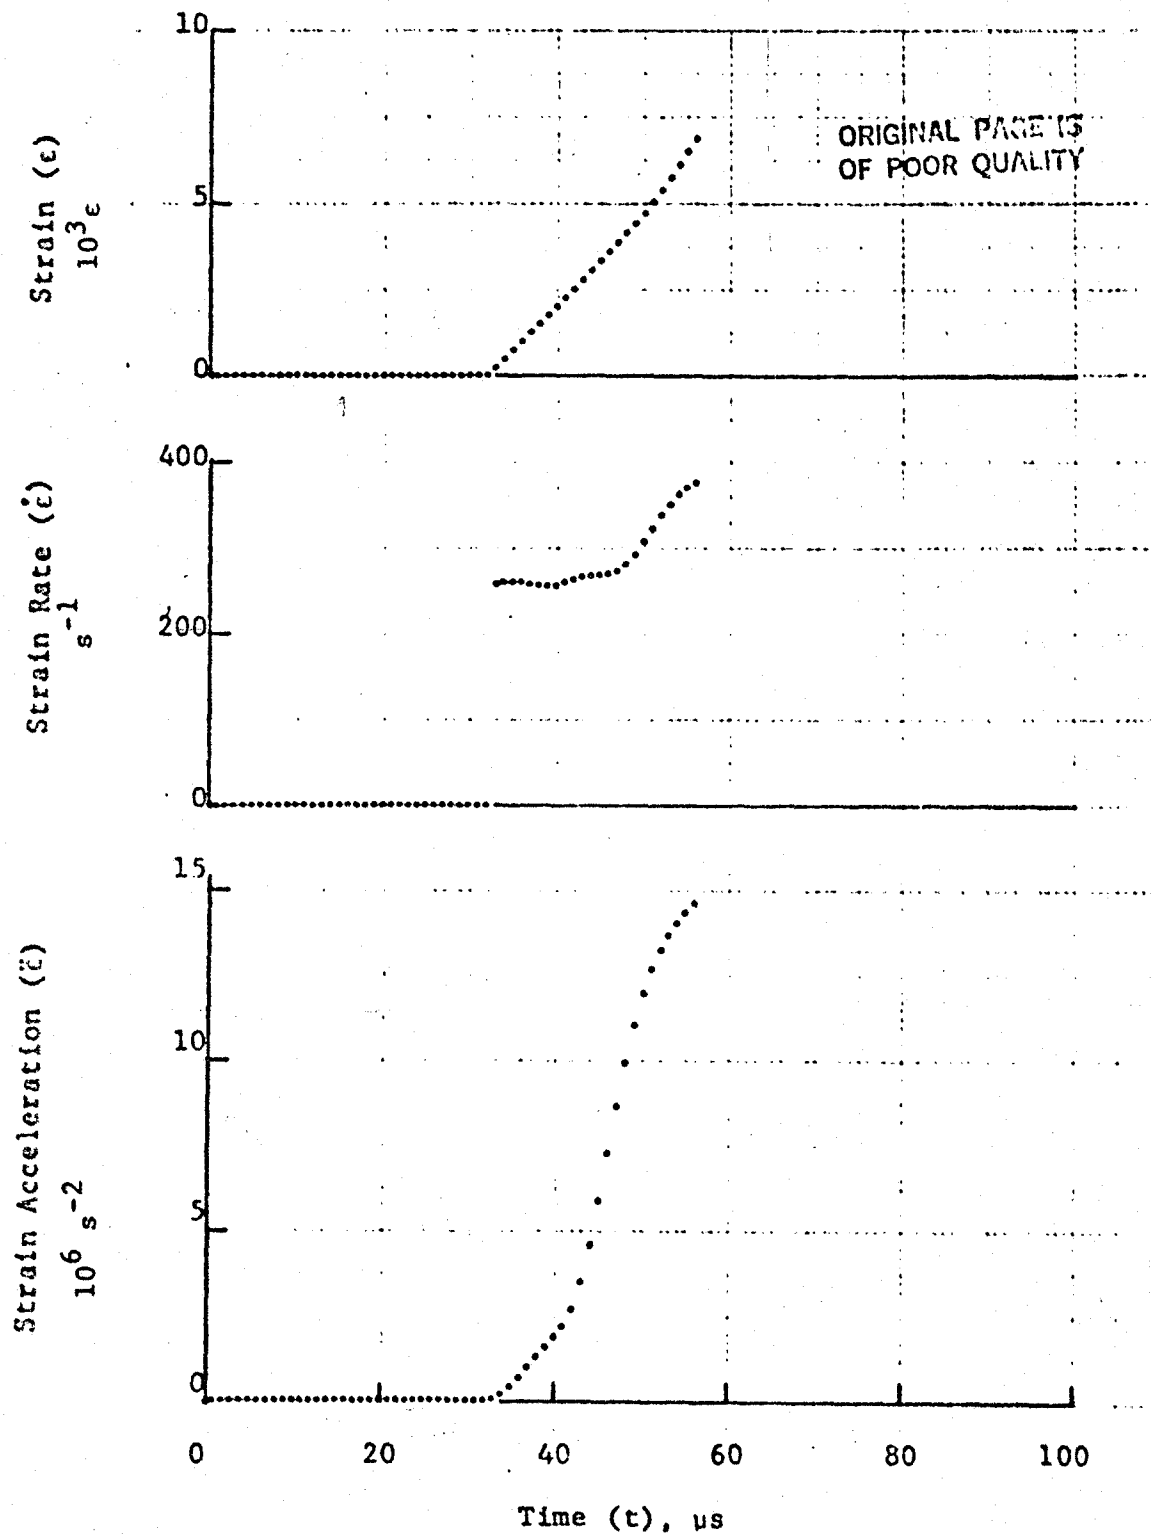


Figure 4-160. Circumferential strain and its derivatives in  $[\pm 75]_{2s}$  80AS/20S/PR288 graphite/S-glass/epoxy ring under dynamic loading for Specimen No. 21-6.

ORIGINAL PAGE IS  
OF POOR QUALITY

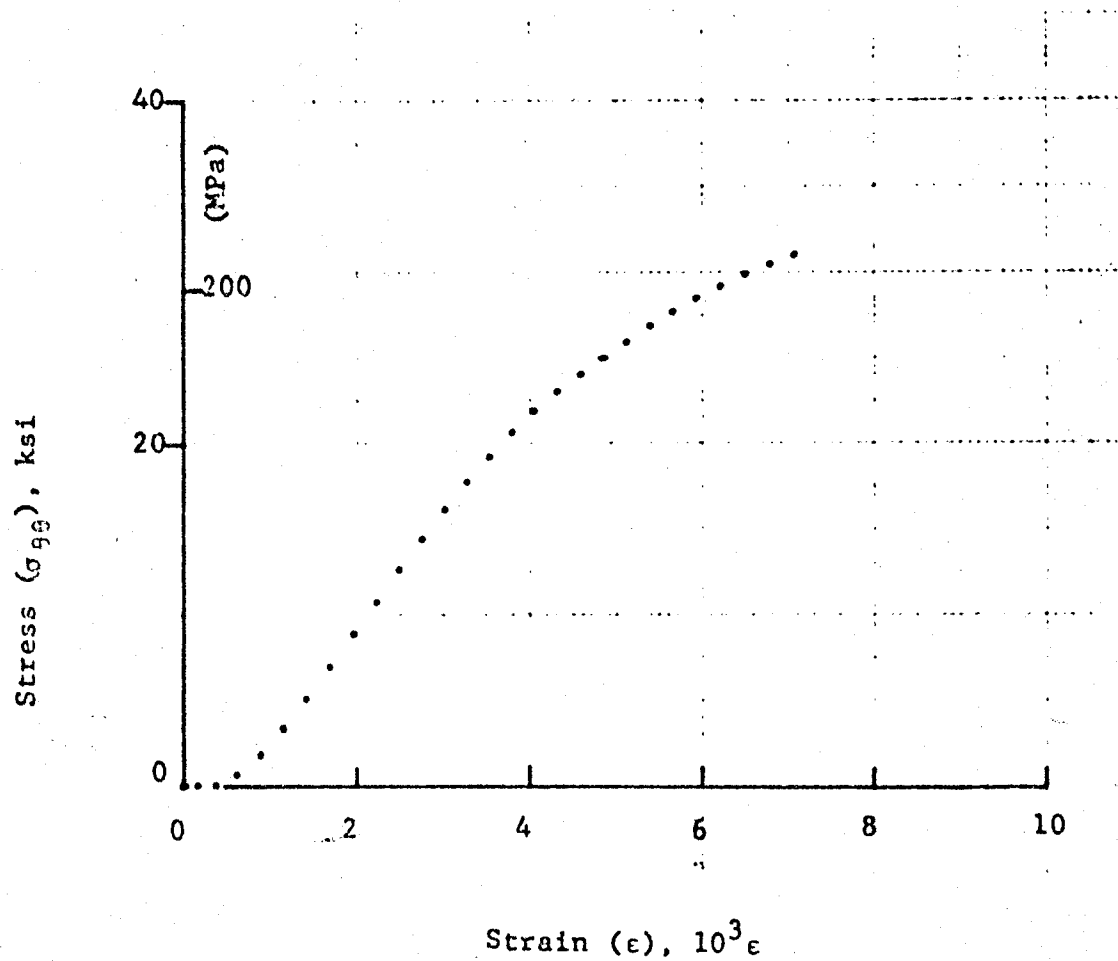


Figure 4-161. Stress-strain curve for dynamically loaded 80AS/20S/PR288  $[\pm 75]_2$  graphite/S-glass/epoxy ring, Specimen No. 21-2 (1.56 g pistol powder,  $KClO_4$ , and aluminum dust).

ORIGINAL PAGE IS  
OF POOR QUALITY

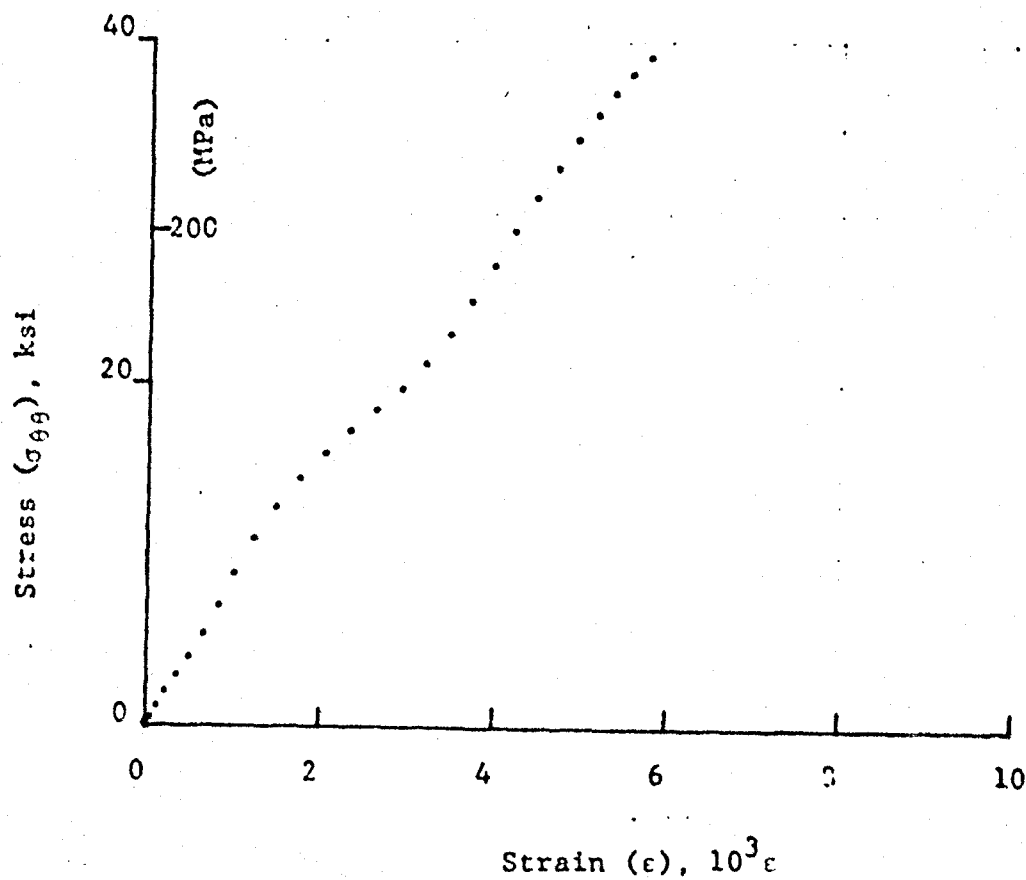


Figure 4-162. Stress-strain curve for dynamically loaded 80AS/20S/PR288  $[\pm 75]_{2s}$  graphite/S-glass/epoxy ring, Specimen No. 21-4 (1.56 g pistol powder,  $KClO_4$ , and aluminum dust).

ORIGINAL PAGE IS  
OF POOR QUALITY

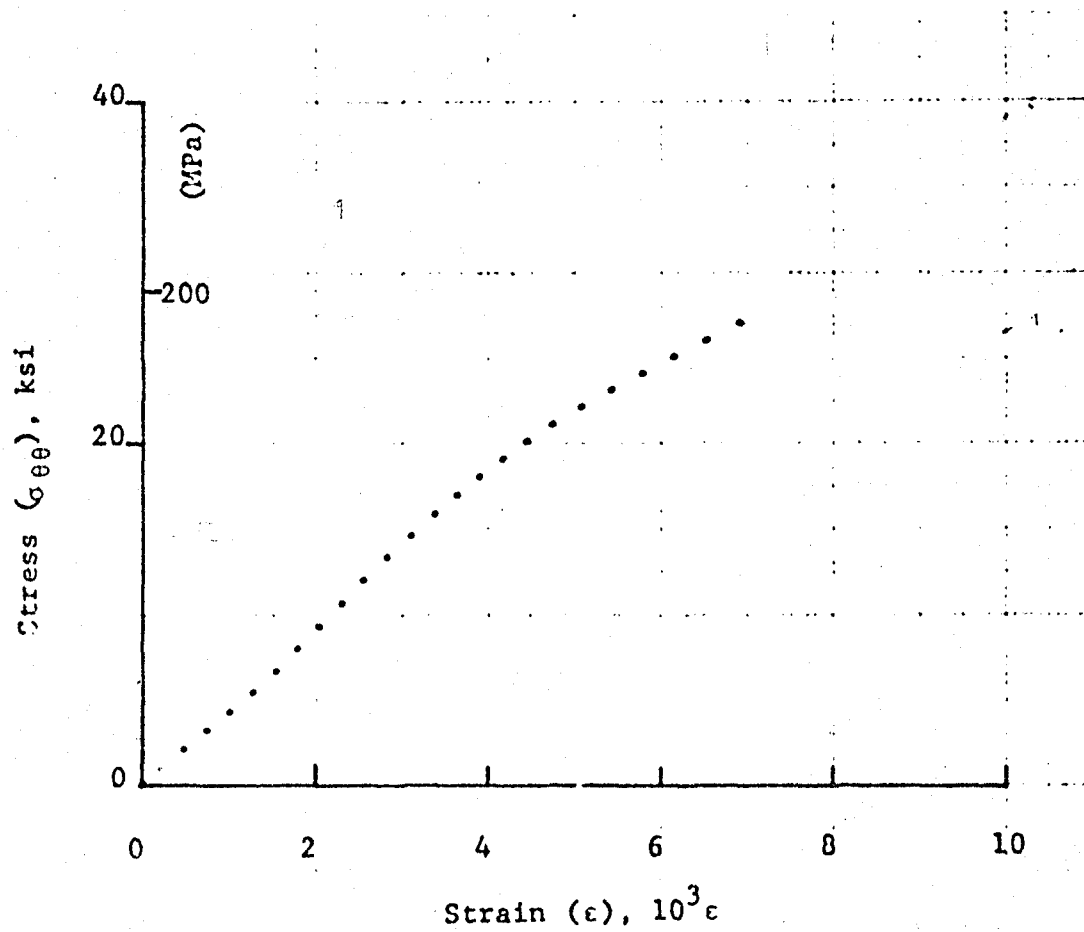


Figure 4-163. Stress-strain curve for dynamically loaded 80AS/20S/PR288 [±75]<sub>2s</sub> graphite/S-glass/epoxy ring, Specimen No. 21-6 (1.56 g pistol powder, KClO<sub>4</sub>, and aluminum dust).

## 5. SUMMARY AND CONCLUSIONS

Methods developed and described in Part I of this report were applied to the characterization of angle-ply laminates. Two material systems, SP288/AS graphite/epoxy and 80AS/20S/PR288 graphite/S-glass/epoxy, were characterized in uniaxial tension at three strain rates, ranging from quasi-static to over  $500\text{s}^{-1}$ . Laminate ring specimens of  $[\pm 15]_{2S}$ ,  $[\pm 22.5]_{2S}$ ,  $[\pm 30]_{2S}$ ,  $[\pm 45]_{2S}$ ,  $[\pm 60]_{2S}$ ,  $[\pm 67.5]_{2S}$ , and  $[\pm 75]_{2S}$  layups were loaded under internal pressure. Results were obtained and presented in the form of stress-strain curves to failure. Properties determined included moduli, Poisson's ratios, strength, and ultimate strain.

In many cases the dynamic stress-strain curves show irregularities. This is a result of a magnification effect of some small experimental scatter and possibly electronic noise effects in the strain data. Small deviations in the recorded strain data can have a large influence on the strain rate and strain acceleration. The terms including strain acceleration effects can be a substantial portion of the computed effective stress. No meaningful observations could be made of the failure patterns because the specimens were shattered into many small pieces under the dynamic loading used.

Average results for all specimens tested are tabulated in Tables 5-1 through 5-14. The effect of strain rate varies with layup, being lowest for the fiber dominated  $[\pm 15]_{2S}$  laminates and highest for the matrix dominated  $[\pm 75]_{2S}$  laminates. The initial and secant moduli show small increases with strain rate for the  $[\pm 15]_{2S}$  layup. The average increase with strain rate for the secant modulus increases from 10% for the  $[\pm 15]_{2S}$  layup to over 200% for the  $[\pm 75]_{2S}$  laminates. The highest strength increments over the static values vary from approximately 14% for the  $[\pm 15]_{2S}$  layup to 275% for the  $[\pm 75]_{2S}$  layup. The ultimate strains in general do not show any significant trends with strain rate for all layups. In six of the fourteen types of specimens tested the ultimate strains at the various strain rates were within  $\pm 10\%$  of the mean value. In five other groups of specimens the ultimate strain variations were within  $\pm 20\%$  of the mean. In the case of the two  $[\pm 45]_{2S}$  groups the results were not conclusive because only lower bounds were obtained for the static ultimate strain.

TABLE 5-1. HIGH STRAIN RATE TENSILE PROPERTIES OF  $[\pm 15]_{2s}$   
SP288/AS GRAPHITE/EPOXY

Specimen Numbers	Strain Rate ( $\dot{\epsilon}_{\theta\theta}$ ), $s^{-1}$	Modulus ( $E_{\theta\theta}$ ), GPa ( $10^6$ psi)	Poisson's Ratio ( $\nu_{\theta x}$ )
<u>Initial Properties</u>			
35-1,3,5	$1 \times 10^{-4}$	105 (15.2)	0.86
35-7,10,11	16	121 (17.5)	0.80
35-2,4,6	190	113 (16.4)	0.76
<u>Secant Properties</u>			
35-1,3,5	$1 \times 10^{-4}$	105 (15.3)	1.00
35-7,10,11	44	122 (17.8)	0.81
35-2,4,6	224	118 (17.1)	0.84
<u>Terminal Properties</u>			
35-1,3,5	$1 \times 10^{-4}$	106 (15.4)	1.22
35-7,10,11	101	147 (21.3)	0.67
35-2,4,6	273	112 (16.2)	0.71
<u>Ultimate Properties</u>			
	Time to Failure ( $t_f$ ), $\mu s$	Strength ( $S_{\theta\theta T}$ ), MPa (ksi)	Strain ( $\epsilon_{\theta\theta T}^U$ )
35-1,3,5	$1 \times 10^8$	823 (119)	0.0078
35-7,10,11	199	1049 (152)	0.0086
35-2,4,6	40	1029 (149)	0.0088

TABLE 5-2. HIGH STRAIN RATE TENSILE PROPERTIES OF  $[\pm 15]_{2s}$   
80AS/20S/PR288 GRAPHITE/S-GLASS/EPOXY

Specimen Numbers	Strain Rate ( $\dot{\epsilon}_{\theta\theta}$ ), $s^{-1}$	Modulus ( $E_{\theta\theta}$ ), GPa ( $10^6$ psi)	Poisson's Ratio ( $\nu_{\theta x}$ )
<u>Initial Properties</u>			
36-1,3,5	$1 \times 10^{-4}$	95 (13.7)	0.68
36-6,10,11	17	104 (15.1)	0.44
36-2,4,7	140	133 (19.3)	0.88
<u>Secant Properties</u>			
36-1,3,5	$1 \times 10^{-4}$	95 (13.8)	0.75
36-6,10,11	43	95 (13.7)	0.50
36-2,4,7	194	101 (14.7)	0.92
<u>Terminal Properties</u>			
36-1,3,5	$1 \times 10^{-4}$	95 (13.7)	0.86
36-6,10,11	212	91 (13.2)	0.51
36-2,4,7	245	50 (7.2)	1.08
<u>Ultimate Properties</u>			
	Time to Failure ( $t_f$ ), $\mu s$	Strength ( $S_{\theta\theta T}$ ), MPa (ksi)	Strain ( $\epsilon_{\theta\theta T}^u$ )
36-1,3,5	$1 \times 10^8$	806 (117)	0.0085
36-6,10,11	240	967 (140)	0.0103
36-2,4,7	43	837 (121)	0.0083



TABLE 5-3. HIGH STRAIN RATE TENSILE PROPERTIES OF  $[\pm 22.5]_{2s}$   
SP288/AS GRAPHITE/EPOXY

Specimen Number	Strain Rate ( $\dot{\epsilon}_{\theta\theta}$ ), $s^{-1}$	Modulus ( $E_{\theta\theta}$ ), GPa ( $10^6$ psi)	Poisson's Ratio ( $\nu_{\theta x}$ )
<u>Initial Properties</u>			
33-1,3,5	$1 \times 10^{-4}$	81.4 (11.8)	1.18
33-10,11,13	17	78.4 (11.4)	1.21
33-4,6,7	138	131.7 (19.1)	1.57
<u>Secant Properties</u>			
33-1,3,5	$1 \times 10^{-4}$	75.2 (10.9)	1.25
33-10,11,13	45	84.0 (12.2)	1.22
33-4,6,7	197	93.4 (13.5)	1.22
<u>Terminal Properties</u>			
33-1,3,5	$1 \times 10^{-4}$	70.7 (10.2)	1.44
33-10,11,13	137	67.6 ( 9.8)	1.23
33-4,6,7	287	62.4 ( 9.0)	1.35
<u>Ultimate Properties</u>			
	Time to Failure ( $t_f$ ), $\mu s$	Strength ( $S_{\theta\theta T}$ ), MPa (ksi)	Strain ( $\epsilon_{\theta\theta T}^u$ )
33-1,3,5	$1 \times 10^8$	773 (112)	0.0103
33-10,11,13	208	771 (112)	0.0093
33-4,6,7	43	790 (115)	0.0084

TABLE 5-4. HIGH STRAIN RATE TENSILE PROPERTIES OF  $[\pm 22.5]_{2s}$   
80AS/20S/PR288 GRAPHITE/S-GLASS/EPOXY

Specimen Numbers	Strain Rate ( $\dot{\epsilon}_{\theta\theta}$ ), $s^{-1}$	Modulus ( $E_{\theta\theta}$ ), GPa ( $10^6$ psi)	Poisson's Ratio ( $\nu_{\theta x}$ )
<u>Initial Properties</u>			
34-1,3,5	$1 \times 10^{-4}$	68.5 ( 9.9)	0.83
34-2,10,11	17	75.7 (11.0)	1.11
34-4,6,7	133	126.1 (18.3)	0.98
<u>Secant Properties</u>			
34-1,3,5	$1 \times 10^{-4}$	63.0 ( 9.1)	0.98
34-2,10,11	47	72.3 (10.5)	1.02
34-4,6,7	217	76.5 (11.1)	0.97
<u>Terminal Properties</u>			
34-1,3,5	$1 \times 10^{-4}$	57.4 ( 8.3)	1.12
34-2,10,11	206	70.2 (10.2)	1.28
34-4,6,7	296	35.4 ( 5.1)	1.02
<u>Ultimate Properties</u>			
	Time to Failure ( $t_f$ ), $\mu s$	Strength ( $S_{\theta\theta T}$ ), MPa (ksi)	Strain ( $\epsilon_{\theta\theta T}^u$ )
34-1,3,5	$1 \times 10^8$	653 ( 95)	0.0104
34-2,10,11	227	753 (109)	0.0104
34-4,6,7	45	731 (106)	0.0095

TABLE 5-5. HIGH STRAIN RATE TENSILE PROPERTIES OF  $[\pm 30]_{2s}$   
SP288/AS GRAPHITE/EPOXY

<u>Specimen Numbers</u>	<u>Strain Rate (<math>\dot{\epsilon}_{\theta\theta}</math>), <math>s^{-1}</math></u>	<u>Modulus (<math>E_{\theta\theta}</math>), GPa (<math>10^6</math> psi)</u>	<u>Poisson's Ratio (<math>\nu_{\theta x}</math>)</u>
<u>Initial Properties</u>			
28-1,3,5	$1 \times 10^{-4}$	58.6 (8.50)	1.25
28-2,12,13	8	48.4 (7.02)	1.01
28-9,10,11	220	85.7 (12.4)	1.22
<u>Secant Properties</u>			
28-1,3,5	$1 \times 10^{-4}$	43.3 (6.28)	1.50
28-2,12,13	58	44.7 (6.48)	1.17
28-9,10,11	297	49.8 (7.2)	1.20
<u>Terminal Properties</u>			
28-1,3,5	$1 \times 10^{-4}$	34.1 (4.94)	1.75
28-2,12,13	179	38.0 (5.50)	1.33
28-9,10,11	428	35.2 (5.1)	1.16
<u>Ultimate Properties</u>			
	<u>Time to Failure (<math>t_f</math>), <math>\mu s</math></u>	<u>Strength (<math>S_{\theta\theta T}</math>), MPa (ksi)</u>	<u>Strain (<math>\epsilon_{\theta\theta T}^u</math>)</u>
28-1,3,5	$1 \times 10^8$	566 (82)	0.0132
28-2,12,13	223	571 (83)	0.0128
28-9,10,11	45	660 (96)	0.0133

TABLE 5-6. HIGH STRAIN RATE TENSILE PROPERTIES OF  $[\pm 30]_{2s}$   
80AS/20S/PR288 GRAPHITE/S-GLASS/EPOXY

Specimen Numbers	Strain Rate ( $\dot{\epsilon}_{\theta\theta}$ ), $s^{-1}$	Modulus ( $E_{\theta\theta}$ ), GPa ( $10^6$ psi)	Poisson's Ratio ( $\nu_{\theta x}$ )
<u>Initial Properties</u>			
29-1,3,5	$1 \times 10^{-4}$	44.9 ( 6.51)	1.26
54-2,3,5	17	43.5 ( 6.31)	1.11
29-10,11,12	207	93.5 (13.60)	1.12
<u>Secant Properties</u>			
29-1,3,5	$1 \times 10^{-4}$	36.2 ( 5.25)	1.33
54-2,3,5	72	41.9 ( 6.07)	1.23
29-10,11,12	324	51.5 ( 7.50)	1.06
<u>Terminal Properties</u>			
29-1,3,5	$1 \times 10^{-4}$	29.9 ( 4.33)	1.55
54-2,3,5	292	41.7 ( 6.04)	1.43
29-10,11,12	440	43.0 ( 6.30)	1.51
<u>Ultimate Properties</u>			
	Time to Failure ( $t_f$ ), $\mu s$	Strength ( $S_{\theta\theta T}$ ), MPa (ksi)	Strain ( $\epsilon_{\theta\theta T}^u$ )
29-1,3,5	$2 \times 10^8$	503 ( 73)	0.0141
54-2,3,5	201	611 ( 89)	0.0144
29-10,11,12	42	690 (100)	0.0135

TABLE 5-7. HIGH STRAIN RATE TENSILE PROPERTIES OF  $[\pm 45]_{2s}$   
SP288/AS GRAPHITE/EPOXY

Specimen Number	Strain Rate $(\dot{\epsilon}_{\theta\theta}), s^{-1}$	Modulus $(E_{\theta\theta}),$ GPa ( $10^6$ psi)	Poisson's Ratio $(\nu_{\theta x})$
<u>Initial Properties</u>			
24-1,3,5	$1 \times 10^{-4}$	20.4 ( 2.95)	0.69
24-10, 52-2,3,4	14	19.1 ( 2.77)	0.90
24-11,12,13	168	111.4 (16.15)	0.78
<u>Secant Properties</u>			
24-10, 52-2,3,4	85	17.6 ( 2.55)	0.80
24-11,12,13	330	40.3 ( 5.83)	0.88
<u>Terminal Properties</u>			
24-10, 52-2,3,4	359	11.5 ( 1.66)	0.85
24-11,12,13	415	20.4 ( 2.97)	0.88
<u>Ultimate Properties</u>			
	Time to Failure $(t_f), \mu s$	Strength $(S_{\theta\theta T}),$ MPa (ksi)	Strain $(\epsilon_{\theta\theta T}^U)$
24-1,3,5	$3 \times 10^8$	>224 (32.5)	>0.0305
24-10, 52-2,3,4	329	494 (72)	0.0279
24-11,12,13	>76	927 (134)	0.0245

TABLE 5-8. HIGH STRAIN RATE TENSILE PROPERTIES OF  $[\pm 45]_{2s}$   
BOAS/20S/PR288 GRAPHITE/S-GLASS/EPOXY

Specimen Numbers	Strain Rate ( $\dot{\epsilon}_{\theta\theta}$ ), $s^{-1}$	Modulus ( $E_{\theta\theta}$ ), GPa ( $10^6$ psi)	Poisson's Ratio ( $\nu_{\theta x}$ )
<u>Initial Properties</u>			
25-1,3,5	$1 \times 10^{-4}$	21.5 (3.12)	0.74
25-9, 53-1,4,5	17	21.1 (3.06)	0.77
25-11,12,13	277	50.8 (7.37)	0.76
<u>Secant Properties</u>			
25-9, 53-1,4,5	111	13.7 (1.99)	0.68
25-11,12,13	555	20.3 (2.95)	0.77
<u>Terminal Properties</u>			
25-9, 53-1,4,5	388	11.2 (1.62)	0.67
25-11,12,13	853	4.8 (0.69)	0.60
<u>Ultimate Properties</u>			
	Time to Failure ( $t_f$ ), $\mu s$	Strength ( $S_{\theta\theta T}$ ), MPa (ksi)	Strain ( $\epsilon_{\theta\theta T}^u$ )
25-1,3,5	$3 \times 10^8$	>191 (27.7)	>0.0265
25-9, 53-1,4,5	255	371 (54)	0.0270
25-11,12,13	64	711 (103)	0.0353

TABLE 5-9. HIGH STRAIN RATE TENSILE PROPERTIES OF  $[\pm 60]_{2s}$   
SP288/AS GRAPHITE/EPOXY

Specimen Numbers	Strain Rate ( $\dot{\epsilon}_{\theta\theta}$ ), $s^{-1}$	Modulus ( $E_{\theta\theta}$ ), GPa ( $10^6$ psi)	Poisson's Ratio ( $\nu_{\theta x}$ )
<u>Initial Properties</u>			
22-1,3,5	$1 \times 10^{-4}$	14.0 (2.03)	0.32
22-9,10,11	22	23.0 (3.34)	0.25
22-6,7,8	250	45.5 (6.59)	0.48
<u>Secant Properties</u>			
22-1,3,5	$1 \times 10^{-4}$	9.1 (1.32)	0.34
22-9,10,11	60	13.9 (2.01)	0.39
22-6,7,8	342	34.6 (5.02)	0.34
<u>Terminal Properties</u>			
22-1,3,5	$1 \times 10^{-4}$	5.6 (0.82)	0.33
22-9,10,11	166	12.1 (1.75)	0.37
22-6,7,8	547	25.7 (3.75)	0.34
<u>Ultimate Properties</u>			
	Time to Failure ( $t_f$ ), $\mu s$	Strength ( $S_{\theta\theta T}$ ), MPa (ksi)	Strain ( $\epsilon_{\theta\theta T}^u$ )
22-1,3,5	$1 \times 10^8$	105 (15.2)	0.0116
22-9,10,11	226	182 (26.4)	0.0134
22-6,7,8	43	511 (74)	0.0145

TABLE 5-10. HIGH STRAIN RATE TENSILE PROPERTIES OF  $[\pm 60]_{2s}$   
80AS/20S/PR288 GRAPHITE/S-GLASS/EPOXY

Specimen Numbers	Strain Rate ( $\dot{\epsilon}_{\theta\theta}$ ), $s^{-1}$	Modulus ( $E_{\theta\theta}$ ), GPa ( $10^6$ psi)	Poisson's Ratio ( $\nu_{\theta x}$ )
<u>Initial Properties</u>			
23-1,3,5	$1 \times 10^{-4}$	18.2 (2.64)	0.30
23-7,10,11	26	24.7 (3.58)	0.24
23-2,4,6	220	48.0 (6.96)	0.34
<u>Secant Properties</u>			
23-1,3,5	$1 \times 10^{-4}$	11.2 (1.62)	0.33
23-7,10,11	59	13.9 (2.01)	0.38
23-2,4,6	280	47.4 (6.86)	0.29
<u>Terminal Properties</u>			
23-1,3,5	$1 \times 10^{-4}$	7.2 (1.05)	0.36
23-7,10,11	165	9.9 (1.44)	0.35
23-2,4,6	440	42.5 (6.16)	0.24
<u>Ultimate Properties</u>			
	Time to Failure ( $t_f$ ), $\mu s$	Strength ( $S_{\theta\theta T}$ ), MPa (ksi)	Strain ( $\epsilon_{\theta\theta T}^U$ )
23-1,3,5	$1 \times 10^8$	94.8 (13.7)	0.0085
23-7,10,11	195	155.5 (22.5)	0.0112
23-2,4,6	44	566 (82)	0.0122



TABLE 5-11. HIGH STRAIN RATE TENSILE PROPERTIES OF [ $\pm 67.5$ ]<sub>2s</sub>  
SP288/AS GRAPHITE/EPOXY

Specimen Numbers	Strain Rate ( $\dot{\epsilon}_{\theta\theta}$ ), s <sup>-1</sup>	Modulus ( $E_{\theta\theta}$ ), GPa (10 <sup>6</sup> psi)	Poisson's Ratio ( $\nu_{\theta x}$ )
<u>Initial Properties</u>			
26-1,3,5	1 x 10 <sup>-4</sup>	12.0 (1.74)	0.17
26-10,11,13	26	17.3 (2.51)	0.15
26-2,4,6	243	48.8 (7.07)	0.17
<u>Secant Properties</u>			
26-1,3,5	1 x 10 <sup>-4</sup>	10.5 (1.52)	0.17
26-10,11,13	73	12.8 (1.86)	0.18
26-2,4,6	270	36.2 (5.24)	0.19
<u>Terminal Properties</u>			
26-1,3,5	1 x 10 <sup>-4</sup>	8.7 (1.26)	0.17
26-10,11,13	167	8.5 (1.23)	0.20
26-2,4,6	347	22.9 (3.32)	0.20
<u>Ultimate Properties</u>			
	Time to Failure ( $t_f$ ), $\mu$ s	Strength ( $S_{\theta\theta T}$ ), MPa (ksi)	Strain ( $\epsilon_{\theta\theta T}^u$ )
26-1,3,5	1 x 10 <sup>8</sup>	85.1 (12.3)	0.0081
26-10,11,13	142	132.2 (19.2)	0.0103
26-2,4,6	36	339 (49)	0.0096



**UNITED STATES DEPARTMENT OF COMMERCE**  
**National Technical Information Service**  
5285 Port Royal Road  
Springfield, Virginia 22161  
OFFICE OF THE DIRECTOR

**NEW NTIS  
ABSTRACT NEWSLETTERS !**



Dear Professional:

I wish I could tell you how much time and money the NTIS Abstract Newsletters could save you.

But, I can't. Because I don't know how much time and money you unknowingly spend on costly research that actually duplicates the work of others. Yet this research information is readily available to you when you know how to access it.

That's what NTIS Abstract Newsletters are all about.

NTIS Abstract Newsletters Summarize  
70,000 New Reports Annually

You see, NTIS information specialists index, analyze, and categorize 70,000 new research documents a year. Each report is judged for its potential value for thousands of current subscribers. Then it is summarized in a brief abstract and published in one or more Newsletters. You receive only those abstracts of interest to your professional field.

NTIS exists to help you find--and provide you with--research results and information. You'll know what you need to know--when you need to know it--with NTIS Abstract Newsletters.

The Newsletters are a speedy, comprehensive, economical way for you to keep current on the latest research and to cut your risk of duplicating work already available in a report from NTIS.

Your Newsletters will suggest possible directions and starting points for your own research. Knowing research applications of others will help you get more out of every research dollar you invest.

#### Worldwide Sources

The NTIS collection also contains selected information on scientific and technical developments around the world.

NTIS is now actively expanding its sources of foreign technology to add to more than 300,000 foreign reports already on hand--including translated materials from the U.S.S.R., other Eastern European countries, Japan, and major Western countries.

#### Low Subscription Rate

By now, you may well be apprehensive over the cost of this remarkable Newsletter service. If so, you will be pleasantly surprised to learn you can subscribe to the *Energy Abstract Newsletter*, for example, for about \$1.83 a week!

NTIS is a unique self-supporting Government agency offering economical information products and services on a cost-recovery basis.

#### You Get Reports on Research Not Published By Any Other Source

NTIS Abstract Newsletters let you know about all Government-sponsored research in your field. Each week you'll learn about research not reported or available from any other source.

And when you spot a report you need, NTIS can provide it for you in a matter of days, usually for about \$14 in paper copy or only \$4.50 in microfiche. Your Newsletters contain a handy report order form for your convenience.

#### Annual Subject Index Included

Your subscription includes an Annual Subject Index to give permanent reference value to your Newsletter.

Of course, your subscription is tax deductible as a business expense in most instances.

More than that, when you consider the wasted time and costly mistakes the Newsletters can help you avoid, you will begin to appreciate what a practical investment NTIS Abstract Newsletters really are. For example:

- *MANUFACTURING TECHNOLOGY*: one of the newest Newsletters that meets industry's most pressing need right now...brings news of the latest research on robotics and CAD/CAM. \$125\*
- *FOREIGN TECHNOLOGY*: abstracts of latest technological and scientific research in all fields from Japan, United Kingdom, France, U.S.S.R., and countries all over the world. \$75\*
- SPECIAL CHARTER RATE:
- *ENVIRONMENTAL POLLUTION & CONTROL*: one of the most sought after Newsletters covering air, noise, solid wastes, water, pesticides, radiation, health and safety and environmental impact statements. \$95\*
- *ENERGY*: brings you a wealth of information on energy use; supply and demand; power and heat generation; energy policies, regulations and studies; engines and fuels, and much more. \$95\*
- *COMPUTERS, CONTROL, AND INFORMATION THEORY*: important information, and lots of it, concerning this, one of the fastest growing and most competitive industries worldwide. \$95\*
- *MATERIAL SCIENCES*: applicable to nearly every industry with abstracts touching on a huge variety of processes and products. \$80\*
- *MEDICINE & BIOLOGY*: covers an enormous range of information from anatomy to zoology. Every facet of medicine and biology is touched upon. \$75\*

And any one of the abstracts in these Newsletters may be the added element of success for your ongoing research, contract proposals, cost reduction efforts, and profits.

NTIS regularly publishes information not available elsewhere, and frequently brings you news of research before it appears in professional journals and magazines. You simply should not risk acting without benefit of complete, current information on what's happening in Government-sponsored research in your field.

You need NTIS Abstract Newsletters and here's how to order them.

Complete the order form at the bottom of this letter and mail it back today to the address below. You may use any of the options listed in order to pay for your subscription.

You are guaranteed satisfaction. If your Newsletters do not satisfy you for any reason, you may cancel and receive a credit or refund for the balance of your subscriptions.

I invite you to subscribe today.

Sincerely,



Joseph F. Caponio  
Acting Director

**NTIS** 5285 Port Royal Road  
Springfield, VA 22161 or Call (703) 487-4630

Please start my subscription to the following *Abstract Newsletters*:

Other Titles:

**Special Offer Only:**

Foreign Technology \_\_\_\_\_  
— Save \$15 or \$30 —  
Charter Rate: 2 yrs. \$150 ☐ (Reg. Rate \$180)  
Charter Rate: 1 yr. \$75 ☐ (Reg. Rate \$90)  
Additional subscriptions \$25 each annually.

Name \_\_\_\_\_  
Occupation \_\_\_\_\_  
Company \_\_\_\_\_  
Address \_\_\_\_\_  
City/State/ZIP \_\_\_\_\_

Title \_\_\_\_\_  
☐ plus \_\_\_\_\_ additional subscriptions to this Newsletter \$25 each

Title \_\_\_\_\_  
☐ plus \_\_\_\_\_ additional subscriptions to this Newsletter \$25 each

☐ Charge to my Deposit Account No. \_\_\_\_\_

☐ Here is my check to NTIS for \$ \_\_\_\_\_

☐ Bill me

Cost  
\$ \_\_\_\_\_  
\$ \_\_\_\_\_  
\$ \_\_\_\_\_  
\$ \_\_\_\_\_  
\$ \_\_\_\_\_

Charge to ☐ American Express ☐ VISA  
☐ MasterCard

Card No. \_\_\_\_\_

Expires \_\_\_\_\_

TOTAL \$ \_\_\_\_\_

Signature \_\_\_\_\_ (required to validate order)

TABLE 5-12. HIGH STRAIN RATE TENSILE PROPERTIES OF [ $\pm 67.5$ ]<sub>2s</sub>  
80AS/20S/PR288 GRAPHITE/S-GLASS/EPOXY

Specimen Numbers	Strain Rate ( $\dot{\epsilon}_{\theta\theta}$ ), s <sup>-1</sup>	Modulus ( $E_{\theta\theta}$ ), GPa (10 <sup>6</sup> psi)	Poisson's Ratio ( $\nu_{\theta x}$ )
<u>Initial Properties</u>			
27-1,3,5	1 x 10 <sup>-4</sup>	14.4 (2.08)	0.16
27-10,11,13	32	20.3 (2.94)	0.13
27-2,4,6	261	45.0 (6.52)	0.23
<u>Secant Properties</u>			
27-1,3,5	1 x 10 <sup>-4</sup>	12.4 (1.79)	0.17
27-10,11,13	61	15.7 (2.28)	0.14
27-2,4,6	236	42.7 (6.18)	0.20
<u>Terminal Properties</u>			
27-1,3,5	1 x 10 <sup>-4</sup>	9.9 (1.43)	0.17
27-10,11,13	134	13.9 (2.02)	0.20
27-2,4,6	253	41.7 (6.05)	0.17
<u>Ultimate Properties</u>			
	Time to Failure ( $t_f$ ), $\mu$ s	Strength ( $S_{\theta\theta T}$ ), MPa (ksi)	Strain ( $\epsilon_{\theta\theta T}^u$ )
27-1,3,5	1 x 10 <sup>8</sup>	76.1 (11.0)	0.0062
27-10,11,13	144	136.6 (19.8)	0.0087
27-2,4,6	36	356 (52)	0.0083

TABLE 5-13. HIGH STRAIN RATE TENSILE PROPERTIES OF  $[\pm 75]_{2s}$   
SP288/AS GRAPHITE/EPOXY

Specimen Numbers	Strain Rate ( $\dot{\epsilon}_{\theta\theta}$ ), $s^{-1}$	Modulus ( $E_{\theta\theta}$ ), GPa ( $10^6$ psi)	Poisson's Ratio ( $\nu_{\theta x}$ )
<u>Initial Properties</u>			
20-1,3,5	$1 \times 10^{-4}$	12.1 (1.75)	0.09
20-12	19	19.7 (2.66)	-
20-2,4,7	230	45. (6.55)	-
<u>Secant Properties</u>			
20-1,3,5	$1 \times 10^{-4}$	10.0 (1.46)	0.08
20-12	45	10.9 (1.58)	0.04
20-2,4,7	272	36.1 (5.24)	0.15
<u>Terminal Properties</u>			
20-1,3,5	$1 \times 10^{-4}$	7.9 (1.14)	0.06
20-12	132	6.0 (0.87)	0.08
20-2,4,7	315	29.7 (4.31)	-
<u>Ultimate Properties</u>			
	Time to Failure ( $t_f$ ), $\mu s$	Strength ( $S_{\theta\theta T}$ ), MPa (ksi)	Strain ( $\epsilon_{\theta\theta T}^u$ )
20-1,3,5	$1 \times 10^8$	74.8 (10.8)	0.0075
20-12	201	98.3 (14.2)	0.0090
20-2,4,7	30	290 (42)	0.0081

TABLE 5-14. HIGH STRAIN RATE TENSILE PROPERTIES OF [ $\pm 75$ ]<sub>2s</sub>  
80AS/20S/PR288 GRAPHITE/S-GLASS/EPOXY

<u>Specimen Numbers</u>	<u>Strain Rate (<math>\dot{\epsilon}_{\theta\theta}</math>), s<sup>-1</sup></u>	<u>Modulus (<math>E_{\theta\theta}</math>), GPa (10<sup>6</sup> psi)</u>	<u>Poisson's Ratio (<math>\nu_{\theta x}</math>)</u>
<u>Initial Properties</u>			
21-1,5	1 x 10 <sup>-4</sup>	15.5 (2.25)	0.10
21-10,11,12	34	16.9 (2.45)	-
21-2,4,6	217	45.1 (6.53)	0.03
<u>Secant Properties</u>			
21-1,5	1 x 10 <sup>-4</sup>	14.0 (2.03)	0.06
21-10,11,12	64	13.4 (1.94)	0.04
21-2,4,6	223	35.1 (5.09)	0.02
<u>Terminal Properties</u>			
21-1,5	1 x 10 <sup>-4</sup>	11.0 (1.59)	0.11
21-10,11,12	116	11.7 (1.69)	0.11
21-2,4,6	295	25.7 (3.72)	-
<u>Ultimate Properties</u>			
	<u>Time to Failure (<math>t_f</math>), <math>\mu</math>s</u>	<u>Strength (<math>S_{\theta\theta T}</math>), MPa (ksi)</u>	<u>Strain (<math>\epsilon_{\theta\theta T}^u</math>)</u>
21-1,5	1 x 10 <sup>8</sup>	61.4 ( 8.9)	0.0047
21-10,11,12	110	94.9 (13.8)	0.0070
21-2,4,6	26	223 (32)	0.0066